



March 2010

For the most current product/pricing information on Anvil products, please visit our website at [www.anvilintl.com](http://www.anvilintl.com).



# Steel Pipe Nipples & Malleable Fittings

BUILDING CONNECTIONS THAT LAST



**GOODYEAR**  
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**  
WebSales@GoodyearRubberProducts.com

**We Ship  
World Wide**



## Anvil's Unmatched Piping Products for Every Industry

*Anvil provides the most comprehensive line of innovative, durable, and reliable pipe connections, support systems, and customer service.*

**For more than 150 years**, Anvil has provided integrated, reliable piping solutions for a variety of applications. With the most complete line of piping products, expert design services, and a responsive customer service team, Anvil's total package is unmatched throughout the industry. Our professionals will work with you to develop innovative solutions that meet your demands and exceed your expectations.

From HVAC, plumbing and mechanical to fire protection, mining, oil and gas, and gas utilities, Anvil covers all markets. Our extensive product line includes grooved couplings, fittings, and valves; cast and malleable pipe fittings; forged steel fittings and unions; steel pipe nipples and couplings; pipe hangers and supports; strut and channel; oil country fittings; and valves. Our exceptional market-specific expertise ensures you always get the best solution for your unique application.

In addition to Anvil's extensive line of domestically manufacture products, Anvil also offers a full line of Globally manufactured malleable iron fittings and steel pipe nipples. These products are manufactured within ISO 9001:2000 facilities where Anvil's quality control engineers oversee the entire process. Anvil is committed to providing the finest quality pipe fittings available, which we believe only a true manufacturer can provide. Engineered drawings of fittings and nipples along with detailed inspection procedures, leave no questions regarding Anvil's commitment to quality imported products.

With 150 years of manufacturing expertise, Anvil is in a unique position to set the highest quality standard for both domestic and import products. Anvil's specifications for SPF malleable fittings and pipe nipples are higher than typical ANSI specification. The SPF malleable fittings are UL Listed and FM Approved.

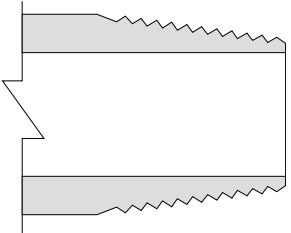

# SPF STEEL PIPE NIPPLES

## Standard Welded

Anvil International is the only manufacturer where you can combine your import and U.S. Manufactured product requirements.

### STANDARDS & SPECIFICATIONS

#### SPF Imported Steel Pipe Nipples (Standard Welded)

Dimensional:	ASTM A733	<p><b>Standard End Finish</b> Tapered Pipe Thread (NPT)</p> 	
Material:	ASTM A53 Type F or Type E		
Galvanizing:	Hot Dip Galvanizing*		
Threading:**	ASME B 1.20.1		

\*Galvanized nipples are manufactured from pipe coated on the inside and outside by hot dip process.

\*\*British Standard threading per BS 21 available upon request.

- Ends are cut square to the central axis. All burrs on the inside are removed. The ends of the pipe nipples are chamfered on the outside at an angle of 35° +/- 10° to the central axis.
- Pipe nipples are threaded on both ends with standard NPT tapered threads. Threads are right hand on both ends.

#### Also available:

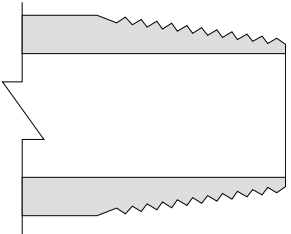

- Ready Cut Pipe, Standard - Schd. 40 (black and galvanized)  
Pipe Size: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"  
Pipe Length: 8", 24", 30", 48", 60", 72"
- "66" Packs, Standard - Schd. 40 (black and galvanized)  
Nipple Size: 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"
- Single Run Nipple Packs (black and galvanized)  
Pipe Size: 1/2", 3/4", 1, 1 1/4", 1 1/2", 2"

Pipe Size (in.)	Pipe O.D. (in.)	Length Close (in.)	Pipe Nipple Lengths (Black and galvanized)															
			1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/8	.405	3/4	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/4	.540	7/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3/8	.675	1	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/2	.840	1 1/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3/4	1.050	1 3/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1	1.315	1 1/2		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1 1/4	1.660	1 5/8		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1 1/2	1.900	1 3/4		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
2	2.375	2			2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
2 1/2	2.875	2 1/2				3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3	3.500	2 5/8				3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
4	4.500	2 7/8						4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
6	6.625	3 1/8						4	4 1/2	5	5 1/2	6	7	8	9	10	11	12

# SPF STEEL PIPE NIPPLES

## Extra Heavy – SCH. 80 Welded

Anvil International is the only manufacturer where you can combine your import and U.S. Manufactured product requirements.

STANDARDS & SPECIFICATIONS		<p><b>Standard End Finish</b> Tapered Pipe Thread (NPT)</p> 	
Steel Pipe Nipples (Extra Heavy Welded)			
Dimensional:	ASTM A733		
Material:	ASTM A53 Type F or Type E		
Galvanizing:	Hot Dip Galvanizing*		
Threading:	ASME B 1.20.1		

\*Galvanized nipples are manufactured from pipe coated on the inside and outside by hot dip process.

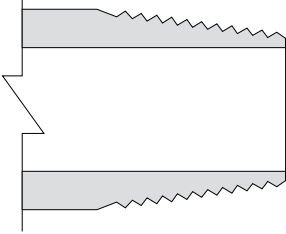

- Ends are cut square to the central axis. All burrs on the inside are removed. The ends of the pipe nipples are chamfered on the outside at an angle of 35° +/- 10° to the central axis.
- Pipe nipples are threaded on both ends with standard NPT tapered threads. Threads are right hand on both ends.

Pipe Size (in.)	Pipe O.D. (in.)	Length Close (in.)	Pipe Nipple Lengths (Black and galvanized)															
			1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/8	.405	3/4	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/4	.540	7/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3/8	.675	1	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/2	.840	1 1/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3/4	1.050	1 3/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1	1.315	1 1/2		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1 1/4	1.660	1 5/8		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1 1/2	1.900	1 3/4		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
2	2.375	2			2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
2 1/2	2.875	2 1/2				3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3	3.500	2 5/8				3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3 1/2	4.000	2 3/4						4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
4	4.500	2 7/8						4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
5	5.563	3						4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
6	6.625	3 1/8						4	4 1/2	5	5 1/2	6	7	8	9	10	11	12

# SPF STEEL PIPE NIPPLES

## Extra Heavy Seamless

Anvil International is the only manufacturer where you can combine your import and U.S. Manufactured product requirements.

STANDARDS & SPECIFICATIONS			
Steel Pipe Nipples (Seamless Extra Heavy – Sch. 80))			
Dimensional:	ASTM A733	<p><b>Standard End Finish</b> Tapered Pipe Thread (NPT)</p> 	
Material:	ASTM A106 Grade B		
Galvanizing:	Hot Dip Galvanizing*		
Threading:	ASME B 1.20.1		

\*Galvanized nipples are manufactured from pipe coated on the inside and outside by hot dip process.

- Ends are cut square to the central axis. All burrs on the inside are removed. The ends of the pipe nipples are chamfered on the outside at an angle of 35° +/- 10° to the central axis.
- Pipe nipples are threaded on both ends with standard NPT tapered threads. Threads are right hand on both ends.


Pipe Size (in.)	Pipe O.D. (in.)	Length Close (in.)	Pipe Nipple Lengths (Black and galvanized)															
			1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/8	.405	3/4	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/4	.540	7/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3/8	.675	1	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1/2	.840	1 1/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3/4	1.050	1 3/8	1 1/2	2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1	1.315	1 1/2		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1 1/4	1.660	1 5/8		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
1 1/2	1.900	1 3/4		2	2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
2	2.375	2			2 1/2	3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
2 1/2	2.875	2 1/2				3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
3	3.500	2 5/8				3	3 1/2	4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
4	4.500	2 7/8						4	4 1/2	5	5 1/2	6	7	8	9	10	11	12
5	5.563	3							4 1/2	5	5 1/2	6	7	8	9	10	11	12
6	6.625	3 1/8							4 1/2	5	5 1/2	6	7	8	9	10	11	12

# SPF MALLEABLE IRON FITTINGS


## Class 150 (Standard)


### STANDARDS & SPECIFICATIONS

#### Import Malleable Iron Screwed Fittings (Class 150)

Dimensional:	Fittings:	ASME B16.3	
	Unions:	ASME B 16.39	
	Bushings/Plugs:	ASME B 16.14	
Material:	ASTM A-197		
Galvanizing:	ASTM A-153	(Hot Dip Galvanizing)	
Threading:*	ASME B 1.20.1		
Pressure Rating:	Fittings:	ASME B 16.3	
	Unions:	ASME B 16.39	
	Bushings/Plugs:	ASME B 16.14	
Pressure Testing:	All malleable iron fittings are tested for through wall porosity using an air under water process.		
Agency Approvals:	All malleable iron fittings and unions are UL Listed and FM Approved.		

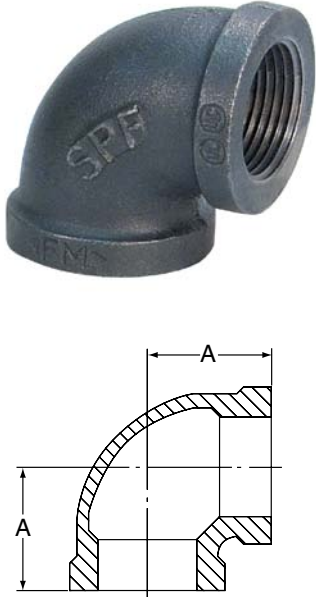
\*British Standard threading per BS 21 available upon request.


90° REDUCING ELBOW	Size	A	B	Weight
	in	in	in	lbs
	1/4 x 1/8	0.74	0.76	0.08
	3/8 x 1/8	0.81	0.85	0.11
	3/8 x 1/4	0.88	0.90	0.13
	1/2 x 1/4	0.97	0.98	0.16
	1/2 x 3/8	1.04	1.03	0.19
	3/4 x 3/8	1.12	1.13	0.26
	3/4 x 1/2	1.20	1.22	0.29
	1 x 3/8	1.18	1.26	0.35
	1 x 1/2	1.26	1.36	0.42
	1 x 3/4	1.37	1.45	0.47
	1 1/4 x 1/2	1.34	1.53	0.54
	1 1/4 x 3/4	1.45	1.62	0.62
	1 1/4 x 1	1.58	1.67	0.73
	1 1/2 x 1/2	1.38	1.65	0.65
	1 1/2 x 3/4	1.52	1.75	0.74
	1 1/2 x 1	1.65	1.80	0.88
	1 1/2 x 1 1/4	1.82	1.88	1.03
	2 x 1/2	1.50	1.89	0.93
	2 x 3/4	1.60	1.97	1.04
	2 x 1	1.73	2.02	1.28
	2 x 1 1/4	1.90	2.10	1.36
	2 x 1 1/2	2.02	2.16	1.51
	2 1/2 x 1 1/2	2.16	2.51	2.20
	2 1/2 x 2	2.39	2.60	2.55
	3 x 2	2.52	2.89	3.35
	3 x 2 1/2	2.83	2.99	4.12
	4 x 2	2.72	3.43	5.01
	4 x 3	3.30	3.60	6.65



# SPF MALLEABLE IRON FITTINGS

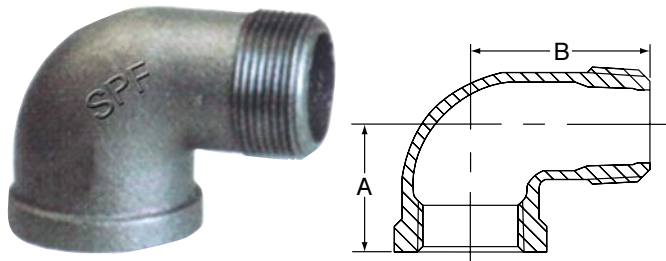
## Class 150 (Standard)

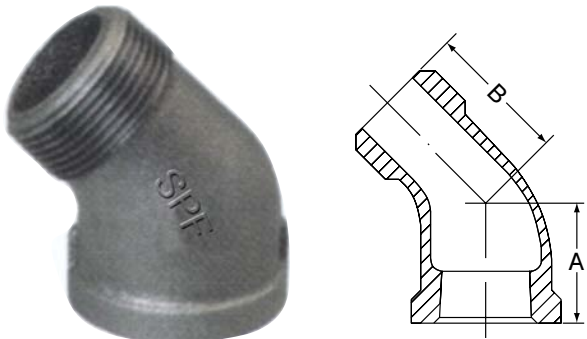
90° ELBOW	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/8	0.69	0.06
	1/4	0.81	0.10
	3/8	0.95	0.15
	1/2	1.12	0.22
	3/4	1.31	0.36
	1	1.50	0.57
	1 1/4	1.75	0.87
	1 1/2	1.94	1.16
	2	2.25	1.81
	2 1/2	2.70	3.23
	3	3.08	4.82
	4	3.79	8.41
	6	5.13	19.96

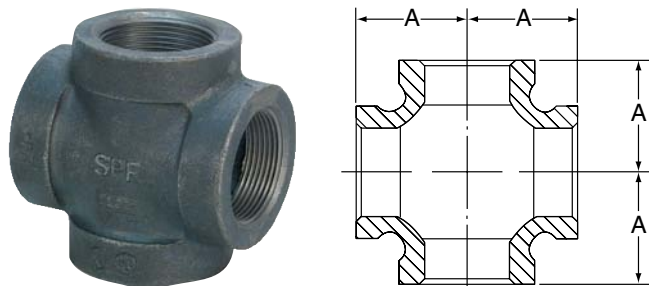
45° ELBOW	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/8	0.63	0.06
	1/4	0.73	0.11
	3/8	0.80	0.14
	1/2	0.88	0.20
	3/4	0.98	0.32
	1	1.12	0.50
	1 1/4	1.29	0.76
	1 1/2	1.43	1.00
	2	1.68	1.61
	2 1/2	1.95	2.77
	3	2.17	4.03
	4	2.61	6.92
	6	3.46	16.31

# SPF MALLEABLE IRON FITTINGS

## Class 150 (Standard)

<b>90° STREET ELBOW</b>		<b>Size</b>	<b>A</b>	<b>B</b>	<b>Weight</b>
		<i>in</i>	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/8	0.69	1.00	0.05	
	1/4	0.81	1.19	0.09	
	3/8	0.95	1.44	0.15	
	1/2	1.12	1.63	0.20	
	3/4	1.31	1.89	0.34	
	1	1.50	2.14	0.58	
	1 1/4	1.75	2.45	0.84	
	1 1/2	1.94	2.69	1.12	
	2	2.25	3.26	1.85	
	2 1/2	2.70	3.86	3.28	
	3	3.08	4.51	5.00	
	4	3.79	5.69	9.18	


<b>45° STREET ELBOW</b>		<b>Size</b>	<b>A</b>	<b>B</b>	<b>Weight</b>
		<i>in</i>	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/8	0.63	0.83	0.05	
	1/4	0.73	0.94	0.08	
	3/8	0.80	1.03	0.12	
	1/2	0.88	1.15	0.18	
	3/4	0.98	1.29	0.27	
	1	1.12	1.47	0.44	
	1 1/4	1.29	1.71	0.70	
	1 1/2	1.43	1.88	0.92	
	2	1.68	2.22	1.50	

<b>CROSS</b>		<b>Size</b>	<b>A</b>	<b>Weight</b>
		<i>in</i>	<i>in</i>	<i>lbs</i>
	1/4	0.81	0.17	
	3/8	0.95	0.26	
	1/2	1.12	0.38	
	3/4	1.31	0.61	
	1	1.50	0.95	
	1 1/4	1.75	1.42	
	1 1/2	1.94	1.86	
	2	2.25	2.83	

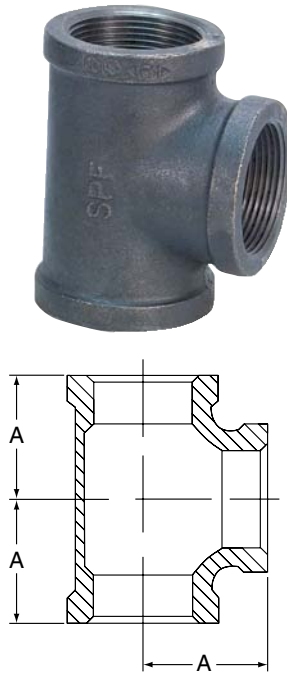


# SPF MALLEABLE IRON FITTINGS

## Class 150 (Standard)


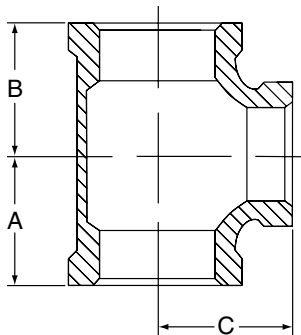
CAP	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/8 ▲	0.53	0.03
	1/4 ▲	0.63	0.05
	3/8 ▲	0.74	0.07
	1/2	0.87	0.11
	3/4	0.97	0.18
	1	1.16	0.30
	1 1/4	1.28	0.44
	1 1/2	1.33	0.55
	2	1.45	0.85
	2 1/2	1.70	1.49
	3	1.80	2.20
	3 1/2	1.90	3.02
	4	2.08	3.79
6	2.55	8.77	

▲ Supplied in Steel only (Black and Galvanized).

TEE	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/8	0.69	0.09
	1/4	0.81	0.14
	3/8	0.95	0.21
	1/2	1.12	0.31
	3/4	1.31	0.50
	1	1.50	0.79
	1 1/4	1.75	1.19
	1 1/2	1.94	1.57
	2	2.25	2.43
	2 1/2	2.70	4.33
	3	3.08	6.37
	4	3.79	11.03
	6	5.13	25.98

# SPF MALLEABLE IRON FITTINGS

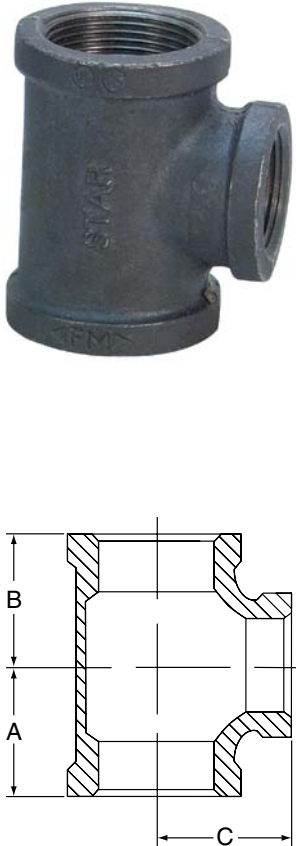
## Class 150 (Standard)

REDUCING TEE	Size			A	B	C	Weight	
	in			in	in	in	lbs	
 	1/2	1/2	1/4	0.97	0.97	0.98	0.24	
			3/8	1.04	1.04	1.03	0.27	
			3/4	1.22	1.22	1.20	0.37	
			1	1.36	1.36	1.26	0.49	
	3/4	1/2	1/2	1.20	1.12	1.22	0.38	
			3/4	1.31	1.22	1.31	0.45	
		3/4	1/4	1.05	1.05	1.08	0.36	
			3/8	1.12	1.12	1.13	0.39	
			1/2	1.20	1.20	1.22	0.43	
			1	1.45	1.45	1.37	0.62	
		1	1/4	1	1.50	1.18	1.50	0.63
			1/2	1/2	1.26	1.12	1.36	0.48
	3/4			1.37	1.22	1.45	0.56	
	1			1.50	1.36	1.50	0.67	
	3/4		1/2	1.26	1.20	1.36	0.53	
			3/4	1.37	1.31	1.45	0.61	
			1	1.50	1.45	1.50	0.71	
			1	3/8	1.18	1.18	1.27	0.57
				1/2	1.26	1.26	1.36	0.62
				3/4	1.37	1.37	1.45	0.69
	1 1/4		1/2	1 1/4	1.67	1.67	1.58	0.94
				1 1/2	1.80	1.80	1.65	1.07
		3/4	2	2.02	2.02	1.73	1.45	
			1	1.58	1.36	1.67	0.82	
			1 1/4	1.75	1.53	1.75	0.95	
			1 1/2	1.88	1.88	1.82	1.34	
		3/4	3/4	1.45	1.31	1.62	0.75	
			1	1.58	1.45	1.67	0.87	
			1 1/4	1.75	1.62	1.75	1.00	
			1	1/2	1.34	1.26	1.53	0.74
				3/4	1.45	1.37	1.62	0.82
				1	1.58	1.50	1.67	0.94
1 1/4		1 1/4	1 1/4	1.75	1.67	1.75	1.08	
			3/8	1.26	1.26	1.44	0.78	
	1/2		1.34	1.34	1.53	0.84		
	3/4		1.45	1.45	1.62	0.92		
	1 1/4	1	1.58	1.58	1.67	1.04		
		1 1/2	1.88	1.88	1.82	1.34		
		2	2.10	2.10	1.90	1.65		
		2	2.10	2.10	1.90	1.65		

**CONTINUED  
ON NEXT PAGE.**


# SPF MALLEABLE IRON FITTINGS

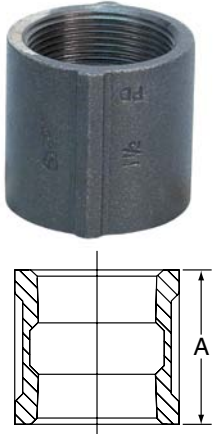
## Class 150 (Standard)

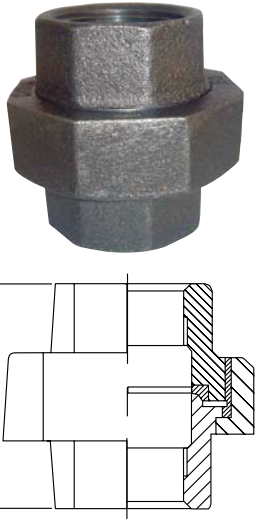
REDUCING TEE		Size		A	B	C	Weight
		in		in	in	in	lbs
	1 1/2	1/2	1 1/2	1.94	1.66	1.94	1.24
			3/4	1.50	1.26	1.69	0.86
		3/4	1 1/2	1.94	1.75	1.94	1.29
			1	1.65	1.50	1.80	1.08
			1 1/4	1.82	1.67	1.88	1.23
		1	1 1/2	1.94	1.80	1.94	1.35
			3/4	1.52	1.45	1.75	1.04
			1	1.65	1.58	1.80	1.17
			1 1/4	1.82	1.75	1.88	1.32
			1 1/2	1.94	1.88	1.94	1.45
		1 1/4	2	2.10	2.10	1.90	1.82
			1/2	1.41	1.41	1.66	1.04
			3/4	1.52	1.52	1.75	1.14
			1	1.65	1.65	1.80	1.27
			1 1/4	1.82	1.82	1.88	1.43
		2	1/2	2	2.25	1.88	2.25
	3/4			2	2.25	1.97	2.25
	3/4		1	1.81	1.75	1.87	1.39
			2	2.25	2.02	2.25	2.00
	1		1 1/4	1.90	1.75	2.10	1.64
			1 1/2	2.02	1.88	2.16	1.80
			2	2.25	2.10	2.25	2.09
	1 1/4		1	1.73	1.65	2.02	1.57
			1 1/4	1.90	1.82	2.10	1.71
			1 1/2	2.02	1.94	2.16	1.88
			2	2.25	2.16	2.25	2.21
	1 1/2		1/2	1.49	1.49	1.88	1.53
			3/4	1.60	1.60	1.97	1.63
			1	1.73	1.73	2.02	1.78
			1 1/4	1.90	1.90	2.10	1.97
			1 1/2	2.02	2.02	2.16	2.12
		2 1/2	2.60	2.60	2.39	3.15	
	2 1/2	2 1/2	3/4	1.74	1.74	2.32	2.67
			1	1.87	1.87	2.37	2.84
			1 1/4	2.04	2.04	2.45	3.09
			1 1/2	2.16	2.16	2.51	3.29
			2	2.39	2.39	2.60	3.65
	3	2	2	2.52	2.25	2.89	3.88
			3/4	1.87	1.87	2.61	3.72
		3	1	2.00	2.00	2.66	3.96
1 1/4			2.17	2.17	2.74	4.23	
1 1/2			2.29	2.29	2.80	4.45	
2			2.52	2.52	2.89	4.90	
2 1/2			2.83	2.83	2.99	5.69	
4	4	2	2.74	2.74	3.41	7.52	
		2 1/2	3.05	3.05	3.51	8.51	
		3	3.30	3.30	3.60	9.25	

# SPF MALLEABLE IRON FITTINGS

## Class 150 (Standard)


FLOOR FLANGE	Size	Dia. Flange	Dia. of Bolt Circle	Dia. of Bolt Holes	Weight
	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>lbs</i>
	¾	3.37	2.36	.28	0.49
	1	3.78	2.80	.28	0.63
	1 ¼	4.19	3.17	.28	0.87
	1 ½	4.59	3.50	.31	1.10
	2	5.18	4.01	.31	1.57


COUPLING	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	⅛	0.96	0.05
	¼	1.06	0.08
	⅜	1.16	0.12
	½	1.34	0.17
	¾	1.52	0.27
	1	1.67	0.43
	1 ¼	1.93	0.65
	1 ½	2.15	0.86
	2	2.53	1.35
	2 ½	2.88	2.33
	3	3.18	3.36
	4	3.69	5.59

UNIONS (BRASS SEAT)	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	⅛	1.26	0.16
	¼	1.46	0.23
	⅜	1.61	0.33
	½	1.73	0.41
	¾	1.95	0.60
	1	2.07	0.89
	1 ¼	2.26	1.25
	1 ½	2.42	1.76
	2	2.75	2.44
	2 ½	3.23	3.52
	3	3.50	4.34

# SPF MALLEABLE IRON FITTINGS



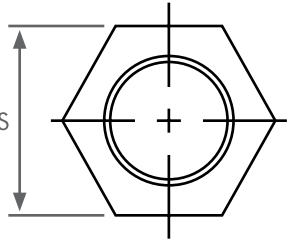
## Class 150 (Standard)

REDUCING COUPLINGS	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/4 x 1/8	1.00	0.07
	3/8 x 1/8	1.13	0.09
	3/8 x 1/4	1.13	0.10
	1/2 x 1/8	1.25	0.13
	1/2 x 1/4	1.25	0.13
	1/2 x 3/8	1.25	0.14
	3/4 x 1/8	1.44	0.18
	3/4 x 1/4	1.44	0.20
	3/4 x 3/8	1.44	0.21
	3/4 x 1/2	1.44	0.22
	1 x 1/2	1.69	0.34
	1 x 3/4	1.69	0.36
	1 1/4 x 1/2	2.06	0.47
	1 1/4 x 3/4	2.06	0.51
	1 1/4 x 1	2.06	0.57
	1 1/2 x 1/2	2.31	0.62
	1 1/2 x 3/4	2.31	0.66
	1 1/2 x 1	2.31	0.73
	1 1/2 x 1 1/4	2.31	0.80
	2 x 1/2	2.81	0.94
	2 x 3/4	2.81	0.99
	2 x 1	2.81	1.03
	2 x 1 1/4	2.81	1.17
	2 x 1 1/2	2.81	1.25
	2 1/2 x 1 1/4	3.25	1.81
	2 1/2 x 1 1/2	3.25	1.90
	2 1/2 x 2	3.25	2.04
	3 x 1	3.69	2.48
	3 x 1 1/4	3.69	2.55
	3 x 1 1/2	3.69	2.67
3 x 2	3.69	2.78	
3 x 2 1/2	3.69	3.23	
4 x 2	4.38	4.43	
4 x 2 1/2	4.38	4.87	
4 x 3	4.38	5.29	

PLUGS		Size	A	B	C	Weight
		<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>lbs</i>
	Solid	1/4	0.44	0.28	0.38	0.04
	Solid	3/8	0.48	0.31	0.44	0.06
	Cored	1/2	0.56	0.38	0.56	0.08
	Cored	3/4	0.63	0.44	0.63	0.13
	Cored	1	0.75	0.50	0.81	0.20
	Cored	1 1/4	0.80	0.56	0.94	0.32
	Cored	1 1/2	0.83	0.62	1.13	0.43
	Cored	2	0.88	0.68	1.31	0.67
	Cored	2 1/2	1.07	0.74	1.50	1.11
	Cored	3	1.13	0.80	1.69	1.53
	Bar Plug	4	1.22	1.00	-	2.71
	Bar Plug	6	1.40	1.25	-	4.00

# SPF MALLEABLE IRON FITTINGS

## Class 150 (Standard)


HEX BUSHING	Size	A	B	S	Weight	Hex
	<i>in</i>	<i>in</i>	<i>in</i>	<i>in</i>	<i>lbs</i>	
  	3/4 x 1/2	0.63	0.22	1.15	0.11	outside
	1 x 1/8	0.75	0.30	1.12	0.18	inside
	1 x 1/4	0.75	0.30	1.12	0.21	inside
	1 x 3/8	0.75	0.30	1.12	0.20	inside
	1 x 1/2	0.75	0.25	1.42	0.22	outside
	1 x 3/4	0.75	0.25	1.42	0.18	outside
	1 1/4 x 1/4	0.80	0.34	1.12	0.30	inside
	1 1/4 x 3/8	0.80	0.34	1.12	0.28	inside
	1 1/4 x 1/2	0.80	0.34	1.34	0.32	inside
	1 1/4 x 3/4	0.80	0.28	1.76	0.37	outside
	1 1/4 x 1	0.80	0.28	1.76	0.30	outside
	1 1/2 x 1/4	0.83	0.37	1.12	0.38	inside
	1 1/2 x 3/8	0.83	0.37	1.12	0.38	inside
	1 1/2 x 1/2	0.83	0.37	1.34	0.40	inside
	1 1/2 x 3/4	0.83	0.37	1.63	0.45	inside
	1 1/2 x 1	0.83	0.31	2.00	0.46	outside
	1 1/2 x 1 1/4	0.83	0.31	2.00	0.31	outside
	2 x 1/4	0.88	0.41	1.12	0.54	inside
	2 x 1/2	0.88	0.41	1.34	0.56	inside
	2 x 3/4	0.88	0.41	1.63	0.61	inside
	2 x 1	0.88	0.41	1.95	0.65	inside
	2 x 1 1/4	0.88	0.34	2.48	0.80	outside
	2 x 1 1/2	0.88	0.34	2.48	0.66	outside
	2 1/2 x 3/4	1.07	0.44	1.63	0.98	inside
	2 1/2 x 1	1.07	0.44	1.95	1.04	inside
	2 1/2 x 1 1/4	1.07	0.44	2.39	1.10	inside
	2 1/2 x 1 1/2	1.07	0.44	2.68	1.38	outside
	2 1/2 x 2	1.07	0.37	2.98	0.97	outside
	3 x 1	1.13	0.48	1.95	1.48	inside
	3 x 1 1/4	1.13	0.48	2.39	1.57	inside
	3 x 1 1/2	1.13	0.48	2.68	1.62	inside
	3 x 2	1.13	0.48	3.28	2.10	outside
3 x 2 1/2	1.13	0.40	3.86	1.84	outside	
3 1/2 x 3	1.18	0.43	4.62	2.10	outside	
4 x 3/4	1.22	0.67	1.63	2.48	inside	
4 x 1	1.22	0.60	1.95	2.60	inside	
4 x 1 1/4	1.22	0.60	2.39	2.74	inside	
4 x 1 1/2	1.22	0.60	2.68	2.81	inside	
4 x 2	1.22	0.60	3.28	2.91	inside	
4 x 2 1/2	1.22	0.60	3.86	2.98	inside	
4 x 3	1.22	0.50	4.62	2.93	outside	

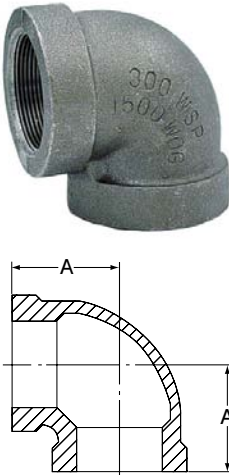
# SPF MALLEABLE IRON FITTINGS

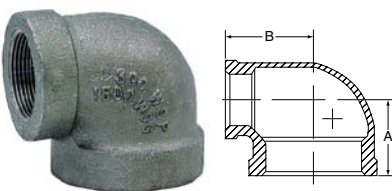
## Class 300 (Extra Heavy)

### STANDARDS & SPECIFICATIONS

#### Malleable Iron Screwed Fittings (Class 300)

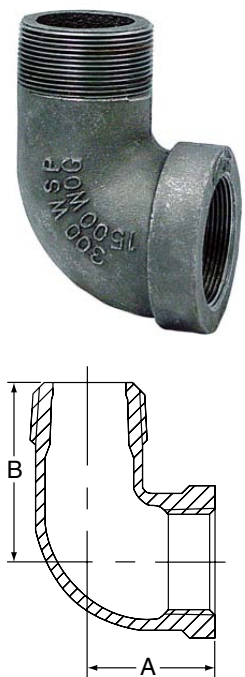
Dimensional:	Fittings:	ASME B16.3	
	Unions:	ASME B 16.39	
	Bushings/Plugs:	ASME B 16.14	
Material:	ASTM A-197		
Galvanizing:	ASTM A-153	(Hot Dip Galvanizing)	
Threading:	ASME B 1.20.1		
Pressure Rating:	Fittings:	ASME B 16.3	
	Unions:	ASME B 16.39	
	Bushings/Plugs:	ASME B 16.14	
Pressure Testing:	All malleable iron fittings are tested for through wall porosity using an air under water process.		
Agency Approvals:	All malleable iron fittings and unions are UL Listed and FM Approved.		

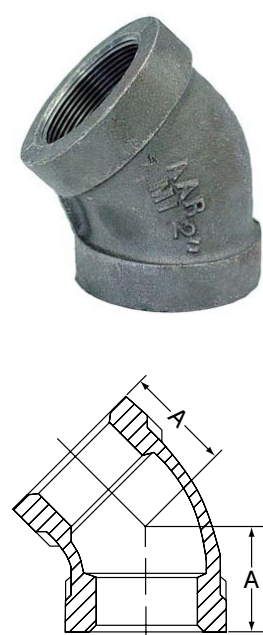
<b>90° ELBOW</b> 	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/4	0.94	0.20
	3/8	1.06	0.29
	1/2	1.25	0.47
	3/4	1.44	0.66
	1	1.63	1.20
	1 1/4	1.94	1.90
	1 1/2	2.13	2.50
	2	2.50	4.20
	2 1/2	2.94	5.30
	3	3.38	9.70
	4	4.50	16.00

<b>90° REDUCING ELBOW</b> 	Size	A	B	Weight
	<i>in</i>	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/2 x 3/8	1.19	1.19	0.41
	1 x 3/4	1.50	1.56	1.00

# SPF MALLEABLE IRON FITTINGS

## Class 300 (Extra Heavy)


90° STREET ELBOW	Size	A	B	Weight
	<i>in</i>	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/4	0.94	1.44	0.17
	3/8	1.06	1.63	0.26
	1/2	1.25	2.00	0.40
	3/4	1.44	2.19	0.68
	1	1.63	2.56	1.10
	1 1/4	1.94	2.88	1.60
	1 1/2	2.13	3.13	2.20
	2	2.50	3.69	3.60
	3	3.38	5.13	9.60

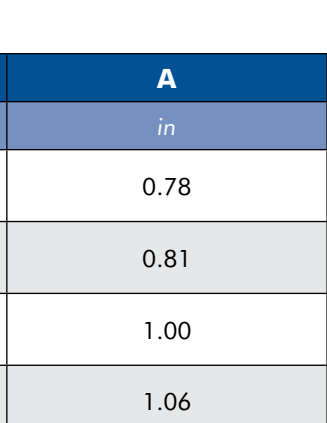
45° ELBOW	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/4	0.81	0.19
	3/8	0.88	1.28
	1/2	1.00	0.43
	3/4	1.13	0.66
	1	1.31	1.00
	1 1/4	1.50	1.70
	1 1/2	1.69	2.10
	2	2.00	3.40
	2 1/2	2.25	5.50
	3	2.50	8.10
4	2.81	13.00	



# SPF MALLEABLE IRON FITTINGS


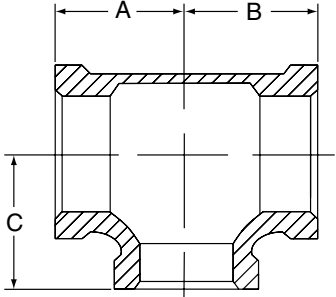
## Class 300 (Extra Heavy)

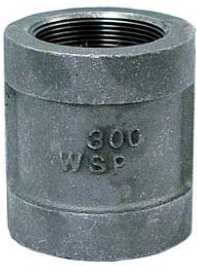

CAP	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/4	0.78	0.10
	3/8	0.81	0.15
	1/2	1.00	2.23
	3/4	1.06	0.35
	1	1.25	0.58
	1 1/4	1.38	0.94
	1 1/2	1.44	1.20
	2	1.69	1.90
	2 1/2	2.06	3.30
	3	2.19	4.70

TEE	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
	1/4	1.31	0.27
	3/8	1.06	0.42
	1/2	1.25	0.65
	3/4	1.44	1.10
	1	1.63	1.60
	1 1/4	1.94	2.50
	1 1/2	2.13	3.40
	2	2.50	5.20
	2 1/2	2.94	8.00
	3	3.38	13.00
	4	4.50	24.00

# SPF MALLEABLE IRON FITTINGS



## Class 300 (Extra Heavy)


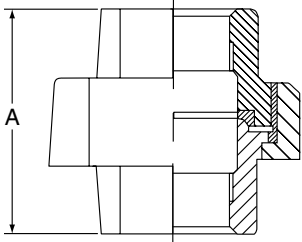
REDUCING TEE	Size			A	B	C	Weight
	in			in	in	in	lbs
 	3/4	3/4	1/2	1.31	1.31	1.38	0.90
	1	1	1/2	1.44	1.44	1.50	1.30
			3/4	1.50	1.50	1.56	1.30
	1 1/4	1 1/4	1/2	1.50	1.50	1.69	1.70
			3/4	1.63	1.63	1.75	1.90
			1	1.75	1.75	1.81	2.10
	1 1/2	1 1/2	1/2	1.63	1.63	1.81	2.30
			3/4	1.69	1.69	1.88	2.50
			1	1.81	1.81	2.00	2.60
			1 1/4	2.00	2.00	2.06	3.00
	2	2	1/2	1.75	1.75	2.06	3.40
			3/4	1.81	1.81	2.13	3.60
			1	2.00	2.00	2.25	4.00
			1 1/4	2.13	2.13	2.31	4.20
			1 1/2	2.25	2.25	2.38	4.60
2 1/2	2 1/2	2	2.69	2.69	2.75	7.60	
3	3	2	2.81	2.81	3.13	9.60	

COUPLING	Size	A	Weight
	in	in	lbs
 	1/4	1.38	0.17
	3/8	1.63	0.26
	1/2	1.88	0.42
	3/4	2.13	0.65
	1	2.38	0.99
	1 1/4	2.88	1.60
	1 1/2	2.88	2.00
	2	3.63	3.20
	2 1/2	4.13	5.50
	3	4.13	7.30

# SPF MALLEABLE IRON FITTINGS

## Class 300 (Extra Heavy)

REDUCING COUPLINGS	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
 	3/8 x 1/4	1.44	0.21
	1/2 x 1/4	1.69	0.31
	1/2 x 3/8	1.69	0.34
	3/4 x 3/8	1.75	0.47
	3/4 x 1/2	1.75	0.50
	1 x 1/2	2.00	0.71
	1 x 3/4	2.00	0.79
	1 1/4 x 1/2	2.38	1.10
	1 1/4 x 3/4	2.38	1.20
	1 1/4 x 1	2.38	1.30
	1 1/2 x 1/2	2.69	1.50
	1 1/2 x 3/4	2.69	1.60
	1 1/2 x 1	2.69	1.60
	1 1/2 x 1 1/4	2.69	1.80
	2 x 1/2	3.19	2.40
	2 x 3/4	3.19	2.40
	2 x 1	3.19	2.50
	2 x 1 1/4	3.19	2.70
	2 x 1 1/2	3.19	2.70
	2 1/2 x 1 1/2	3.69	4.10
2 1/2 x 2	3.69	4.30	
3 x 2	4.06	5.80	
3 x 2 1/2	4.06	6.50	
4 x 3	4.38	10.00	

UNIONS (BRASS SEAT)	Size	A	Weight
	<i>in</i>	<i>in</i>	<i>lbs</i>
 	1/8	1.31	0.14
	1/4	1.81	0.47
	3/8	1.81	0.43
	1/2	2.06	0.53
	3/4	2.25	0.80
	1	2.56	1.30
	1 1/4	2.75	1.60
	1 1/2	3.00	2.10
	2	3.38	3.50
	2 1/2	3.88	5.00
	3	4.25	7.70
	4	4.88	18.00



## Corporate Offices

110 Corporate Drive, Suite 10  
P.O. Box 3180  
Portsmouth, NH 03801-3180

Tel: 603-422-8000  
Fax: 603-422-8033

E-mail: [webmaster@anvilintl.com](mailto:webmaster@anvilintl.com)

## Anvil International Worldwide Customer Service Center

Tel: 708-885-3000  
Fax: 708-534-5441

## U.S. REGIONAL SERVICE CENTERS

### Northern Region

#### Regional Distribution & Customer Service Center

**SERVICING:** Illinois, Indiana, Iowa, Kentucky, Michigan, Minnesota, Nebraska, North and South Dakota, Ohio, West Pennsylvania, West Virginia, Wisconsin

750 Central Avenue  
University Park, IL 60484

Tel: 708-885-3000  
Fax: 708-534-5441  
Toll Free: 1-800-301-2701

### Southern Region

#### Regional Distribution & Customer Service Center

**SERVICING:** Alabama, Arkansas, Kansas, Louisiana, Mississippi, Missouri, Oklahoma, Tennessee, Texas

1401 Valley View Lane, Suite 150  
Irving, TX 75061

Tel: 972-871-1206  
Fax: 972-641-8946  
Toll Free: 1-800-451-4414

### Eastern Region

#### Regional Distribution Center

**SERVICING:** Connecticut, Delaware, Florida, Georgia, Maine, Maryland, Massachusetts, New Hampshire, New Jersey, New York, North and South Carolina, East Pennsylvania, Rhode Island, Vermont, Virginia

800 Malleable Road  
Columbia, PA 17512

### Western Region

#### Regional Distribution Center

**SERVICING:** Alaska, Arizona, California, Colorado, Hawaii, Idaho, Montana, Nevada, New Mexico, Oregon, Utah, Washington, Wyoming

1385 Greg Street  
Sparks, NV 89431

## CANADA SERVICE CENTER

### Anvil International Canada Customer Service Center

390 Second Avenue  
P.O. Box 40  
Simcoe, Ontario N3Y 4K9

Tel: 519-426-4551  
Fax: 519-426-5509

## INTERNATIONAL SALES

### Europe and Middle East Region

Rick van Meesen, *Sales Director*  
The Netherlands  
[rvanmeesen@anvilintl.com](mailto:rvanmeesen@anvilintl.com)

Tel: +31-53-5725570  
Fax: +31-53-5725579

U.S. Customer Service  
Tel: +1-708-885-3000  
Fax: +1-708-534-5441

### Mexico, Puerto Rico and Latin America

Abraham Quijada, *Sales Manager*  
[aquijada@anvilintl.com](mailto:aquijada@anvilintl.com)

Tel: +1-281-590-4600

U.S. Customer Service  
Tel: +1-708-885-3000  
Fax: +1-708-534-5441

BUILDING CONNECTIONS THAT LAST



**GOODYEAR**  
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**  
[WebSales@GoodyearRubberProducts.com](mailto:WebSales@GoodyearRubberProducts.com)

**We Ship  
World Wide**