

Kanaflex®


KANALINE SR

Exposed helix . . . acts as a scuff guard, permits wash water to flow underneath and allows easy drag.

Braided reinforcement . . . permits use under higher working pressure. Will take full vacuum. Will not stretch or elongate.

Smooth bore . . . provides unrestricted flow.

Clear sidewall . . . permits visual check of material flow.

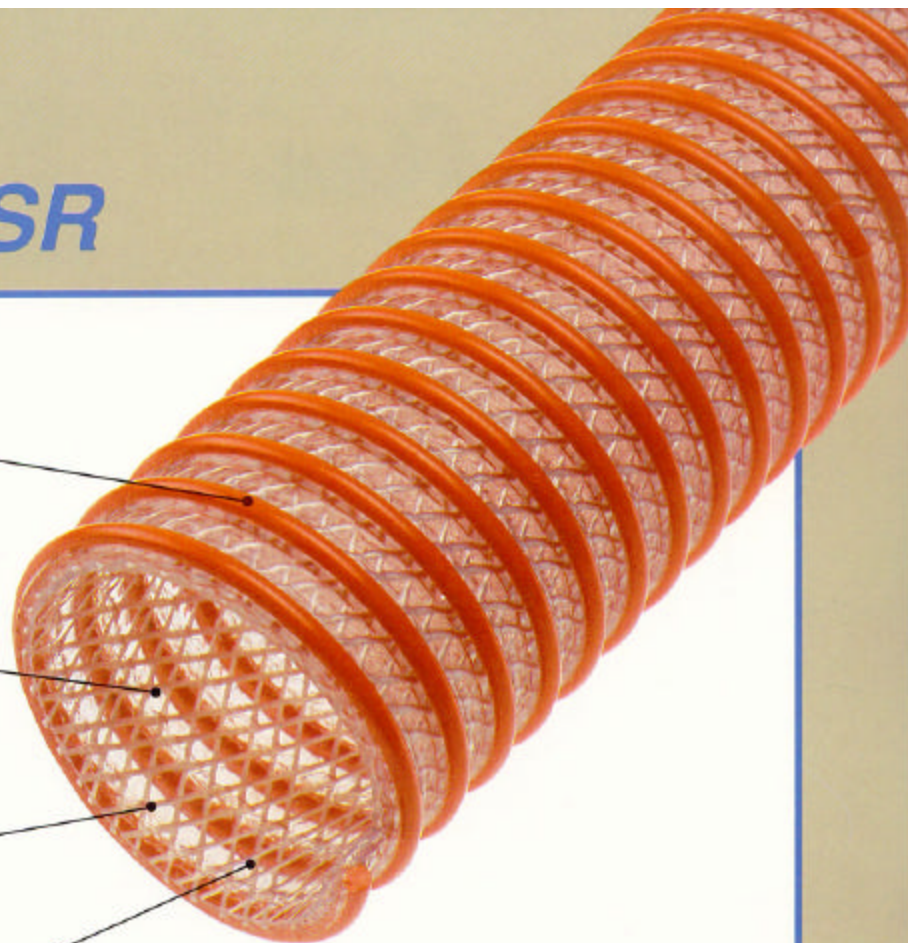

SPECIFICATIONS

SIZE	OUTSIDE DIAMETER Inches	PITCH Inches	MIN. BENDING RADIUS 72°F, Inches	WORKING PRESSURE 72°F, P.S.I.	BURSTING PRESSURE 72°F, P.S.I.	VACUUM RATING 72°F, In. / Hg.	WEIGHT Lbs. / Ft.
1 1/2"	2.01	0.35	2.0	125	375	28	0.41
2"	2.58	0.39	3.5	125	375	28	0.65
3"	3.60	0.59	3.5	125	375	28	1.07
4"	4.72	0.65	7.1	100	300	28	1.74
6"	7.17	0.94	10.2	50	150	28	3.87
8"	9.33	1.10	15.7	50	150	28	5.34
10"	11.63	1.26	24.8	36	100	28	8.67

Kanaflex®

CORPORATION

800 Woodlands Parkway
Vernon Hills, IL 60061

DISTRIBUTED BY:

GOODYEAR
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship
World Wide**