


Kanaflex®

SERIES 390 SD (100% EPDM) ALL-WEATHER SUCTION/DISCHARGE HOSE.
THE BEST HOSE TO DO THE JOB RIGHT.

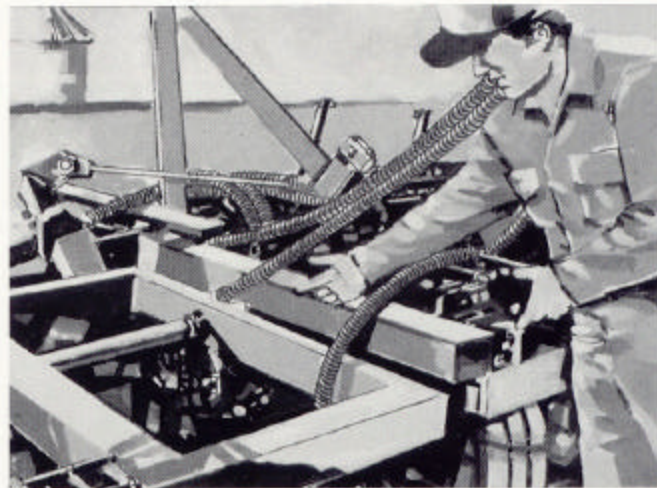

• Construction • Rental Equipment • Agricultural • Cesspool/Sewer Cleaning • Plant Maintenance

Long life . . . abrasion resistant cover lasts longer than PVC and conventional rubber hose.

Weatherproof . . . Kanaflex is highly resistant to temperature changes and deterioration by sun, ozone or mildew.

Easy drag . . . exposed helix makes handling easy.

Flexible . . . lends itself to working in tight spaces. Flexible in low temperatures especially when compared to PVC.

Lightweight . . . up to 50% lighter than conventional rubber hose, so it's easier to handle and less expensive to transport.

Smooth bore . . . combined with smooth bending characteristics, makes for the fastest, most efficient transfer of materials.

Braided . . . allows for heavier working pressure.

Kanaflex® SERIES 390 SD SPECIFICATIONS:

INSIDE DIAMETER, Inches	OUTSIDE DIAMETER, Inches	PITCH, Inches	MIN. BENDING RADIUS, 72°F, Inches	WORKING PRESSURE, 72°F, P.S.I.	VACUUM RATING, 72°F, In./Hg.	WEIGHT, Lbs./Ft.
1-1/4	1.60	.47	3.0	100	29.8	.34
1-1/2	1.87	.47	3.0	100	29.8	.47
2	2.42	.47	5.0	100	29.8	.61
3	3.54	.59	7.0	90	29.8	1.10

Temperature range:—40° to 158° F.

Refer to chemical resistant chart in our catalog.

Kanaflex®
CORPORATION

800 Woodlands Parkway
Vernon Hills, IL 60061

DISTRIBUTED BY:

GOODYEAR
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**
WebSales@GoodyearRubberProducts.com

**We Ship
World Wide**