

## IMPRESSION TOP BELT



### #103B 2 Ply 220 Chevron Top x Bare Back

Excellent all purpose rubber incline belt. Low stretch polyester fabric contains 1/16" high continuous SBR rubber chevrons.

**Temperature range:** -40° F to 225° F. **Thickness:** 15/64". **Weight:** .130 piw.  
**Minimum pulley diameter:** 12". **Recommended fasteners:** #2 Hook, #125 Staple, #20 Alligator.

**Part Number: 20029575**



### #46 3 Ply 105 Black Roughtop x Friction Surface

Popular standard roughtop belt with rugged appearance. Often used as pulley lagging. Features a deep, nonskid hemp impression roughtop surface that enables products to be conveyed on inclines and declines. Grip impression eliminates or minimizes slide back of loads.

**Temperature range:** -25° F to 225° F. **Thickness:** 21/64". **Weight:** .130 piw.  
**Minimum pulley diameter:** 4". **Recommended fasteners:** #1 Hook, #125 Staple, #7 Alligator.

**Part Number: 20030200**




### #47 2 Ply 150 Black Roughtop x Bare Back

Popular standard roughtop belt that can be used as pulley lagging. Features a deep, nonskid hemp impression roughtop surface that enables products to be conveyed on inclines and declines. Grip impression eliminates or minimizes slide back of loads.

**Temperature range:** -25° F to 225° F. **Thickness:** 15/64". **Weight:** .120 piw.  
**Minimum pulley diameter:** 4". **Recommended fasteners:** #1 Hook, #125 Staple, #7 Alligator.

**Part Number: 20029005**

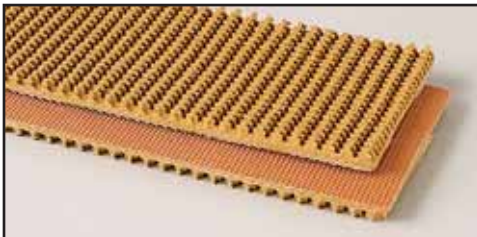


### #47A 2 Ply 150 Tan Roughtop x Bare Back

Popular non-marking roughtop belt that can be used as pulley lagging. Features a deep, nonskid hemp impression roughtop surface that enables products to be conveyed on inclines and declines. Grip impression eliminates or minimizes slide back of loads.

**Temperature range:** -25° F to 225° F. **Thickness:** 15/64". **Weight:** .120 piw.  
**Minimum pulley diameter:** 4". **Recommended fasteners:** #25LP Hook, #62 Staple, #7 Alligator.

**Part Number: 20029000**

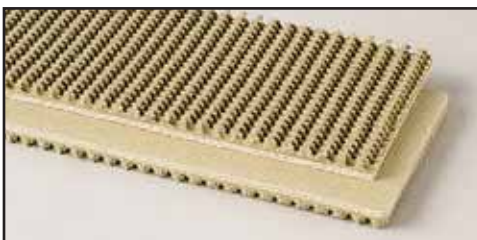

### #48 3 Ply 135 Pure Gum Roughtop x Friction Surface

Popular standard natural gum rubber roughtop belt. The natural gum is soft with a low durometer for the highest grip which eliminates or minimizes slide back of loads. Features a deep, nonskid hemp impression roughtop surface that permits products to be conveyed on the steepest inclines and declines. Three plies of cotton-polyester fabric provide strength without sacrificing flexibility.

**Temperature range:** -40° F to 250° F. **Thickness:** 9/32". **Weight:** .100 piw.  
**Minimum pulley diameter:** 4". **Recommended fasteners:** #2 Hook, #125 Staple, #20 Alligator.

**Part Number: 20030220**



### #48A 3 Ply Polyester 150 Brown Nitrile Roughtop x Bare Back

Nitrile roughtop construction resists the effects of oil, heat, grease, and many chemical concentrations. Nitrile cover provides excellent flex life, abrasion, and impact resistance.

**Temperature range:** 0° F to 250° F. **Thickness:** 9/32". **Weight:** .105 piw.  
**Minimum pulley diameter:** 3 1/2". **Recommended fasteners:** #2 Hook, #62 Staple, #7 Alligator.

**Part Number: 20030205**