

WHITE FOOD BELT



#91C 3 Ply 150 White RMV x Friction Surface

Excellent belt for handling meat, poultry, fish, canned fruits, vegetable, and dry bulk foods. Polyester carcass is blended with vinyl compounds and remains bright after cleaning. Excellent choice for many heavier duty belt applications requiring higher belt tensions. This belt can be fabricated with cleats, flanges, v-guides, and other value added profiles. Meets FDA requirements; is USDA accepted.


Temperature range: 20° F to 180° F. **Thickness:** 9/64". **Weight:** .083 piw.
Minimum pulley diameter: 3". **Recommended fasteners:** #1 Hook, #125 Staple, #15 Alligator.
Part Number: 20032951



#221 Polymate 135 White RMP COS

Smooth white oil resistant cover with unique quiet running, excellent tracking, and laterally rigid non-woven carcass. Great choice for cleated profiles. FDA/USDA Approved.


Temperature range: 20° F to 180° F. **Thickness:** 9/64". **Weight:** .070 piw.
Minimum pulley diameter: 2 1/2". **Recommended fasteners:** #1 Hook, #7 Alligator.
Part Number: 20028507

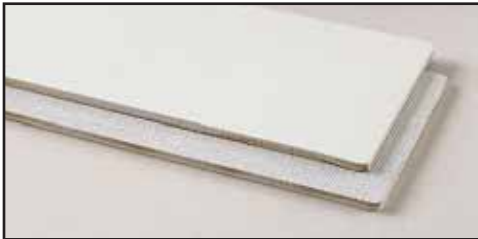

#92 3 Ply Poly 105 White Nitrile 3/64 x Friction Surface

A thicker and stronger white nitrile food belt. Very popular with USDA and FDA applications. Generally used for more rugged food handling uses. Can be hot water or steam cleaned. High strength polyester carcass has great dimensional stability for tracking. Belt can be fabricated with cleats, flanges, v-guides, and other value added profiles. Meets FDA requirements; is USDA accepted.

Temperature range: 0° F to 250° F. **Thickness:** 1/8". **Weight:** .070 piw.
Minimum pulley diameter: 3". **Recommended fasteners:** #1 Hook, #125 Staple, #7 Alligator.
Part Number: 20028505

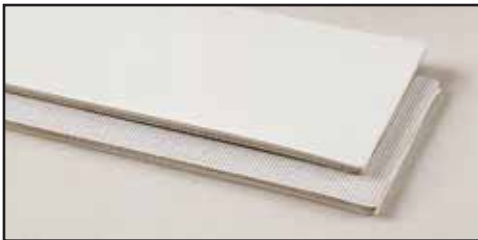

#92A 3 Ply PNT 150 White Nitrile 3/64 x Friction Surface

Strong polyester food belt with an extra heavy cover that resists the higher impact of heavier loading. Stable polyester carcass is strong, yet flexible. Tracks well and can be fabricated with cleats, flanges, v-guides, and other value added profiles. Meets FDA requirements; is USDA accepted.


Temperature range: 0° F to 250° F. **Thickness:** 5/32". **Weight:** .080 piw.
Minimum pulley diameter: 3 1/2". **Recommended fasteners:** #2 Hook, #125 Staple, #20 Alligator.
Part Number: 20028504



#94A PVC 100 White Cover x Mini Skim Coat

Belt provides a high service yield and is an excellent value for most food processing and harvesting uses. Fabricated cleats, flanges, v-guides, and other value added profiles can be hot welded to surfaces. Meets FDA requirements; is USDA accepted.

Temperature range: 20° F to 180° F. **Thickness:** 7/64". **Weight:** .050 piw.
Minimum pulley diameter: 1 1/2". **Recommended fasteners:** #1SP Hook, #62 Staple, #7 Alligator.
Part Number: 20035400

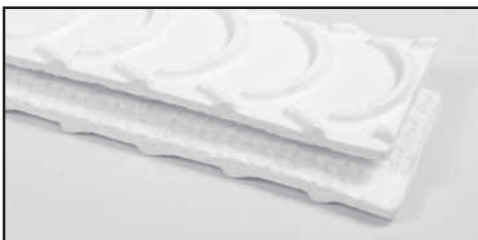

#239 PVC 120 White Crescent Top x Friction Surface

Crescent half moon shaped profiles project from belt surface to effectively move packaged and bulk materials. Profile design assists in draining liquids and crescents overlap to assure smooth and quiet running on return rolls. Meets FDA requirements; is USDA accepted.

Temperature range: 20° F to 180° F. **Thickness:** 15/64". **Weight:** .085 piw.
Minimum pulley diameter: 2". **Recommended fasteners:** #1 SP Hook, #62 Staple, #7 Alligator.
Part Number: 20035535