


# Polypropylene, Glass-filled

## FEATURES

- Safety Latches available on all couplers ranging in size from 1-1/4" to 3"
- Chemical resistant to most acids (Refer to chemical resistance tables for specific recommendation)
- Normal conditions: from 10°F to 180°F
- All couplers feature stainless steel handles & pins
- Interchangeable with other couplers and adapters – manufactured to MIL-spec
- EPDM gaskets furnished as standard. Buna-N, Viton and Neoprene also available

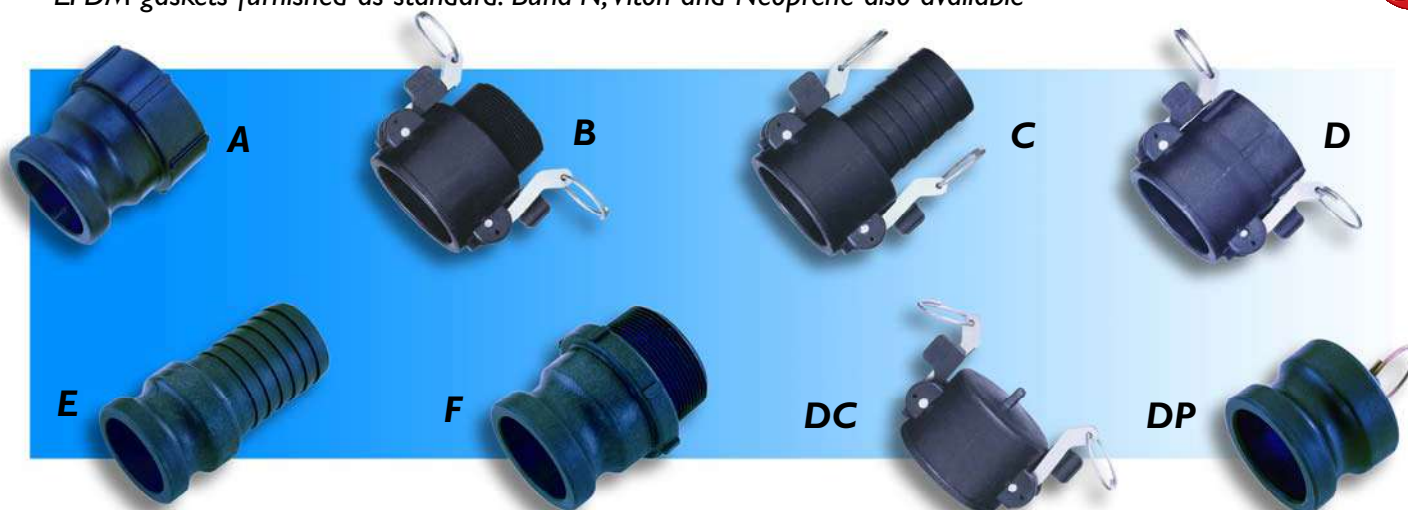

ITEM DESCRIPTION	1/4"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"	3"	4"
A Male Adapter/Female Thread	025 A-M	037 A-M	050 A-M		075 A-M	100 A-M	125 A-M	150 A-M	200 A-M	300 A-M	
Std. Package — Qty.	125	125	125		125	80	50	50	80	44	
Std. Package — Wt.	7#	7#	7#		7#	7#	11#	9#	22#	18#	
B Female Coupler/Male Thread			050 B-M		075 B-M	100 B-M	125 B-M	150 B-M	200 B-M	300 B-M*	
Std. Package — Qty.			100		100	80	60	60	50	25	
Std. Package — Wt.			14#		15#	14#	27#	27#	26#	25#	
C Female Coupler/Hose Shank			050 C-M	062 C-M	075 C-M	100 C-M	125 C-M	150 C-M	200 C-M	300 C-M	
Std. Package — Qty.			100	100	90	60	65	65	44	18	
Std. Package — Wt.			15#	11#	14#	11#	33#	32#	27#	22#	
D Female Coupler/Female Thread	025 D-M	037 D-M	050 D-M		075 D-M	100 D-M	125 D-M	150 D-M	200 D-M	300 D-M*	
Std. Package — Qty.	100	100	100		100	60	70	70	50	25	
Std. Package — Wt.	16#	16#	16#		16#	11#	37#	35#	29#	21#	
E Male Adapter/Hose Shank			050 E-M	062 E-M	075 E-M	100 E-M	125 E-M	150 E-M	200 E-M	300 E-M	
Std. Package — Qty.			125	100	75	45	50	45	30	32	
Std. Package — Wt.			5#	6#	5#	5#	9#	8#	9#	18#	
F Male Adapter/Male Thread			050 F-M		075 F-M	100 F-M	125 F-M	150 F-M	200 F-M	300 F-M	400 F-M
Std. Package — Qty.			90		90	100	120	120	75	33	12
Std. Package — Wt.			5#		5#	10#	23#	23#	22#	20#	11#
DC Female Coupler Cap					075 DC-M	100 DC-M		150 DC-M	200 DC-M	300 DC-M	400 DC-M
Std. Package — Qty.					125	80		80	70	30	20
Std. Package — Wt.					18#	13#		37#	35#	28#	22#
DP Male Adapter Plug					075 DP-M	100 DP-M		150 DP-M	200 DP-M	300 DP-M	400 DP-M
Std. Package — Qty.					150	100		45	25	25	36
Std. Package — Wt.					8#	7#		6#	6#	10#	23#

\* Coupler supplied with rings only

Size	Operating Pressure
1/4"-1"	125 psi max @ 70° F
1 1/4"-2"	100 psi max @ 70° F
3"	75 psi max @ 70° F
4"	35 psi max @ 70° F

- On 1/4", 3/8" & 1/2" sizes the coupler and adapter portion is to 3/4" standard.
- On 1-1/4" size the coupler and adapter is to 1-1/2" standard.
- British thread also available.

WARNING: Do not operate couplers under pressure or with liquid in the lines. To prevent accidental opening fully engage and secure handles prior to pressurizing.

