


# Food-Grade Filled Polypropylene

## FEATURES

- Chemical Resistant to most acids (Refer to chemical resistance tables for specific recommendation)
- FDA approved
- All couplers feature stainless steel handles & pins
- Interchangeable with other couplers and adapters – manufactured to MIL-spec
- Neoprene gaskets furnished as standard. EPDM, Buna-N and Viton also available.
- Good mechanical strength
- Resistance to alkalis, salts and alcohols
- Resistance to animal, vegetable and mineral oils
- Resistance to phosphoric and hydrochloric acids
- Temperature range under normal conditions 10° to 180° F

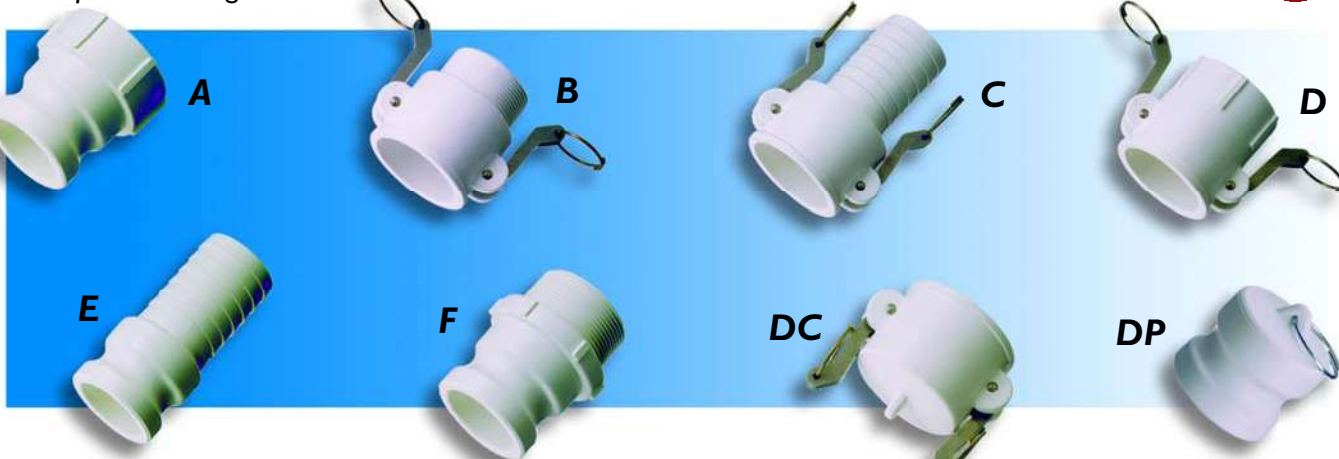

ITEM DESCRIPTION	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	3"
A Male Adapter/Female Thread				075 A-F	100 A-F		150 A-F	200 A-F	300 A-F
Std. Package — Qty.				125	80		50	80	44
Std. Package — Wt.				7#	7#		9#	22#	18#
B Female Coupler/Male Thread				075 B-F	100 B-F		150 B-F	200 B-F	300 B-F*
Std. Package — Qty.				100	80		60	50	25
Std. Package — Wt.				15#	14#		27#	26#	25#
C Female Coupler/Hose Shank				075 C-F	100 C-F		150 C-F	200 C-F	300 C-F
Std. Package — Qty.				90	60		65	44	18
Std. Package — Wt.				14#	11#		32#	27#	22#
D Female Coupler/Female Thread				075 D-F	100 D-F		150 D-F	200 D-V	300 D-F*
Std. Package — Qty.				100	60		70	50	25
Std. Package — Wt.				16#	11#		35#	29#	21#
E Male Adapter/Hose Shank				075 E-F	100 E-F		150 E-F	200 E-F	300 E-F
Std. Package — Qty.				75	45		45	30	32
Std. Package — Wt.				5#	5#		8#	9#	18#
F Male Adapter/Male Thread				075 F-F	100 F-F		150 F-F	200 F-F	300 F-F
Std. Package — Qty.				90	100		120	75	33
Std. Package — Wt.				5#	10#		23#	22#	20#
DC Female Coupler Cap				075 DC-F	100 DC-F		150 DC-F	200 DC-F	300 DC-F
Std. Package — Qty.				125	80		80	70	
Std. Package — Wt.				18#	13#		37#	35#	28#
DP Male Adapter Plug				075 DP-F	100 DP-F		150 DP-F	200 DP-F	300 DP-F
Std. Package — Qty.				150	100		45	25	25
Std. Package — Wt.				8#	7#		6#	6#	10#

\* Coupler supplied with rings only

Size  
1/4"-1"  
1 1/4"-2"  
3"

Operating Pressure  
125 psi max @ 70° F  
100 psi max @ 70° F  
50 psi max @ 70° F

- On 1/4", 3/8" & 1/2" sizes the coupler and adapter portion is to 3/4" standard.
- On 1-1/4" size the coupler and adapter is to 1-1/2" standard.
- British thread also available.

WARNING: Do not operate couplers under pressure or with liquid in the lines. To prevent accidental opening fully engage and secure handles prior to pressurizing.

