


Flareless Bite Type Fittings


BT-FP Adapter Straight C2405 Series

SAE # 080103



PART NO. SIZE	TUBE O.D.	B1 THREAD	A2 NPTF	L LGTH	M.M.	C HEX	C HEX	M.M.	Standard Material From Stock			
									S	FG	SS	B
C2405-02-02	1/8	5/16-24	1/8-27	1.050	26.67	9/16	0.562	14.27	•		•	
C2405-04-02	1/4	7/16-20	1/8-27	1.090	27.70	9/16	0.562	14.27	•		•	
C2405-04-04	1/4	7/16-20	1/4-18	1.290	32.77	3/4	0.750	19.05	•		•	
C2405-05-02	5/16	1/2-20	1/8-27	1.080	27.45	9/16	0.562	14.27	•		•	
NEW C2405-05-04											•	
C2405-06-04	3/8	9/16-18	1/4-28	1.310	33.27	3/4	0.750	19.05	•		•	
C2405-06-06	3/8	9/16-18	3/8-18	1.340	34.04	7/8	0.875	22.22	•		•	
C2405-06-08	3/8	9/16-18	1/2-14	1.590	40.39	1 1/8	1.125	28.57	•		•	
C2405-08-04	1/2	3/4-16	1/4-18	1.460	37.08	13/16	0.812	20.62	•		•	
C2405-08-06	1/2	3/4-16	3/8-18	1.470	37.34	7/8	0.875	22.22	•		•	
C2405-08-08	1/2	3/4-16	1/2-14	1.690	42.93	1 1/8	1.125	28.57	•		•	
NEW C2405-10-06											•	
C2405-10-08	5/8	7/8-14	1/2-14	1.770	44.96	1 1/8	1.125	28.57	•		•	
C2405-12-12	3/4	1 1/16-12	3/4-14	1.890	48.01	1 3/8	1.375	34.92	•		•	
NEW C2405-14-12											•	
C2405-16-16	1	1 15/16-12	1-11 1/2	2.130	54.10	1 5/8	1.625	41.27	•		•	
C2405-20-20	1 1/4	1 5/8-12	1 1/4-11 1/2	2.220	56.39	2	2.000	50.80	•		•	
C2405-24-24	1 1/2	1 7/8-12	1 1/2-11 1/2	2.230	56.64	2 3/8	2.375	60.32	•		•	

Tube-BT Reducer C2406 Series

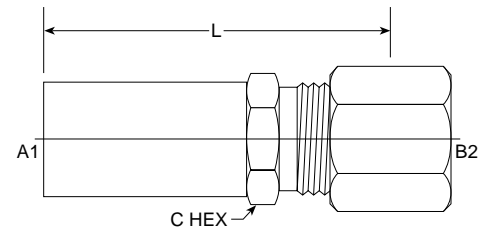

PART NO. SIZE	TUBE O.D.	A1 TUBE	B2 THREAD	L LGTH	M.M.	C HEX	C HEX	M.M.	Standard Material From Stock			
									S	FG	SS	B
C2406-06-04	3/8	0.375	7/16-20	1.610	40.89	1/2	0.500	12.70	•		•	
C2406-08-04	1/2	0.500	7/16-20	1.730	43.94	9/16	0.562	14.27	•		•	
C2406-08-06	1/2	0.500	9/16-18	1.770	44.96	9/16	0.562	14.27	•		•	
C2406-10-08	5/8	0.625	7/8-14	1.950	49.53	13/16	0.812	20.62	•		•	
C2406-12-06	3/4	0.750	1 1/16-12	1.940	49.28	13/16	0.812	20.62	•		•	
C2406-12-08	3/4	0.750	1 1/16-12	2.030	51.56	13/16	0.812	20.62	•		•	
C2406-16-08	1	1.000	1 5/16-12	2.050	52.07	1 1/16	1.062	26.97	•		•	
C2406-16-12	1	1.000	1 5/16-12	2.250	57.15	1 1/8	1.125	28.57	•		•	
C2406-20-16	1 1/4	1.250	1 5/8-12	2.280	57.91	1 3/8	1.375	34.92	•		•	