


Double-Ferrule Tube Fittings

Female Gage Adapter N2431

INCH OD Ports X Female ISO Parallel Threads (gage)

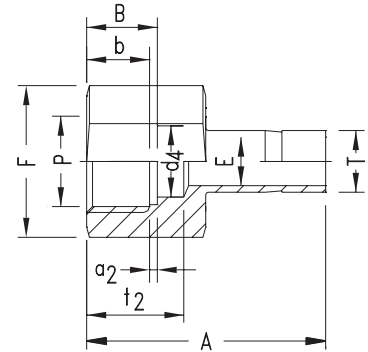


Part No.	T Tube OD	P ISO Female	A	B	E min.	F A/F	a2	d4	b	t2
N2431-04-04	1/4	1/4	35.3	13.0	4.8	19	1.6	5.8	9.4	17.0
N2431-06-06	3/8	3/8	39.4	14.2	6.6	24	1.6	—	9.9	—
N2431-08-08	1/2	1/2	45.7	18.8	7.1	27	1.6	—	14.5	—

No seal is made around the male thread. Instead, a gasket is dropped into the flat bottom in the female thread, and the end of the male threaded end exerts a load on the gasket to seal.

Union Elbow N2500

INCH OD Tubes

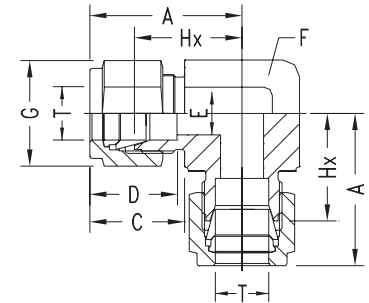

Part No.	T Tube OD	A	C	D	E min.	F A/F	G	Hx
N2500-01-01	1/16	17.8	11.0	8.6	1.3	11	8	14.0
N2500-02-02	1/8	22.4	15.3	12.7	2.4	11	11	15.8
N2500-04-04	1/4	26.9	17.8	15.3	4.8	14	14	19.6
N2500-05-05	5/16	28.7	18.5	16.3	6.3	16	16	21.3
N2500-06-06	3/8	30.5	19.3	16.8	7.1	17	17	23.2
N2500-08-08	1/2	36.0	21.8	22.9	10.4	22	22	25.9
N2500-10-10	5/8	38.1	21.8	24.4	12.7	24	25	27.9
N2500-12-12	3/4	39.9	21.8	24.4	15.8	27	28.5	29.7
N2500-14-14	7/8	44.7	21.8	25.9	18.2	35	32	34.6
N2500-16-16	1	49.0	26.4	31.2	22.3	35	38	36.8
N2500-20-20	1-1/4	66.6	38.9	41.2	27.6	46	50	44.5
N2500-24-24	1-1/2	78.0	45.2	50.0	34.0	55	57	50.8
N2500-32-32	2	107.2	62.7	67.6	46.0	70	76	69.9