


RUBBER SHEET PACKING

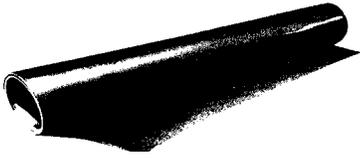

Darco Southern offers a general line of commercial grade rubber sheet packing. Generally, elastomers classified as commercial grade incorporate characteristics which are capable of meeting the needs of many industrial applications for which they are used. Consideration should always be given to a specific materials ability to withstand the type of exposure or wear to which the item will be subjected. **Minimum order quantity may apply.**

RED RUBBER SHEET - 75 DURO

AVAILABLE IN 36" OR 48" WIDTHS
AVAILABLE IN 1/16", 3/32", 1/8", 3/16", & 1/4" THICKNESSES

CLOTH INSERTED SHEET - SBR
AVAILABLE IN 36" OR 48" WIDTHS
AVAILABLE IN 1/16", 3/32", 1/8", 3/16", & 1/4" THICKNESSES

TAN PURE GUM 35 - 40 DURO
AVAILABLE IN 36" OR 48" WIDTHS
AVAILABLE IN 1/16", 3/32", 1/8", 3/16", & 1/4" THICKNESSES

NITRILE (Buna-N) - 60 DURO
AVAILABLE IN 36"
AVAILABLE IN 1/16", 1/8", 3/16", & 1/4" THICKNESSES

NEOPRENE SHEET- 40 DURO, 50 DURO, 60 DURO, and 70 DURO
AVAILABLE IN 36" OR 48" WIDTHS
AVAILABLE IN 1/16", 3/32", 1/8", 3/16", & 1/4" THICKNESSES

WHITE Food Grade RUBBER - 60 DURO
AVAILABLE IN 36" WIDTH
AVAILABLE IN 1/16", 1/8", 3/16", & 1/4" THICKNESSES

HYPALON - 60 DURO
AVAILABLE IN 36" WIDTH
AVAILABLE IN 1/16", 1/8", 3/16", & 1/4" THICKNESSES

BUTYL - 60 DURO
AVAILABLE IN 36" WIDTH
AVAILABLE IN 1/16", 1/8", 3/16", & 1/4" THICKNESSES

NEOPRENE DIAPHRAGM -Duck Inserted
AVAILABLE IN 48" WIDTH
AVAILABLE IN 1/16", 3/32", 1/8", 3/16", & 1/4" THICKNESSES

NEOPRENE DIAPHRAGM -Nylon Inserted
AVAILABLE IN 36" OR 48" WIDTHS
AVAILABLE IN 1/16", 3/32", 1/8", 3/16", & 1/4" THICKNESSES

EPDM (Ethylene Propylene) - 60 DURO Also called EPR, EPT
For service temperatures from
-67°F to +275°F

SILICONE RUBBER - 50-60 DURO MEETS SPEC ZZ-R-765 Cl. 2, Gr. 50, 60
AVAILABLE IN 36" WIDTH
AVAILABLE IN 1/32", 1/16", 3/32", 1/8", 3/16", & 1/4" THICKNESSES

VITON® (Fluoroelastomer) - 75 DURO
AVAILABLE IN 36" OR 48" WIDTHS
AVAILABLE IN 1/16", 1/8", 3/16", & 1/4" THICKNESSES