

Air Fittings and Accessories

Air King with Ferrules

Universal design provides quick, easy and effective coupling of air hose. Exclusive interlocking ferrule can be crimped or swaged to achieve maximum coupling sealing and retention with a low profile streamline appearance. For crimp or swage diameter recommendations see page 543.

- Iron and stainless steel Air King with carbon steel ferrules can be crimped or swaged.
- Rated to **150 PSI** working pressure. SAFETY ALERT
- For air and water service only.

Size	Hose O.D.		Iron		Stainless Steel	
	From:	To:	Part #	Price/E	Part #	Price/E
1/2"	5/4"	1-2/64"	AM1WF	\$11.00	---	---
3/4"	1-4/64"	1-22/64"	AM6WF	9.85	RAM6WF	\$62.00
1"	1-18/64"	1-34/64"	AM11WF-1	18.20	---	---
1"	1-30/64"	1-46/64"	AM11WF	11.85	---	---



D
Air Fittings

Air King with Gauge Port

- Drilled to 1/4" NPT for mounting gauge
- Gauge not included


Iron		Stainless Steel	
Part #	Price/E *	Part #	Price/E *
AM7T	\$18.30	RAM7T	\$73.00



In-Line Ball Valve with Air King End

- Easily maintained in line valve
- One piece ball and stem
- Positive on/off

Size	Part #	Price/E
3/4"	VAM75	\$66.10

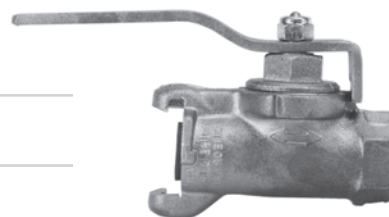

Air King Universal Swivels

These universal swivel fittings interchange with other Air King fittings and include a heavy-duty, free-turning joint that will swivel under pressure to prevent hose kinking. Working pressure: **150 PSI**. For air and water service only

SAFETY ALERT



Size	Hose End		Male NPT		Female NPT	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/2"	---	---	AM2SWIV	\$51.75	---	---
3/4"	AM6SWIV	\$56.80	AM7SWIV	42.75	AM8SWIV	\$50.70

SAFETY ALERT

Warning: Never use any Air King coupling for steam service!

None of Dixon's catalog information is to be interpreted to mean that this type of coupling is suitable for use on steam hose.