
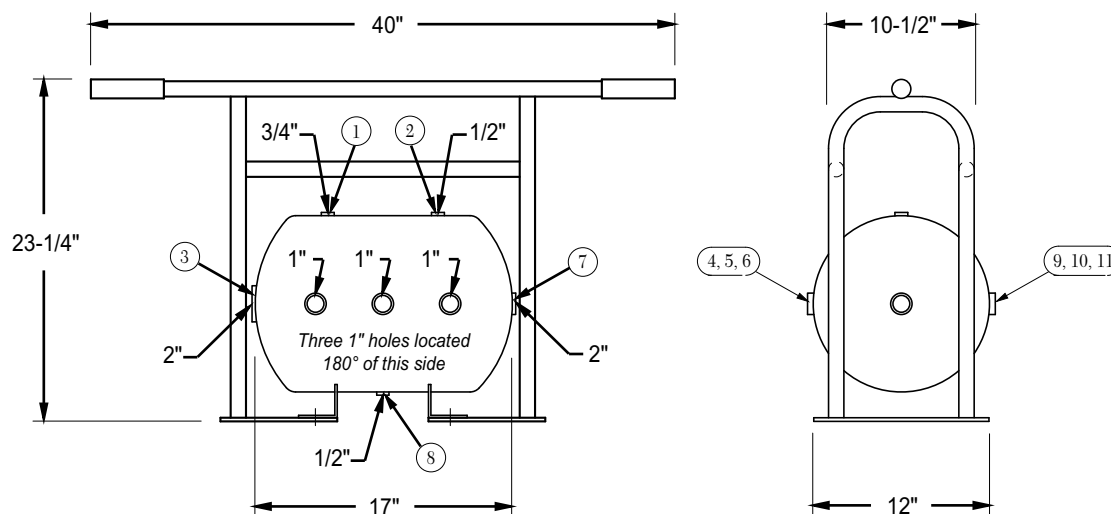


ASME Air Receiver Manifold

Compressor Air Receiver:

- Built to ASME Code, National Board registered
- 7 gallon capacity
- **200 PSI** working pressure
- All openings are female NPT thread
- Painted safety orange
- Conforms to OSHA standards 1910.169 and 1926.306

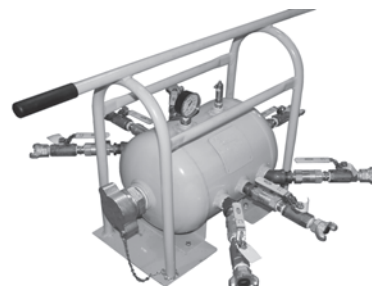

Dixon 1217AR-4AK air receiver manifold assembly with Air King outlet ports includes the following:

Part # / Locations	Description	Price Each	Price
1217AR-4	7 gallon ASME compressed air receiver		\$932.00
1217 frame	1 protective frame		350.00
Location 1	1 HB2F6M 3/4" male x 1/4" female hex bushing 1 GL345 0-300 PSI gauge	\$6.05 14.25	6.05 14.25
Location 2	1 HB2F4M 1/2" male x 1/4" female hex bushing 1 SV200 safety pop-off valve	3.45 27.50	3.50 27.50
Location 3	1 GM28 2" male spud 1 B27SC wing nut cap	44.60 67.45	44.60 67.45
Locations 4, 5, 6, 9, 10, 11	6 HB6F8M 1" male x 3/4" female bushings 6 BCN75 3/4" brass hex nipples 6 BBLV75 ball valves 6 SCVS6 safety shut-off valves 6 AM7 Air King universal couplings 4 1SELCSX100 45° street elbow (1 each in locations 4, 6, 9 and 11 only)	8.60 5.80 50.05 76.80 6.75 12.60	51.60 34.80 300.30 460.80 40.50 50.40
Location 7	1 HB2075 2" male x 3/4" female bushing 1 BCN75 3/4" brass hex nipples 1 BBLV75 ball valve 1 SCVS6 safety shut-off valve 1 AM7 Air King universal coupling	5.50 5.80 50.05 76.80 6.75	5.50 5.80 50.05 76.80 6.75
Location 8	1 HB2F4M 1/2" male x 1/4" female hex bushing 1 D04 1/4" drain cock	3.45 3.95	3.45 3.95
	Labor cost for assembly of complete unit		315.00
1217AR-4AK	Air King receiver manifold complete assembly		2851.05
Tank and frame only			
1217AR-4FR	7 gallon ASME compressed air receiver with frame		\$1282.00