

Wilkerson Miniature Filters

Miniature Transparent Bowl

Automatic Drain

Manual Drain


Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/8"	F03-01A	27	\$55.55	1/8"	F03-01M	27	\$46.00
1/4"	F03-02A	35	55.55	1/4"	F03-02M	35	46.00

Miniature Metal Bowl

Automatic Drain

Manual Drain

Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/8"	F03-01AMB	27	\$63.10	1/8"	F03-01MMB	27	\$53.55
1/4"	F03-02AMB	35	63.10	1/4"	F03-02MMB	35	53.55



- 5 micron element
- .5 oz. bowl
- Maximum operating conditions:
Transparent bowl: 150 PSIG (10 bar) and 125°F (52°C)
Metal bowl: 200 PSIG (14 bar) and 150°F (65.5°C)




D
Air
Fittings

Miniature Transparent Bowl with Guard

Automatic Drain

Manual Drain

Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/8"	F08-01A	25	\$57.65	1/8"	F08-01M	25	\$50.15
1/4"	F08-02A	50	57.65	1/4"	F08-02M	50	50.15

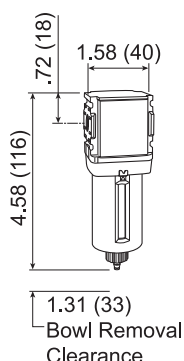

- 5 micron element
- .4 oz. bowl
- Maximum operating conditions:
Transparent bowl: 150 PSIG (10 bar) and 125°F (52°C)
Metal bowl: 250 PSIG (17 bar) and 150°F (65.5°C)




Wilkerson Mini Regulators

With Gauge

Without Gauge

Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/8"	R03-01RG	17.5	\$49.50	1/8"	R03-01R	17.5	\$35.05
1/4"	R03-02RG	24.5	49.50	1/4"	R03-02R	24.5	35.05

- 0-125 PSI range
- Balanced valve design
- Self-relieving standard
- Non-rising push/pull locking adjustment knob
- Two 1/8" NPT gauge ports standard on models without gauge, one on models with gauge - can be used for additional outlet ports.
- Models supplied without gauge use GC620 gauge.




With Gauge *

Without Gauge

Size	Part #	SCFM	Price/E	Size	Part #	SCFM	Price/E
1/8"	R08 - 01RG	28.7	\$62.55	1/8"	R08 - 01R	28.7	\$41.30
1/4"	R08 - 02RG	40	62.55	1/4"	R08 - 02R	40	41.30

*Supplied with 0-160 PSI Flush Mount Style Gauge only.

- 0-125 PSI range
- Balanced valve design
- Self-relieving standard
- Non-rising push/pull locking adjustment knob
- Two 1/8" NPT gauge ports standard on models without gauge - can be used for additional outlet ports.
- One 1/8" NPT gauge port on models with Flush Mount style gauge.
- Models supplied without gauge use GC620 gauge.



SAFETY
ALERT

Note: FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.