Pipe and Welding Fittings

Notched Turned Back Nipples

- These fittings can be swaged or crimped onto hose, providing improved shank retention.
- The stem can be removed from a damaged hose by cutting away the ferrule, without necessarily damaging the fitting. After inspection to determine its suitability for reuse, it can be reinstalled into another hose by using a new ferrule. SAFETY

When used with double bolt or band clamps, notched turned back nipples will provide shank retention similar to that of the King turned back nipples.

- Notched turned back nipples let you use the same ferrules used with the notched (NO) cam and groove. This lets you maximize your inventory usage and reduce costs.
- See page 316 for the threaded couplings using the notched ferrules.
- Consult the factory for specifications on swaging and crimping procedures.



Note: Stems are for use with Lap Joint Flanges on page 461



| Notched Ferrule | | | | | | |
|-----------------|---------------------------------------|---------|----------------------------|----------|--|--|
| Size | 304 Stainless Steel Part # Price/E | | Hose O.D. Range From To | | | |
| 1-1/2" | GAS2334NO | \$32.30 | 1-60/64" | 2-12/64" | | |
| | GAS2370NO | 33.50 | 2-4/64" | 2-22/64" | | |
| 2" | GAS2709NO | 26.95 | 2-30/64" | 2-44/64" | | |
| | GAS2885NO | 55.65 | 2-42/64" | 2-54/64" | | |
| 3" | GAS3760NO | 42.20 | 3-30/64" | 3-46/64" | | |
| | GAS3885NO | 58.90 | 3-47/64" | 3-54/64" | | |
| 4" | GAS5010NO | 171.00 | 4-40/64" | 4-47/64" | | |

Notched Turned Back Nipples

| Size | Carbon Steel | | 316 Stainless Steel | |
|--------|--------------|---------|---------------------|---------|
| | Part # | Price/E | Part # | Price/E |
| 1-1/2" | N150NO | \$28.10 | RN150NO | \$80.60 |
| 2" | N200NO | 31.70 | RN200NO | 92.70 |
| 3" | N300NO | 75.20 | RN300NO | 159.65 |
| 4" | N400NO | 122.70 | RN400NO | 248.25 |

Special Pushers required:

11/2" stem - RN150NOPUSH stem - RN200NOPUSH

- 3" stem - RN300NOPUSH
- stem RN400NOPUSH

King Turned Back Hose Nipples for Floating Flanges




 A turned back nipple, when used in a floating flange assembly, allows the flange to be aligned without stressing (twisting) the hose. This generally increases the hose's service life by eliminating a common cause of premature hose failure.

For use with Lap Joint flanges shown on page 461

| - | | | | |
|----------|---------------------|---------|---------------------|----------|
| Cizo | Plated Carbon Steel | | 316 Stainless Steel | |
| Size | Part # | Price/E | Part # | Price/E |
| 3/4" | N5 † | \$31.80 | | |
| 1" | N10 | 39.00 | RN10 | \$117.00 |
| 1-1/4" | N15 | 39.00 | RN15 | 125.00 |
| 1-1/2" | N20 | 75.50 | RN20 | 152.35 |
| 2" | N25 | 70.00 | RN25 | 190.40 |
| 2-1/2" | N30 | 99.20 | RN30 | 265.00 |
| 3" | N35 | 86.00 | RN35 | 301.80 |
| 4" | N40 | 135.00 | RN40 | 437.85 |
| 6" | N60 | 215.60 | RN60 | 890.00 |
| 8" | N80 | 335.00 | RN80 | 1325.00 |
| 10" | N100 | 535.30 | RN100 | POR |
| 12" | N120 | 884.00 | RN120 | POR |
| + 1A/:11 | | | | |

† Will be deleted as inventory is depleted

King Turned Back Weld-To-Metal Hose Nipples

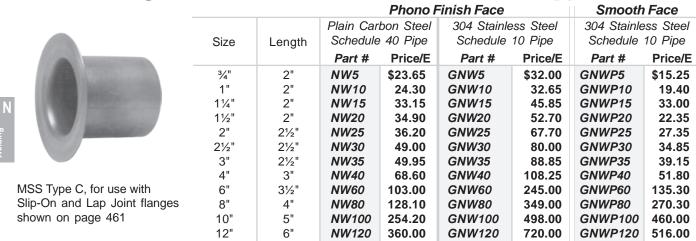

WebSales@GoodyearRubberProducts.com

460



DPL108

We Ship

World Wide