


Double Clapper Siamese Connections 21-133

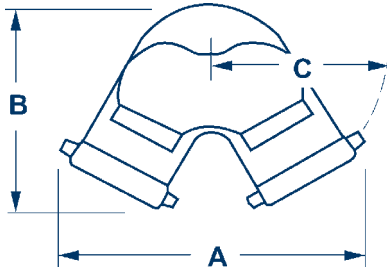

21-133
90° type - (bottom outlet)

Size	Dimensions (inches)		
	A	B	C
^{1,2} 4 x 2½ x 2½	11-3/4	9-5/8	7-1/4
6 x 2½ x 2½	11-3/4	10-3/4	7-1/4
^{1,2,3} 4 x 3 x 3	12-1/2	10-1/8	7-1/2
^{2,3} 6 x 3 x 3	12-1/4	10-7/8	7-1/4

- ¹ Approved by Factory Mutual
- ² Approved by Underwriters Laboratories
- ³ Approved by New York City Board of Standards and Appeals

Double drop clapper with (2) pin lug swivel inlets. Provides the required 500 gpm minimum to supplement the fire protection as an auxiliary inlet connection to the water supply. (250 GPM minimum per inlet.) Exposed Fire Department Connections (FDC) provide an economical method of satisfying local fire codes.

- Cast brass finish
- U/L listed and FM approved
- Branding see below
- For use up to **175 PSI**
- -P polished
- -C polished chrome plated

Bottom Outlet - (90°)

Outlet Female NPT	(2) Inlets Female	Branding	Dixon Part #	Powhatan Part #
4"	2½" NH(NST)	AutoSprinkler	90DCS4025F	21-133-00008
	2½" NH(NST)	AutoSprinkler	90DCS4025F-P	21-133-00010
	2½" NH(NST)	AutoSprinkler	90DCS4025F-C	21-133-00011
	2½" NH(NST)	StandPipe	90DCS4025F-SP	21-133-00023
	2½" NH(NST)	No Branding	90DCS4025F-NB	21-133-00032
4"	3" NH(NST)	AutoSprinkler	90DCS4030F	21-133-00039
	3" NYFD	AutoSprinkler	90DCS4030NYFD	21-133-00038
	3" NYFD	StandPipe	90DCS4030NYFDSP	21-133-00041
6"	2½" NH(NST)	AutoSprinkler	90DCS6025F	21-133-00060
	2½" NH(NST)	StandPipe	90DCS6025F-SP	21-133-00053
	3" NYFD	AutoSprinkler	90DCS6030NYFD	21-133-00374

- Not all configurations are stocked
- Other sizes and threads are also available, consult the factory for pricing and availability