

STYLE CG & CGI TO BS 4865 PART 2 TO SUIT BS 4504 FLANGES

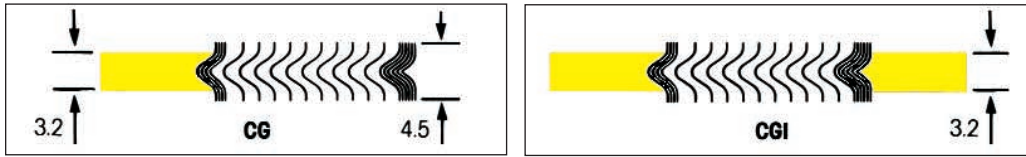


TABLE
12

| Nominal Pipe Size | Inner Ring Inside Diameter | Sealing Element PN10-PN40 | | Centering Ring Outside Diameter | | | |
|-------------------|----------------------------|---------------------------|--------------|---------------------------------|------|------|------|
| | | Inside Dia. | Outside Dia. | PN10 | PN16 | PN25 | PN40 |
| 10 | 15 | 23.6 | 36.4 | 48 | 48 | 48 | 48 |
| 15 | 19 | 27.6 | 40.4 | 53 | 53 | 53 | 53 |
| 20 | 24 | 33.6 | 47.4 | 63 | 63 | 63 | 63 |
| 25 | 30 | 40.6 | 55.4 | 73 | 73 | 73 | 73 |
| 32 | 39 | 49.6 | 66.4 | 84 | 84 | 84 | 84 |
| 40 | 45 | 55.6 | 72.4 | 94 | 94 | 94 | 94 |
| 50 | 56 | 67.6 | 86.4 | 109 | 109 | 109 | 109 |
| 65 | 72 | 83.6 | 103.4 | 129 | 129 | 129 | 129 |
| 80 | 84 | 96.6 | 117.4 | 144 | 144 | 144 | 144 |
| 100 | 108 | 122.6 | 144.4 | 164 | 164 | 170 | 170 |
| 125 | 133 | 147.6 | 170.4 | 194 | 194 | 196 | 196 |
| 150 | 160 | 176.6 | 200.4 | 220 | 220 | 226 | 226 |
| 200 | 209 | 228.6 | 255.4 | 275 | 275 | 286 | 293 |
| 250 | 262 | 282.4 | 310.4 | 330 | 331 | 343 | 355 |
| 300 | 311 | 331.6 | 360.4 | 380 | 386 | 403 | 420 |
| 350 | 355 | 374.6 | 405.4 | 440 | 446 | 460 | 477 |
| 400 | 406 | 425.6 | 458.4 | 491 | 498 | 517 | 549 |
| 450 | 452 | 476.6 | 512.4 | 541 | 558 | 567 | 574 |
| 500 | 508 | 527.6 | 566.4 | 596 | 620 | 627 | 631 |
| 600 | 610 | 634.6 | 675.4 | 698 | 737 | 734 | 750 |
| 700 | 710 | 734.0 | 778.5 | 813 | 807 | 836 | - |
| 800 | 811 | 835.0 | 879.5 | 920 | 914 | 945 | - |
| 900 | 909 | 933.0 | 980.5 | 1020 | 1014 | 1045 | - |

DIMENSIONS IN mm.

The use of an inner ring is recommended for gaskets for use with PN25 and PN40 flanges.
Inner rings may be fitted also to gaskets for use with PN10 and PN16 flanges.

THE ANSWER IS ALWAYS

Flexitallic®

GOODYEAR
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship
World Wide**