



HI-PERFORMANCE PD™ PLUS


SYNCHRONOUS “QD” SPROCKET DIMENSIONS

To be used with Goodyear Hi-Performance Pd™ or WhiteHawk Pd™ Synchronous Belting.

SYNCHRONOUS

SPROCKET TYPES

The following types of sprockets are available for HPPD+ Belts. Sketches are shown with the Sure-Grip¹ bushing in place.

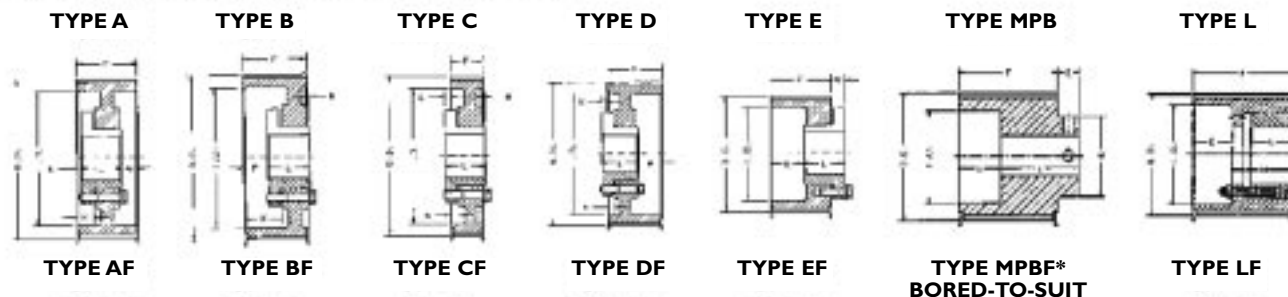


The figure following the sketch reference letter in the “Type” column indicates the construction of the sprocket (1=Solid, 2=Web, and 3=Arms), and the letter “F” indicates that the sprocket has flanges.

Note: “Type L” and “Type LF” are not available in 5M.

SYNCHRONOUS TAPER-LOCK² SPROCKET DIMENSIONS

SPROCKET TYPES

The following types of sprockets are available for HPPD+ Belts. Sketches are shown with the Taper-Lock[®] bushing in place.

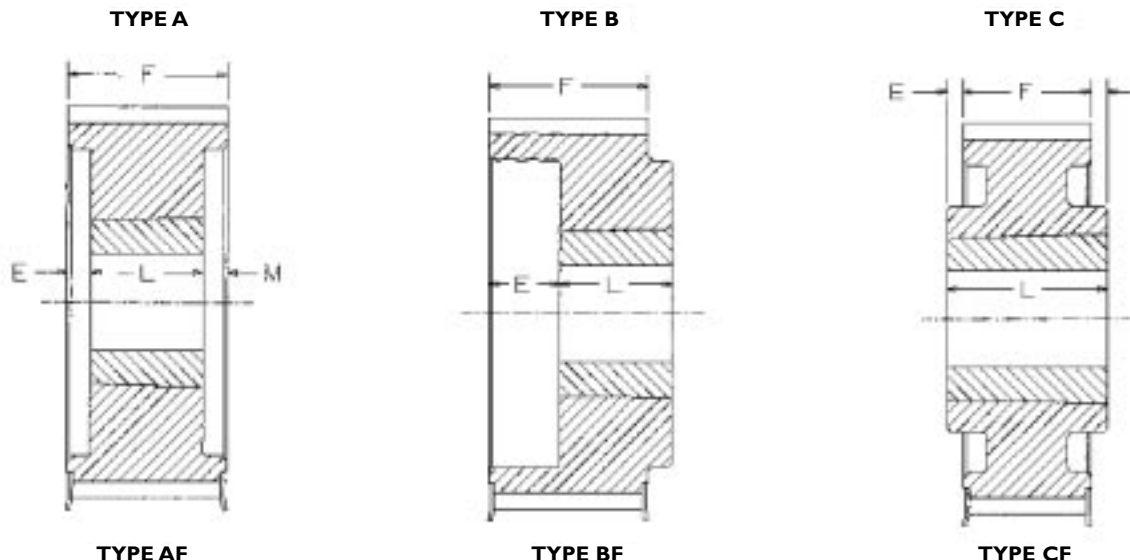

The figure following the sketch reference letter in the “Type” column indicates the construction of the sprocket (1=Solid, 2=Web, and 3=Arms), and the letter “F” indicates that the sprocket has flanges.

Note: Synchronous Taper-Lock available for 8M and 14M sizes only.

**FOR FULL PRODUCT AVAILABILITY AND SPECIFICATIONS,
PLEASE VISIT WWW.GOODYEARPTP.COM OR CONTACT A GOODYEAR REPRESENTATIVE.**

¹SURE-GRIP is a registered trademark of TB WOOD'S Incorporated

²TAPER-LOCK[®] is a registered trademark of Reliance Electric Company