

# TYVEK®



**TY125S**



**TY120S**

Coverall with collar  
Zipper front, open sleeves  
and ankles. No hood or  
boots. Serged seams.  
M-X4 25/case



**TY127S**

Model TY120S with  
elastic sleeves and  
ankles and attached  
hood.  
L-X4 25/case



**TY122S**

Coverall. Zipper front.  
Elastic sleeves and ankles.  
Attached hood and skid-  
resistant boots. Serged  
seams.  
L-X4 25/case



**TY210S**

Lab coat with collar.  
Front snap closure. Open  
sleeves.  
No pockets.  
Serged seams.  
L-X4 30/case



**TY125S**

Model TY120S with  
elastic sleeves and ankles.  
L-X4 25/case



**TY657S**

Pull-over hood with  
elastic around the face  
100 ea/case

**FC440S**

Skid resistant shoe  
covers. Low elastic top.  
One Size 100 pair/case  
**TY440S** Plain Shoe Cover

**TY500S**

18" sleeve. Elastic top  
and wrist. Serged  
seams.  
One Size  
100 pair/case

**INDUSTRY APPLICATIONS**

- General Maintenance/Operations
- Spray Painting
- Lead Abatement
- Environmental Clean-up
- Asbestos Abatement
- Agriculture
- Food Processing
- Mold Remediation
- Silica


**FEATURES**

- Inherent barrier protection against dry particulate hazards.
- Even after abrasion, stops microporous particles better than other reusable garments.
- The best balance of protection, durability and comfort.

**Tyvek® Garment Size - Dimensions**

Sizes are as follows (in inches) +/- .3 inch

SIZES	A	B	C	D	Part #
LG	33	52	37	30	TY120SL
XL	35	56	38	31	TY120SXL
2XL	35	58	41	31	TY120SX2
3XL	36	62	42	32	TY120SX3
4XL	36	66	44	34	TY120SX4

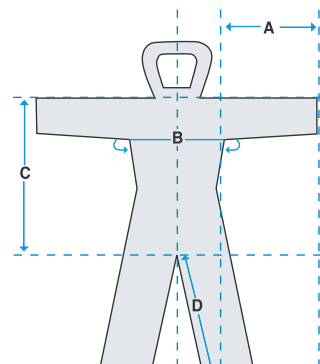

- A: Top of sleeve, sleeve length only.
- B: Chest around widest point.
- C: Back Length, from crotch to inside seam of hood.
- D: Inseam, inner leg length.

Measurement lengths apply to all sizes of Tyvek coveralls