


## SHUT-OFF COCKS

## BRASS FITTINGS

- Designed for automotive or industrial use. AGA approved shut-off cocks approved for LPG and natural gas applications. Lubricant may wash out at higher pressures or with some exotic fluids.

- Designed for working pressure of 30 PSI.
- Forged brass bodies and brass handles.
- Instantaneous off-on operation with 360° rotation.


### FLARE X MALE PIPE

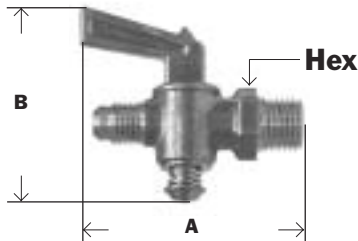

V402F  
848

Part #	Male Flare X Male Pipe	Industry Number	A	B	Hex	Approx. Wt. Lbs.	List Price
46-100	1/4" x 1/8"	27SAE	2.16	1.88	0.50	0.14	15.77
46-101	1/4" x 1/4"	227SAE	2.19	1.84	0.62	0.16	19.11
46-102	5/16" x 1/8"	29SAE	2.06	1.88	0.50	0.14	15.77
46-103	5/16" x 1/4"	229SAE	2.12	1.82	0.69	0.16	19.11
46-104	3/8" x 1/4"	57SAE	2.27	1.84	0.62	0.17	19.11
46-106	3/8" x 1/2"	577SAE	2.16	2.28	1.00	0.18	25.33
46-107	1/2" x 3/8"	67SAE	2.36	2.27	0.82	0.20	21.68

### FLARE X FLARE




842  
V203F  
136C

Part #	Male Flare X Male Flare	Industry Number	A	B	Approx. Wt. Lbs.	List Price
46-115	1/4"	28SAE	1.94	1.87	0.13	16.32
46-116	5/16"	30SAE	2.00	1.90	0.16	19.43
46-117	3/8"	58SAE	2.20	1.83	0.18	18.80
46-118	1/2"	68SAE	2.50	2.31	0.50	22.84
46-119	5/8"	1010SAE	3.05	2.59	0.70	25.25

\* Please request AGA valves

### FLARE X FEMALE PIPE



138C  
2046

Part #	Male Flare X Female Pipe	Ind. #	A	B	Hex	Approx. Wt. Lbs.	List Price
46-127	3/8" x 3/8"	163SAE	2.28	2.38	1.03	0.40	45.48
46-125	3/8" x 1/2"	161SAE	2.45	2.31	1.03	0.32	45.48
46-126*	3/8" x 1/2"	161SAE	2.26	2.32	1.03	0.28	46.93
46-128	1/2" x 1/2"	164SAE	2.52	2.19	1.03	0.34	44.69
46-123	5/8" x 1/2"	164SAE	2.61	2.12	1.25	0.54	63.70

\* Heater Valve

Dimension data can change without notice.  
Please call us when dimensions are critical.

**MIDLAND  
METAL**

**GOODYEAR**  
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**  
WebSales@GoodyearRubberProducts.com

**We Ship  
World Wide**