

BRONZE FITTINGS

BRONZE FITTINGS

Class 125 (150) For steam, water, gas, oil and air service

Standard specifications


Materials - ASTM B62-82 (85,5,5,5)

Dimensions - ANSI B 16.15

Threads - ANSI B2.1 or BA 21 and Fed. WW-P-460


Bronze threaded fittings are manufactured from smooth-cored castings, designed to provide full flow with minimum restriction. All threads are accurately machined and gauged to ensure a perfect fit with the pipe. All fittings are individually tested under water to ensure quality.

90° ELBOWS




| Part # | Size | A | Approx. Wt. Lbs. | List Price |
|--------|--------|------|------------------|------------|
| 44-100 | 1/8" | 0.55 | 0.08 | 3.46 |
| 44-101 | 1/4" | 0.72 | 0.10 | 2.89 |
| 44-102 | 3/8" | 0.83 | 0.17 | 3.46 |
| 44-103 | 1/2" | 1.03 | 0.24 | 4.32 |
| 44-104 | 3/4" | 1.19 | 0.35 | 5.88 |
| 44-105 | 1" | 1.43 | 0.59 | 9.03 |
| 44-106 | 1-1/4" | 1.71 | 0.96 | 14.41 |
| 44-107 | 1-1/2" | 1.87 | 1.33 | 18.01 |
| 44-108 | 2" | 2.14 | 2.34 | 29.27 |
| 44-109 | 2-1/2" | 2.74 | 3.79 | 78.14 |
| 44-110 | 3" | 3.10 | 5.21 | 85.54 |
| 44-112 | 4" | 3.80 | 8.59 | 198.03 |

90° REDUCING ELBOWS



| Part # | Size | A | B | Approx. Wt. Lbs. | List Price |
|--------|-------------|------|------|------------------|------------|
| 44-120 | 1/4" x 1/8" | 0.67 | 0.81 | 0.10 | 6.05 |
| 44-123 | 1/2" x 1/4" | 0.67 | 1.17 | 0.19 | 6.58 |
| 44-124 | 1/2" x 3/8" | 0.81 | 1.17 | 0.22 | 5.64 |
| 44-127 | 3/4" x 1/2" | 1.17 | 1.42 | 0.31 | 7.69 |
| 44-131 | 1" x 3/4" | 1.42 | 1.72 | 0.56 | 11.26 |
| 44-134 | 1-1/4" x 1" | 1.72 | 2.10 | 0.81 | 23.93 |
| 44-137 | 1-1/2" x 1" | 1.72 | 2.38 | 1.02 | 30.26 |
| 44-140 | 2" x 1" | 1.72 | 2.92 | 1.30 | 47.36 |

90° STREET ELLS

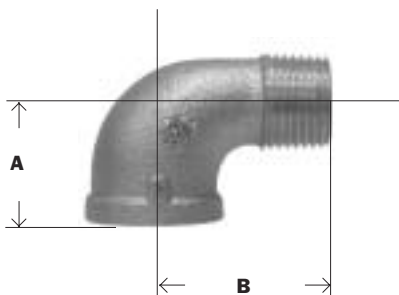

| Part # | Size | A | B | Approx. Wt. Lbs. | List Price |
|--------|--------|------|------|------------------|------------|
| 44-160 | 1/8" | 0.55 | 0.92 | 0.07 | 4.32 |
| 44-161 | 1/4" | 0.72 | 1.11 | 0.11 | 4.32 |
| 44-162 | 3/8" | 0.83 | 1.24 | 0.16 | 4.32 |
| 44-163 | 1/2" | 1.03 | 1.51 | 0.21 | 5.42 |
| 44-164 | 3/4" | 1.19 | 1.66 | 0.34 | 7.66 |
| 44-165 | 1" | 1.43 | 1.98 | 0.65 | 12.62 |
| 44-166 | 1-1/4" | 1.71 | 2.26 | 1.11 | 19.38 |
| 44-167 | 1-1/2" | 1.87 | 2.46 | 1.16 | 25.22 |
| 44-168 | 2" | 2.14 | 2.98 | 2.09 | 42.77 |
| 44-169 | 2-1/2" | 2.74 | 3.92 | 3.79 | 75.62 |
| 44-170 | 3" | 3.10 | 4.45 | 6.38 | 132.33 |

