

Product Specifications

Welded steel couplings both galvanized and black in diameters from 1/8" up to 4"


Technical Specifications

Standards: Product complies with ASTM A-53, A-733 and ANSI B1.20.1 for threading, dimensions and pipe specifications.

Pipe: Complies with ASTM A-53 milltested schedule 40 and 80. Meets ANSI B36.1. All pipe is hydrostatic tested.

Galvanized: Zinc coating applied by hot dipping. Galvanized complying with ASTM-A-123.

MERCHANT COUPLINGS

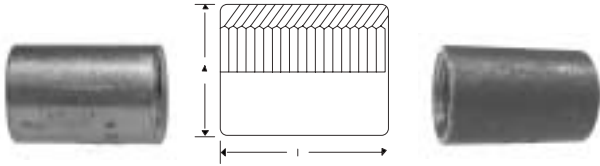

Galvanized

Black

| Part # Galv | List Price | Size | Part # Black | List Price |
|-------------|------------|-------|--------------|------------|
| 64-770 | 1.12 | 1/8 | 65-770 | 1.06 |
| 64-771 | 1.37 | 1/4 | 65-771 | 0.94 |
| 64-772 | 1.50 | 3/8 | 65-772 | 1.24 |
| 64-773 | 1.84 | 1/2 | 65-773 | 1.20 |
| 64-774 | 2.45 | 3/4 | 65-774 | 1.63 |
| 64-775 | 3.86 | 1 | 65-775 | 2.53 |
| 64-776 | 4.77 | 1-1/4 | 65-776 | 3.68 |
| 64-777 | 5.95 | 1-1/2 | 65-777 | 3.88 |
| 64-778 | 7.02 | 2 | 65-778 | 5.47 |
| 64-779 | 24.20 | 2-1/2 | 65-779 | 18.96 |
| 64-780 | 37.63 | 3 | 65-780 | 24.59 |
| 64-781 | 60.58 | 4 | 65-781 | 33.93 |

HALF MERCHANT COUPLINGS



Galvanized

Black

| Part # Galv | List Price | Size | Part # Black | List Price |
|-------------|------------|-------|--------------|------------|
| | | 1/4 | 65-771H | 0.74 |
| | | 3/8 | 65-772H | 0.76 |
| 64-773H | 1.31 | 1/2 | 65-773H | 0.94 |
| 64-774H | 1.85 | 3/4 | 65-774H | 1.19 |
| 64-775H | 2.93 | 1 | 65-775H | 1.86 |
| 64-776H | 3.41 | 1-1/4 | 65-776H | 2.63 |
| 64-777H | 4.24 | 1-1/2 | 65-777H | 3.84 |
| 64-778H | 6.01 | 2 | 65-778H | 4.34 |
| | | 2-1/2 | 65-779H | 11.58 |
| | | 3 | 65-780H | 15.99 |
| | | 4 | 65-781H | 22.06 |

MERCHANT COUPLINGS SPECIFICATIONS

| Size | Outside Diam. | Length | Weight 100 pcs approx. | Quantity per box | Threads per Inch | Threads |
|--------|---------------|---------|------------------------|------------------|------------------|--------------|
| | | Inches | Pounds | | | Type |
| 1/8" | .59" | .78 | 3.5 | 1000 | 27 | Straight |
| 1/4" | .73" | 1.18 | 7.5 | 500 | 18 | Straight |
| 3/8" | .86" | 1.18" | 9 | 600 | 18 | Straight |
| 1/2" | 1.063" | 1-9/16" | 13.0 | 100 | 14 | Straight |
| 3/4" | 1.313" | 1-5/8" | 28.3 | 50 | 14 | Straight |
| 1" | 1.576" | 2" | 40.1 | 30 | 11-1/2 | Straight |
| 1-1/4" | 1.900" | 2-1/16" | 49.5 | 25 | 11-1/2 | Straight |
| 1-1/2" | 2.200" | 2-1/16" | 71.48 | 25 | 11-1/2 | Straight |
| 2" | 2.750" | 2-1/8" | 112.0 | 20 | 11-1/2 | Straight |
| 2-1/2" | 3.250" | 3-1/8" | 231.2 | 8 | 8 | Taper Tapped |
| 3" | 4.000" | 3-1/4" | 353.8 | 5 | 8 | Taper Tapped |
| 4" | 5.000" | 3-1/2" | 471.8 | 4 | 8 | Taper Tapped |

