


HYDRAULIC COUPLINGS

QUICK DISCONNECT

FLUSH FACE

Nominal Size	ISO Size	Maximum Working Pressure	Rated Flow	Minimum Burst-Plug	Minimum Burst-Coupler	Minimum Burst Connected
1/8"	5	7250 PSI	1.6 GPM	43,5000 PSI	29,000 PSI	43,500 PSI
1/4"	6.3	5000 PSI	4.8 GPM	28,275 PSI	23,925 PSI	33,350 PSI
3/8"	10	5000 PSI	10.0 GPM	29,200 PSI	21,025 PSI	20,590 PSI
1/2"	12.5	5000 PSI	19.8 GPM	25,375 PSI	21,750 PSI	23,925 PSI
5/8"	16	5000 PSI	26.4 GPM	24,255 PSI	21,750 PSI	23,200 PSI
3/4"	19	5000 PSI	37.0 GPM	20,580 PSI	20,580 PSI	20,300 PSI
1"	25	5000 PSI	52.8 GPM	20,580 PSI	20,580 PSI	21,750 PSI
1 1/2"	40	3625 PSI	89.5 GPM	14,500 PSI	14,500 PSI	14,500 PSI

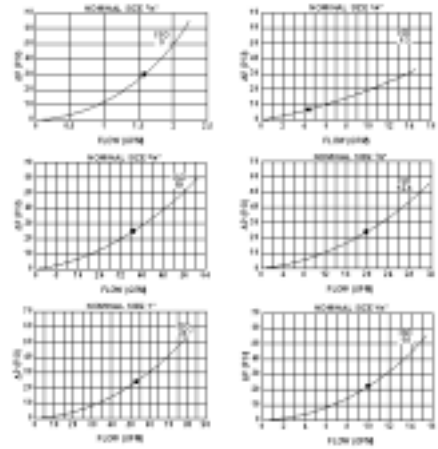

FEMALE PIPE COUPLER

Part #	Body Size	NPT	Working PSI	List Price
FF-14-F	1/4	1/4	4400	117.38
FF-38-12-F	3/8	1/2	4350	105.19
FF-38-F	3/8	3/8	4350	102.02
FF-12-F	1/2	1/2	3650	143.99
FF-34-12-SAE-F	1/2	3/4	3675	180.37
FF-34-F	3/4	3/4	3650	240.12
FF-1-F	1	1	3675	339.86




MALE PIPE PLUG

Part #	Body Size	NPT	Working PSI	List Price
FF-14-M	1/4	1/4	4400	47.04
FF-38-12-M	3/8	1/2	4350	55.13
FF-38-M	3/8	3/8	4350	49.17
FF-12-M	1/2	1/2	3650	96.29
FF-34-12-SAE-M	1/2	3/4	3675	94.45
FF-34-M	3/4	3/4	3650	151.70
FF-1-M	1	1	3675	232.04

AG INTERCHANGE

Nominal Size	Rated Flow	Minimum Burst-Coupler	Minimum Burst-Plug	Minimum Burst Connected
1/4"	6.08 GPM	27,550 PSI	21,170 PSI	22,040 PSI
3/8"	9.5 GPM	26,970 PSI	18,125 PSI	23,200 PSI
1/2"	11.3 GPM	18,850 PSI	15,370 PSI	16,820 PSI
3/4"	24.5 GPM	17,400 PSI	17,400 PSI	15,370 PSI
1"	27.5 GPM	16,820 PSI	14,500 PSI	14,790 PSI

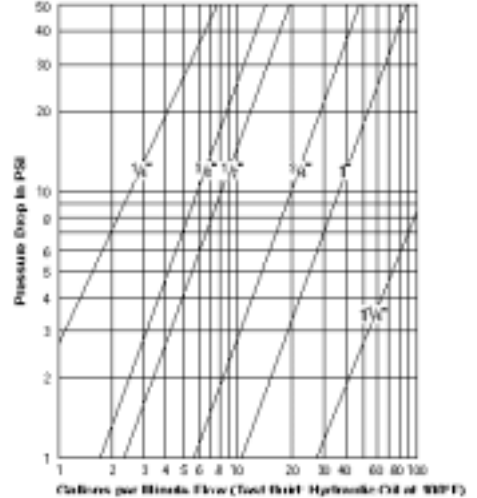

FEMALE PIPE COUPLER

Part #	Body Size	NPT	Working PSI	List Price
NV-14-F	1/4	1/4	5075	28.30
NV-38-F	3/8	3/8	4550	87.24
NV-12-F	1/2	1/2	3625	45.35
NV-34-F	3/4	3/4	3625	87.24
NV-1-F	1	1	3335	124.44



MALE PIPE PLUG

Part #	Body Size	NPT	Working PSI	List Price
NV-14-M	1/4	1/4	5075	13.30
NV-38-M	3/8	3/8	4550	16.17
NV-12-M	1/2	1/2	3625	19.99
NV-34-M	3/4	3/4	3625	36.75
NV-1-M	1	1	3335	54.68

QUICK DISCONNECT

