




- **Sales Tip:** For maximum effectiveness, we highly recommend that the end-user properly attaches the grounding cord which is included at no charge. It easily snaps into a grommet which is installed in the mat at our factory.
- **Where to Specify:** Assembly or testing areas for circuitry: computers, chips, electronics of all kinds.

- Dissipative /anti-static matting is formulated to absorb static electricity. This matting drains static from worker keeping sensitive circuitry safe from damage.
- Durable vinyl diamond-plate top surface is combined with dense closed cell foam base utilizing NOTRAX® exclusive UniFusion™ technology.
- Provides excellent anti-fatigue support with a textured anti-slip surface
- Overall mat thickness is 9/16 inch.
- Sloped beveled foam on all 4 undersides affords easy access onto and off of mat.
- Custom widths available

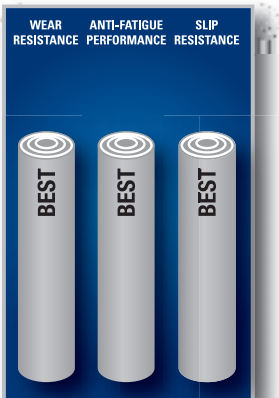

RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NOTRAX® INDUSTRIAL MATS



Uni FUSION™

#826 DIAMOND STAT™			
Stock Sizes	2' x 3'	3' x 5'	3' x 12'
List Price	\$99.36	\$248.40	\$596.16
Weight (lbs.)	9	16	38
Roll & Custom Sizes			
	3' x 75'	3' Widths	Custom Widths
List Price	\$3726.00	\$16.56/sq.ft.	\$19.87/sq.ft.
Weight (lbs.)	320	1.36/sq.ft.	1.36/sq.ft.
Prices include Grounding Cord			
Shipping Location: Superior Manufacturing Group - Moselle, MS 39459			

