




SPIRALITE® 150

PVC OIL RESISTANT SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Orange PVC with white helix. Smooth wall and interior.
- **BENEFITS:**
 - Specially compounded from oil-resistant PVC.
 - Excellent alternative to more expensive rubber hoses.
- **GENERAL APPLICATIONS:**
 - General suction for light oils and animal fats.
 - Good for use in environments where hose may be exposed to oils.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1" thru 6" 100ft.

NOMINAL SIZE	inch	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
APPROX. O.D.	inch	1.29	1.57	1.87	2.44	2.78	3.54	4.65	5.65	6.80
RECOMMENDED W.P. AT 68°F	psi	120	90	90	85	75	75	70	55	50
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	4	5	7	10	12	16	21	24
APPROX. WT.	lbs./ft.	.31	.43	.57	.87	1.19	1.62	2.56	3.15	4.64

* BEND RADIUS FOR CONTINUOUS SERVICE.

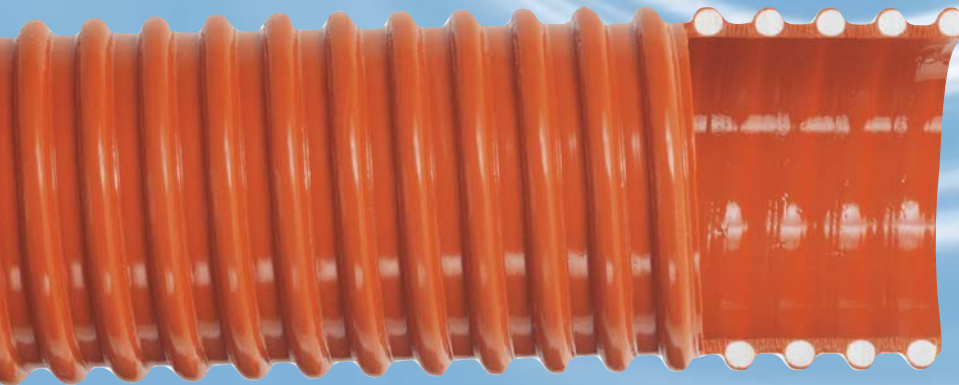

SPIRALITE® 160

PVC OIL RESISTANT CORRUGATED SUCTION HOSE

- **APPEARANCE/CONSTRUCTION:**
Orange PVC with white helix. Corrugated wall, smooth interior.
- **BENEFITS:**
 - Specially compounded from oil-resistant PVC.
 - Excellent alternative to more expensive rubber hoses.
- **GENERAL APPLICATIONS:**
 - General suction for light oils and animal fats.
 - Good for use in environments where hose may be exposed to oils.
 - Vapor recovery.
- **TEMPERATURE RANGE:**
-10°F to +130°F
- **STANDARD LENGTHS:**
1-1/2" thru 4" 100ft.

NOMINAL SIZE	inch	1 1/2"	2"	2 1/2"	3"	4"
APPROX. O.D.	inch	1.86	2.44	2.98	3.54	4.65
RECOMMENDED W.P. AT 68°F	psi	50	40	35	35	35
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	4	5	6	8
APPROX. WT.	lbs./ft.	.39	.60	.81	1.10	1.73

* BEND RADIUS FOR CONTINUOUS SERVICE.