

Micro Ball Valve Series 708 / 709

Advantages

The Parker Micro-Valve is designed to be used in confined and hard to reach applications. This miniature 2 way valve has a barstock body for extended service life and is offered with either male / female or female / female pipe ends. Features of the MV708 / 709 valves include chrome plate ball, PTFE seats, nitrile stem seal and a low profile chrome plated steel handle.


Applications

Parker's industrial ball valve product line is intended for general purpose use. Please be aware that ball valves are intended for use in the fully open or closed positions. Depending on application conditions, throttling of the valve may result in premature seal failure and / or inability to turn the valve handle.

Working Pressure and Temperatures

These valves are designed and built for use at pressures and temperatures within the stated ranges. Consult the factory for any use outside of these ranges.

Vacuum to 29 inches Hg

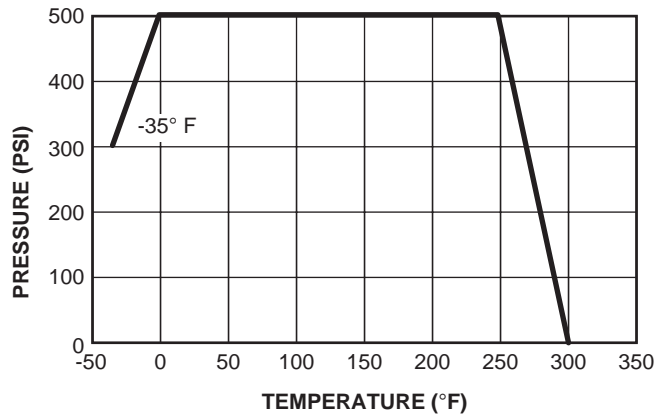

Operating Instructions

Quarter turn is "ON" or "OFF".
(Provides positive stop action for full shutoff.)

Style	Type	Size
MV	708 709	-4
Style	MV-Mini Valve	
Type	708 - Male / Female 709 - Female / Female	
Size	4-1/4"	

Flow data

VALVE SIZE	MV708 CV	MV709 CV
1/4	.95	.95