


Needle Valve NV106C-NV106CA

Compression to Male Pipe *Provided with Pin Handle
 Temperature Range: -45° to +250° F


PART NO.	TUBE SIZE	PIPE THREAD	H	L	M
NV106C-4-2*	1/4	1/8	1.50	1.41	1.53
NV106C-4-4*	1/4	1/4	1.50	1.40	1.55
NV106C-5-2*	5/16	1/8	1.50	1.35	1.50
NV106C-6-4	3/8	1/4	1.38	1.56	1.75
NV106CA-4-2	1/4	1/8	1.50	1.41	1.47
NV106CA-4-4*	1/4	1/4	1.50	1.33	1.52
NV106CA-6-4	3/8	1/4	1.38	1.53	1.78

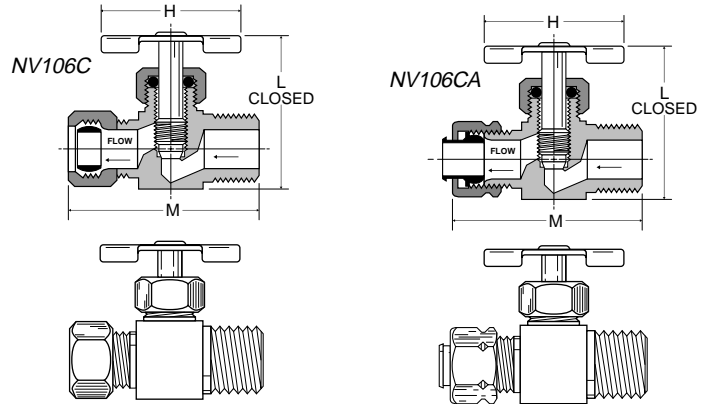

Needle Valve NV107P

Male Pipe to Male Pipe *Provided with Pin Handle
 Temperature Range: -45° to +250° F


PART NO.	PIPE THREAD	H	L	M
NV107P-2*	1/8	1.50	1.35	1.25
NV107P-4	1/4	1.38	1.54	1.65

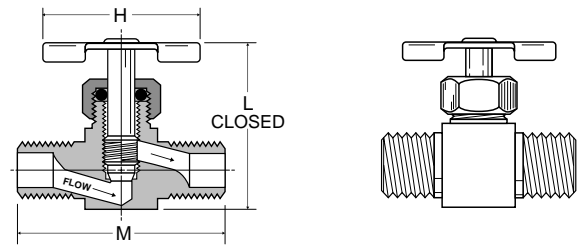

Needle Valve NV108P

Female Pipe to Male Pipe *Provided with Pin Handle
 Temperature Range: -45° to +250° F


PART NO.	PIPE THREAD	H	L	M
NV108P-2*	1/8	1.50	1.36	1.25
NV108P-4	1/4	1.38	1.56	1.61

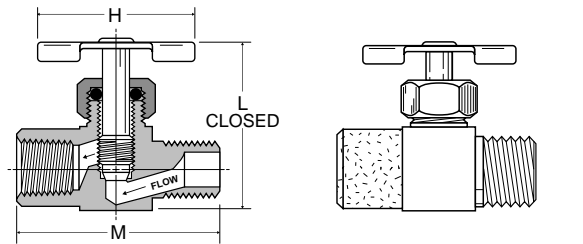

Needle Valve NV109P

Female Pipe to Female Pipe *Provided with Pin Handle
 Temperature Range: -45° to +250° F


PART NO.	PIPE THREAD	H	L	M
NV109P-2*	1/8	1.50	1.35	1.25
NV109P-4	1/4	1.38	1.53	1.62

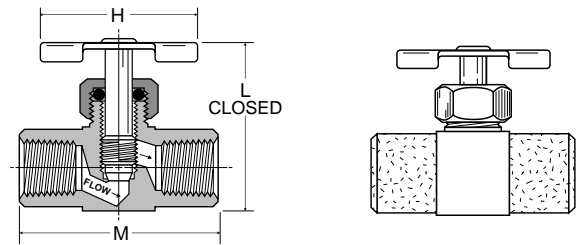

Needle Valve NV311P

Poly-Tite to Male Pipe
 Temperature Range: 0° to +150° F

PART NO.	TUBE SIZE	PIPE THREAD	H	L	M	N
NV311P-4-2	1/4	1/8	1.07	1.17	.50	.63
NV311P-4-4	1/4	1/4	1.07	1.18	.50	.72
NV311P-6-4	3/8	1/4	1.07	1.19	.56	.72

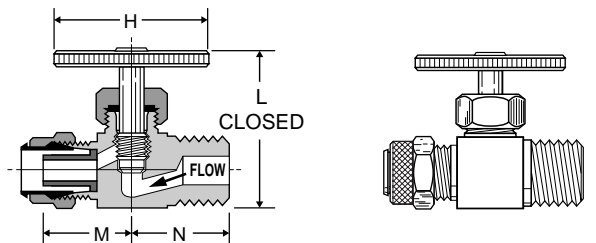

J