


# SERIES R - 6201

Braided Flexible Metal Reducing Connectors (321 Stainless Hose with 304 Stainless Steel Braid and Carbon Steel Plate Flanges).

TABLE 3: Sizes • Offset • Working Pressures • Weights

Expansion Joint Size: ID X ID X Length	Stock	Lateral Offset		Working Press (PSI)		Approx. Unit Ship Weight
		Intermittent	Permanent	@70°F	@300°F	
3 X 2 1/2 X 9	S	1/8"	3/8"	345	303	14
4 X 2 X 9	S	1/8"	3/8"	455	400	14
4 X 2 1/2 X 9	S	1/8"	3/8"	345	303	14
4 X 3 X 9	S	1/8"	3/8"	289	254	16
5 X 3 X 9	S	1/8"	3/8"	289	254	22
5 X 4 X 9	S	1/8"	3/8"	300	264	25
6 X 3 X 9	S	1/8"	3/8"	289	254	23
6 X 4 X 9	S	1/8"	3/8"	300	264	30
6 X 5 X 11	S	1/8"	3/8"	220	193	35
8 X 4 X 11	S	1/8"	3/8"	300	264	58
8 X 5 X 11	S	1/8"	3/8"	220	193	58
8 X 6 X 11	S	1/8"	3/8"	200	176	61
10 X 6 X 11	S	1/8"	3/8"	200	176	80
10 X 6 X 11	S	1/8"	3/8"	190	167	85
10 X 8 X 11	S	1/8"	3/8"	190	167	85
12 X 8 X 12	S	1/8"	3/8"	190	167	105
12 X 8 X 14	S	1/8"	3/8"	190	1267	135
12 X 10 X 13	S	1/8"	3/8"	150	132	135
14 X 10 X 13	X	1/8"	3/8"	120	105	140
14 X 12 X 14	X	1/8"	3/8"	100	88	145

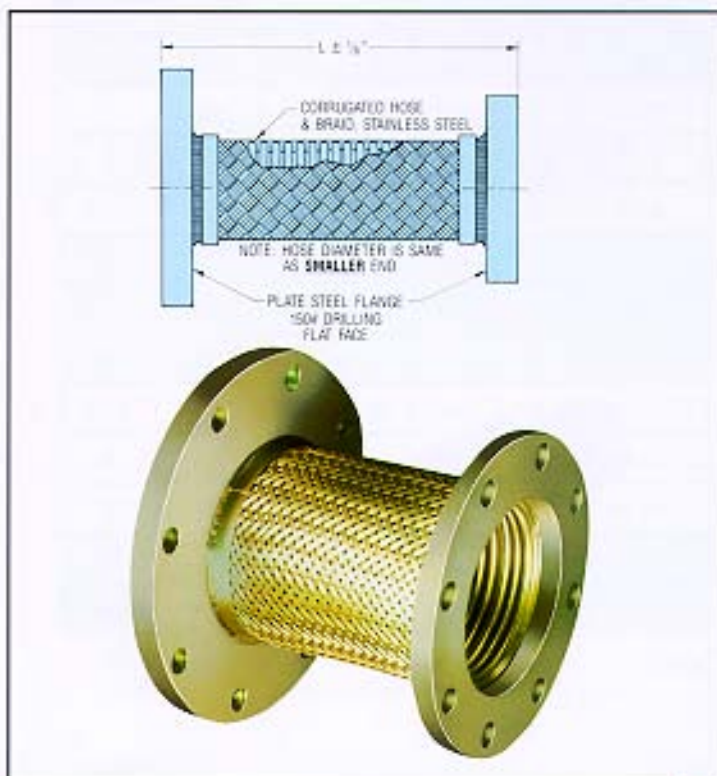

NOTES: 1. "S" indicates stocked item.  
2. "X" indicates a special order item.

**GOODYEAR**  
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship  
World Wide**