

# N-DURA<sup>®</sup> - Type NP




## Nylon Double Jacket Attack Hose

N-Dura<sup>®</sup> has an outstanding record of durability and value: 30 years of fireground experience and millions of feet sold prove that it is one of America's favorites. Produced from high quality raw materials to exacting standards, this rubber lined, nylon double jacketed hose has extinguished fires in every state, for the largest cities and the smallest volunteer fire departments.

### Properties and Construction

- Top quality, double jacket, rubber lined municipal fire hose made from 100% high strength, low stretch, air-entangled nylon for enhanced abrasion and kink resistance along with a lining of extruded EPDM rubber tube for long term adhesion.
- Outer jacket is manufactured with a tight weave with a high "pick" count to virtually eliminate snagging and pulling while on the fireground.
- Reverse twill weave of the inner jacket provides a smooth waterway, delivering the lowest friction loss in its class.
- The standard Dura-Cote™ treatment provides exceptional heat resistance, reduces moisture absorption, and greatly increases abrasion and petrochemical resistance.
- Lining remains flexible to temperatures as low as -40°F (-40°C) and is highly resistant to ozone and oxidation.
- Well suited for C.A.F.S. and foam solution application.
- National Fire Hose N-Dura<sup>®</sup> is manufactured in accordance with NFPA1961 standard, latest edition within our ISO-9001: 2000 certified quality assurance system.

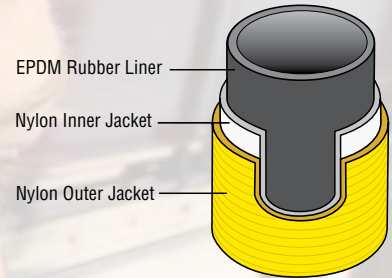

### Construction:

Nylon Double Jacket  
EPDM Rubber Inner Liner

### Temperature Range:

-40° to 150°F (-40° to 65°C)

### Couplings Available:

Aluminum NH/NST or  
IPT Threaded

### Hose Colors:



ATTACK



C.A.F.S.

SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (For 50' Coupled)	FLAT WIDTH	HOSE BED Volume (100')	BOWL SIZE
	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	FT <sup>3</sup>	IN
1-1/2"	400 (2760)	800 (5515)	1200 (8275)	15 (6.8)	2.80	1.0	1-15/16
1-3/4"	400 (2760)	800 (5515)	1200 (8275)	16 (7.3)	3.20	1.0	2-3/16
2"	400 (2760)	800 (5515)	1200 (8275)	20 (9.1)	3.70	1.5	2-1/2
2-1/2"	400 (2760)	800 (5515)	1200 (8275)	26 (11.8)	4.50	2.0	3
3"	400 (2760)	800 (5515)	1200 (8275)	34 (15.4)	5.30	2.5	3-17/32

### How to Order

NP	17X50	R	15	N	
TYPE	HOSE I.D. x HOSE LENGTH	COLOR TYPE	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
NP	15 = 1-1/2" 17 = 1-3/4" 20 = 2" 25 = 2-1/2" 30 = 3"	Y = Yellow R = Red B = Blue O = Orange G = Green T = Tan	15 = 1-1/2" 20 = 2" 25 = 2-1/2" 30 = 3"	N = NH I = IPT	Blank = Aluminum