


PLAIN FEMALE PIPE

PLAIN FEMALE RP⁴

PLAIN MALE PIPE

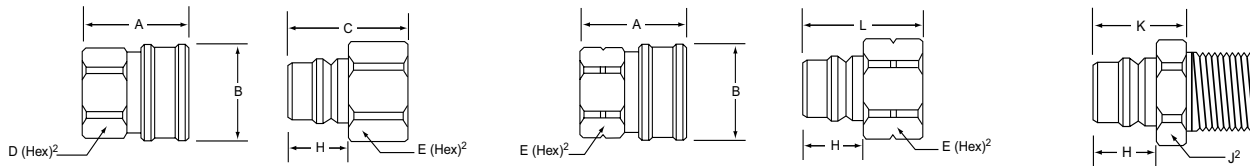


Size		1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
A	in	1.34	1.50	1.62	1.91	2.07	2.28	2.57	2.48	3.11	3.35	3.88
	mm	34.04	38.10	41.15	48.51	52.58	57.91	65.28	62.99	78.99	85.09	98.55
B	in	1.00	1.19	1.39	1.63	2.00	2.19	2.75	3.50	4.50	5.45	6.75
	mm	25.40	30.23	35.31	41.40	50.80	55.63	69.85	88.90	114.30	138.43	171.45
C	in	1.32	1.52	1.72	1.92	2.10	2.22	2.44	2.60	2.95	3.40	3.73
	mm	33.53	38.61	43.69	48.77	53.34	56.39	61.98	66.04	74.93	86.36	94.74
D²	in	.88	1.00	1.19	1.50	1.88	2.00	2.50	3.25	3.75	4.75	5.50
	mm	22.35	25.40	30.23	38.10	47.75	50.80	63.50	82.55	95.25	120.65	139.70
E²	in	.63	.81	1.00	1.19	1.50	1.88	2.13	2.75	3.25	4.00	5.00
	mm	16.00	20.57	25.40	30.23	38.10	47.75	54.10	69.85	82.55	101.60	127.00
H	in	.58	.71	.72	.88	.91	.90	1.06	1.32	1.41	1.56	1.93
	mm	14.73	18.03	18.29	22.35	23.11	22.86	26.92	33.53	35.81	39.62	49.02
K	in	.78	.98	1.01	1.14	1.16	1.17	1.34	2.03	2.08	2.59	2.58
	mm	19.81	24.89	25.65	28.96	29.46	29.72	34.04	51.56	52.83	65.79	65.53
J²	in	.56	.69	.88	1.06	1.38	1.88	2.13	2.50	3.25	4.00	5.00
	mm	14.22	17.53	22.35	26.92	35.05	47.75	54.10	63.50	82.55	101.60	127.00
L	in	1.27	1.44	1.72	1.86	2.13	2.22	2.44	2.60	2.95	3.40	3.73
	mm	32.26	36.58	43.69	47.24	54.10	56.39	61.98	66.04	74.93	86.36	94.74

- ¹ Other special end fittings available upon request.
- ² Dimensions taken across the hex flats. Round stock with two milled flats may be substituted for hex stock. Dimensions across flats same as dimensions across hex flats. Max O.D. of round stock will not exceed the dimensions across the points of the hex stock. Valve coupler and nipple bodies may be supplied from round bar stock without wrench flats.
- ³ 3.5" (88.9 mm) across hex flats - may substitute 3.75" (95.25 mm) round with 3.38" (85.85 mm) across wrench flats.
- ⁴ Notch on Hex indicates RP British parallel threads.


ACCESSORIES

Dust caps, dust plugs and pressure caps protect disconnected coupler and nipple from damage, dirt and other contaminants. Dust caps and dust plugs are available in plastic and clear anodized aluminum.



Plastic Caps and Plugs

Inexpensive means to protect your investment against contamination and damage. Comes with a loop to fit over pipe fitting or affixing to equipment with sheet metal screw. Available in sizes 1/4" thru 1".



Aluminum Dust Caps and Plugs

Alternate method to protect your equipment – aluminum dust caps and plugs are available in sizes 1/4" thru 3". The 1/4" thru 3/4" sizes come with 10" chrome plated brass bead chain. The 1" and above come with steel zinc plated sash chain.



Pressure Caps

Pressure-tight pressure caps for nipples are standard in steel, zinc yellow dichromate plated. Other materials such as brass, aluminum and stainless steel available on special order. Sizes available 1/4" thru 3". Sizes 1/4" thru 3/4" come with 10" length of corrosion resistant steel cable. Sizes 1" thru 3" come with 12" of cable-all with adjustable loop at end of cable. Consult factory for special lengths and part number.

SIZES	PLASTIC PLUG	PLASTIC CAP	ALUMINUM PLUG	ALUMINUM CAP	PRESSURE CAP
1/4"	PDP-4	PDC-4	AMPH-4	ADCH-4	MCH-4
3/8"	PDP-6	PDC-6	AMPH-6	ADCH-6	MCH-6
1/2"	PDP-8	PDC-8	AMPH-8	ADCH-8	MCH-8
3/4"	PDP-12	PDC-12	AMPH-12	ADCH-12	MCH-12
1"	PDP-16	PDC-16	AMPH-16	ADCH-16	MCH-16
1-1/4"			AMPH-20	ADCH-20	MCH-20
1-1/2"			AMPH-24	ADCH-24	MCH-24
2"			AMPH-32	ADCH-32	MCH-32
2-1/2"			AMPH-40	ADCH-40	MCH-40
3"			AMPH-48	ADCH-48	MCH-48