


Technical Information

Mounting Subplates (For Valve Size 01)

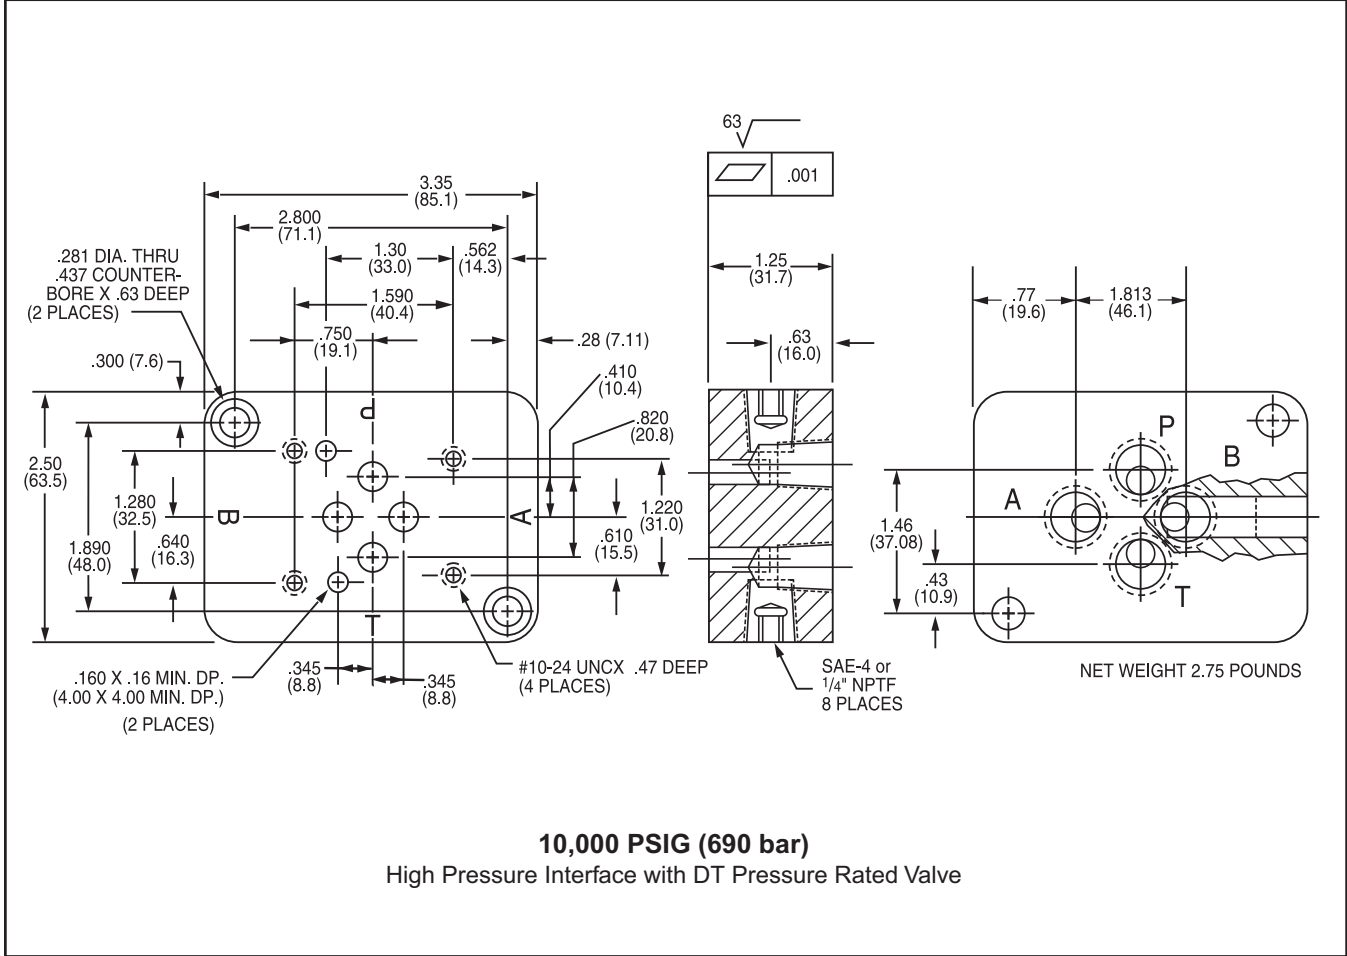

Mounting Bolts

The mounting bolts are Grade 8 or better socket head cap screws 10-24 x 2.5 inches (63.5 mm) long. 4 required. Bolts should be torqued to 80 inch pounds. Order bolt kit separate when MARSTAN subplate not ordered with valve. **Bolt Kit Part Number PMT01-BK**

Subplate comes complete with required mounting bolts and is drilled and tapped for bottom and side porting. Four plugs are provided to seal unused ports. Standard ports are 1/4" SAE straight thread O-ring sealed, 1/4" NPTF, 1/4" BS2779 Female British Parallel.