
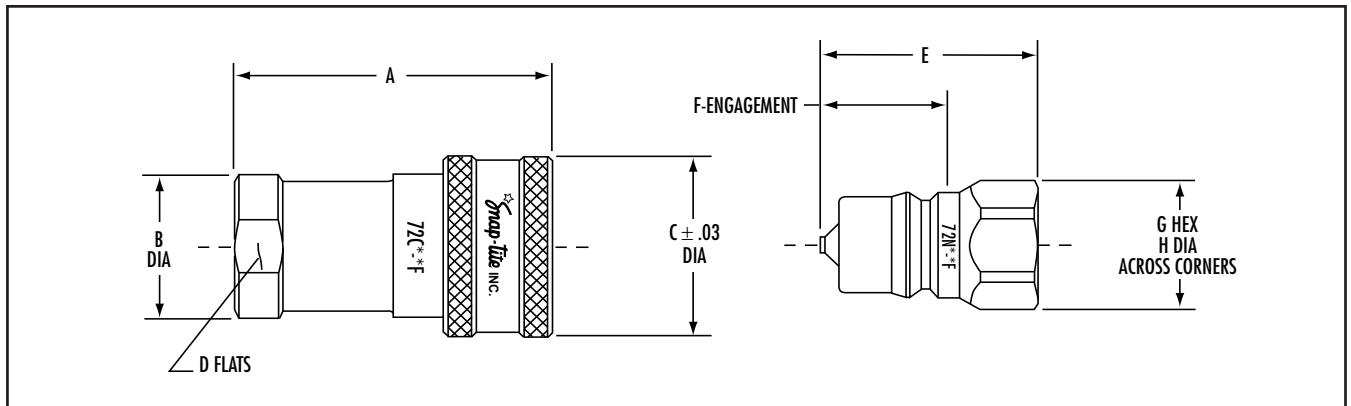


Certification: Texas Railroad Commission

Temperature Range: -40°F (-40°C) to 250°F (121°C)

Material: 303 Stainless Steel

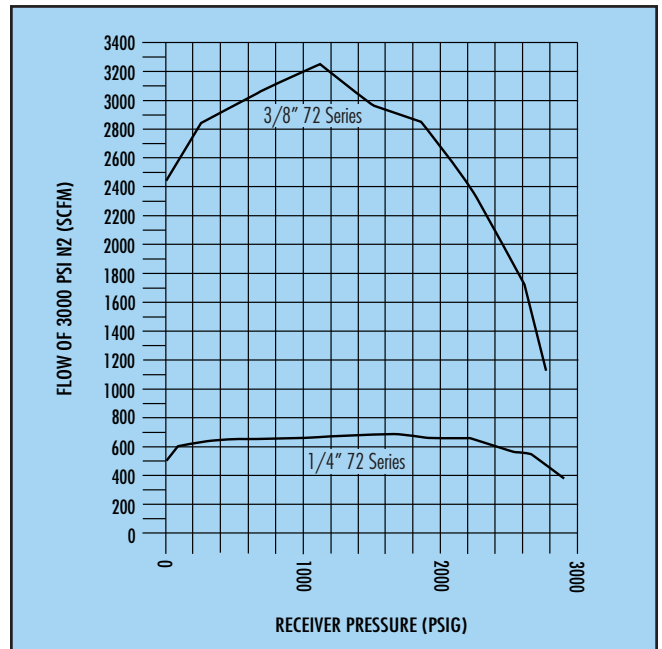

SIZE	A	B	C	D	E	F	G	H
1/4	2.25 (57.15)	.88 (22.35)	1.12 (28.45)	.75 (19.05)	1.51 (38.35)	.95 (24.13)	.75 (19.05)	.83 (21.08)
3/8	2.57 (65.28)	1.13 (28.70)	1.37 (34.80)	1.00 (25.40)	1.74 (44.20)	1.13 (28.70)	.88 (22.35)	.96 (24.38)

in (mm)

PART NUMBER	COUPLING HALF	END FITTING	WORKING PRESSURE	BURST PRESSURE
S72C4-4F UR	COUPLER	1/4 NPTF	5500 PSI (379 BAR)	22,000 PSI (1517 BAR)
S72N4-4F UR	NIPPLE	1/4 NPTF	5500 PSI (379 BAR)	22,000 PSI (1517 BAR)
S72C6-6F UR	COUPLER	3/8 NPTF	3750 PSI (259 BAR)	15,000 PSI (1035 BAR)
S72N6-6F UR	NIPPLE	3/8 NPTF	3750 PSI (259 BAR)	15,000 PSI (1035 BAR)