


FUEL TRANSFER 150

The Transporter® Fuel Transfer 150 hose is designed for gasoline/fuel oil delivery type applications. This hose features a polyester cord, dual lead stainless steel static wire reinforcement that enables this to have a constant working pressure of 150 psi regardless of the size of the hose. The NBR/PVC cover is both oil and abrasion resistant. The NBR tube has excellent resistance to oil.

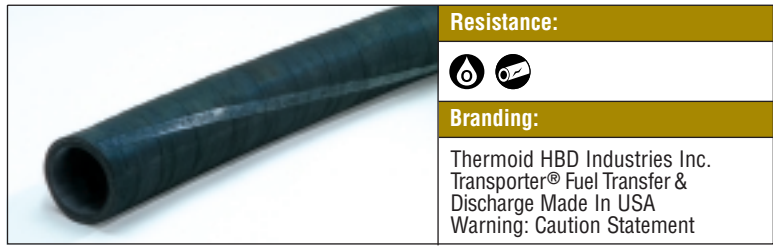

- Cover Color:** Black
- Oil Resistance:** High
- Construction:**
 - Tube:** NBR, RMA Class A
 - Cover:** NBR/PVC, RMA Class B
 - Reinforcement:** Polyester cord, dual lead stainless steel static wire
- Temperature Range:** -20°F to +200°F
-29°C to +93°C
- Packaging:** 100 ft. maximum
Minimum run of 1200 ft. per size

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|--------|--------------|--------|-------|------------------|-------|------------------|--------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 17817002002 | 2 | 50.80 | 2.50 | 63.50 | 2 | 150 | 1.03 | 14.00 | 355.60 | 1.00 | 1.49 |
| 17817003002▲ | 3 | 76.20 | 3.50 | 88.90 | 2 | 150 | 1.03 | 24.00 | 609.60 | 1.50 | 2.23 |
| 17817004002▲ | 4 | 101.60 | 4.63 | 117.48 | 2 | 150 | 1.03 | 32.00 | 812.80 | 2.40 | 3.57 |

▲ = Make To Order (MTO)