


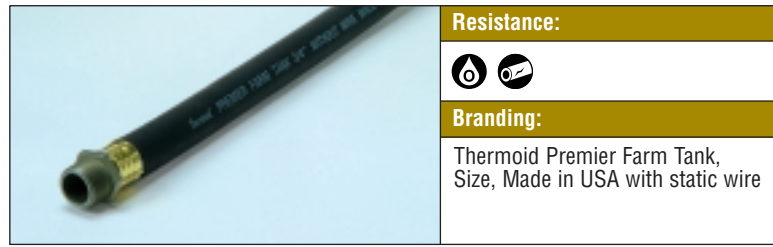

Hose information is subject to change. For full details, visit our website or contact Customer Service.

### PREMIER FARM TANK

Premier Farm Tank hose is an economical hose designed for use in agricultural, industrial and construction maintenance applications. It features 2-spiral, high-tensile, polyester cord reinforcement with an NBR tube and a NBR/PVC cover. Premier Farm Tank hose is oil and abrasion resistant. This hose was engineered for dispensing gasoline, kerosene and oil from farm or barrel-type pumps where UL approval is not required. Farm Tank hose is supplied with static wire. Static wire hose is designed for use with electric pumps.

**Note: Do not use these hoses at a service station or to refuel any aircraft.**



<b>Resistance:</b>
 
<b>Branding:</b>
Thermoid Premier Farm Tank, Size, Made in USA with static wire

- Cover Color:** Black
- Oil Resistance:** High
- Construction:**
  - Tube:** NBR, RMA Class A
  - Cover:** NBR/PVC RMA Class A
  - Reinforcement:** Spiral high tensile polyester cord
- Temperature Range:** -20°F to +160°F  
-29°C to +71°C
- Packaging:** Reels or coupled lengths

Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
00667212200	3/4	19.05	1.13	28.58	2	60	0.41	4.50	114.30	0.29	0.43
00667216200	1	25.40	1.38	34.93	2	60	0.41	7.00	177.80	0.45	0.67

#### Coupled Lengths – Male x Male Coupling – With Static Wire

Product Number	Nominal I.D.		Length	
	(inches)	(mm)	(feet)	(meters)
00667212208	3/4	19.05	8.00	2.44
00667212210	3/4	19.05	10.00	3.05
00667212212	3/4	19.05	12.00	3.66
00667212214	3/4	19.05	14.00	4.27
00667216208	1	25.40	8.00	2.44
00667216210	1	25.40	10.00	3.05
00667216212	1	25.40	12.00	3.66
00667216214	1	25.40	14.00	4.27

