DIXON

The Right Connection™



2010 Price List

Distributed By:

Cam & Groove Fittings



Dixon, Boss-Lock, EZ Boss-Lock, swaged-on and phonograph finish, polypropylene, reducing couplers, adapters, gaskets, replacement handles, accessories, Strap-Grip

A p.16

Dry Disconnects Fittings



Dry disconnect fittings, dry gas, dry aviation, dry break, Flomax connectors, safety break away fittings

B p.67

Swivel Joints



Single, double and triple plane V-ring type and O-ring type swivels

C p.85

Boss Fittings



Boss and EZ-Boss ground joint and washer type couplings, male and LP stems, Boss clamps, air hammer fittings, Boss Holedall fittings, steam quick disconnects, hammer unions, Dixon mining fittings

D p.90

Air Fittings



Manifolds, Air King universal couplings, King cable, Dix-Lock, Dual-Lock, Air Chief quick connects, air valves, blow guns, tube fittings and valves, FRL's, thermometers, gauges, hose racks and reels, safety check valves

E p.101

Shank Fittings



Menders, nipples, suction couplings, foot valves, strainers, skimmers, long and short shank fittings, spray hose couplings, quick connects, inserts

F p.263

Brass Fittings



Hose stations, nozzles, garden hose fittings, garden hose, shank fittings, ferrules, crimping tools, pressure gun and accessories, grease whip assemblies, push-on fittings, short shank fittings

G p.285

Plastic Fittings



Quick disconnect fittings, PVC tubing, tubing cutters, Tuff-Lite nylon and polypropylene hose fittings, acetal fittings, push-in fittings

H p.319

Clamps



Pinch-on, worm gear, band clamps, Strap-Grip, single and double bolt clamps, spiral clamps, T-bolt clamps, clamp kits, tools and accessories, spring hose clamps, thumb screw clamps, constant torque clamps

I p.331


Hydraulic Fittings



Straight through's, Flo-Mate, flow control valves, high pressure ball valves, needle valves, hydraulic quick connects, return line fittings, plugs and caps, swivel adapters, hydraulic couplings, flat face fittings

J p.346

Holedall Fittings

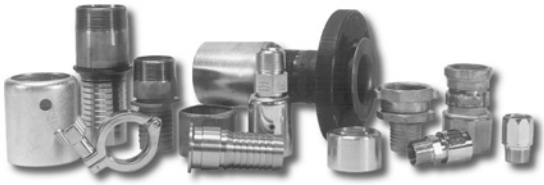

Rams, Holedall externally swaged fittings, flanged assemblies, notched fittings, Holedall internally expanded fittings, sanitary fittings, Holedall petroleum fittings, petroleum coupling expanders, API certified fittings

K p.375

Sanitary Fittings



Clamp fittings, 3A gaskets, weld fittings, bevel seat fittings, John Perry, Q-Line, and I-line fittings, buttweld fittings, tube O.D. fittings and hangers, ball valves, butterfly valves, check valves

L p.392


Fire Hose Fittings



Flat Seal couplings, fire hose, reels, clappers, expansion ring couplings, wrenches, adapters, swivels, nipples, valves, thermoplastic, brass and aluminum nozzles, dry hydrants, Storz fittings, expanders

M p.441

Valves

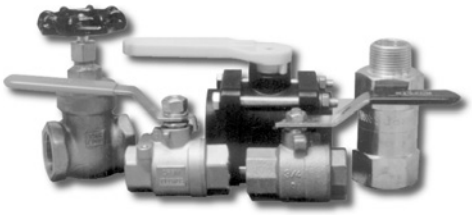

Ball valves, locking ball valves, steam valves, mini valves, pneumatically actuated valves, non-metallic ball valves, strainers, gate valves, butterfly valves, air valves, globe valves, faucets

N p.494

Pipe & Welding Fittings



Weld end fittings, welding nipples, flanges, turned back fittings, NPT threaded fittings, nipples, sight flow indicators, grooved pipe fittings, Straub couplings

O p.526

Tank Truck Fittings



Tight and loose fill couplers and adapters, shank couplings, pipe caps, sight flow indicators, reducers and adapters for tank trucks, Bayco hose swivels, Bayco hose nozzles, rack cords, dry disconnects, nozzles

P p.557

Rack Equipment



Swivels, safety break-away couplings, TTMA flange adapters, API coupler, API rack cords, flanged sight flow indicators, TTMA flange extensions, Type 35 loading arm swivel

Q p.575

Maintenance & Repair



Thread tape, test pumps, coupling inserter, hose mallet, hose knife, hose jackets and guards, hose tags, ties and tape, fiberglass sleeves

R p.585

PTFE Hose & Fittings



Nominal fittings, true ID fittings, smooth bore PTFE conductive and non-conductive hose, open pitch convoluted hose, heavy wall true ID smooth bore hose

S p.593

This catalog is intended as a product offering. It is not intended to be a user or technical manual. Information in this catalog is subject to change without notice. All users and distributors of products sold through this catalog should contact Dixon with questions of use, compatibilities, coupling procedures and life of product. Dixon's full-time engineering and test staff is always available to recommend uses and to assist distributors and users with any questions. For safety related information, please refer to pages 2 - 7.

This safety alert logo, which appears throughout our catalog, is used as a reminder that the user should carefully review for safety the appropriateness of the product for the media, application and environment in which it will be used.

SAFETY ALERT

All cast dimensions are nominal as defined in ANSI Y14.5-1973 paragraph 5-1.6.8

Hose and Hose Coupling Safety

"The very properties that make compressed gases useful in almost every area of modern life can also make them dangerous when mishandled. Years of experience with compressed gases have led to practices and equipment which, if employed, result in complete safety." [1]

Dixon hose couplings have been carefully engineered to meet specific requirements. If hose or couplings are not used in correct applications or are incorrectly applied, accidents and downtime can result. It is up to the end user to inform the distributor of the application and pressures involved when ordering hose assemblies and it is up to the distributor to supply the right hose and coupling for that application. When in doubt, Dixon is here to help you with a proper coupling recommendation.

1. Air hose couplings - This form of energy can be one of the most dangerous because it is used in so many applications and, when mishandled, can have more serious results than fluids. Air, as a gas, is compressible (fluids press only against hose or vessel walls and lose little volume under pressure). When pressurized air releases suddenly, it does so with explosive force and can cause rapid hose whip, which can do serious physical harm to personnel or damage to nearby objects. This is why the selection of proper hose and couplings for air lines is so important, along with their proper installation and maintenance. Never take for granted that a coupling is installed properly or a clamp fully tightened on an air hose - check it regularly and use safety devices (see paragraph 4).

2. Steam and gas - The same rules apply for steam and gas, but, because these are inherently more hazardous materials, personnel tend to treat hose and couplings on these lines with more respect and care. Checking clamp tightness is very important with steam hose, where it is not unusual for clamps to loosen in service, in which case they must be retightened! Safety devices should also be used (see paragraph 4).

3. Fluid hose couplings - Again, nothing should be taken for granted - in particular, check clamps for tightness each time the lines are used - especially when petroleum products or other hazardous liquids are involved. Large diameter hose, when suspended, can also be quite dangerous if it drops unexpectedly due to a coupling "pull-out" or sudden disconnection. A heavy fitting or clamp, plus the weight of the hose itself falling from any significant height, can cause injuries or damage. Be sure to use safety devices (see paragraph 4).

4. All hose assemblies - All hose assemblies should be treated with respect as potential hazards. Worn-out fittings should be replaced. Retaining devices such as clips, cables or chains should be used. Clamps should be checked regularly. Under no circumstances should any coupling be disconnected while under pressure, unless the coupling is specifically designed to do so. Disconnecting couplings under pressure could result in serious injury or death, and destruction of property and equipment.

[1] "Handbook of Compressed Gases"

General Safety Information

Pressure Ratings

Pressure ratings for couplings, as stated in this catalog, are based upon ambient temperature (**70°F**) applications with true hose I.D., new Dixon supplied couplings, new Dixon supplied clamps, new quality hose, and proper installation by a qualified assembler using Dixon procedures and equipment. In addition, temperature can affect coupling retention. For temperatures other than ambient (**70°F**), contact the hose manufacturer or call Dixon at 800-355-1991.

Product Selection

Many of the products in this catalog are used in hose assemblies in a variety of applications. The safety of any hose assembly rests on the proper selection, installation, testing and use of each product. The safe use of any product in this catalog is dependent upon the correct selection of the hose, fittings and method of attachment. To ensure such a proper selection, the user must inform the distributor of the application and pressure involved when ordering hose assemblies. The use of S.T.A.M.P.E.D. (Size, Temperature, Application, Media, Pressure, Ends, Dixon) will help in the proper selection of hose assembly components (see page 4). The selection of couplings and clamping devices is the responsibility of the purchaser or user, based upon the hose manufacturer's recommendations. If the purchaser or user is uncertain about the use or application of a product, Dixon stands ready to provide information, including test results (if available), coupling and clamping recommendations and other data to help resolve those matters.

Installation

To achieve a safe and reliable assembly, proper installation procedures must be followed. Each component of the assembly has a part in determining these procedures. The purchaser or user must follow proper procedures. If the purchaser or user has any questions regarding installation, please contact Dixon.

Testing

Dixon recommends that all hose assemblies be tested in accordance with the hose manufacturer's recommendations.

Re-testing and inspection

Dixon recommends inspection and re-testing of hose assemblies on a regular and consistent basis in accordance with the hose manufacturer's recommendations. The application determines the regularity of the inspection and re-testing schedule. Any worn-out fittings, damaged hoses or missing safety devices should be replaced immediately. Bolt-style clamps must be checked and retightened on a regular and consistent basis.

Hose and Hose Coupling Safety

All hose assemblies should be viewed as potential hazards. This document is designed to inform and educate anyone who manufactures, specifies, supplies, purchases, assembles, uses, maintains or tests any hose assembly or its component parts. The proper selection and maintenance of hose, couplings, attachment devices and accessories is imperative.

It is the end user's responsibility to identify to the distributor the application and any special conditions that the hose assembly must meet. It is the distributor's responsibility to supply the proper assembly for the intended application. Accidents and down time may occur if hose assemblies are not properly selected for the specific application.

The performance and safety of the assembly is affected by the quality of the individual components. The use of the acronym S.T.A.M.P.E.D. (Size, Temperature, Application, Media, Pressure, Ends, Dixon) will help in the proper selection of the hose assembly components (see page 4).

Warning!

Failure to use these procedures can result in serious injury or death, and destruction of property and equipment.

If anyone is uncertain about the use or application of a product, Dixon can provide test results, coupling and clamping recommendations and other data to help resolve those matters. Call 800-355-1991 with any questions.

S.T.A.M.P.E.D.

When fabricating and specifying hose assemblies ask the following questions:

S*ize*: What is the I.D. (Inside Diameter) of the hose? What is the O.D. (Outside Diameter) of both ends of the hose? What is the overall length of the assembly required?

T*emperature*: What is the temperature range of the media (product) that is flowing through the hose assembly? What is the temperature range of the environment that surrounds the outside of the hose assembly?

A*pplication*: How is the hose assembly actually being used? Is it a pressure application? Is it a vacuum (suction) application? Is it a gravity flow application? Are there any special requirements that the hose assembly is expected to perform? Is the hose being used in a horizontal or vertical position? Are there any pulsations or vibrations acting on the hose assembly?

M*edia*: What is the media/material that is flowing through the hose assembly? Being specific is critical. Check for: Abrasive materials, chemical compatibility, etc.

P*ressure*: What is the maximum pressure including surges (or, maximum vacuum) that this hose assembly will be subjected to? Always rate the maximum working pressure of your hose assembly by the lowest rated component in the system.

E*nds*: What couplings have been requested by the user? Are they the proper fittings for the application and hose selected?

D*ixon*: Dixon recommends that, based on the hose, fittings and attachment method used, all assemblies be permanently marked with the designed working pressure and intended media. Do not use other manufacturer's fittings or ferrules with Dixon products due to the differences in dimensions and tolerances. We also recommend that all hose assemblies be tested frequently.
Be Safe: Any questions on application, use or assembly call 800-355-1991.

MSHA (Mine Safety and Health Administration) Regulations

30 CFR Sections 56.13021 and 57.13021
Except where automatic shut-off valves are used, safety chains or other suitable locking devices shall be used at connections to machines of high-pressure hose line of ¾" inside diameter or larger, and between high-pressure hose lines of ¾" inside diameter of larger, where a connection failure would create a hazard.

30 CFR Section 75.1730
(e) Safety chains, suitable locking devices, or automatic cut-off valves shall be used at connections to machines of high-pressure hose lines of ¾" inside diameter or larger, and between high-pressure hose lines of ¾" inside diameter or larger, where a connection failure would create a hazard. For purposes of this paragraph, high-pressure means pressure of 100 PSI or more.

30 CFR Section 77.412
(d) Safety chains or suitable locking devices shall be used at connections to machines of high-pressure hose line of 1" inside diameter or larger, and between high-pressure hose line of 1" inside diameter or larger, where a connection failure would create a hazard.

OSHA Regulations

Standards - 29 CFR, 1910.242 (partial):
(b) Compressed air used for cleaning - Compressed air shall not be used for cleaning purposes except where reduced to less than 30 PSI and then only with effective chip guarding and personal protective equipment.

Standards - 29 CFR, 1915.131 (partial):
(e) Before use, pneumatic tools shall be secured to the extension hose or whip by some positive means to prevent the tool from becoming accidentally disconnected from the whip.

Standards - 29 CFR, 1926.302 (partial):
(b)(1) Pneumatic power tools shall be secured to the hose or whip by some positive means to prevent the tool from becoming accidentally disconnected.
(b)(2) Safety clips or retainers shall be securely installed and maintained on pneumatic impact (percussion) tools to prevent attachments from being accidentally expelled.
(b)(3) All pneumatically driven nailers, staplers and other similar equipment provided with automatic fastener feed, which operate at more than 100 PSI pressure at the tool shall have a safety device on the muzzle to prevent the tool from ejecting fasteners, unless the muzzle is in contact with the work surface.
(b)(4) Compressed air shall not be used for cleaning purposes except where reduced to 30 PSI and then only with effective chip guarding and personal protective equipment which meets the requirements of Subpart E of this part. The 30 PSI requirement does not apply for concrete form, mill scale and similar cleaning purposes.
(b)(5) The manufacturer's safe operating pressure for hoses, pipes, valves, filters and other fittings shall not be exceeded.
(b)(6) The use of hoses for hoisting or lowering tools shall not be permitted.
(b)(7) All hoses exceeding ½" inside diameter shall have a safety device at the source of supply or branch line to reduce pressure in case of hose failure.

Standards - 29 CFR, 1926.306:
(a) "General requirements"
(a)(1) "Application." This section applies to compressed air receivers, and other equipment used in providing and utilizing compressed air for performing operations such as cleaning, drilling, hoisting, and chipping. On the other hand, however, this section does not deal with the special problems created by using compressed air to convey materials nor the problems created when men work in compressed air as in tunnels and caissons. This section is not intended to apply to compressed air machinery and equipment used on transportation vehicles such as steam railroad cars, electric railway cars, and automotive equipment.
(a)(2) "New and existing equipment."
(a)(2)(i) All new air receivers installed after the effective date of these regulations shall be constructed in accordance with the 1968 edition of the A.S.M.E. Boiler and Pressure Vessel Code Section VIII.
(a)(2)(ii) All safety valves used shall be constructed, installed and maintained in accordance with the A.S.M.E. Boiler and Pressure Vessel Code, Section VIII Edition 1968.
(b) "Installation and equipment requirements"
(b)(1) "Installation." Air receivers shall be so installed that all drains, handholes, and manholes therein are easily accessible. Under no circumstances shall an air receiver be buried underground or located in an inaccessible place.
(b)(2) "Drains and traps." A drain pipe and valve shall be installed at the lowest point of every air receiver to provide for the removal of accumulated oil and water. Adequate automatic traps may be installed in addition to drain valves. The drain valve on the air receiver shall be opened and the receiver completely drained frequently and at such intervals as to prevent the accumulation of excessive amounts of liquid in the receiver.
(b)(3) "Gages and valves."
(b)(3)(i) Every air receiver shall be equipped with an indicating pressure gauge (so located as to be readily visible) and with one or more spring-loaded safety valves. The total relieving capacity of such safety valves shall be such as to prevent pressure in the receiver from exceeding the maximum allowable working pressure of the receiver by more than 10 percent.
(b)(3)(ii) No valve of any type shall be placed between the air receiver and its safety valve or valves.

Standards - 29 CFR, 1926.603 (partial):
(a)(9) Steam hose leading to a steam hammer or jet pipe shall be securely attached to the hammer with an adequate length of at least ¼" diameter chain or cable to prevent whipping in the event the joint at the hammer is broken. Air hammer hoses shall be provided with the same protection as required for steam lines.
(a)(10) Safety chains, or equivalent means, shall be provided for each hose connection to prevent the line from thrashing around in case the coupling becomes disconnected.

The regulations may be viewed in full on the OSHA website, http://www.osha.gov. Please check the website for updates.

The Canada Occupational Safety and Health regulations, Part XIII, 13:6b states:
"Where an air hose is connected to a portable air powered tool used by an employee, a restraining device shall be attached to all hose connections, in order to prevent injury to an employee in the event of an accidental disconnection of a hose."

Hose Coupling Workshops

In an effort to provide our customers with information regarding the proper and safe methods of assembling hose and couplings, Dixon offers Hose Coupling Workshops suitable for a company's sales force and shop personnel.

Classes consist of lectures and/or "hands-on" demonstrations of coupling selection, hose preparation, coupling installation, assembly testing and maintenance procedures. Morning, afternoon and all day classes are available. For more information, please contact the factory at 800-355-1991.

We encourage you to share this information with anyone who may be affected by the selection, installation, maintenance or use of any hose assembly. Always use quality products to **Be Safe**.

Be Safe

Hose assemblies must be inspected prior to each use. Worn out fittings, attachment devices, hose and accessory items must be replaced. Retaining devices (safety devices) such as clips, cables or chains must be used. Clamps must be checked regularly to the specified torque found in the Dixon literature. Under no circumstance should any coupling be disconnected while under pressure unless the coupling is specifically designed to do so. Disconnecting couplings under pressure could result in serious injury or death, and destruction to property and equipment.

For all hose assemblies in use:

B*eware* - Hose assemblies when used improperly or in the wrong application can be dangerous. The maximum working pressure shown on the hose is not an indication of the working pressure of the assembly. Based on the hose, fittings and attachment method used, all assemblies should be permanently marked with the designed working pressure and the intended media. The assembly working pressure should be permanently displayed. Hose assemblies must be used for the intended service only. Never alter manufactured product or substitute component parts.

E*liminate* - hazardous conditions by inspecting, maintaining and testing hose assemblies. Dixon recommends that all hose assemblies be tested in accordance with the hose manufacturer's specifications. The application determines the regularity of the re-testing schedule.

S*ecure* - and inspect hose, fittings, clamping devices and safety accessories before each use. Never take for granted that the coupling or attachment devices are properly installed.

A*lways* - inspect and re-tighten the bolts of any bolt style clamping device to the manufacturer's torque specifications.

F*ittings* - hose and clamping devices that are worn out or damaged must be removed from service.

E*ducate* - your employees about the proper use, care and potential hazards of hose assemblies. Take advantage of Dixon's free Hose Assembly Safety Program and the follow up Training Seminar to aid you in setting up your own inspection program. Any questions on applications, use or assembly call 1-800-355-1991.

SAFETY ALERT

The Importance of Whip Hose

SAFETY ALERT

The constant vibration created by air tools, like air drills and pavement breakers, is destructive to air hose couplings, especially the quick-acting type. To provide protection against coupling breakage and related hazards, Dixon recommends the use of a whip hose. To construct a whip hose, connect one end of a short (3' to 10') air hose to the air tool using a 3500 type steel nipple. Connect the other end of the hose to the air supply using the standard quick-acting coupling. The heat-treated 3500 nipple will withstand vibration far better than the standard coupling and provide a safer connection. The whip hose should remain permanently connected to the tool.

Hose Assembly Safety Program

Dixon, in partnership with your industrial hose supplier, is pleased to offer a hose and coupling safety survey of your plant, at no cost to you, to assist in your efforts to make your facility as safe, efficient and productive as possible.

Today, plant safety is an enormous, ongoing endeavor in which it is impossible to be an expert in every field.

The use of damaged or misapplied hose couplings and related items occurs. To the untrained eye, these hazards may continue to exist until an accident happens, threatening not only plant machinery, but also the well-being of plant personnel.

Our program includes a visual inspection of hose assemblies and related accessories in your plant by trained technicians. A professionally written report containing our observations and recommendations for corrective action is subsequently provided to augment your own ongoing safety program. If desired, photographs of the areas of concern can be supplied with the report. As a follow-up, the program offers an educational hands-on seminar directly relating to the safety concerns in your facility.

Plant safety is coming under increasing scrutiny by various regulatory agencies. Let Dixon's trained personnel assist you in establishing and maintaining safety compliance in your plant.

The safety survey report is completely confidential and will only be shown to authorized plant personnel. Again, there is no cost to you for this service. For more information, please contact the factory at 1-800-355-1991.

Safety Products and Recommendations in the Dixon Price List

Safety is everyone's concern!

Dixon provides many safety products designed to protect personnel and property. Recommendations and safety warnings are also included for your review.

Hose and coupling safety .....pages 2-3
S.T.A.M.P.E.D. .....page 4
Pressure recommendations .....pages 8-13
EZ Boss-Lock handles .....page 62
Cam and groove safety clips .....page 62-63
Air King - not to be used for steam statement .....pages 102-106
King cable safety cables .....page 115
Safety shut-off valves, OSHA REG. 1926.302 .....page 118
30 PSI safety blow guns .....page 136
Safety vented ball valves .....page 501
Safety tags and safety tape .....page 592
The importance of whip hose statement .....pages 6, 281

Dixon is a proud member of The Association for Hose and Accessories Distribution (NAHAD). We support the NAHAD Hose Assembly Guidelines Program given the use of genuine Dixon couplings and clamps.

NAHAD Industrial Hose Listed Manufacturer

Pressure Recommendations

The images shown on these two pages are provided to assist in coupling and clamp or ferrule identification for the pressure recommendation chart on pages 10 - 13.

Couplings



Dixon Cam & Groove




Machined Short Shank



Holedall Internal Expansion




Boss Couplings

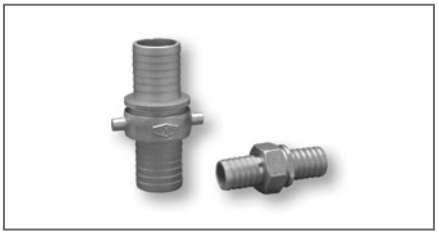

Cast Short Shank




Flow Chief / Sanitary

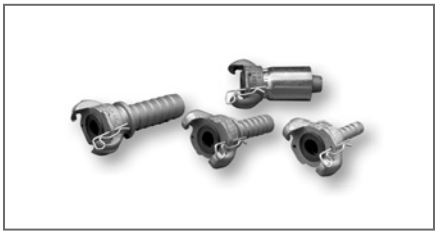

Air King Universal




Push-On

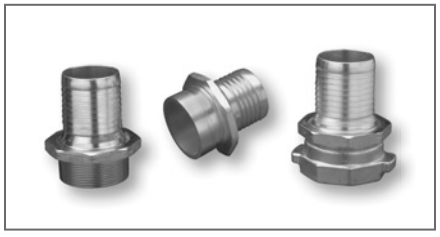

Holedall Internal Expansion Petroleum



King Machined Medium Shank

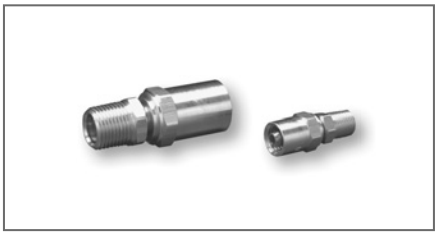

Reusable Brass



Flat Seal



King Machined Long Shank



Holedall Swage / Crimp

Pressure Recommendations

1. The chart on pages 10 - 13 is intended as a guide only. It only applies to metal couplings as shown for ambient temperature (**70°F**) applications with true I.D. hose. It assumes new Dixon supplied couplings, new Dixon supplied clamps, new quality hose and proper installation by a qualified assembler using Dixon procedures and equipment. Temperature can affect the coupling retention. For questions relating to temperatures other than ambient (**70°F**) contact the hose manufacturer or Dixon at 1-800-355-1991.
2. This chart does not apply to non-Dixon products, with used hose, in non-approved or unsupported applications or in non-standard assemblies.
3. Do not use this chart if it conflicts with the hose manufacturer's recommendations.
4. All hose assemblies should be pressure tested to hose manufacturers or Rubber Manufacturers Association (R.M.A.) specifications prior to being put into service.
5. Our test experience indicates that coupling retention can vary with changes in hose design. For pressure ratings other than those listed and shown, or if questions arise, please call Dixon Valve & Coupling Company at 1-800-355-1991 for assistance.
6. All hose assembly components must be compatible with the materials and environments with which they are to come in contact.
7. Dixon recommends that all hose assemblies be marked with the assembly working pressure and media of the intended application. Under no circumstances should the assembly working pressure exceed the working pressure of the lowest rated component (coupling, clamp, ferrule or hose).
8. For further safety information refer to pages 2-7.

Clamps and Ferrules




Boss Interlocking Clamps



Preformed Clamps



Internal Expansion

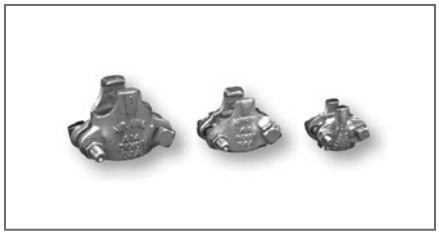


Air King Interlocking Clamps



Double Bolt Clamps




Internal Expansion Petroleum

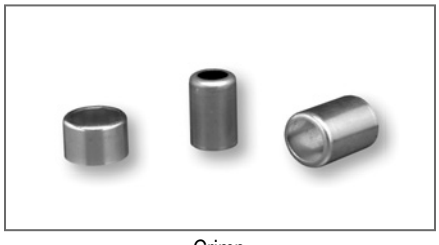


Crimp



Swage / Crimp

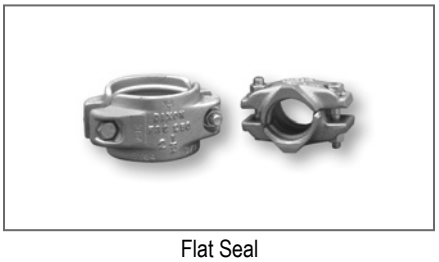

Flat Seal

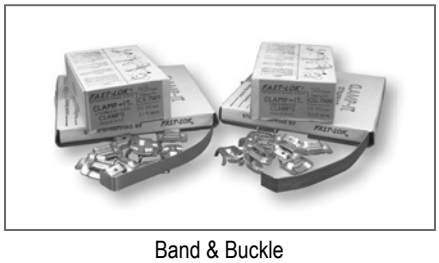

Band & Buckle

Pressure Recommendations

Mark hose assembly with pressure from this chart or hose working pressure, whichever is lower.
All pressure recommendations are in pounds per square inch (PSI).

1. This chart is intended as a guide only. It only applies to metal couplings as shown for ambient temperature (**70°F**) applications with true I.D. hose. It assumes new Dixon supplied couplings, new Dixon supplied clamps, new quality hose and proper installation by a qualified assembler using Dixon procedures and equipment.
   Temperature can affect the coupling retention. For questions relating to temperatures other than ambient (**70°F**) contact the hose manufacturer or Dixon at 1-800-355-1991.
2. This chart does not apply to non-Dixon products, with used hose, in non-approved or unsupported applications or in non-standard assemblies.

Hose (rubber covered)	Couplings	DPL sect.	Clamps & Ferrules	* Assembly * Procedure	1/4"	3/8"	1/2"	5/8"	3/4"
Air *textile reinforced rubber lined*	Air King Universal	E	Preformed Band Clamp	2102			150	150	150
	Machined - Short Shank	F	Crimp	2304	200	150	150	100	100
	Machined - Short Shank	F	Preformed Band Clamp	2100-2101			150	100	100
	Reusable - Brass	G	n/a	2305	250	250	250		
	King Machined - Medium Shank	F	Preformed Band Clamp	2100-2101			250	200	200
	King Machined - Long Shank	F	Preformed Band Clamp	2100-2101			300	300	300
Air *textile or wire reinforced rubber lined*	Air King Universal	E	Air King or Boss Interlocking Clamp	2000		150	150		150
	Air King Universal	E	Swage/Crimp	see DPL			150		150
	Boss Couplings	D	Boss Interlocking Clamp	2000-2004	600	600	600		600
	Holedall Swage/Crimp	K	Swage/Crimp	see Ram Manual	600	600	600		600
Asphalt & Hot Tar	Boss Couplings	D	Boss Interlocking Clamp	2001-2002					
Chemical *plastic lined for liquid service*	King Machined - Medium Shank	F	Preformed Band Clamp	2100-2101			125		125
	King Machined - Medium Shank	F	Band & Buckle	2104					
	King Machined - Long Shank	F	Preformed Band Clamp	2100-2101			150		150
	King Machined - Long Shank	F	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Preformed Band Clamp	2100-2101			150		150
	Boss-Lock Cam & Groove	A	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Swage/Crimp	see Ram Manual					250
	Holedall Swage/Crimp	K	Swage/Crimp	see Ram Manual			600		600
Chemical *rubber lined for liquid service*	King Machined - Medium Shank	F	Preformed Band Clamp	2100-2101			125		125
	King Machined - Medium Shank	F	Band & Buckle	2104					
	King Machined - Long Shank	F	Preformed Band Clamp	2100-2101			150		150
	King Machined - Long Shank	F	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Preformed Band Clamp	2100-2101			150		150
	Boss-Lock Cam & Groove	A	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Swage/Crimp	see Ram Manual					250
	Boss Couplings	D	Boss Interlocking Clamp	2000-2004			600		600
	Holedall Internal Expansion	K	Internal Expansion	see Ram Manual					
	Holedall Swage/Crimp	K	Swage/Crimp	see Ram Manual			600		600
Food Grade *conforming to 3A*	Flow Chief Sanitary	K	Internal Expansion	see Ram Manual					
Food Grade *rubber lined*	King Machined - Medium Shank	F	Preformed Band Clamp	2100-2101			125		125
	King Machined - Medium Shank	F	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Preformed Band Clamp	2100-2101			150		150
	Boss-Lock Cam & Groove	A	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Swage/Crimp	see Ram Manual					250
	Holedall Internal Expansion	K	Internal Expansion	see Ram Manual					
	Holedall Swage/Crimp	K	Swage/Crimp	see Ram Manual			600		600
Layflat	Flat Seal	A / M	Flat Seal Clamps	2202					

3. Do not use this chart if it conflicts with the hose manufacturer's recommendations.
4. All hose assemblies should be pressure tested to hose manufacturers or Rubber Manufacturers Association (R.M.A.) specifications prior to being put into service.
5. Our test experience indicates that coupling retention can vary with changes in hose design. For pressure ratings other than those listed and shown, or if questions arise, please call Dixon Valve & Coupling Company at 1-800-355-1991 for assistance.
6. All hose assembly components must be compatible with the materials and environments with which they are to come in contact.
7. Dixon recommends that all hose assemblies be marked with the assembly working pressure and media of the intended application. Under no circumstances should the assembly working pressure exceed the working pressure of the lowest rated component (coupling, clamp, ferrule or hose).
8. For further safety information refer to pages 2-7.

* *Procedures can be found at www.dixonvalve.com or by calling 1-800-355-1991.*

Hose (rubber covered)	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	Notes
Air *textile reinforced rubber lined*	150									(2) bands on 5/8" or larger; *Must use mating Dixon Air King fittings with safety clip installed.*
	100									
	100									
										(2) bands on 1/2" to 1"
	150									
	300									
Air *textile or wire reinforced rubber lined*	150									*Must use mating Dixon Air King fittings with safety clip installed.*
	150									Coupling and ferrule are sold assembled. *Must use mating Dixon Air King fittings with safety clip installed.*
	600	600	600	600	450	450	250		250	
	600	600	600	600	600	600	500	450	400	
Asphalt & Hot Tar	200	200	200	200	200	200	200			Consult factory
Chemical *plastic lined for liquid service*	125	125	125	75	75	50	50			(3) bands on 3" & 4"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
		125	125	75	75	50	50			(3) bands on 3" & 4"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
	150	150	150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on 1-1/4" & 1-1/2"; (2) bands on the rest
		150	150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on the rest
	250	250	250	250	150	125	100			
		250	250	250	150	125	100			
	250		250	250		125	100			*Requires properly matched stem and ferrule.*
	600	600	600	600	600	600	500			
Chemical *rubber lined for liquid service*	125	125	125	75	75	50	50			(3) bands on 3" & 4"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
		125	125	75	75	50	50			(3) bands on 3" & 4"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
	150	150	150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on 1-1/4" & 1-1/2"; (2) bands on the rest
		150	150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on the rest
	250	250	250	250	150	125	100			
		250	250	250	150	125	100			
	250		250	250		125	100			*Requires properly matched stem and ferrule.*
	600	600	600	600	450	450	250			
	800	800	800	800	600	600	500			Consult factory for ratings on IXF48-3 to IXF48-5 & IXF64-2 to IXF64-5 ferrules. *Internal Expansion is NOT recommended for XLPE, UHMWPE & Gum Rubber lined hoses.*
	600	600	600	600	600	600	500			
Food Grade *conforming to 3A*			250	250		250				Use Stainless Steel Food Grade Ferrule ONLY.
Food Grade *rubber lined*	125	125	125	75	75	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
		125	125	75	75	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
	250	250	250	250	150	125	100	75	75	(3) bands on 6"; (2) bands on the rest
		250	250	205	150	125	100	75	75	(3) bands on 6"; (2) bands on the rest
	250		250	250		125	100			*Requires properly matched stem and ferrule.*
	250		250	250	250	250	200			
	600	600	600	600	600	600	500	450	400	
Layflat			300	300	300	300	225		150	To be used as a set ONLY. *6" Cam & Groove couplings are rated to 75PSI.*

Pressure Recommendations

Hose (rubber covered)	Couplings	DPL sect.	Clamps & Ferrules	* Assembly * Procedure	1/4"	3/8"	1/2"	5/8"	3/4"
Material Handling *rubber lined*	Cast Short Shank	F	Preformed Band Clamp	2100-2101					
	Cast Short Shank	F	Band & Buckle	2104					
	King Machined - Medium Shank	F	Preformed Band Clamp	2100-2101					
	King Machined - Medium Shank	F	Band & Buckle	2104					
	King Machined - Long Shank	F	Preformed Band Clamp	2100-2101					
	King Machined - Long Shank	F	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Preformed Band Clamp	2100-2101					
	Boss-Lock Cam & Groove	A	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Swage/Crimp	see Ram Manual					
	Holedall Swage/Crimp	K	Swage/Crimp	see Ram Manual					
	Holedall Internal Expansion	K	Internal Expansion	see Ram Manual					
Material Handling *no helical wire rubber lined*	Cast Short Shank	F	Double Bolt Clamp	2201					
	King Machined - Medium Shank	F	Double Bolt Clamp	2201					
	King Machined - Long Shank	F	Double Bolt Clamp	2201					
Material Handling *cement rubber lined*	Boss Couplings	D	Boss Interlocking Clamp	2000-2004					
	Holedall Swage/Crimp	K	Swage/Crimp	see Ram Manual					
	Holedall Internal Expansion	K	Internal Expansion	see Ram Manual					
Petroleum Transfer	King Machined - Medium Shank	F	Preformed Band Clamp	2100-2101			125		125
	King Machined - Medium Shank	F	Band & Buckle	2104					
	King Machined - Long Shank	F	Preformed Band Clamp	2100-2101			150		150
	King Machined - Long Shank	F	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Preformed Band Clamp	2100-2101			150		250
	Boss-Lock Cam & Groove	A	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Swage/Crimp	see Ram Manual					250
	Holedall Internal Expansion	K	Internal Expansion	see Ram Manual					
	Holedall Swage/Crimp	K	Swage/Crimp	see Ram Manual			600		600
Air Craft Refueling *conforming to API 1529*	Holedall Internal Expansion (Petroleum)	K	Internal Expansion (Petroleum)	see Ram Manual					
Push-On	Push-On	G	n/a	2001-2002	175	175	175	175	175
Steam	Boss Couplings	D	Boss Interlocking Clamp	2000-2004			250		250
Water	Air King Universal	E	Preformed Band Clamp	2100-2101			150	150	150
	Air King Universal	E	Air King or Boss Interlocking Clamp	2000-2001		150	150		150
	Machined - Short Shank	F	Preformed Band Clamp	2100-2101			150	100	100
	Machined - Short Shank	F	Crimp	2304	200	150	150	100	100
	Cast Short Shank	F	Preformed Band Clamp	2100-2101			150	100	100
	Cast Short Shank	F	Band & Buckle	2104					
	King Machined - Medium Shank	F	Preformed Band Clamp	2100-2101			250	200	200
	King Machined - Long Shank	F	Preformed Band Clamp	2100-2101			300	300	300
	Boss-Lock Cam & Groove	A	Preformed Band Clamp	2100-2101			150		250
	Boss-Lock Cam & Groove	A	Band & Buckle	2104					
	Boss-Lock Cam & Groove	A	Swage/Crimp	see Ram Manual					250
	Boss Couplings	D	Boss Interlocking Clamp	2000-2002	600	600	600		600
	Holedall Swage/Crimp	K	Swage/Crimp	see Ram Manual	600	600	600		600
Water *no helical wire*	Cast Short Shank	F	Double Bolt Clamp	2201					
	King Machined - Medium Shank	F	Double Bolt Clamp	2201					
	King Machined - Long Shank	F	Double Bolt Clamp	2201					

Pressure Recommendations

Hose (rubber covered)	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	Notes
Material Handling *rubber lined*			75	75	50	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"
			75	75	50	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"
			125	75	75	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"
			125	75	75	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"
			150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on the res
			150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on the res
			250	250	150	125	100	75	75	(3) bands on 6"; (2) bands on the rest
			250	250	150	125	100	75	75	(3) bands on 6"; (2) bands on the rest
			250	250		125	100			*Requires properly matched stem and ferrule.*
			600	600	600	600	500	450	400	
			800	800	600	600	500		400	Consult factory for ratings on IXF48-3 to IXF48-5 & IXF64-2 to IXF64-5 ferrules. *Internal Expansion is NOT recommended for XLPE, UHMWPE & Gum Rubber lined hoses.*
Material Handling *no helical wire rubber lined*			75	75	50	50	50	25	25	(3) double bolt clamps on 5" & 6"; (2) double bolt clamps on 3" to 4"; (1) double bolt clamp on the rest
			125	75	75	50	50	25	25	(3) double bolt clamps on 5" & 6"; (2) double bolt clamps on 3" to 4"; (1) double bolt clamp on the rest
			150	125	100	75	75			(3) double bolt clamps on all sizes
Material Handling *cement rubber lined*	600	600	600	600	450	450	250		250	Cement will erode ID
	600	600	600	600	600	600	500	450	400	Cement will erode ID
	800	800	800	800	600	600	500		400	Cement will erode ID Consult factory for ratings on IXF48-3 to IXF48-5 & IXF64-2 to IXF64-5 ferrules.
Petroleum Transfer	125	125	125	75	75	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
		125	125	75	75	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
	150	150	150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on 1-1/4" & 1-1/2"; (2) bands on the rest
		150	150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on the rest
	250	250	250	250	150	125	100	75	75	(3) bands on 6"; (2) bands on the rest
		250	250	250	150	125	100	75	75	(3) bands on 6"; (2) bands on the rest
	250		250	250		125	100			*Requires properly matched stem and ferrule.*
	800	800	800	800	600	600	500		400	Consult factory for ratings on IXF48-3 to IXF48-5 & IXF64-2 to IXF64-5 ferrules.
	600	600	600	600	600	600	500	450	400	
Air Craft Refueling *conforming to API 1529*	300	300	300	300	300	300	300			
Push-On										Push-On fittings should ONLY be used on Push-On hose.
Steam	250	250	250	250	250	250	250		250	
Water	150									(2) bands on 5/8" or larger; *Must use mating Dixon Air King fittings with safety clip installed.* *Band & Buckle is NOT recommended for 1-1/2" and smaller.*
	150									*Must use mating Dixon Air King fittings with safety clip installed.* *Band & Buckle is NOT recommended for 1-1/2" and smaller.*
	100									(1) band; *Band & Buckle is NOT recommended for 1-1/2" and smaller.*
	100									
	100	75	75	75	50	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
		75	75	75	50	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
	150	150	125	75	75	50	50	25	25	(4) bands on 6"; (3) bands on 3" to 5"; (2) bands on 1-1/2" to 2-1/2"; (1) band on the rest
	300	300	150	125	100	75	75			(5) bands on 3" & 4"; (4) bands on 2" & 2-1/2"; (3) bands on 1-1/4" & 1-1/2"; (2) bands on the rest
	250	250	250	250	150	125	100	75	75	(3) bands on 6"; (2) bands on the rest
		250	250	250	150	125	100	75	75	(3) bands on 6"; (2) bands on the rest
	250		250	250		125	100			*Requires properly matched stem and ferrule.*
	600	600	600	600	450	450	250		250	
	600	600	600	600	600	600	500	450	400	
Water *no helical wire*			75	75	50	50	50	25	25	(3) double bolt clamps on 5" & 6"; (2) double bolt clamps on 3" to 4"; (1) double bolt clamp on the rest
			125	75	75	50	50	25	25	(3) double bolt clamps on 5" & 6"; (2) double bolt clamps on 3" to 4"; (1) double bolt clamp on the rest
			150	125	100	75	75			(3) double bolt clamps on all sizes


Cam & Groove



poly replacement parts
page 36



TTMA slip-on flange x socket weld adapter
pages 53



buttweld to tube cam & groove
page 59

Boss Fittings



GJ Boss™ ground joint knurled nut
page 93


Air Fittings



global 4-lug Air King
page 103



in-line lubricator base
page 114

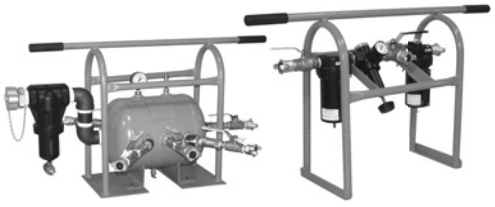

ASME air tank with a Watts filter and Wilkerson combination unit with frame
page 117



Parker Ez-Mate industrial interchange couplers
page 123



high volume cannon and Typhoon blow guns
pages 138-139



polyurethane whip hose
page 141



Sharkbite® push-in fittings
pages 161-162



LIQUIfit™ Fittings
pages 185-189




process gauges
page 256

Shank Fittings



BSPT end King Combination nipples
page 264



extra long quick connect fittings
page 273



heavy duty quick connect fittings
page 276

Brass Fittings



turbo garden hose nozzle
page 296



female 37° JIC / 45° SAE swivel x
push-on 90° elbows
page 307



female insert 90° elbows
page 310



female NPTF swivel x hose barb
page 312

Clamps



thumb screw clamps
page 334



constant torque clamps
page 344

Hydraulic Fittings



flat face fittings
pages 364-365

Sanitary Fittings



bolted clamp
page 409



tube buttweld x
schedule 5 buttweld adapter
page 410



buna-N DIN gasket
page 413

Fire Hose Fittings



500# SJ UL labeled fire hose
500# SJ color impregnated fire hose
page 448



saddle hose racks
page 457



aluminum breakable cap
page 463



master stream nozzle
page 486



fire equipment cabinets
page 493

Valves



adjustable faucets
page 494



globe and check valves
page 496



one and two way ball valves
(socket weld end, grooved end)
pages 497-498

Tank Truck & Rack Equipment



fuel nozzles & accessories
pages 570-571



API coupler
page 582




TTMA flange extension
page 584



type 35 loading arm swivel
page 584

Dixon

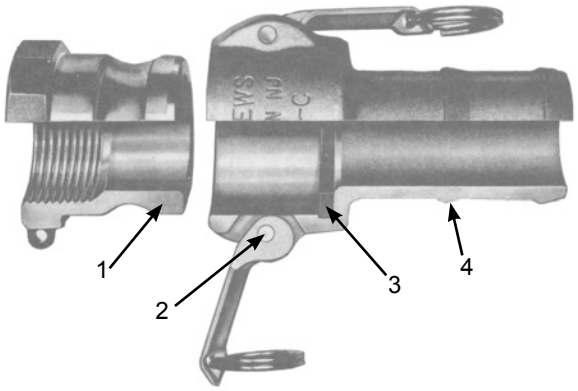

1. Precision machined to rigid tolerances.
2. Durable stainless steel cam arm pins will not rust or bind, for greater strength and safety.
3. Recess holds gasket firmly in place - ensures proper placement.
4. Long shank design allows proper banding, thus eliminating the major cause of hose damage.

Operation of Cam and Groove

1. To make connection, simply slide the adapter into the coupler and with normal hand pressure, press the cam levers down.
2. Uncoupling is as quick and simple as coupling. Just lift the cam arms and remove the adapter.

Boss-Lock



Boss-Lock cam and groove provides a *unique patented safety feature*. The cast-in lugs allow safety clips to be attached once the lugs are passed through slots in the special cam lever arms. These clips prevent the coupler from being unlocked until they are removed, providing a *positive locking action*.

Pull Ring Safety Clips



Dixon has developed the pull ring safety clip to simplify the locking action on Boss-Lock couplers. No more inserting clips or dangling lanyards, just a twist and it's locked, giving you a low profile *positive locking action*.

Buy with Confidence
Boss-Lock investment stainless steel cam arms are *guaranteed* !
Should you ***ever*** break a Boss-Lock investment stainless steel cam arm, simply return it to the nearest warehouse for a *free* replacement.

Ordering System



Size represents the coupler or adapter and hose or pipe end. (i.e. 200 = 2") If the coupling is a reducing size, the coupler or adapter is the first size. (i.e. 4030-C is 4" coupler to 3" hose shank).

Specifications on Dixon Cam and Groove

Specifications:

- Dixon, Boss-Lock and EZ Boss-Lock cam and groove couplers and adapters are produced to interchange with all product produced to Commercial Item Description A-A-59326B.
- No standard exists for the ½" and 8" fittings, and generally these sizes do not interchange with other manufacturers.
- Dust caps and dust plugs are ***not*** to be used in pressure applications for safety and environmental reasons.
- *Designed for use with liquids*, consult Dixon for specific recommendations.


Pressure Ratings:

SAFETY ALERT Recommendations based on the use of mating Dixon fittings at ambient temperature (**70°F**) with standard Buna-N Seal installed. For use at elevated temperature or other unusual operating conditions, consult the factory. Dixon, Boss-Lock and EZ Boss-Lock couplers and adapters maximum working pressure are as follows:

Size	½"	¾" thru 2"	2½"	3"	4"	5" and 6"	8"
PSI	**150**	**250**	**150**	**125**	**100**	**75**	**50**

EZ Boss-Lock

No more fumbling with clamps, wire, clips or pins.
Just close the handles and the locking
mechanism is engaged.

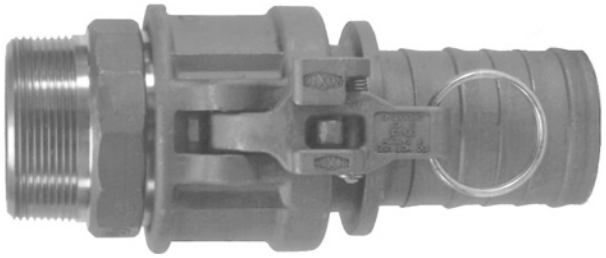


Unlike other safety couplings . . .


- *The EZ Boss-Lock is extremely easy to open!!!*
  The release lever is under your thumb when you want to open the fitting. Ergonomic.
- *The EZ Boss-Lock is resistant to accidental disconnection when being dragged.* The release lever opens in the direction opposite to the cam arm, so movements that tend to open the release lever also tend to close the cam arm!!!
- *The EZ Boss-Lock alerts you if it is not properly engaged.*
  If the rotating lever is not flush with the handle, it is not properly engaged.
- *The EZ Boss-Lock has no sliding pins to jam.*
  The EZ Boss-Lock's rotating action helps keep the locking device free of debris.
- *The EZ Boss-Lock has no sliding pins to pop open.*
  The EZ Boss-Lock is designed to protect critical parts from impact and to withstand rugged use.
- *The EZ Boss-Lock can be supplied with special shanks custom suited to your needs.* The EZ Boss-Lock is available with swaged and PF shank designs for hard to couple chemical hoses.
- *The EZ Boss-Lock cam arm assemblies are made of investment cast stainless steel with plated carbon steel pull rings.*
- *The EZ Boss-Lock is easier to insert into the hose tubes on tank trucks, and easier to use in restricted spaces.*
  This is due to the smaller maximum OD and a more snag free exterior.
- *The EZ Boss-Lock cam arm assemblies can be retrofitted onto undamaged stainless steel Boss-Lock.* This allows you to protect your investment in stainless steel Boss-Lock couplings while you upgrade.
- *The EZ Boss-Lock is made in the USA.*

Cam and Groove Line Drawings


Line drawings are representative of the Dixon line of cam and groove.




Type A
male adapter x female NPT




Type E
male adapter x hose shank




Type B
female coupler x male NPT




Type F
male adapter x male NPT




Type C
female coupler x hose shank



Type DC *
dust cap



Type D
female coupler x female NPT



Type DP *
dust plug

SAFETY ALERT

* Dust caps and dust plugs are ***not*** to be used in pressure applications for safety and environmental reasons.

Warning !
Under no circumstances should cam and groove couplings be used for compressed air or steam service**!**

SAFETY ALERT

Dixon / Boss-Lock Type A Adapters



male adapter x female NPT

Size	356T6 Aluminum		Aluminum Hard Coat		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	***50-A-AL*** [2]	**$8.50**	**---**	**---**	***50-A-BR***	**$14.40**
¾" x ½"	***7550-A-AL*** [2]	**13.50**	**---**	**---**	***7550-A-BR***	**27.00**
¾"	***75-A-AL*** [2]	**8.45**	**---**	**---**	***75-A-BR***	**16.40**
1"	***100-A-AL*** [2]	**10.00**	**---**	**---**	***100-A-BR***	**17.90**
1¼"	***125-A-AL***	**12.90**	**---**	**---**	***125-A-BR***	**35.90**
1½"	***150-A-AL***	**13.85**	***150-A-ALH***	**$28.30**	***150-A-BR***	**37.40**
2"	***200-A-AL***	**16.10**	***200-A-ALH***	**32.20**	***200-A-BR***	**47.40**
2½"	***250-A-AL***	**24.30**	**---**	**---**	***250-A-BR***	**81.70**
3"	***300-A-AL***	**25.90**	***300-A-ALH***	**45.70**	***300-A-BR***	**98.70**
4"	***400-A-AL***	**58.60**	***400-A-ALH***	**95.50**	***400-A-BR***	**167.10**
5"	***500-A-AL***	**98.85**	**---**	**---**	***500-A-BR***	**274.95**
6"	***600-A-AL***	**117.05**	***600-A-ALH***	**181.80**	***600-A-BR***	**367.50**
8" DIX	***800-A-AL*** [1]	**321.65**	**---**	**---**	**---**	**---**
8" BL	***801-A-AL*** [1]	**331.00**	**---**	**---**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*.
[2] made from 6061-T6 aluminum
• Pressure rating is based on the seal of the mating part. See ratings on page 16.

Dixon / Boss-Lock Type E Adapters



male adapter x hose shank

Size	356T6 Aluminum		Aluminum Hard Coat		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	***50-E-AL***	**$11.75**	**---**	**---**	***50-E-BR***	**$23.40**
¾" x ½"	***7550-E-AL***	**9.95**	**---**	**---**	**---**	**---**
¾"	***75-E-AL***	**11.05**	**---**	**---**	***75-E-BR***	**23.75**
1"	***100-E-AL***	**11.10**	**---**	**---**	***100-E-BR***	**31.40**
1¼"	***125-E-AL***	**14.95**	**---**	**---**	***125-E-BR***	**44.20**
1½"	***150-E-AL*** [2]	**15.00**	***150-E-ALH***	**$30.40**	***150-E-BR***	**47.40**
2"	***200-E-AL*** [2]	**18.65**	***200-E-ALH***	**36.50**	***200-E-BR***	**67.40**
2½"	***250-E-AL***	**29.65**	**---**	**---**	***250-E-BR***	**104.20**
3"	***300-E-AL*** [2]	**31.40**	***300-E-ALH***	**58.70**	***300-E-BR***	**115.00**
4"	***400-E-AL*** [2]	**63.45**	***400-E-ALH***	**101.50**	***400-E-BR***	**197.60**
5"	***500-E-AL***	**101.90**	**---**	**---**	**---**	**---**
6"	***600-E-AL***	**123.90**	***600-E-ALH***	**198.00**	***600-E-BR***	**521.85**
8" DIX	***800-E-AL*** [1]	**550.60**	**---**	**---**	**---**	**---**
8" BL	***801-E-AL*** [1]	**556.40**	**---**	**---**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*.
[2] See page 37 for external interlocking crimp ferrules
• Pressure rating is based on the seal of the mating part. See ratings on page 16.



Interlocking Crimp Ferrule [2]
For use on 1½", 2", 3" and 4" aluminum hose shanks only.

Stainless steel crimp sleeves for Dixon and Boss-Lock shanks are available on page 37.

Dixon / Boss-Lock Type A Adapters

Size	*Unplated Iron*		*Plated Iron*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	---	---	---	---	***50-A-SS***	**$53.30**
¾" x ½"	---	---	---	---	***7550-A-SS***	**57.95**
¾"	---	---	***75-A-PM***	**$14.25**	***75-A-SS***	**45.60**
1"	---	---	***100-A-PM***	**15.70**	***100-A-SS***	**47.50**
1¼"	---	---	---	---	***125-A-SS***	**59.60**
1½"	***150-A-MI***	**$22.55**	***150-A-PM***	**25.30**	***150-A-SS***	**57.20**
2"	***200-A-MI***	**26.60**	***200-A-PM***	**28.80**	***200-A-SS***	**58.30**
2½"	---	---	---	---	***250-A-SS***	**177.00**
3"	***300-A-MI***	**46.50**	***300-A-PM***	**50.20**	***300-A-SS***	**113.75**
4"	***400-A-MI***	**74.10**	***400-A-PM***	**80.10**	***400-A-SS***	**212.00**
5"	***500-A-MI***	**165.00**	---	---	***500-A-SS***	**336.35**
6"	---	---	***600-A-PM***	**176.00**	***600-A-SS***	**368.90**
8" DIX	---	---	---	---	---	---
8" BL	---	---	---	---	---	---

Dixon / Boss-Lock Type E Adapters

Size	*Unplated Iron*		*Plated Iron*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	---	---	---	---	***50-E-SS***	**$48.30**
¾" x ½"	---	---	---	---	***7550-E-SS***	**55.20**
¾"	---	---	***75-E-PM***	**$22.00**	***75-E-SS***	**47.80**
1"	---	---	***100-E-PM***	**25.30**	***100-E-SS***	**49.60**
1¼"	---	---	***125-E-PM***	**29.80**	***125-E-SS***	**70.30**
1½"	***150-E-MI***	**$26.25**	***150-E-PM***	**28.30**	***150-E-SS***	**61.30**
2"	***200-E-MI***	**33.20**	***200-E-PM***	**35.90**	***200-E-SS***	**61.95**
2½"	---	---	---	---	***250-E-SS***	**168.90**
3"	***300-E-MI***	**46.35**	***300-E-PM***	**53.25**	***300-E-SS***	**115.00**
4"	***400-E-MI***	**87.30**	***400-E-PM***	**92.50**	***400-E-SS***	**270.00**
5"	---	---	---	---	***500-E-SS***	**396.00**
6"	---	---	***600-E-PM***	**215.00**	***600-E-SS***	**508.50**
8" DIX	---	---	---	---	---	---
8" BL	---	---	---	---	---	---

Stainless steel crimp sleeves for Dixon and Boss-Lock shanks are available on page 37.

Dixon / Boss-Lock Type F Adapters



male adapter x male NPT

Size	356T6 Aluminum		Aluminum Hard Coat		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	***50-F-AL***	**$8.85**	**---**	**---**	***50-F-BR***	**$17.90**
¾" x ½"	***7550-F-AL***	**19.70**	**---**	**---**	***7550-F-BR***	**42.80**
¾"	***75-F-AL***	**10.15**	**---**	**---**	***75-F-BR***	**20.25**
1"	***100-F-AL***	**12.85**	**---**	**---**	***100-F-BR***	**26.25**
1¼"	***125-F-AL***	**14.95**	**---**	**---**	***125-F-BR***	**47.90**
1½"	***150-F-AL***	**16.10**	***150-F-ALH***	**$30.65**	***150-F-BR***	**37.55**
2"	***200-F-AL***	**18.95**	***200-F-ALH***	**35.75**	***200-F-BR***	**46.00**
2½"	***250-F-AL***	**33.60**	**---**	**---**	***250-F-BR***	**117.00**
3"	***300-F-AL***	**35.20**	***300-F-ALH***	**58.50**	***300-F-BR***	**131.00**
4"	***400-F-AL***	**64.10**	***400-F-ALH***	**103.35**	***400-F-BR***	**183.65**
5"	***500-F-AL***	**118.85**	**---**	**---**	**---**	**---**
6"	***600-F-AL***	**142.50**	***600-F-ALH***	**213.00**	***600-F-BR***	**523.90**
8" DIX	***800-F-AL*** [1]	**419.70**	**---**	**---**	**---**	**---**
8" BL	***801-F-AL*** [1]	**426.50**	**---**	**---**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*.

- Pressure rating is based on the seal of the mating part. See ratings on page 16.

Dixon / Boss-Lock Type DP Dust Plugs



dust plug

Size	356T6 Aluminum		Aluminum Hard Coat		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	**---**	**---**	**---**	**---**	***50-DP-BR***	**$22.70**
¾"	***75-DP-AL***	**$10.25**	**---**	**---**	***75-DP-BR***	**23.30**
1"	***100-DP-AL***	**11.40**	**---**	**---**	***100-DP-BR***	**21.70**
1¼"	***125-DP-AL***	**13.55**	**---**	**---**	***125-DP-BR***	**37.20**
1½"	***150-DP-AL***	**14.50**	***150-DP-ALH***	**$29.80**	***150-DP-BR***	**41.70**
2"	***200-DP-AL***	**14.90**	***200-DP-ALH***	**31.60**	***200-DP-BR***	**42.90**
2½"	***250-DP-AL***	**21.40**	**---**	**---**	***250-DP-BR***	**61.70**
3"	***300-DP-AL***	**22.40**	***300-DP-ALH***	**43.95**	***300-DP-BR***	**68.10**
4"	***400-DP-AL***	**33.15**	***400-DP-ALH***	**66.00**	***400-DP-BR***	**144.00**
5"	***500-DP-AL***	**60.65**	**---**	**---**	**---**	**---**
6"	***600-DP-AL***	**74.50**	***600-DP-ALH***	**125.60**	***600-DP-BR***	**513.00**
8" DIX	***800-DP-AL*** [1]	**312.50**	**---**	**---**	**---**	**---**
8" BL	***801-DP-AL*** [1]	**317.50**	**---**	**---**	**---**	**---**

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*.

SAFETY ALERT

Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

Dixon / Boss-Lock Type F Adapters

Size	*Unplated Iron*		*Plated Iron*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	---	---	---	---	***50-F-SS***	**$52.80**
¾" x ½"	---	---	---	---	***7550-F-SS***	**62.00**
¾"	---	---	***75-F-PM***	**$20.00**	***75-F-SS***	**53.50**
1"	---	---	***100-F-PM***	**19.30**	***100-F-SS***	**59.65**
1¼"	---	---	---	---	***125-F-SS***	**82.30**
1½"	***150-F-MI***	**$27.50**	***150-F-PM***	**31.70**	***150-F-SS***	**76.65**
2"	***200-F-MI***	**33.95**	***200-F-PM***	**37.40**	***200-F-SS***	**79.90**
2½"	---	---	---	---	***250-F-SS***	**256.85**
3"	***300-F-MI***	**66.00**	***300-F-PM***	**67.50**	***300-F-SS***	**158.20**
4"	***400-F-MI***	**99.25**	***400-F-PM***	**104.75**	***400-F-SS***	**267.85**
5"	---	---	---	---	---	---
6"	---	---	***600-F-PM***	**245.00**	***600-F-SS***	**383.50**
8" DIX	---	---	---	---	---	---
8" BL	---	---	---	---	---	---

Dixon / Boss-Lock Type DP Dust Plugs

Size	*Unplated Iron*		*Plated Iron*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	---	---	---	---	***50-DP-SS***	**$41.40**
¾"	---	---	---	---	***75-DP-SS***	**40.60**
1"	---	---	***100-DP-PM***	**$26.50**	***100-DP-SS***	**42.30**
1¼"	---	---	***125-DP-PM***	**26.20**	***125-DP-SS***	**46.40**
1½"	***150-DP-MI***	**$19.95**	***150-DP-PM***	**24.50**	***150-DP-SS***	**55.55**
2"	***200-DP-MI***	**28.50**	***200-DP-PM***	**30.50**	***200-DP-SS***	**62.15**
2½"	---	---	***250-DP-PM***	**34.00**	***250-DP-SS***	**138.85**
3"	***300-DP-MI***	**36.15**	***300-DP-PM***	**41.30**	***300-DP-SS***	**99.80**
4"	***400-DP-MI***	**61.00**	***400-DP-PM***	**69.40**	***400-DP-SS***	**163.85**
5"	---	---	---	---	---	---
6"	---	---	---	---	***600-DP-SS***	**367.95**
8" DIX	---	---	---	---	---	---
8" BL	---	---	---	---	---	---

Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

SAFETY ALERT

Dixon Type C Couplers



female coupler x hose shank



Interlocking Crimp Ferrule [3]
For use on 1½", 2", 3" and 4" aluminum hose shanks only.

Size	*356T6 Aluminum*		*Aluminum Hard Coat*		*Brass*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	***50-C-AL***	**$17.60**	**---**	**---**	***50-C-BR***	**$38.00**
¾"	***75-C-AL***	**20.95**	**---**	**---**	***75-C-BR***	**44.10**
1"	***100-C-AL***	**21.60**	**---**	**---**	***100-C-BR***	**49.60**
1¼"	***125-C-AL*** [2]	**49.00**	**---**	**---**	***125-C-BR*** [2]	**75.30**
1½"	***150-C-AL*** [3]	**27.60**	***150-C-ALH***	**$41.60**	***150-C-BR***	**67.10**
2"	***200-C-AL*** [3]	**31.50**	***200-C-ALH***	**49.50**	***200-C-BR***	**78.80**
2½"	***250-C-AL*** [2]	**54.35**	**---**	**---**	***250-C-BR*** [2]	**114.00**
3"	***300-C-AL*** [3]	**49.25**	***300-C-ALH***	**77.80**	***300-C-BR***	**154.75**
4"	***400-C-AL*** [3]	**69.00**	***400-C-ALH***	**104.85**	***400-C-BR***	**207.20**
5"	***500-C-AL***	**115.65**	**---**	**---**	**---**	**---**
6"	***600-C-AL***	**170.75**	***600-C-ALH***	**241.50**	***600-C-BR***	**727.00**
8"	***800-C-AL*** [1]	**674.30**	**---**	**---**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size.* The 8" Dixon design has 4 cam arms.
[2] Parts are manufactured in Canada.
[3] See page 40 for external interlocking crimp ferrules

Boss-Lock Type C Couplers



female coupler x hose shank

Size	*356T6 Aluminum*		*Brass*	
	Part #	Price/E	Part #	Price/E
¾" x ½"	**---**	**---**	**---**	**---**
¾"	***AC075***	**$32.85**	***BC075***	**$54.60**
1"	***AC100***	**35.50**	***BC100***	**63.65**
1¼"	***AC125***	**39.15**	***BC125***	**79.00**
1½"	***AC150***	**38.40**	***BC150***	**80.90**
2"	***AC200***	**41.10**	***BC200***	**97.95**
2½"	***AC250***	**50.60**	***BC250***	**142.20**
3"	***AC300***	**61.60**	***BC300***	**151.00**
4"	***AC400***	**83.15**	***BC400***	**290.00**
6"	***AC600***	**183.40**	***BC600***	**670.00**
8"	***AC800*** [1]	**543.55**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size.* The 8" Dixon design has 4 cam arms.

EZ Boss-Lock Type C Couplers



female coupler x hose shank

Size	*356T6 Aluminum*		*Brass*	
	Part #	Price/E	Part #	Price/E
¾" x ½"	**---**	**---**	**---**	**---**
¾"	***AC075EZ***	**$58.20**	***BC075EZ***	**$104.50**
1"	***AC100EZ***	**65.45**	***BC100EZ***	**107.75**
1¼"	**---**	**---**	***BC125EZ***	**149.70**
1½"	***AC150EZ***	**70.00**	***BC150EZ***	**121.95**
2"	***AC200EZ***	**75.00**	***BC200EZ***	**137.50**
2½"	***AC250EZ***	**85.00**	**---**	**---**
3"	***AC300EZ***	**110.00**	***BC300EZ***	**224.00**
4"	***AC400EZ***	**136.15**	***BC400EZ***	**327.60**
6"	***AC600EZ***	**293.00**	**---**	**---**
8"	***AC800EZ*** [1]	**600.00**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size.* The 8" Dixon design has 4 cam arms.

Dixon Type C Couplers

Size	Unplated Iron		Stainless Steel	
	Part #	Price/E	Part #	Price/E
½"	---	---	50-C-SS	$68.45
¾"	---	---	75-C-SS	67.10
1"	---	---	100-C-SS	77.00
1¼"	---	---	125-C-SS [2]	117.50
1½"	150-C-MI	$43.75	150-C-SS	89.40
2"	200-C-MI	49.80	200-C-SS	105.45
2½"	---	---	250-C-SS [2]	239.95
3"	300-C-MI	79.00	300-C-SS	192.40
4"	400-C-MI	128.00	400-C-SS	292.10
5"	---	---	500-C-SS	461.90
6"	---	---	600-C-SS	462.00
8"	---	---	---	---

Finger rings are not supplied on ½" - 1" Dixon couplings.

½" Dixon has only one cam arm.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Stainless steel crimp sleeves for Dixon and Boss-Lock shanks are available on page 37.

Boss-Lock Type C Couplers

Size	Plated Iron		Stainless Steel	
	Part #	Price/E	Part #	Price/E
¾" x ½"	---	---	RC050BL	$85.50
¾"	IC075	$63.40	RC075BL	85.60
1"	IC100	51.40	RC100BL	94.40
1¼"	---	---	RC125BL	111.80
1½"	IC150	56.40	RC150BLNO	103.50
2"	IC200	76.60	RC200BLNO	106.00
2½"	---	---	---	---
3"	IC300	100.00	RC300BL	203.30
4"	IC400	144.25	RC400BLNO	278.90
6"	IC600	375.00	---	---
8"	---	---	---	---

All Boss-Lock couplers are supplied with safety clips.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Stainless steel crimp sleeves for Dixon and Boss-Lock shanks are available on page 37.

EZ Boss-Lock Type C Couplers

Size	Stainless Steel	
	Part #	Price/E
¾" x ½"	RC050EZ	$100.70
¾"	RC075EZ	98.95
1"	RC100EZ	110.80
1¼"	RC125EZ	135.00
1½"	RC150EZNO	113.75
2"	RC200EZNO	121.30
2½"	---	---
3"	RC300EZ	220.75
4"	RC400EZ	329.55
6"	RC600EZ	515.35
8"	---	---

SAFETY ALERT

Under no circumstances should the EZ Boss-Lock cam arms be used on any fitting not specifically designed for their use. See page 62 for further specifications.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Stainless steel crimp sleeves for Dixon and Boss-Lock shanks are available on page 37.

Dixon Type D Couplers



female coupler x female NPT

Size	356T6 Aluminum		Aluminum Hard Coat		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	***50-D-AL***	**$21.85**	**---**	**---**	***50-D-BR***	**$36.50**
¾"	***75-D-AL***	**22.10**	**---**	**---**	***75-D-BR***	**42.30**
1"	***100-D-AL***	**22.30**	**---**	**---**	***100-D-BR***	**45.50**
1¼"	***125-D-AL*** [2]	**43.00**	**---**	**---**	***125-D-BR*** [2]	**77.00**
1½"	***150-D-AL***	**27.95**	***150-D-ALH***	**$48.30**	***150-D-BR***	**61.70**
2"	***200-D-AL***	**31.10**	***200-D-ALH***	**53.00**	***200-D-BR***	**76.70**
2½"	***250-D-AL*** [2]	**54.50**	**---**	**---**	***250-D-BR*** [2]	**120.50**
3"	***300-D-AL***	**49.05**	***300-D-ALH***	**78.00**	***300-D-BR***	**144.00**
4"	***400-D-AL***	**69.60**	***400-D-ALH***	**120.00**	***400-D-BR***	**214.00**
5"	***500-D-AL***	**123.90**	**---**	**---**	***500-D-BR***	**438.00**
6"	***600-D-AL***	**163.20**	***600-D-ALH***	**247.80**	***600-D-BR***	**565.00**
8"	***800-D-AL*** [1]	**722.45**	**---**	**---**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size.* The 8" Dixon design has 4 cam arms.
[2] Parts are manufactured in Canada.

Boss-Lock Type D Couplers




female coupler x female NPT

Size	356T6 Aluminum		Brass	
	Part #	Price/E	Part #	Price/E
¾" x ½"	***AD050***	**$41.25**	***BD050***	**$56.00**
¾"	***AD075***	**35.10**	***BD075***	**58.00**
1"	***AD100***	**36.20**	***BD100***	**61.50**
1¼"	***AD125***	**39.40**	***BD125***	**74.00**
1½"	***AD150***	**37.75**	***BD150***	**75.50**
2"	***AD200***	**39.30**	***BD200***	**91.25**
2½"	***AD250***	**53.05**	***BD250***	**148.50**
3"	***AD300***	**59.80**	***BD300***	**169.00**
4"	***AD400***	**81.70**	***BD400***	**224.00**
5"	***AD500***	**136.00**	**---**	**---**
6"	***AD600***	**199.00**	***BD600***	**585.00**
8"	***AD800*** [1]	**506.45**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size.* The 8" Dixon design has 4 cam arms.

EZ Boss-Lock Type D Couplers



female coupler x female NPT

Size	356T6 Aluminum		Brass	
	Part #	Price/E	Part #	Price/E
¾" x ½"	**---**	**---**	**---**	**---**
¾"	***AD075EZ***	**$65.10**	***BD075EZ***	**$105.00**
1"	***AD100EZ***	**67.50**	***BD100EZ***	**106.40**
1¼"	**---**	**---**	***BD125EZ***	**132.10**
1½"	***AD150EZ***	**71.10**	***BD150EZ***	**121.05**
2"	***AD200EZ***	**72.00**	***BD200EZ***	**138.00**
2½"	***AD250EZ***	**88.00**	***BD250EZ***	**156.25**
3"	***AD300EZ***	**114.95**	***BD300EZ***	**244.00**
4"	***AD400EZ***	**132.25**	***BD400EZ***	**298.00**
5"	***AD500EZ***	**195.00**	**---**	**---**
6"	***AD600EZ***	**301.00**	**---**	**---**
8"	***AD800EZ*** [1]	**516.00**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size.* The 8" Dixon design has 4 cam arms.

Dixon Type D Couplers

Size	Unplated Iron		Stainless Steel	
	Part #	Price/E	Part #	Price/E
½"	---	---	50-D-SS	$68.55
¾"	---	---	75-D-SS	74.20
1"	---	---	100-D-SS	77.00
1¼"	---	---	125-D-SS	119.80
1½"	150-D-MI	$49.40	150-D-SS	105.50
2"	200-D-MI	53.75	200-D-SS	113.75
2½"	---	---	250-D-SS	232.20
3"	300-D-MI	88.80	300-D-SS	211.95
4"	400-D-MI	109.00	400-D-SS	298.55
5"	500-D-MI	186.15	500-D-SS	496.00
6"	---	---	600-D-SS	576.95
8"	---	---	---	---

Finger rings are not supplied on ½" - 1" Dixon couplings.

½" Dixon has only one cam arm.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Boss-Lock Type D Couplers

Size	Plated Iron		Stainless Steel	
	Part #	Price/E	Part #	Price/E
¾" x ½"	---	---	RD050BL	$94.55
¾"	ID075	$48.00	RD075BL	87.20
1"	ID100	52.95	RD100BL	88.65
1¼"	---	---	RD125BL	120.60
1½"	ID150	58.00	RD150BL	114.80
2"	ID200	72.80	RD200BL	127.80
2½"	---	---	---	---
3"	ID300	108.60	RD300BL	241.10
4"	ID400	124.00	RD400BL	310.70
5"	---	---	---	---
6"	ID600	400.00	---	---
8"	---	---	---	---

All Boss-Lock couplers are supplied with safety clips.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

EZ Boss-Lock Type D Couplers

Size	Stainless Steel	
	Part #	Price/E
¾" x ½"	RD050EZ	$108.50
¾"	RD075EZ	103.40
1"	RD100EZ	104.15
1¼"	RD125EZ	136.95
1½"	RD150EZ	140.90
2"	RD200EZ	144.50
2½"	---	---
3"	RD300EZ	268.60
4"	RD400EZ	331.00
5"	---	---
6"	RD600EZ	518.00
8"	---	---

SAFETY ALERT

Under no circumstances should the EZ Boss-Lock cam arms be used on any fitting not specifically designed for their use. See page 62 for further specifications.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Dixon Type B Couplers



female coupler x male NPT

Size	356T6 Aluminum		Aluminum Hard Coat		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	***50-B-AL***	**$21.70**	**---**	**---**	***50-B-BR***	**$33.20**
¾"	***75-B-AL***	**21.90**	**---**	**---**	***75-B-BR***	**39.55**
1"	***100-B-AL***	**23.90**	**---**	**---**	***100-B-BR***	**44.40**
1¼"	***125-B-AL*** [2]	**35.00**	**---**	**---**	**---**	**---**
1½"	***150-B-AL***	**25.25**	***150-B-ALH***	**$44.80**	***150-B-BR***	**64.70**
2"	***200-B-AL***	**31.50**	***200-B-ALH***	**51.45**	***200-B-BR***	**73.90**
2½"	***250-B-AL*** [2]	**53.90**	**---**	**---**	**---**	**---**
3"	***300-B-AL***	**50.00**	***300-B-ALH***	**77.20**	***300-B-BR***	**147.70**
4"	***400-B-AL***	**74.90**	***400-B-ALH***	**115.00**	***400-B-BR***	**205.00**
5"	***500-B-AL***	**130.30**	**---**	**---**	**---**	**---**
6"	***600-B-AL***	**172.80**	***600-B-ALH***	**263.50**	**---**	**---**
8"	***800-B-AL*** [1,3]	**949.50**	**---**	**---**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*. The 8" Dixon design has 4 cam arms.
[2] Parts are manufactured in Canada.
[3] Parts are produced as a welded fabrication.

Boss-Lock Type B Couplers



female coupler x male NPT

Size	356T6 Aluminum		Brass	
	Part #	Price/E	Part #	Price/E
¾" x ½"	**---**	**---**	***BB050***	**$65.00**
¾"	**---**	**---**	***BB075***	**62.80**
1"	***AB100***	**$37.20**	***BB100***	**63.00**
1¼"	***AB125***	**41.80**	***BB125***	**78.70**
1½"	***AB150***	**38.75**	***BB150***	**84.00**
2"	***AB200***	**39.30**	***BB200***	**99.00**
2½"	***AB250***	**55.25**	***BB250***	**131.00**
3"	***AB300***	**66.95**	***BB300***	**183.50**
4"	***AB400***	**92.00**	***BB400***	**268.00**
6"	***AB600***	**232.00**	***BB600***	**810.00**

EZ Boss-Lock Type B Couplers



female coupler x male NPT

Size	356T6 Aluminum		Brass	
	Part #	Price/E	Part #	Price/E
¾" x ½"	**---**	**---**	**---**	**---**
¾"	**---**	**---**	***BB075EZ***	**$92.50**
1"	***AB100EZ***	**$66.20**	***BB100EZ***	**111.50**
1¼"	**---**	**---**	***BB125EZ***	**121.00**
1½"	***AB150EZ***	**74.80**	***BB150EZ***	**128.90**
2"	***AB200EZ***	**77.80**	***BB200EZ***	**142.40**
3"	***AB300EZ***	**115.00**	***BB300EZ***	**265.00**
4"	***AB400EZ***	**141.00**	***BB400EZ***	**322.00**
6"	**---**	**---**	**---**	**---**

Dixon Type B Couplers

Size	Unplated Iron		Stainless Steel	
	Part #	Price/E	Part #	Price/E
½"	---	---	50-B-SS	$69.90
¾"	---	---	75-B-SS	71.30
1"	---	---	100-B-SS	79.70
1¼"	---	---	---	---
1½"	150-B-MI	$48.40	150-B-SS	102.75
2"	200-B-MI	58.10	200-B-SS	115.50
2½"	---	---	250-B-SS	254.00
3"	300-B-MI	94.90	300-B-SS	218.10
4"	400-B-MI	139.00	400-B-SS	255.80
5"	---	---	---	---
6"	---	---	600-B-SS	639.30
8"	---	---	---	---

Finger rings are not supplied on ½" - 1" Dixon couplings.

½" Dixon has only one cam arm.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Boss-Lock Type B Couplers

Size	Plated Iron		Stainless Steel	
	Part #	Price/E	Part #	Price/E
¾" x ½"	---	---	RB050BL	$88.75
¾"	---	---	RB075BL	87.20
1"	IB100	$50.00	RB100BL	90.15
1¼"	---	---	RB125BL	113.30
1½"	IB150	56.60	RB150BL	118.50
2"	IB200	69.60	RB200BL	132.30
2½"	---	---	---	---
3"	IB300	118.00	RB300BL	246.85
4"	IB400	151.00	RB400BL	286.80
6"	---	---	---	---

All Boss-Lock couplers are supplied with safety clips.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

EZ Boss-Lock Type B Couplers

Size	Stainless Steel	
	Part #	Price/E
¾" x ½"	RB050EZ	$102.50
¾"	RB075EZ	101.00
1"	RB100EZ	106.10
1¼"	RB125EZ	132.80
1½"	RB150EZ	138.80
2"	RB200EZ	152.45
3"	RB300EZ	265.55
4"	RB400EZ	307.80
6"	RB600EZ	578.00

SAFETY ALERT

Under no circumstances should the EZ Boss-Lock cam arms be used on any fitting not specifically designed for their use. See page 62 for further specifications.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Dixon Type DC Dust Caps



dust cap

Size	356T6 Aluminum		Aluminum Hard Coat		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	***50-DC-AL***	**$19.30**	**---**	**---**	***50-DC-BR***	**$29.35**
¾"	***75-DC-AL***	**21.70**	**---**	**---**	***75-DC-BR***	**38.75**
1"	***100-DC-AL***	**21.65**	**---**	**---**	***100-DC-BR***	**47.30**
1½"	***150-DC-AL***	**28.00**	***150-DC-ALH***	**$44.00**	***150-DC-BR***	**64.55**
2"	***200-DC-AL***	**27.00**	***200-DC-ALH***	**45.10**	***200-DC-BR***	**62.70**
2½"	***250-DC-AL*** [2]	**45.80**	**---**	**---**	**---**	**---**
3"	***300-DC-AL***	**35.40**	***300-DC-ALH***	**60.75**	***300-DC-BR***	**90.60**
4"	***400-DC-AL***	**48.00**	***400-DC-ALH***	**91.00**	***400-DC-BR***	**133.45**
5"	***500-DC-AL***	**79.90**	**---**	**---**	***500-DC-BR***	**312.00**
6"	***600-DC-AL***	**119.85**	***600-DC-ALH***	**197.40**	**---**	**---**
8"	***800-DC-AL*** [1]	**495.00**	**---**	**---**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*. The 8" Dixon dust cap has 2 cam arms.

[2] Parts are manufactured in Canada.

Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

Boss-Lock Type H Dust Caps



dust cap

Size	356T6 Aluminum		Brass	
	Part #	Price/E	Part #	Price/E
¾"	**---**	**---**	**---**	**---**
1"	***AH100***	**$35.25**	***BH100***	**$63.90**
1¼"	***AH125***	**35.00**	***BH125***	**68.00**
1½"	***AH150***	**36.40**	***BH150***	**75.00**
2"	***AH200***	**37.50**	***BH200***	**95.20**
2½"	***AH250***	**40.45**	***BH250***	**113.00**
3"	***AH300***	**51.00**	***BH300***	**140.00**
4"	***AH400***	**70.75**	***BH400***	**188.50**
6"	***AH600***	**187.00**	***BH600***	**474.50**
8"	***AH800*** [1]	**426.60**	**---**	**---**

SAFETY ALERT

[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*. The 8" Boss-Lock design has 2 cam arms.

Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

EZ Boss-Lock Type H Dust Caps



dust cap

Size	356T6 Aluminum		Brass	
	Part #	Price/E	Part #	Price/E
¾"	**---**	**---**	**---**	**---**
1"	***AH100EZ***	**$67.90**	***BH100EZ***	**$110.00**
1¼"	**---**	**---**	**---**	**---**
1½"	***AH150EZ***	**70.00**	***BH150EZ***	**111.30**
2"	***AH200EZ***	**70.00**	***BH200EZ***	**120.75**
2½"	***AH250EZ***	**78.50**	**---**	**---**
3"	***AH300EZ***	**100.00**	***BH300EZ***	**237.40**
4"	***AH400EZ***	**117.70**	**---**	**---**
6"	***AH600EZ***	**227.00**	**---**	**---**

SAFETY ALERT

Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

Dixon Type DC Dust Caps

Size	Unplated Iron		Stainless Steel	
	Part #	Price/E	Part #	Price/E
½"	---	---	50-DC-SS	$65.30
¾"	---	---	75-DC-SS	61.60
1"	---	---	100-DC-SS	69.50
1½"	---	---	150-DC-SS	86.00
2"	200-DC-MI	$45.65	200-DC-SS	101.40
2½"	---	---	250-DC-SS	180.00
3"	300-DC-MI	62.20	300-DC-SS	129.20
4"	400-DC-MI	93.00	400-DC-SS	192.20
5"	---	---	500-DC-SS	374.05
6"	---	---	600-DC-SS	477.25
8"	---	---	---	---

Finger rings are not supplied on ½" - 1" Dixon couplings.

½" Dixon has only one cam arm.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

SAFETY ALERT

Boss-Lock Type H Dust Caps

Size	Plated Iron		Stainless Steel	
	Part #	Price/E	Part #	Price/E
¾"	---	---	RH075BL	$73.85
1"	---	---	RH100BL	79.20
1¼"	---	---	RH125BL	91.55
1½"	IH150	$52.85	RH150BL	101.70
2"	IH200	60.00	RH200BL	118.25
2½"	---	---	---	---
3"	IH300	86.50	RH300BL	181.40
4"	IH400	110.00	RH400BL	215.70
6"	IH600	290.00	---	---
8"	---	---	---	---

All Boss-Lock couplers are supplied with safety clips.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

SAFETY ALERT

EZ Boss-Lock Type H Dust Caps

Size	Stainless Steel	
	Part #	Price/E
¾"	RH075EZ	$90.75
1"	RH100EZ	95.25
1¼"	RH125EZ	117.80
1½"	RH150EZ	122.10
2"	RH200EZ	138.60
2½"	---	---
3"	RH300EZ	199.50
4"	RH400EZ	239.55
6"	RH600EZ	458.75

SAFETY ALERT

Under no circumstances should the EZ Boss-Lock cam arms be used on any fitting not specifically designed for their use. See page 62 for further specifications.

Couplers are supplied standard with a Buna-N gasket. Other gasket types are available on page 64.

Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

SAFETY ALERT

Global Cam and Groove

- designed to interchange with all products produced to MIL-C-27487F
- made to Dixon specifications and branded Dixon
- Buna seals are standard in all couplers
- Pressure rating for adapters, is based on the seal of the mating part.
- *Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons*

SAFETY ALERT

Global Type A Adapters



female NPT x male adapter

Size	*Aluminum* *		*ASTMC38000 Forged Brass*		*316 Investment Cast SS*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
¾"	***G75-A-AL***	**$3.95**	***G75-A-BR***	**$8.35**	***G75-A-SS***	**$14.90**
1"	***G100-A-AL***	**4.25**	***G100-A-BR***	**10.85**	***G100-A-SS***	**15.35**
1¼"	***G125-A-AL***	**6.35**	***G125-A-BR***	**14.10**	***G125-A-SS***	**23.85**
1½"	***G150-A-AL***	**4.50**	***G150-A-BR***	**16.45**	***G150-A-SS***	**25.55**
2"	***G200-A-AL***	**5.40**	***G200-A-BR***	**21.15**	***G200-A-SS***	**30.95**
2½"	***G250-A-AL***	**11.95**	***G250-A-BR***	**32.10**	***G250-A-SS***	**57.70**
3"	***G300-A-AL***	**10.75**	***G300-A-BR***	**35.55**	***G300-A-SS***	**63.15**
4"	***G400-A-AL***	**16.85**	***G400-A-BR***	**63.10**	***G400-A-SS***	**115.05**
6"	***G600-A-AL***	**45.20**	**---**	**---**	***G600-A-SS***	**202.15**

* ¾" - 4" are A380 permanent mold aluminum
6" is 356-T6 permanent mold aluminum

Global Type E Adapters



hose shank x male adapter

NOT for use with Interlocking Crimp Ferrules

Size	*Aluminum* *		*ASTMC38000 Forged Brass*		*316 Investment Cast SS*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
¾"	***G75-E-AL***	**$3.40**	***G75-E-BR***	**$15.00**	***G75-E-SS***	**$13.65**
1"	***G100-E-AL***	**4.35**	***G100-E-BR***	**13.85**	***G100-E-SS***	**18.10**
1¼"	***G125-E-AL***	**5.95**	***G125-E-BR***	**16.35**	***G125-E-SS***	**32.60**
1½"	***G150-E-AL***	**5.50**	***G150-E-BR***	**20.95**	***G150-E-SS***	**28.55**
2"	***G200-E-AL***	**6.90**	***G200-E-BR***	**29.35**	***G200-E-SS***	**41.10**
2½"	***G250-E-AL***	**12.95**	***G250-E-BR***	**48.70**	***G250-E-SS***	**63.15**
3"	***G300-E-AL***	**13.25**	***G300-E-BR***	**56.95**	***G300-E-SS***	**90.95**
4"	***G400-E-AL***	**21.80**	***G400-E-BR***	**90.45**	***G400-E-SS***	**131.45**
6"	***G600-E-AL***	**69.00**	**---**	**---**	***G600-E-SS***	**315.60**

* ¾" - 4" are A380 permanent mold aluminum
6" is 356-T6 permanent mold aluminum

Global Type F Adapters



male NPT x male adapter

Size	*Aluminum* *		*ASTMC38000 Forged Brass*		*316 Investment Cast SS*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
¾"	***G75-F-AL***	**$4.35**	***G75-F-BR***	**$9.95**	***G75-F-SS***	**$17.75**
1"	***G100-F-AL***	**4.85**	***G100-F-BR***	**12.95**	***G100-F-SS***	**21.05**
1¼"	***G125-F-AL***	**7.65**	***G125-F-BR***	**23.30**	***G125-F-SS***	**34.15**
1½"	***G150-F-AL***	**5.95**	***G150-F-BR***	**23.45**	***G150-F-SS***	**37.35**
2"	***G200-F-AL***	**6.65**	***G200-F-BR***	**26.55**	***G200-F-SS***	**44.65**
2½"	***G250-F-AL***	**15.40**	***G250-F-BR***	**38.85**	***G250-F-SS***	**73.60**
3"	***G300-F-AL***	**14.00**	***G300-F-BR***	**51.25**	***G300-F-SS***	**89.85**
4"	***G400-F-AL***	**21.45**	***G400-F-BR***	**78.30**	***G400-F-SS***	**129.70**
6"	***G600-F-AL***	**57.05**	**---**	**---**	***G600-F-SS***	**316.30**

* ¾" - 4" are A380 permanent mold aluminum
6" is 356-T6 permanent mold aluminum

Global Type DP Dust Plugs



dust plug

Size	*Aluminum* *		*ASTMC38000 Forged Brass*		*316 Investment Cast SS*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
¾"	***G75-DP-AL***	**$3.80**	***G75-DP-BR***	**$10.85**	***G75-DP-SS***	**$11.60**
1"	***G100-DP-AL***	**4.10**	***G100-DP-BR***	**11.10**	***G100-DP-SS***	**14.65**
1¼"	***G125-DP-AL***	**4.35**	***G125-DP-BR***	**13.70**	***G125-DP-SS***	**23.50**
1½"	***G150-DP-AL***	**4.80**	***G150-DP-BR***	**14.10**	***G150-DP-SS***	**22.25**
2"	***G200-DP-AL***	**5.75**	***G200-DP-BR***	**17.10**	***G200-DP-SS***	**26.75**
2½"	***G250-DP-AL***	**8.35**	***G250-DP-BR***	**26.55**	***G250-DP-SS***	**41.95**
3"	***G300-DP-AL***	**9.45**	***G300-DP-BR***	**29.75**	***G300-DP-SS***	**57.85**
4"	***G400-DP-AL***	**14.90**	***G400-DP-BR***	**48.70**	***G400-DP-SS***	**69.70**
6"	***G600-DP-AL***	**40.35**	**---**	**---**	***G600-DP-SS***	**200.30**

* ¾" - 4" are A380 permanent mold aluminum
6" is 356-T6 permanent mold aluminum

Global Type B Couplers

Size	*Aluminum **		*ASTMC38000 Forged Brass*	
	Part #	Price/E	Part #	Price/E
¾"	***G75-B-AL***	**$9.15**	***G75-B-BR***	**$19.05**
1"	***G100-B-AL***	**9.85**	***G100-B-BR***	**19.90**
1¼"	***G125-B-AL***	**13.65**	***G125-B-BR***	**28.80**
1½"	***G150-B-AL***	**10.95**	***G150-B-BR***	**29.15**
2"	***G200-B-AL***	**12.35**	***G200-B-BR***	**31.40**
2½"	***G250-B-AL***	**21.05**	***G250-B-BR***	**48.55**
3"	***G300-B-AL***	**19.95**	***G300-B-BR***	**59.50**
4"	***G400-B-AL***	**27.35**	***G400-B-BR***	**85.60**
6"	***G600-B-AL***	**83.05**	**---**	**---**



female coupler x male NPT

* ¾" - 4" are A380 permanent mold aluminum
6" is 356-T6 permanent mold aluminum

Size	*316 Investment Cast Stainless Steel*	
	Part #	Price/E
¾"	***G75-B-SS***	**$25.85**
1"	***G100-B-SS***	**27.00**
1¼"	***G125-B-SS***	**41.75**
1½"	***G150-B-SS***	**41.75**
2"	***G200-B-SS***	**51.90**
2½"	***G250-B-SS***	**71.70**
3"	***G300-B-SS***	**89.25**
4"	***G400-B-SS***	**128.80**
6"	***G600-B-SS***	**346.65**



female coupler x male NPT

Global Type C Couplers

Size	*Aluminum **		*ASTMC38000 Forged Brass*	
	Part #	Price/E	Part #	Price/E
¾"	***G75-C-AL***	**$8.55**	***G75-C-BR***	**$15.95**
1"	***G100-C-AL***	**8.55**	***G100-C-BR***	**22.75**
1¼"	***G125-C-AL***	**12.65**	***G125-C-BR***	**24.15**
1½"	***G150-C-AL***	**11.05**	***G150-C-BR***	**30.50**
2"	***G200-C-AL***	**12.85**	***G200-C-BR***	**37.05**
2½"	***G250-C-AL***	**20.75**	***G250-C-BR***	**55.45**
3"	***G300-C-AL***	**20.35**	***G300-C-BR***	**67.65**
4"	***G400-C-AL***	**32.00**	***G400-C-BR***	**97.10**
6"	***G600-C-AL***	**97.85**	**---**	**---**



female coupler x hose shank

NOT for use with Interlocking Crimp Ferrules

* ¾" - 4" are A380 permanent mold aluminum
6" is 356-T6 permanent mold aluminum

Size	*316 Investment Cast Stainless Steel*	
	Part #	Price/E
¾"	***G75-C-SS***	**$24.25**
1"	***G100-C-SS***	**25.05**
1¼"	***G125-C-SS***	**41.85**
1½"	***G150-C-SS***	**40.10**
2"	***G200-C-SS***	**51.30**
2½"	***G250-C-SS***	**64.35**
3"	***G300-C-SS***	**100.60**
4"	***G400-C-SS***	**139.85**
6"	***G600-C-SS***	**346.65**



female coupler x hose shank

NOT for use with Interlocking Crimp Ferrules

Global Type D Couplers



female coupler x female NPT

Size	*Aluminum **		*ASTMC38000 Forged Brass*	
	Part #	Price/E	Part #	Price/E
¾"	***G75-D-AL***	**$9.65**	***G75-D-BR***	**$17.75**
1"	***G100-D-AL***	**9.55**	***G100-D-BR***	**21.80**
1¼"	***G125-D-AL***	**13.45**	***G125-D-BR***	**27.45**
1½"	***G150-D-AL***	**11.55**	***G150-D-BR***	**31.10**
2"	***G200-D-AL***	**13.35**	***G200-D-BR***	**33.55**
2½"	***G250-D-AL***	**21.80**	***G250-D-BR***	**56.40**
3"	***G300-D-AL***	**21.85**	***G300-D-BR***	**59.80**
4"	***G400-D-AL***	**30.10**	***G400-D-BR***	**97.80**
6"	***G600-D-AL***	**87.25**	**---**	**---**

* ¾" - 4" are A380 permanent mold aluminum
6" is 356T6 permanent mold aluminum



female coupler x female NPT

Size	*316 Investment Cast Stainless Steel*	
	Part #	Price/E
¾"	***G75-D-SS***	**$24.95**
1"	***G100-D-SS***	**26.10**
1¼"	***G125-D-SS***	**44.00**
1½"	***G150-D-SS***	**44.00**
2"	***G200-D-SS***	**54.10**
2½"	***G250-D-SS***	**76.20**
3"	***G300-D-SS***	**89.25**
4"	***G400-D-SS***	**142.35**
6"	***G600-D-SS***	**346.65**

Global Type DC Dust Caps



dust cap

Size	*Aluminum **		*ASTMC38000 Forged Brass*	
	Part #	Price/E	Part #	Price/E
¾"	***G75-DC-AL***	**$8.45**	***G75-DC-BR***	**$15.15**
1"	***G100-DC-AL***	**8.85**	***G100-DC-BR***	**17.75**
1¼"	***G125-DC-AL***	**11.35**	***G125-DC-BR***	**24.40**
1½"	***G150-DC-AL***	**10.20**	***G150-DC-BR***	**28.15**
2"	***G200-DC-AL***	**10.95**	***G200-DC-BR***	**28.65**
2½"	***G250-DC-AL***	**18.65**	***G250-DC-BR***	**39.20**
3"	***G300-DC-AL***	**20.05**	***G300-DC-BR***	**55.30**
4"	***G400-DC-AL***	**25.75**	***G400-DC-BR***	**73.60**
6"	***G600-DC-AL***	**75.95**	**---**	**---**

* ¾" - 4" are A380 permanent mold aluminum
6" is 356T6 permanent mold aluminum



dust cap

Size	*316 Investment CastStainless Steel*	
	Part #	Price/E
¾"	***G75-DC-SS***	**$22.95**
1"	***G100-DC-SS***	**23.70**
1¼"	***G125-DC-SS***	**41.00**
1½"	***G150-DC-SS***	**39.35**
2"	***G200-DC-SS***	**46.05**
2½"	***G250-DC-SS***	**63.95**
3"	***G300-DC-SS***	**76.05**
4"	***G400-DC-SS***	**106.40**
6"	***G600-DC-SS***	**341.25**

Replacement Handle Assemblies for Global Couplers

For Aluminum and Brass Global Couplers

- Handles come complete with ring and pin.

Fits on sizes	*Investment Stainless* Part #	Price/E
¾"	***G75HRP***	**$2.35**
1"	***G100HRP***	**3.30**



investment stainless

Fits on sizes	*Forged Brass* Part #	Price/E
1¼" - 2½"	***G152HRP***	**$3.30**
3" and 4"	***G34HRP***	**5.85**
6"	***G600HRP***	**13.00**


forged brass

For Stainless Steel Global Couplers

- Handles come complete with ring and pin.

Fits on sizes	*Investment Stainless* Part #	Price/E
¾"	***G75HRPSS***	**$3.50**
1"	***G100HRPSS***	**3.40**
1¼" - 2½"	***G125250HRPSS***	**8.00**
3" and 4"	***G300400HRPSS***	**8.00**
6"	***G600HRPSS***	**17.35**



investment stainless

Safety Clip for Global Couplers

Zinc Plated Carbon Steel Part #	Price/E
GSAFETYCLIP	**$0.25**



Polypropylene Adapters

SAFETY ALERT

NOT recommended for use with Teflon® gaskets

- recommended for a maximum working pressure of **125 PSI** (½" - 1"), **100 PSI** (1¼" - 2") and **75 PSI** (3" - 4"); recommendations based on the use of mating Dixon fittings at an ambient temperature of **70°F** with standard seal installed
- ½" couplers and adapters will interchange with ¾" couplers and adapters. Only the threads and barbs are ½". 1¼" couplers and adapters will interchange with 1½" couplers and adapters. Only the threads and barbs are 1¼".
- Polypropylene cam and groove should not be mixed with metal fittings. SAFETY ALERT
- Adapters are manufactured from a glass-filled polypropylene.

[1] *Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.* SAFETY ALERT



male adapter x female NPT

type A

Size	Polypropylene Part #	Price/E	Opt Qty
¾" x ½"	***PPA50***	**$4.90**	24
¾"	***PPA75***	**4.90**	24
1"	***PPA100***	**5.35**	24
1½" x 1¼"	***PPA125***	**5.50**	24
1½"	***PPA150***	**5.95**	24
2"	***PPA200***	**7.05**	24
3"	***PPA300***	**15.75**	24
4"	***PPA400***	**25.90**	8



male adapter x male NPT

type F

Size	Polypropylene Part #	Price/E	Opt Qty
¾" x ½"	***PPF50***	**$5.40**	24
¾"	***PPF75***	**5.40**	24
1"	***PPF100***	**6.10**	24
1½" x 1¼"	***PPF125***	**6.15**	24
1½"	***PPF150***	**6.20**	24
2"	***PPF200***	**8.15**	24
3"	***PPF300***	**20.10**	24
4"	***PPF400***	**25.90**	8



male adapter x hose shank

type E

Size	Polypropylene Part #	Price/E	Opt Qty
¾" x ½"	***PPE50***	**$5.40**	24
¾"	***PPE75***	**5.40**	24
1"	***PPE100***	**6.10**	24
1½" x 1¼"	***PPE125***	**6.15**	24
1½"	***PPE150***	**6.20**	24
2"	***PPE200***	**8.15**	24
3"	***PPE300***	**20.10**	24
4"	***PPE400***	**25.90**	8



dust plug [1]

type P [1]

Size	Polypropylene Part #	Price/E	Opt Qty
¾"	***PPP75***	**$4.90**	24
1"	***PPP100***	**5.35**	24
1½"	***PPP150***	**5.90**	24
2"	***PPP200***	**7.90**	24
3"	***PPP300***	**15.75**	24
4"	***PPP400***	**20.60**	8

Polypropylene Adapter Elbows

- recommended for a maximum working pressure of **100 PSI** (1½" - 2"); recommendations based on the use of mating Dixon fittings at an ambient temperature of **70°F** with standard seal installed.
- Adapter elbows are manufactured from a glass-filled polypropylene.
- *For use at elevated temperatures or other unusual operating conditions, consult factory.* SAFETY ALERT



male adapter x female NPT

90° Elbow x FNPT

Size	Polypropylene Part #	Price/E	Opt Qty
1½"	***90PPA150***	**$9.80**	24
2"	***90PPA200***	**10.45**	24



male adapter x male NPT

90° Elbow x MNPT

Size	Polypropylene Part #	Price/E	Opt Qty
1½"	***90PPF150***	**$11.35**	24
2"	***90PPF200***	**11.85**	24

Polypropylene Couplers

NOT recommended for use with Teflon® gaskets

SAFETY ALERT

- recommended for a maximum working pressure of **125 PSI** (½" - 1"), **100 PSI** (1¼" - 2") and **75 PSI** (3" - 4"); recommendations based on the use of mating Dixon fittings at an ambient temperature of **70°F** with standard seal installed.
- ½" couplers and adapters will interchange with ¾" couplers and adapters. Only the threads and barbs are ½".
  1¼" couplers and adapters will interchange with 1½" couplers and adapters. Only the threads and barbs are 1¼".
- Polypropylene cam and groove should not be mixed with metal fittings.
- supplied with EPDM gaskets, 304 stainless steel handles and pins
- Couplers are manufactured from a glass-filled polypropylene.

SAFETY ALERT

[1] *Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.*

SAFETY ALERT

[2] 4" coupler has 3 handles

type D


Size	Polypropylene Part #	Price/E	Opt Qty
¾" x ½"	***PPD50***	**$13.25**	24
¾"	***PPD75***	**13.25**	24
1"	***PPD100***	**15.15**	24
1½" x 1¼"	***PPD125***	**18.10**	24
1½"	***PPD150***	**17.95**	24
2"	***PPD200***	**21.20**	24
3"	***PPD300***	**34.90**	24
4"	***PPD400***[2]	**68.55**	8



female coupler x female NPT

type B

Size	Polypropylene Part #	Price/E	Opt Qty
¾" x ½"	***PPB50***	**$13.25**	24
¾"	***PPB75***	**13.25**	24
1"	***PPB100***	**15.15**	24
1½" x 1¼"	***PPB125***	**18.10**	24
1½"	***PPB150***	**17.95**	24
2"	***PPB200***	**21.20**	24
3"	***PPB300***	**34.90**	24
4"	***PPB400***[2]	**68.55**	8



female coupler x male NPT

type C

Size	Polypropylene Part #	Price/E	Opt Qty
¾" x ½"	***PPC50***	**$13.25**	24
¾"	***PPC75***	**13.25**	24
1"	***PPC100***	**15.15**	24
1½" x 1¼"	***PPC125***	**18.10**	24
1½"	***PPC150***	**17.95**	24
2"	***PPC200***	**21.20**	24
3"	***PPC300***	**34.90**	24
4"	***PPC400***[2]	**68.55**	8



female coupler x hose shank

type H[1]

Size	Polypropylene Part #	Price/E	Opt Qty
¾"	***PPH75***	**$12.80**	24
1"	***PPH100***	**14.70**	24
1½"	***PPH150***	**17.95**	24
2"	***PPH200***	**21.20**	24
3"	***PPH300***	**34.90**	24
4"	***PPH400***[2]	**49.90**	8



dust cap[1]

locking handle pictured is only available in 1¼" thru 2"


Polypropylene Coupler Elbows

- recommended for a maximum working pressure of **100 PSI** (1½" - 2"); recommendations based on the use of mating Dixon fittings at an ambient temperature of **70°F** with standard seal installed.
- Coupler elbows are manufactured from a glass-filled polypropylene.
- Supplied with EPDM gaskets, 304 stainless steel handles and pins.
- *For use at elevated temperatures or other unusual operating conditions, consult factory.*

SAFETY ALERT

FNPT x 90° Elbow

Size	Polypropylene Part #	Price/E	Opt Qty
1½"	***90PPD150***	**$20.95**	24
2"	***90PPD200***	**24.85**	24



female NPT x female coupler

Hose Shank x 90° Elbow

Size	Polypropylene Part #	Price/E	Opt Qty
1½"	***90PPC150***	**$20.95**	24
2"	***90PPC200***	**24.85**	24



hose shank x female coupler

2010 NEW Replacement Parts for Polypropylene Cam & Groove

Handles



1¼", 1½", 2"



½", ¾", 1", 3", 4"

Used on sizes	*430 Stainless Steel* Part #	Price/E
½"	***61594***	**$3.10**
¾"	***61594***	**3.10**
1"	***61594***	**3.10**
1¼"	***61595***	**4.20**
1½"	***61595***	**4.20**
2"	***61595***	**4.20**
3"	***61596***	**5.65**
4"	***61596***	**5.65**

Gaskets



Used on sizes	*EPDM* Part #	Price/E
½"	***61570***	**$1.15**
¾"	***61570***	**1.15**
1"	***61571***	**1.15**
1¼"	***61572***	**1.70**
1½"	***61572***	**1.70**
2"	***61574***	**1.95**
3"	***61575***	**2.15**
4"	***62797***	**10.70**

Key Rings



Used on sizes	*304 Stainless Steel* Part #	Price/E
½"	***61589***	**$1.90**
¾"	***61589***	**1.90**
1"	***61589***	**1.90**
1¼"	***61589***	**1.90**
1½"	***61589***	**1.90**
2"	***61589***	**1.90**
3"	***61589***	**1.90**
4"	***61589***	**1.90**

Handle Pins



Used on sizes	*304 Stainless Steel* Part #	Price/E
½"	***61582***	**$6.65**
¾"	***61582***	**6.65**
1"	***61582***	**6.65**
1¼"	***61585***	**1.00**
1½"	***61585***	**1.00**
2"	***61585***	**1.00**
3"	***61584***	**1.05**
4"	***61584***	**1.05**

Safety Clips



Used on sizes	*304 Stainless Steel* Part #	Price/E
1¼"	***63545***	**$1.00**
1½"	***63545***	**1.00**
2"	***63545***	**1.00**


Swaged Cam and Groove

- Developed specifically for chemical transport hoses having Crosslinked Polyethylene (XLPE) or Ultra High Molecular Weight Polyethylene (UHMW) tubes. Swaged Boss-Lock provides you with a permanently attached Cam and Groove fitting when superior coupling retention is required.
- In testing tank transport hoses from a wide variety of manufacturers, the swaged Boss-Lock fitting proved itself to be the clear winner in overall performance.
- Fittings are also available on special order for other sizes or hose OD's. Consult the factory for pricing and availability.
- Consult the factory for pricing and availability of the *special equipment required for installation* or refer to page 375.

SAFETY ALERT

EZ Boss-Lock type C Coupler with Ferrule

Size	Hose OD		*316 Stainless Steel*	
	from	to	Part #	Price/E
¾"	1-6/64"	1-22/64"	***RC075EZ-70***	**$126.30**
1"	1-29/64"	1-35/64"	***RC100EZ-20***	**132.50**
1"	1-36/64"	1-44/64"	***RC100EZ-70***	**136.60**



coupler x hose shank with ferrule

Boss-Lock type E Adapter with Ferrule

Size	Hose OD		*316 Stainless Steel*	
	from	to	Part #	Price/E
¾"	1-6/64"	1-22/64"	***RE075-1370***	**$88.40**
1"	1-29/64"	1-35/64"	***RE100-1620***	**67.00**
1"	1-36/64"	1-44/64"	***RE100-1770***	**74.15**



adapter x hose shank with ferrule

Crimp Sleeves

- The hose OD ranges for the crimp sleeves are the same as for Dixon's standard cam and groove notched ferrules.
- The crimp sleeve is not designed to be used in applications where the assembly is exposed to high temperatures.
- Carbon steel is also available. Contact the factory for pricing and availability.

Size	Hose OD		*304 Stainless Steel*	
	from	to	Part #	Price/E
2"	2-30/64"	2-44/64"	***GCS2709***	**$22.40**
3"	3-30/64"	3-46/64"	***GCS3760***	**32.45**



Dixon stems and ferrules are specifically designed to be used together as a coupling system.
Due to differences in dimensions and tolerances for safety reasons,
do not use other manufacturer's stems or ferrules with Dixon Holedall products.

SAFETY ALERT

Notched Ferrules

Size	Hose OD		*304 Stainless Steel*	
	from	to	Part #	Price/E
1½"	1-60/64"	2-12/64"	***GAS2334NO***	**$33.60**
1½"	2-4/64"	2-22/64"	***GAS2370NO***	**35.10**
2"	2-30/64"	2-44/64"	***GAS2709NO***	**30.10**
2"	2-42/64"	2-54/64"	***GAS2885NO***	**61.55**
3"	3-30/64"	3-46/64"	***GAS3760NO***	**43.90**
3"	3-47/64"	3-54/64"	***GAS3885NO***	**60.00**
4"	4-40/64"	4-47/64"	***GAS5010NO***	**250.00**



Dixon stems and ferrules are specifically designed to be used together as a coupling system.
Due to differences in dimensions and tolerances for safety reasons,
do not use other manufacturer's stems or ferrules with Dixon Holedall products.

SAFETY ALERT

Notched Cam and Groove

- The largest advantage of the notched EZ Boss-Lock design is that the coupling can be removed from a damaged hose by cutting away the ferrule, without necessarily damaging the fitting. *After inspection of the fitting to determine its suitability for reuse*, it can be reinstalled into another hose by using a *new ferrule*.
- The notched EZ Boss-Lock system allows you to better manage your inventories. You can stock one coupling and two ferrules, and cover the same hose range with less inventory. *You must purchase a fitting and the matching ferrule to create an assembly*.
- for use with notched ferrules on previous page

SAFETY ALERT

SAFETY ALERT

Dixon stems and ferrules are specifically designed to be used together as a coupling system.
SAFETY ALERT
Due to differences in dimensions and tolerances for safety reasons,
do not use other manufacturer's stems or ferrules with Dixon products.

Couplers



female coupler x
notched hose shank

EZ Boss-Lock type C with notched shank


Size	*316 Stainless Steel* Part #	Price/E
1½"	***RC150EZNO***	**$113.75**
2"	***RC200EZNO***	**121.30**
3"	***RC300EZNO***	**208.20**
4"	***RC400EZNO***	**310.85**

Boss-Lock type C with notched shank

Size	*316 Stainless Steel* Part #	Price/E
1½"	***RC150BLNO***	**$103.50**
2"	***RC200BLNO***	**106.00**
3"	***RC300BLNO***	**192.70**
4"	***RC400BLNO***	**278.90**




female coupler x
notched hose shank



crimped assembly

SAFETY ALERT

Contact the factory for swage and crimp recommendations.



swaged assembly

Adapters



male adapter x
notched hose shank

Boss-Lock type E with notched shank


Size	*316 Stainless Steel* Part #	Price/E
1½"	***RE150NO***	**$59.00**
2"	***RE200NO***	**59.95**
3"	***RE300NO***	**114.40**
4"	***RE400NO***	**239.70**



swaged assembly

SAFETY ALERT

Contact the factory for swage and crimp recommendations.



crimped assembly

Dixon Cam and Groove with Notched NOS Shank

- The largest advantage of the notched design is that the coupling can be removed from a damaged hose by cutting away the ferrule, without necessarily damaging the fitting. *After inspection of the fitting to determine its suitability for reuse,* it can be reinstalled into another hose by using a *new ferrule*. SAFETY ALERT
- The notched system allows you to better manage your inventories. You can stock one stem and two ferrules, and cover the same hose range with less inventory. *You must purchase a fitting and the matching ferrule to create an assembly*. SAFETY ALERT
- For hose outside diameters of 2-4/64" and below, *the couplings are crimp only*. SAFETY ALERT
- For hose outside diameters of 2-5/64" and above, the couplings can be crimped or swaged.


- See pages 265 and 380 for male NPT notched NOS fittings.
- for use with notched ferrules at bottom of the page

SAFETY ALERT **Only use the NOS shank with the NOS ferrules.**
Due to differences in dimensions and tolerances for safety reasons,
do not use other manufacturer's stems or ferrules with Dixon products. SAFETY ALERT

Couplers


Dixon type C with NOS shank

Size	*316 Stainless Steel* Part #	Price/E
1½"	***150CNOSSS***	**$72.00**
2"	***200CNOSSS***	**79.15**
3"	***300CNOSSS***	**156.90**



crimped assembly

SAFETY ALERT
Contact the factory for swage and crimp recommendations.



swaged assembly



female coupler x
notched NOS hose shank

Adapters

type E with NOS shank

Size	*316 Stainless Steel* Part #	Price/E
1½"	***150ENOSSS***	**$34.50**
2"	***200ENOSSS***	**47.25**
3"	***300ENOSSS***	**96.00**



swaged assembly

SAFETY ALERT
Contact the factory for swage and crimp recommendations.



crimped assembly



male adapter x
notched NOS hose shank

Notched NOS Ferrules


Size	Hose OD From:	Hose OD To:	*Carbon Steel* Part #	Price/E	*304 Stainless Steel* Part #	Price/E
1½"	1-60/64"	2-12/64"	***CAS2334NOS***	**$15.20**	***GAS2334NOS***	**$31.00**
1½"	2-4/64"	2-22/64"	***CAS2370NOS***	**15.20**	***GAS2370NOS***	**33.00**
2"	2-30/64"	2-44/64"	***CAS2709NOS***	**20.90**	***GAS2709NOS***	**30.00**
2"	2-42/64"	2-54/64"	***CAS2885NOS***	**20.90**	***GAS2885NOS***	**59.00**
3"	3-30/64"	3-46/64"	***CAS3760NOS***	**32.60**	***GAS3760NOS***	**45.00**
3"	3-47/64"	3-54/64"	***CAS3885NOS***	**32.60**	***GAS3885NOS***	**61.50**



Interlocking Style External Crimp Ferrules

Dixon's External Crimp Ferrules are designed for use with Dixon's Type C and E hose shanks (pages 18, 22). This design offers 360° interlocking with approved Dixon hose shanks and can be installed with any Dixon crimper system. For crimp specifications please refer to pages 638-640.

- designed to be used on aluminum Dixon grooved hose shanks (1½", 2", 3", 4")
- carbon steel for rugged applications
- 1½" – 2" features .063" wall thickness
- 3" – 4" features .125" wall thickness
- turnover edge is sliced for easy ferrule removal
- large offering of ID sizes to match your hose OD
- streamlined and safe final assembly
- *Do NOT interchange with other products.* SAFETY ALERT



interlocking crimp ferrule



type E Dixon cam & groove



type C Dixon cam & groove

Size	Hose OD		*Carbon Steel*	
	from	to	Part #	Price/E
1½"	1-49/64"	1-52/64"	***CF150-1***	**$11.75**
	1-53/64"	1-56/64"	***CF150-2***	**11.75**
	1-57/64"	1-60/64"	***CF150-3***	**11.75**
	1-61/64"	2"	***CF150-4***	**11.75**
	2-1/64"	2-4/64"	***CF150-5***	**11.75**
	2-5/64"	2-8/64"	***CF150-6***	**11.75**
	2-9/64"	2-12/64"	***CF150-7***	**11.75**
	2-13/64"	2-16/64"	***CF150-8***	**11.75**
	2-17/64"	2-20/64"	***CF150-9***	**11.75**
	2-21/64"	2-24/64"	***CF150-10***	**11.75**
2"	2-21/64"	2-24/64"	***CF200-1***	**14.65**
	2-25/64"	2-28/64"	***CF200-2***	**14.65**
	2-29/64"	2-32/64"	***CF200-3***	**14.65**
	2-33/64"	2-36/64"	***CF200-4***	**14.65**
	2-37/64"	2-40/64"	***CF200-5***	**14.65**
	2-41/64"	2-44/64"	***CF200-6***	**14.65**
	2-45/64"	2-48/64"	***CF200-7***	**14.65**
	2-49/64"	2-52/64"	***CF200-8***	**14.65**
	2-53/64"	2-56/64"	***CF200-9***	**14.65**
	2-57/64"	2-60/64"	***CF200-10***	**14.65**
3"	3-23/64"	3-26/64"	***CF300-1***	**20.75**
	3-27/64"	3-30/64"	***CF300-2***	**20.75**
	3-31/64"	3-34/64"	***CF300-3***	**20.75**
	3-35/64"	3-38/64"	***CF300-4***	**20.75**
	3-39/64"	3-42/64"	***CF300-5***	**20.75**
	3-43/64"	3-46/64"	***CF300-6***	**20.75**
	3-47/64"	3-50/64"	***CF300-7***	**20.75**
	3-51/64"	3-54/64"	***CF300-8***	**20.75**
	3-55/64"	3-58/64"	***CF300-9***	**20.75**
	3-59/64"	3-62/64"	***CF300-10***	**20.75**
4"	4-23/64"	4-26/64"	***CF400-1***	**27.80**
	4-27/64"	4-30/64"	***CF400-2***	**27.80**
	4-31/64"	4-34/64"	***CF400-3***	**27.80**
	4-35/64"	4-38/64"	***CF400-4***	**27.80**
	4-39/64"	4-42/64"	***CF400-5***	**27.80**
	4-43/64"	4-46/64"	***CF400-6***	**27.80**
	4-47/64"	4-50/64"	***CF400-7***	**27.80**
	4-51/64"	4-54/64"	***CF400-8***	**27.80**
	4-55/64"	4-58/64"	***CF400-9***	**27.80**
	4-59/64"	4-62/64"	***CF400-10***	**27.80**

Boss-Lock PF Cam and Groove

- The shank design on these fittings was developed specifically for chemical transport hoses having Crosslinked Polyethylene (XLPE) or Ultra High Molecular Weight Polyethylene (UHMW) tubes, where shank retention can be a problem when using conventional band clamps. In testing tank transport hoses from a wide variety of manufacturers, the Boss-Lock-PF fitting showed significant improvement in hose coupling retention over the conventional cam and groove shank design.
- Other sizes are available on special order. Consult the factory for pricing and availability.
- For best results we recommend the use of ¾" wide band clamps found on pages 338 and 339.



female coupler x PF hose shank

EZ Boss-Lock type C coupler x special hose shank

Size	*Stainless Steel* Part #	Price/E	Opt Qty
2"	***RC200EZPF***	**$163.00**	10
3"	***RC300EZPF***	**231.00**	5



male adapter x PF hose shank

type E adapter x special hose shank

Size	*Stainless Steel* Part #	Price/E	Opt Qty
2"	***RE200PF***	**$96.30**	10

Cam and Groove Hydrant Adapters

- Pin lugs allow for easy connection using standard spanner and hydrant wrenches (pages 464 and 465).
- supplied with a Buna-N washer in the threaded end



female NST x male adapter

Female NST Thread	Male Adapter	*Brass* Part #	Price/E	*Aluminum* Part #	Price/E
1½"	1½"	***HA1515ADP***	**$75.50**	***AHA1515ADP***	**$34.65**
2½"	2½"	***HA2525ADP***	**83.30**	***AHA2525ADP***	**43.25**

Replacement Washers

- Buna-N

ID	OD	Thickness	Part #	Price/E
1-9/16"	2-1/16"	1/8"	***SW150***	**$2.00**
2-9/16"	3-3/16"	3/16"	***SW250***	**3.15**

Dixon Tank Car Adapters



railroad thread x male adapter

- standard 5" Railroad Tank Car thread
- supplied with a Buna-N gasket in the threaded end, see below for other gasket types

Size	*Aluminum*		*Brass*		*Iron*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
2"	***200-TCA-AL***	**$110.60**	**---**	**---**	**---**	**---**	***200-TCA-SS***	**$670.00**
3"	***300-TCA-AL***	**97.00**	***300-TCA-BR***	**$328.60**	***300-TCA-MI***	**$242.80**	***300-TCA-SS***	**716.00**
4"	***400-TCA-AL***	**113.15**	***400-TCA-BR***	**391.25**	**---**	**---**	***400-TCA-SS***	**762.00**

Stainless steel adapters are not compatible with the aluminum and brass adapters.

SAFETY ALERT



swivel railroad thread x 45° male adapter

- standard 5" Railroad Tank Car thread
- 45° tank car swivel adapter
- unit has a long handle brass swivel nut and a swivel retaining ring
- supplied with a Buna-N gasket in the threaded end , see below for other gasket types

Size	*Aluminum*	
	Part #	Price/E
4"	***40A-45TCAL***	**$406.00**

Dixon Railroad Tank Car Gaskets

Old Style

- for use with Dixon fittings

Size	OD	ID	THK	Material	Part #	Price/E
5"	5-1/4"	3-1/2"	3/16"	*leather*	***G9***	**$14.00**

Standard



standard

- for use with Dixon fittings

Size	OD	ID	THK	Material	Part #	Price/E
5"	5-1/4"	3-7/8"	1/8"	*Buna-N*	***500GTCABU***	**$5.80**
5"	5-1/4"	3-7/8"	1/8"	*Viton®*	***500GTCAVI***	**49.75**

Teflon® Envelope



Teflon® envelope

- for use with Dixon fittings
- may be too thick for insertion in some older Dixon fittings

Size	OD	ID	THK	Material	Part #	Price/E
5"	5-1/4"	3-13/16"	3/16"	*Teflon® with Buna-N filler*	***500GTCATF***	**$62.10**
5"	5-1/4"	3-13/16"	3/16"	*Teflon® with Viton® filler*	***500GTCATV***	**107.00**

Railroad Tank Car Connections

- all swivel nuts have standard 5" Railroad Tank Car Thread
- supplied with a Buna-N gasket in the threaded end
  Other gasket types are available on page 42.
- Tank car connections are also available in other materials and in 2" and 2½" sizes.
  Consult factory for pricing and availability.

Style S

- shank is 20° below horizontal

Shank Size	Swivel Nut	*Iron* Part #	*Iron* Price/E	*Aluminum* Part #	*Aluminum* Price/E
3"	5"	***TCS30***	**$233.40**	***ATCS30***	**$250.00**
4"	5"	***TCS40***	**272.30**	***ATCS40***	**308.50**



railroad thread swivel nut
x 20° hose shank

Style T

- 3" threaded end is 30° below horizontal
- 4" threaded end is 20° below horizontal

Male NPT	Swivel Nut	*Iron* Part #	*Iron* Price/E	*Aluminum* Part #	*Aluminum* Price/E
3"	5"	***TCT30***	**$235.00**	***ATCT30***	**$262.50**
4"	5"	***TCT40***	**292.90**	***ATCT40***	**323.90**



railroad thread swivel nut
x 30° male NPT

Style T

- Stainless steel railroad tank car connections are not compatible with aluminum and brass.
- 3" threaded end is 30° below horizontal
- 4" threaded end is 20° below horizontal

SAFETY ALERT

Male NPT	Swivel Nut	*Stainless Steel* Part #	*Stainless Steel* Price/E
3"	5"	***RTCT30***	**$659.00**
4"	5"	***RTCT40***	**771.00**



railroad thread swivel nut
x 20° male NPT

Style A

- Stainless steel railroad tank car connections are not compatible with aluminum and brass.
- adapter is 20° below horizontal

SAFETY ALERT

Adapter	Swivel Nut	*Stainless Steel* Part #	*Stainless Steel* Price/E
3"	5"	***RTCA30***	**$806.00**
4"	5"	***RTCA40*** [1]	**998.00**

[1] Parts are produced as a welded fabrication.



railroad thread swivel nut
x 20° adapter

Wrenches

Pin Lug

- used on aluminum and iron tank car nuts

Iron Part #	*Iron* Price/E
G10	**$99.00**



Long Handle

- used on stainless steel tank car nuts

Iron Part #	*Iron* Price/E
LHW	**$302.55**



Cam and Groove x Cam and Groove Elbows

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

45° Elbows



male adapter x female coupler

adapter x coupler

Size	Aluminum		Stainless Steel	
	Part #	Price/E	Part #	Price/E
2"	***200DA-45AL*** [1]	**$124.75**	***200DA-45SS*** [1]	**$465.00**
3"	***300DA-45AL***	**175.00**	***300DA-45SS*** [1]	**691.90**
4"	***400DA-45AL***	**231.75**	***400DA-45SS*** [1]	**922.50**
6"	***600DA-45AL***	**525.00**	**---**	**---**

[1] Parts are produced as a welded fabrication.



female coupler x female coupler

coupler x coupler

Size	Aluminum		Stainless Steel	
	Part #	Price/E	Part #	Price/E
2"	***200DD-45AL***	**$152.90**	**---**	**---**
3"	***300DD-45AL***	**348.00**	***300DD-45SS***	**$580.00**
4"	***400DD-45AL***	**340.00**	**---**	**---**
6"	***600DD-45AL***	**670.00**	**---**	**---**

Parts are produced as a welded fabrication.

90° Elbows



male adapter x female coupler

adapter x coupler

Size	Aluminum		Stainless Steel	
	Part #	Price/E	Part #	Price/E
1"	**---**	**---**	***100DA-90SS*** [1]	**$333.00**
1½"	***150DA-90AL*** [1]	**$109.20**	***150DA-90SS*** [1]	**355.00**
2"	***200DA-90AL***	**87.90**	***200DA-90SS***	**355.00**
3"	***300DA-90AL***	**138.00**	***300DA-90SS***	**693.00**
4"	***400DA-90AL***	**221.25**	***400DA-90SS***	**785.00**
5"	***500DA-90AL*** [1]	**1397.00**	**---**	**---**
6"	***600DA-90AL***	**465.00**	***RDA90600EZ*** [1, 2]	**2300.00**

[1] Parts are produced as a welded fabrication.
[2] EZ Boss-Lock design (not pictured)



female coupler x female coupler

coupler x coupler

Size	Aluminum		Stainless Steel	
	Part #	Price/E	Part #	Price/E
2"	***200DD-90AL***	**$157.60**	**---**	**---**
3"	***300DD-90AL***	**334.50**	***300DD-90SS***	**$556.00**
4"	***400DD-90AL***	**169.50**	**---**	**---**
6"	***600DD-90AL***	**750.00**	**---**	**---**

Parts are produced as a welded fabrication.

Cam and Groove Elbows

Type A

• Pressure rating is based on the seal of the mating part. See ratings on page 16.

male adapter x female NPT 90° elbow

Size	Aluminum		Stainless Steel	
	Part #	Price/E	Part #	Price/E
1½"	***150A-90AL***	**$64.80**	**---**	**---**
2"	***200A-90AL***	**65.50**	***200A-90SS*** [1]	**$425.00**
3"	***300A-90AL***	**110.25**	***300A-90SS***	**440.00**
4"	***400A-90AL***	**199.00**	**---**	**---**

[1] Parts are produced as a welded fabrication.



male adapter x female NPT

Type D

• Couplers are supplied standard with a Buna-N gasket.
• Other gasket types are available on page 64.

female coupler x female NPT 90° elbow

Size	Aluminum		Brass		Stainless Steel	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1"	**---**	**---**	**---**	**---**	***100D-90SS***	**$199.40**
1¼"	**---**	**---**	***125D-90BR***	**$127.00**	**---**	**---**
1½"	***150D-90AL***	**$69.60**	***150D-90BR***	**109.70**	**---**	**---**
2"	***200D-90AL***	**63.85**	***200D-90BR***	**140.40**	***200D-90SS***	**210.00**
3"	***300D-90AL***	**92.70**	**---**	**---**	***300D-90SS***	**538.00**
4"	***400D-90AL***	**128.90**	**---**	**---**	***400D-90SS*** [1]	**1015.00**
4"	***AD90400EZ*** [2]	**225.05**	**---**	**---**	**---**	**---**
6"	***600D-90AL***	**304.00**	**---**	**---**	**---**	**---**

[1] Parts are produced as a welded fabrication.
[2] EZ Boss-Lock design (not pictured)



female coupler x female NPT

Type E

• Pressure rating is based on the seal of the mating part. See ratings on page 16.

male adapter x hose shank 90° elbow

Size	Aluminum		Stainless Steel	
	Part #	Price/E	Part #	Price/E
2"	**---**	**---**	***200E-90SS*** [1]	**$480.00**
3"	***300E-90AL***	**$128.00**	***300E-90SS***	**544.95**
4"	***400E-90AL***	**156.75**	***400E-90SS*** [1]	**882.00**
6"	***600E-90AL*** [1]	**800.00**	**---**	**---**

[1] Parts are produced as a welded fabrication.



male adapter x hose shank


Type C

• Couplers are supplied standard with a Buna-N gasket.
• Other gasket types are available on page 64.

female coupler x hose shank 90° elbow

Size	Aluminum		Brass		Stainless Steel	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1¼"	**---**	**---**	***125C-90BR***	**$131.00**	**---**	**---**
1½"	***150C-90AL***	**$63.00**	**---**	**---**	***150C-90SS***	**$335.00**
2"	***200C-90AL***	**61.25**	***200C-90BR***	**142.50**	***200C-90SS***	**345.00**
3"	***300C-90AL***	**92.90**	**---**	**---**	***300C-90SS***	**534.20**
4"	***400C-90AL***	**173.00**	**---**	**---**	***400C-90SS*** [1]	**914.25**
6"	***600C-90AL***	**458.65**	**---**	**---**	**---**	**---**


[1] Parts are produced as a welded fabrication.



female coupler x hose shank

Cam and Groove Elbows

Type F



male adapter x male NPT

- Pressure rating is based on the seal of the mating part. See ratings on page 16.

male adapter x male NPT 90° elbow

Size	*Aluminum*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E
1½"	***150F-90AL***	**$52.70**	**---**	**---**
2"	***200F90AL***	**81.30**	***200F-90SS*** [1]	**$395.00**
3"	**---**	**---**	***300F-90SS*** [1]	**732.90**

[1] Parts are produced as a welded fabrication.

Type B



female coupler x male NPT

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

female coupler x male NPT 90° elbow

Size	*Aluminum*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E
1½"	***150B-90AL***	**$68.90**	**---**	**---**
2"	***200B-90AL***	**80.00**	***200B-90SS*** [1]	**$490.00**
3"	**---**	**---**	***300B-90SS*** [1]	**650.00**

[1] Parts are produced as a welded fabrication.

Reducing Cam and Groove Couplings

In reducing couplings, the cam and groove end is the first size given in the part number.
(i.e., a 4030-C-AL is a 4" coupler to a 3" hose shank).

Type A

- Pressure rating is based on the seal of the mating part. See ratings on page 16.

male adapter x female NPT

Size	*Aluminum* Part #	Price/E	Opt Qty	*Stainless Steel* Part #	Price/E	Opt Qty
2" x 1½"	***2015-A-AL***	**$40.25**	--	***2015-A-SS*** [1]	**$190.00**	--
2" x 3"	***2030-A-AL***	**55.75**	10	***2030-A-SS***	**204.00**	10
3" x 2"	***3020-A-AL***	**51.70**	5	***3020-A-SS***	**268.00**	10
3" x 4"	***3040-A-AL***	**62.85**	10	**---**	**---**	--
4" x 3"	***4030-A-AL***	**63.90**	10	***4030-A-SS*** [1]	**425.00**	--
4" x 6"	***4060-A-AL***	**181.75**	5	**---**	**---**	--
6" x 4"	***6040-A-AL***	**192.60**	5	***6040-A-SS*** [1]	**985.00**	--

[1] Parts are produced as a welded fabrication.



reducing
male adapter x female NPT

Type D

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

female coupler x female NPT

Size	*Aluminum* Part #	Price/E	Opt Qty	*Brass* Part #	Price/E	*Stainless Steel* Part #	Price/E
1½" x 1"	***1510-D-AL*** [1]	**$63.50**	10	**---**	**---**	***1510-D-SS*** [1]	**$292.00**
2" x 1½"	***2015-D-AL***	**41.45**	10	**---**	**---**	***2015-D-SS***	**190.00**
3" x 2"	***3020-D-AL***	**76.50**	10	**---**	**---**	***3020-D-SS***	**330.00**
4" x 3"	***4030-D-AL***	**115.30**	10	***4030-D-BR***	**$363.00**	***4030-D-SS*** [1]	**488.00**
5" x 4"	***5040-D-AL*** [1]	**315.00**	--	**---**	**---**	**---**	**---**
6" x 4"	***6040-D-AL*** [1]	**393.00**	--	**---**	**---**	**---**	**---**

[1] Parts are produced as a welded fabrication.



reducing
female coupler x female NPT

Type E

- Pressure rating is based on the seal of the mating part. See ratings on page 16.

male adapter x hose shank

Size	*Aluminum* Part #	Price/E	Opt Qty	*Stainless Steel* Part #	Price/E
2" x 1½"	***2015-E-AL*** [1]	**$161.20**	--	***2015-E-SS*** [1]	**$195.00**
3" x 2"	**---**	**---**	--	***3020-E-SS*** [1]	**351.20**
3" x 2½"	**---**	**---**	--	***3025-E-SS***	**190.80**
4" x 3"	***4030-E-AL***	**83.50**	10	***4030-E-SS*** [1]	**541.00**
5" x 4"	***5040-E-AL*** [1]	**315.00**	--	**---**	**---**

[1] Parts are produced as a welded fabrication.



reducing
male adapter x hose shank


Type C

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

female coupler x hose shank

Size	*Aluminum* Part #	Price/E	Opt Qty	*Stainless Steel* Part #	Price/E
2" x 1½"	***2015-C-AL*** [1]	**$163.00**	--	***2015-C-SS*** [1]	**$320.00**
3" x 2"	***3020-C-AL***	**64.50**	10	***3020-C-SS***	**342.80**
3" x 2½"	**---**	**---**	--	***3025-C-SS***	**378.00**
3" x 4"	***3040-C-AL***	**112.00**	5	**---**	**---**
4" x 3"	***4030-C-AL***	**86.90**	5	***4030-C-SS*** [1]	**570.00**
5" x 4"	***5040-C-AL*** [1]	**326.00**	--	**---**	**---**

[1] Parts are produced as a welded fabrication.




reducing
female coupler x hose shank

Reducing Cam and Groove Couplings

In reducing couplings, the cam and groove end is the first size given in the part number. (i.e., a 4030-B-AL is a 4" coupler to a 3" male NPT).

Type F

- Pressure rating is based on the seal of the mating part. See ratings on page 16.



reducing
male adapter x male NPT


male adapter x male NPT

Size	*Aluminum* Part #	Price/E	Opt Qty	*Stainless Steel* Part #	Price/E
1½" x 2"	***1520-F-AL***	**$41.50**	--	**---**	**---**
2" x 1½"	***2015-F-AL***	**43.20**	--	***2015-F-SS*** [1]	**$379.60**
2" x 3"	***2030-F-AL***	**64.20**	--	**---**	**---**
3" x 1½"	***3015-F-AL***	**55.90**	10	***3015-F-SS*** [1]	**405.00**
3" x 2"	***3020-F-AL***	**59.50**	10	***3020-F-SS***	**399.00**
3" x 4"	***3040-F-AL***	**76.60**	10	**---**	**---**
4" x 3"	***4030-F-AL***	**83.00**	10	***4030-F-SS*** [1]	**575.00**

[1] Parts are produced as a welded fabrication.

Type B

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.



reducing
female coupler x male NPT

female coupler x male NPT

Size	*Aluminum* Part #	Price/E	Opt Qty	*Stainless Steel* Part #	Price/E
1½" x 1"	***1510-B-AL***	**$59.50**	10	***1510-B-SS*** [1]	**$295.00**
2" x 1½"	***2015-B-AL***	**61.25**	10	***2015-B-SS*** [1]	**334.90**
2" x 3"	***2030-B-AL***	**69.70**	--	**---**	**---**
3" x 2"	***3020-B-AL***	**71.25**	10	***3020-B-SS*** [1]	**345.00**
3" x 4"	***3040-B-AL***	**100.00**	10	**---**	**---**
4" x 3"	***4030-B-AL***	**112.00**	5	***4030-B-SS*** [1]	**485.80**

[1] Parts are produced as a welded fabrication.

Dixon Reducing Cam and Groove Couplings

In reducing cam and groove couplings, the coupler is the first size in the part number; (i.e., a 4030-DA-AL is a 4" coupler to a 3" adapter).

[1] Parts are produced as a welded fabrication.

[2] The 8" coupler has 4 cam arms and *does not interchange.* SAFETY ALERT

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.



3" coupler x 1½" adapter



4" coupler x 6" adapter



3" coupler x 2½" adapter



5" coupler x 6" adapter

coupler x adapter

Size	*Aluminum* Part #	Price/E	Opt Qty	*Stainless Steel* Part #	Price/E
1" x 1½"	***1015-DA-AL*** [1]	**$145.00**	--	***1015-DA-SS*** [1]	**$298.75**
1½" x 1"	***1510DAAL***	**62.75**	--	***1510-DA-SS*** [1]	**290.00**
1½" x 2"	***1520-DA-AL***	**80.20**	10	***1520-DA-SS***	**369.00**
2" x 1"	***2010-DA-AL*** [1]	**139.00**	--	***2010-DA-SS*** [1]	**235.00**
2" x 1½"	***2015-DA-AL***	**57.40**	10	***2015-DA-SS***	**262.00**
2" x 2½"	***2025-DA-AL*** [1]	**140.00**	--	***2025-DA-SS*** [1]	**525.00**
2" x 3"	***2030-DA-AL***	**68.50**	5	***2030-DA-SS***	**283.25**
2" x 4"	***2040-DA-AL***	**110.65**	--	***2040-DA-SS*** [1]	**476.00**
2½" x 2"	**---**	**---**	--	***2520-DA-SS*** [1]	**520.00**
2½" x 3"	**---**	**---**	--	***2530-DA-SS*** [1]	**612.00**
3" x 1½"	***3015-DA-AL***	**86.60**	--	***3015-DA-SS*** [1]	**375.00**
3" x 2"	***3020-DA-AL***	**66.85**	10	***3020-DA-SS***	**277.00**
3" x 2½"	***3025-DA-AL*** [1]	**140.00**	--	***3025-DA-SS*** [1]	**466.50**
3" x 4"	***3040-DA-AL***	**99.90**	5	***3040-DA-SS***	**729.00**
3" x 6"	***3060-DA-AL*** [1]	**232.00**	--	***3060-DA-SS*** [1]	**698.00**
4" x 2"	***4020-DA-AL***	**99.00**	5	***4020-DA-SS*** [1]	**544.80**
4" x 2½"	***4025-DA-AL***	**147.00**	--	***4025-DA-SS*** [1]	**732.00**
4" x 3"	***4030-DA-AL***	**102.50**	5	***4030-DA-SS***	**520.00**
4" x 5"	***4050-DA-AL***	**220.20**	2	**---**	**---**
4" x 6"	***4060-DA-AL***	**179.10**	2	***4060-DA-SS*** [1]	**1097.00**
5" x 3"	***5030-DA-AL*** [1]	**255.50**	2	***5030-DA-SS*** [1]	**725.00**
5" x 4"	***5040-DA-AL***	**181.75**	2	***5040-DA-SS*** [1]	**717.90**
5" x 6"	***5060-DA-AL*** [1]	**375.50**	--	***5060-DA-SS***	**950.00**
6" x 3"	***6030-DA-AL***	**195.90**	2	***6030-DA-SS*** [1]	**1125.80**
6" x 4"	***6040-DA-AL***	**178.75**	2	***6040-DA-SS***	**1125.80**
6" x 5"	***6050-DA-AL***	**321.70**	--	***6050-DA-SS*** [1]	**1225.00**
8" x 6"	***8060-DA-AL*** [1,2]	**1100.00**	--	**---**	**---**


Size	*Brass* Part #	Price/E	Opt Qty	*Iron* Part #	Price/E	Opt Qty
3" x 2"	***3020-DA-BR***	**$273.90**	10	***3020-DA-MI***	**$107.00**	10
3" x 4"	***3040-DA-BR***	**367.50**	5	**---**	**---**	--
4" x 3"	***4030-DA-BR***	**305.00**	2	***4030-DA-MI***	**197.30**	--
6" x 4"	***6040-DA-BR***	**675.00**	--	***6040-DA-MI***	**420.00**	--

Reducing Coupler x Adapter with Port



Size	Tap Size	*Stainless Steel* Part #	Price/E
3" x 2"	1/4"	***3020DAT25SS***	**$354.00**
3" x 2"	3/8"	***3020DAT38SS***	**354.00**
3" x 2"	1/2"	***3020DAT50SS***	**354.00**
3" x 2"	3/4"	***3020DAT75SS***	**354.00**

Boss-Lock Reducing Cam and Groove Couplings



3" coupler x 2" adapter

In reducing cam and groove couplings, the coupler is the first size in the part number; (i.e., a ADA4030 is a 4" coupler to a 3" adapter).

[1] Parts are produced as a welded fabrication.

[2] The 8" coupler *does not interchange.* SAFETY ALERT

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

coupler x adapter

Size	*Aluminum* Part #	Price/E	*Stainless Steel* Part #	Price/E	Opt Qty
2" x 3"	***ADA2030*** [1]	**$167.50**	***RDA2030BL*** [1]	**$392.25**	10
2½" x 2"	***ADA2520*** [1]	**148.80**	**---**	**---**	--
2½" x 3"	***ADA2530*** [1]	**206.00**	**---**	**---**	--
3" x 2"	***ADA3020***	**81.00**	***RDA3020BL***	**354.55**	10
3" x 4"	***ADA3040*** [1]	**196.35**	***RDA3040BL*** [1]	**400.00**	10
4" x 2"	***ADA4020*** [1]	**223.80**	***RDA4020BL*** [1]	**620.50**	10
4" x 3"	***ADA4030***	**132.00**	***RDA4030BL***	**594.45**	10
6" x 4"	***ADA6040*** [1]	**498.20**	**---**	**---**	--
8" x 6"	***ADA8060*** [1,2]	**1077.00**	**---**	**---**	--

EZ Boss-Lock Reducing Cam and Groove Couplings



4" coupler x 2" adapter

In reducing cam and groove couplings, the coupler is the first size in the part number; (i.e., a ADA4030EZ is a 4" coupler to a 3" adapter).

[1] Parts are produced as a welded fabrication.

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

coupler x adapter

Size	*Aluminum* Part #	Price/E	*Stainless Steel* Part #	Price/E
2" x 3"	***ADA2030EZ*** [1]	**$195.80**	***RDA2030EZ*** [1]	**$398.60**
3" x 2"	***ADA3020EZ***	**132.20**	***RDA3020EZ***	**357.25**
3" x 4"	***ADA3040EZ*** [1]	**241.85**	***RDA3040EZ*** [1]	**421.00**
4" x 2"	***ADA4020EZ*** [1]	**282.15**	***RDA4020EZ*** [1]	**629.80**
4" x 3"	***ADA4030EZ***	**185.00**	***RDA4030EZ***	**587.60**
6" x 4"	***ADA6040EZ*** [1]	**544.10**	***RDA6040EZ***	**635.00**

Dixon Lockable Dust Caps

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.
- *Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.* SAFETY ALERT



Size	*Aluminum* Part #	Price/E	Opt Qty	*Brass* Part #	Price/E	Opt Qty
1½"	***150DC-LAL***	**$45.25**	10	***150DC-LBR***	**$88.00**	10
2"	***200DC-LAL***	**48.80**	10	***200DC-LBR***	**90.60**	10
3"	***300DC-LAL***	**60.25**	10	***300DC-LBR***	**110.00**	10
4"	***400DC-LAL***	**78.60**	10	***400DC-LBR***	**156.00**	10
6"	***600DC-LAL***	**197.10**	2	**---**	**---**	--

- with angled, ergonomic thumb release



Size	*Stainless Steel* Part #	Price/E
1½"	***150DC-LSS***	**$116.15**
2"	***200DC-LSS***	**157.90**
3"	***300DC-LSS***	**191.30**
4"	***400DC-LSS***	**249.50**

Dixon Spool Adapters

- Pressure rating is based on the seal of the mating part. See ratings on page 16.

adapter x adapter

Size	*Aluminum*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E
1"	---	---	***100-AA-SS***	**$98.90**
1¼"	---	---	***125-AA-SS*** [1]	**344.80**
1½"	***150-AA-AL***	**$30.50**	***150-AA-SS***	**108.05**
1½" x 2"	***1520-AA-AL***	**39.50**	***1520-AA-SS***	**170.90**
2"	***200-AA-AL***	**37.75**	***200-AA-SS***	**155.50**
2" x 3"	***2030-AA-AL***	**60.85**	***2030-AA-SS***	**212.10**
2" x 4"	***2040-AA-AL***	**100.80**	***2040-AA-SS*** [1]	**433.95**
2½" x 3"	***2530-AA-AL*** [1]	**198.50**	***2530-AA-SS*** [1]	**554.70**
2½" x 4"	***2540-AA-AL*** [1]	**258.45**	---	---
3"	***300-AA-AL***	**61.55**	***300-AA-SS***	**253.70**
3" x 4"	***3040-AA-AL***	**87.00**	***3040-AA-SS*** [1]	**474.40**
4"	***400-AA-AL***	**80.25**	***400-AA-SS***	**346.00**
4" x 5"	***4050-AA-AL***	**123.00**	---	---
4" x 6"	***4060-AA-AL***	**204.45**	***4060-AA-SS*** [1]	**995.00**
5"	***500-AA-AL*** [1]	**262.00**	***500-AA-SS*** [1]	**999.00**
5" x 6"	***5060-AA-AL*** [1]	**375.00**	---	---
6"	***600-AA-AL***	**217.75**	***600-AA-SS*** [1]	**970.80**

Size	*Brass*	
	Part #	Price/E
2"	***200-AA-BR***	**$115.00**
3"	***300-AA-BR***	**223.00**



increaser / reducer



same size

[1] Parts are produced as a welded fabrication.

Dixon Spool Couplers

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

coupler x coupler

Size	*Aluminum*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E
1½"	---	---	***150-DD-SS*** [1]	**$250.80**
2"	***200-DD-AL***	**$65.80**	***200-DD-SS***	**188.70**
2" x 3"	***2030-DD-AL***	**103.80**	***2030-DD-SS***	**315.00**
3"	***300-DD-AL***	**83.00**	***300-DD-SS***	**292.10**
3" x 4"	***3040-DD-AL***	**113.00**	***3040-DD-SS*** [1]	**683.50**
4"	***400-DD-AL***	**118.60**	***400-DD-SS*** [1]	**762.00**
4" x 5"	***4050-DD-AL*** [1]	**379.50**	***4050-DD-SS*** [1]	**742.95**
4" x 6"	***4060-DD-AL*** [1]	**347.10**	***4060-DD-SS***	**782.10**
5"	***500-DD-AL*** [1]	**432.00**	***500-DD-SS***	**999.00**
6"	***600-DD-AL*** [1]	**540.00**	***600-DD-SS***	**1100.00**



reducer / increaser



same size

[1] Parts are produced as a welded fabrication.

Boss-Lock Spool Couplers

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

coupler x coupler

Size	*Aluminum*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E
2"	***ADD200*** [1]	**$163.50**	***RDD200EZ***	**$360.85**
2" x 3"	***ADD2030*** [1]	**163.50**	***RDD2030EZ*** [1]	**400.00**
3"	***ADD300*** [1]	**217.50**	***RDD300EZ*** [1]	**532.10**
3" x 4"	***ADD3040*** [1]	**303.80**	***RDD3040EZ*** [1]	**638.10**
4"	***ADD400*** [1]	**297.10**	***RDD400EZ*** [1]	**645.50**
6"	---	---	***RDD600EZ*** [1]	**1200.00**



reducer / increaser



same size

[1] Parts are produced as a welded fabrication.

Adapters and Couplers x 150# Flanged Drilling

See page 619 for flange drilling standards.



adapter x 150# ASA flange

Dixon adapter x 150# flange

Size	*Aluminum*		*Iron*		*Stainless Steel*		Approx. Flange Thickness
	Part #	Price/E	Part #	Price/E	Part #	Price/E	
1"	**---**	**---**	**---**	**---**	***100-AL-SS***	**$188.00**	9/16"
1½"	**---**	**---**	**---**	**---**	***150-AL-SS***	**186.20**	5/8"
2"	***200-AL-AL***	**$104.50**	**---**	**---**	***200-AL-SS***	**223.00**	7/16"
3"	***300-AL-AL***	**106.85**	***300-AL-MI***	**$190.00**	***300-AL-SS***	**290.55**	7/16"
4"	***400-AL-AL***	**158.60**	**---**	**---**	***400-AL-SS***	**521.70**	7/16"
6"	***600-AL-AL***	**237.50**	**---**	**---**	***600-AL-SS***	**715.00**	5/8"
8"	***800-AL-AL*** [1]	**1344.00**	**---**	**---**	**---**	**---**	--

[1] Parts are produced as a welded fabrication.

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.



coupler x 150# ASA flange

Dixon coupler x 150# flange

Size	*Aluminum*		*Stainless Steel*		Approx. Flange Thickness
	Part #	Price/E	Part #	Price/E	
1"	**---**	**---**	***100-DL-SS***	**$190.40**	5/8"
1½"	**---**	**---**	***150-DL-SS***	**252.00**	25/32"
2"	***200-DL-AL***	**$140.20**	***200-DL-SS***	**371.80**	7/16"
3"	***300-DL-AL***	**202.00**	***300-DL-SS***	**493.30**	7/16"
4"	***400-DL-AL***	**281.00**	***400-DL-SS***	**1044.00**	7/16"
6"	***600-DL-AL***	**381.50**	***600-DL-SS***	**1081.00**	5/8"
8"	***800-DL-AL*** [1]	**1797.00**	**---**	**---**	--

[1] Parts are produced as a welded fabrication.

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.



EZ Boss-Lock coupler x 150# ASA flange

EZ Boss-Lock coupler x 150# flange

Size	*Stainless Steel*	
	Part #	Price/E
1"	***RDL100EZ*** [1]	**$371.60**
1½"	***RDL150EZ*** [1]	**593.50**
2"	***RDL200EZ***	**460.70**
3"	***RDL300EZ*** [1]	**566.85**
4"	***RDL400EZ*** [1]	**615.00**
6"	***RDL600EZ*** [1]	**1650.00**

[1] Parts are produced as a welded fabrication.

In-Line Sight Glass for Bulk Transfer



Designed for dry bulk transfer hose. Includes aluminum bodies, Buna seals, acrylic sight glasses, stainless steel hardware and bronze cam arms (where applicable).

Not intended for liquid service, for dry bulk transfer *only*. SAFETY ALERT

coupler x adapter

Size	Part #	Price/E
4" x 4"	***3544CA***	**$295.90**
3" x 3"	***3533CA***	**295.85**
4" x 3"	***3543CA***	**295.90**
3" x 4"	***3534CA***	**295.90**

adapter x adapter

Size	Part #	Price/E
3" x 3"	***3533AA***	**$219.75**
4" x 4"	***3544AA***	**219.75**
3" x 4"	***3534AA***	**219.75**

coupler x coupler

Size	Part #	Price/E
4" x 4"	***3544CC***	**$368.70**
3" x 3"	***3533CC***	**368.70**
4" x 3"	***3543CC***	**368.70**

Adapters and Couplers with Straight Pipe Thread (NPSM)

- for delivery of dry goods
- Cork buna gaskets are standard in threaded end.
  Replacement gasket; ***400GAGFI,*** **$4.30**
- Pressure rating is based on the seal of the mating part. See ratings on page 16.



adapter x NPSM thread

Size	*Aluminum* Part #	Price/E
4"	***400-AS-AL***	**$76.65**

- Coupler is supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.



Boss-Lock coupler x NPSM thread

Size	*Aluminum* Part #	Price/E
4"	***ADS400***	**$93.00**

TTMA Series Flange Adapters

- provides a simple and easy way to quickly convert threaded components to a standard 4" TTMA flange configuration
- more durable than welded fabrications due to the solid cast lightweight aluminum design
- design improves flow through adapter even on the 3" reducer
- compact size reduces the overall space needed to install
- for flange drilling standards, see page 619

Male Threaded

TTMA flange x standard male NPT

TTMA Flange	Male NPT	*Aluminum* Part #	Price/E
3"	3"	***TTF3AL-3MT***	**$51.15**
4"	3"	***TTF4AL-3MT***	**51.15**
4"	4"	***TTF4AL-4MT***	**51.15**



TTMA flange x male NPT

Extended Length - Male Threaded

TTMA flange x extended length male NPT

TTMA Flange	Male NPT	*Aluminum* Part #	Price/E
4"	3"	***TTF4AL-3EMT***	**$73.35**
4"	4"	***TTF4AL-4EMT***	**73.35**



TTMA flange x male NPT extended length

Female Threaded

TTMA flange x female NPT

TTMA Flange	Female NPT	*Aluminum* Part #	Price/E
4"	3"	***TTF4AL-3FT***	**$65.55**
4"	4"	***TTF4AL-4FT***	**65.55**



TTMA flange x female NPT

Slip-on


2010 NEW


TTMA flange x socket weld

TTMA Flange	Pipe Size	*Aluminum* Part #	Price/E
4"	4"	***TTF400SP***	**$64.40**



TTMA flange x socket weld


TETF4AL


TETFG4AL

2010 NEW TTMA Flange Extensions

Flange extensions are used on load arms to connect the API load coupler to the load arm.
- adds a 6" space between the load arm and the tank truck
- Flange extension with groove provides a specified parting point to prevent excessive damage to the loading arm.

Size	Description	*Aluminum* Part #	Price/E
4"	TTMA flange extension	***TETF4AL***	**$119.70**
4"	TTMA flange extension with groove	***TETFG4AL***	**124.25**

Dixon Adapters and Couplers x Round Tank Truck Flange


adapter x round tank truck flange

[1] Parts are produced as a welded fabrication.
- Pressure rating is based on the seal of the mating part. See ratings on page 16.
- See page 619 for flange drilling standards.

adapter x round tank truck flange

Size	*Aluminum* Part #	Price/E	*Stainless Steel* Part #	Price/E
3"	***300-ALT-AL***	**$67.60**	***300-ALT-SS*** [1]	**$440.00**
3" x 4"	***3040ALTAL***	**98.90**	**---**	**---**
4"	***400-ALT-AL***	**82.30**	***400-ALT-SS*** [1]	**736.00**
6"	***600-ALT-AL***	**216.30**	**---**	**---**


coupier x round tank truck flange

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

coupler x round tank truck flange

Size	*Aluminum* Part #	Price/E
3"	***300-DLT-AL***	**$125.00**
3" x 4"	***3040DLTAL***	**142.50**
4"	***400-DLT-AL***	**143.00**
6"	***600-DLT-AL***	**309.50**

Dixon 22½° Adapters and Couplers x Round Tank Truck Flange


22½° adapter x round flange

- Pressure rating is based on the seal of the mating part. See ratings on page 16.

22½° adapter x round tank truck flange

Size	*Aluminum* Part #	Price/E
4"	***40022ALTAL***	**$177.70**


22½° coupler x round flange

- Couplers are supplied standard with a Buna-N gasket.
- Other gasket types are available on page 64.

22½° coupler x round tank truck flange

Size	*Aluminum* Part #	Price/E
4"	***40022DLTAL***	**$143.45**


Round Tank Truck Flange Gaskets



Size	OD	ID	THK	Material	Part #	Price/E
3"	5-5/8"	3-1/2"	1/8"	*Cork / Buna*	***300GTTFCB***	**$3.10**
3"	5-5/8"	3-1/2"	1/16"	*Teflon® envelope with Klinger filler*	***300GTTFTK***	**13.75**
3"	5-5/8"	3-1/2"	1/8"	*Klingersil® C-4401*	***300GTTFK***	**9.00**
4"	6-5/8"	4-9/16"	1/8"	*Cork / Buna*	***400GTTFCB***	**4.00**
4"	6-5/8"	4-9/16"	1/16"	*Teflon® envelope with Klinger filler*	***400GTTFTK***	**19.75**
4"	6-5/8"	4-9/16"	1/8"	*Klingersil® C-4401*	***400GTTFK***	**17.10**

Dixon Vapor Recovery Couplers


- Not intended for liquid service, for vapor recovery *only*. SAFETY ALERT
- cast aluminum body
- bronze arms with stainless steel pins
- plated carbon steel finger rings
- Buna-N gasket





coupler with probe x hose shank


Coupler Size	Hose Shank Size	*Aluminum* Part #	Price/E
4"	3"	***4030-CVR-AL***	**$123.00**
4"	4"	***400-CVR-AL***	**126.75**





coupler with probe x adapter


Coupler Size	Adapter Size	*Aluminum* Part #	Price/E
4"	3"	***4030-DAVR-AL***	**$129.75**





coupler with probe x female NPT

Coupler Size	Female NPT Size	*Aluminum* Part #	Price/E
4"	3"	***4030-DVR-AL***	**$133.85**
4"	4"	***400-DVR-AL***	**135.70**






coupler with probe x coupler with probe

Coupler Size	Coupler Size	*Aluminum* Part #	Price/E
4"	4"	***400-DDVR-AL***	**$146.00**

Dixon Bayco Vapor Recovery Couplers

- Not intended for liquid service, for vapor recovery *only*. SAFETY ALERT
- *The Dixon replacement handle assemblies will not work on these fittings*.
- for use with 3" vapor hose
- cast aluminum body, bronze arms with stainless steel pins and finger rings
- Buna-N gasket






coupler with probe x hose shank

Coupler Size	Hose Shank Size	*Aluminum* Part #	Price/E
3"	3"	***VRC3000AL***	**$129.25**

- The VR4030CS-AL has a Viton® O-ring poppet seal.






coupler with poppet and probe x hose shank

Coupler Size	Hose Shank Size	*Aluminum* Part #	Price/E
4"	3"	***VR4030CS-AL***[1]	**$191.35**

[1] The VR4030CS-AL will interchange with all competitor vapor valves *except* Civacon #633LVH (special bulb design). SAFETY ALERT

Strap-Grip Saddles and Fittings

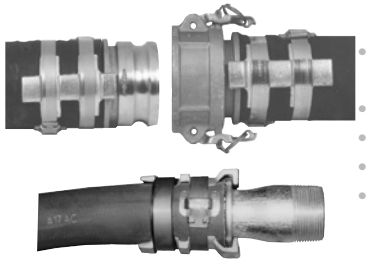

- Strap-Grip is designed to provide greater resistance to end pull than conventional band clamps alone.
- Only the fittings shown below are designed for use with Strap-Grip Saddles.
- Saddles are sold in pairs and designed for use with 3/4" or 5/8" wide bands.
- Bands must be purchased separately.
- Band clamps should first be applied to the OD to seal the hose. Then Strap-Grip saddles should be banded over the initial clamp to anchor the fitting in the hose.



saddles

saddles only

Size	Hose OD		*Plated Iron*	
	from	to	Part #	Price/E *
1½"	1-13/16"	2-1/8"	***SGS150***	**$12.50**
2"	2-5/8"	3"	***SGS200***	**14.50**
3"	3-1/2"	3-7/8"	***SGS300***	**18.95**
4"	4-9/16"	5-1/8"	***SGS400***	**21.90**
6"	6-1/2"	7-1/16"	***SGS600***	**39.50**
8"	8-5/8"	9-3/8"	***SGS800***	**44.00**

* prices are for two saddles



male NPT x hose shank

male NPT x hose shank

Size	*Schedule 40 Plated Carbon Steel*		*Schedule 40 Stainless Steel*		*Schedule 80*[1] *Plated Carbon Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1½"	***LP21***	**$57.45**	**---**	**---**	***LP21-80***	**$65.45**
2"	***LP26***	**49.40**	**---**	**---**	***LP26-80***	**68.40**
3"	***LP36***	**121.30**	***RLP36*** [2]	**$215.00**	**---**	**---**
4"	***LP46***	**154.00**	***RLP46*** [2]	**364.00**	**---**	**---**
6"	***LP66***	**329.45**	**---**	**---**	**---**	**---**

[1] Schedule 80 stems meet NFPA 58
[2] tubular steel



female coupler x hose shank

Boss-Lock type C coupler x hose shank

Size	*Aluminum*		*Brass*		*Stainless*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1"	**---**	**---**	**---**	**---**	***RC100CEZ***	**$116.20**
1½"	**---**	**---**	**---**	**---**	***RC150CEZ***	**133.20**
2"	***AC200C***	**$49.45**	**---**	**---**	***RC200CEZ***	**141.00**
3"	***AC300C***	**70.80**	**---**	**---**	***RC300CEZ***	**239.55**
4"	***AC400C***	**100.90**	**---**	**---**	**---**	**---**
6"	***AC600C***	**251.50**	***BC600***	**$670.00**	**---**	**---**



male adapter x hose shank

type E adapter x hose shank

Size	*Aluminum*		*Stainless*	
	Part #	Price/E	Part #	Price/E
2"	**---**	**---**	***RE200C***	**$91.40**
3"	***AE300C***	**$44.00**	***RE300C***	**175.40**
4"	***AE400C***	**68.00**	**---**	**---**
6"	***AE600***	**158.00**	**---**	**---**
8"	***801-E-AL***	**556.40**	**---**	**---**


Flat Seal Boss-Lock Cam and Groove Assemblies

- Flat Seal couplings are for lay flat hose with a wall thickness between 5/64" - 3/16".
- includes clamp
- See page 441 for additional Flat Seal coupling assemblies.
- recommended maximum pressure is **75 PSI**
- *maximum recommended torque 40 ft./lbs*
- Coupler is supplied with a Buna-N gasket.

SAFETY ALERT

flat seal Boss-Lock coupler

Size	*Aluminum* Part #	Price/E
6"	***FSAC600 ****	**$322.40**



flat seal adapter

Size	*Aluminum* Part #	Price/E
6"	***FSAE600 ****	**$318.00**



* items will be discontinued as inventory is depleted


Dixon Adapters for Welding

- not all configurations are stocked
- Line drawings are for reference only. Consult the factory for specific dimensions.
- Final weld preparation, as with all weld fittings, is the responsibility of the welder.
- [1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*.

SAFETY ALERT


socket weld to schedule 40 pipe

Size	Bore	*Aluminum* Part #	Price/E	*Stainless Steel* Part #	Price/E
¾"	1.065	**---**	**---**	***75AWSPSS***	**$96.80**
1"	1.330	**---**	**---**	***100AWSPSS***	**97.95**
1½"	1.915	***150AWSPAL***	**$55.50**	***150AWSPSS***	**112.80**
2"	2.390	***200AWSPAL***	**44.30**	***200AWSPSS***	**107.00**
3"	3.530	***300AWSPAL***	**56.90**	***300AWSPSS***	**181.55**
4"	4.530	***400AWSPAL***	**74.75**	***400AWSPSS***	**272.00**
5"	5.593	***500AWSPAL***	**115.60**	***500AWSPSS***	**437.10**
6"	6.655	***600AWSPAL***	**131.10**	***600AWSPSS***	**461.00**
8" DIX	8.711	***800AWSPAL*** [1]	**461.60**	**---**	**---**
8" BL	8.711	***801AWSPAL*** [1]	**440.00**	**---**	**---**



butt weld to schedule 40 pipe / socket weld to nominal OD tubing

Size	Bore	*Aluminum* Part #	Price/E	*Stainless Steel* Part #	Price/E
¾"	.765	**---**	**---**	***75AWBPSTSS***	**$96.80**
1"	1.015	**---**	**---**	***100AWBPSTSS***	**97.95**
1½"	1.515	***150AWBPSTAL***	**$49.40**	***150AWBPSTSS***	**112.50**
2"	2.015	***200AWBPSTAL***	**37.40**	***200AWBPSTSS***	**107.00**
3"	3.015	***300AWBPSTAL***	**56.00**	***300AWBPSTSS***	**181.55**
4"	4.015	***400AWBPSTAL***	**74.75**	***400AWBPSTSS***	**272.00**
5"	5.015	***500AWBPSTAL***	**115.60**	***500AWBPSTSS***	**437.10**
6"	6.020	***600AWBPSTAL***	**129.85**	***600AWBPSTSS***	**461.00**
8" BL	8.035	***801AWBPSTAL*** [1]	**440.00**	**---**	**---**




Dixon Couplers for Welding

- not all configurations are stocked
- Boss-Lock versions are also available. Consult the factory for pricing and availability.
- Line drawings are for reference only. Consult the factory for specific dimensions.
- Final weld preparation, as with all weld fittings, is the responsibility of the welder.


[1] Dixon and Boss-Lock cam and groove couplings *do not interchange in the 8" size*. The 8" Dixon design has 4 cam arms.

SAFETY ALERT



socket weld to schedule 40 pipe


Size	Bore	*Aluminum* Part #	Price/E	*Stainless Steel* Part #	Price/E
¾"	1.065	***---***	**---**	***75DWSPSS***	**$141.70**
1"	1.330	***100DWSPAL***	**$POR**	***100DWSPSS***	**121.90**
1½"	1.915	***150DWSPAL***	**59.90**	***150DWSPSS***	**148.60**
2"	2.390	***200DWSPAL***	**70.00**	***200DWSPSS***	**149.30**
3"	3.530	***300DWSPAL***	**70.75**	***300DWSPSS***	**261.75**
4"	4.530	***400DWSPAL***	**87.00**	***400DWSPSS***	**341.00**
5"	5.593	***500DWSPAL***	**205.00**	***500DWSPSS***	**665.00**
6"	6.655	***600DWSPAL***	**230.00**	***600DWSPSS***	**750.00**
8"	8.711	***800DWSPAL*** [1]	**956.00**	***---***	**---**



butt weld to schedule 40 pipe / socket weld to nominal OD tubing


Size	Bore	*Aluminum* Part #	Price/E	*Stainless Steel* Part #	Price/E
¾"	.765	***---***	**---**	***75DWBPSTSS***	**$122.25**
1"	1.015	***---***	**---**	***100DWBPSTSS***	**121.90**
1½"	1.515	***150DWBPSTAL***	**$57.80**	***150DWBPSTSS***	**148.50**
2"	2.015	***200DWBPSTAL***	**56.00**	***200DWBPSTSS***	**149.30**
3"	3.015	***300DWBPSTAL***	**67.50**	***300DWBPSTSS***	**261.75**
4"	4.015	***400DWBPSTAL***	**89.00**	***400DWBPSTSS***	**343.20**
5"	5.015	***500DWBPSTAL***	**167.70**	***---***	**---**
6"	6.020	***600DWBPSTAL***	**230.00**	***---***	**---**

EZ Boss-Lock Couplers for Welding



socket weld to schedule 40 pipe

Size	Bore	*Stainless Steel* Part #	Price/E
¾"	1.065	***RDWSP075EZ***	**$207.75**
1"	1.330	***RDWSP100EZ***	**194.60**
1½"	1.915	***RDWSP150EZ***	**200.00**
2"	2.390	***RDWSP200EZ***	**207.75**
3"	3.530	***RDWSP300EZ***	**299.00**
4"	4.530	***RDWSP400EZ***	**346.00**
6"	6.655	***RDWSP600EZ***	**669.00**



butt weld to schedule 40 pipe / socket weld to nominal OD tubing

Size	Bore	*Stainless Steel* Part #	Price/E
¾"	.765	***RDWBPST075EZ***	**$147.50**
1"	1.015	***RDWBPST100EZ***	**155.30**
1½"	1.515	***RDWBPST150EZ***	**215.00**
2"	2.015	***RDWBPST200EZ***	**219.55**
3"	3.015	***RDWBPST300EZ***	**299.00**
4"	4.015	***RDWBPST400EZ***	**369.00**
6"	6.020	***RDWBPST600EZ***	**538.40**


Dixon Butt Weld to Tube Cam and Groove

2010 NEW

- 316 stainless steel investment casting
- designed to be butt welded to standard sanitary tubing


adapter x butt weld to tube end

Size	*316 Stainless Steel* Part #	Price/E
1"	***RE100BT***	**$130.00**
1½"	***RE150BT***	**143.00**
2"	***RE200BT***	**148.00**
3"	***RE300BT***	**345.00**



Boss-Lock coupler x butt weld to tube end

Size	*316 Stainless Steel* Part #	Price/E
1"	***RC100BT***	**$210.00**
1½"	***RC150BT***	**243.00**
2"	***RC200BT***	**280.00**
3"	***RC300BT***	**441.00**



Hastelloy Adapters and Couplers

- fittings are Hastelloy type CW-6M-C276
- couplers supplied with Viton® gaskets
- cam arms are 316 stainless steel
- pins are 302 stainless steel
- rings are yellow zinc plated 12 gauge steel wire
- Stainless steel crimp sleeves for Dixon and Boss-Lock shanks are available on page 37.



male adapter
x female NPT

Type A

Size	Part #	Price/E
1"	***100-A-HA***	**$283.00**
1½"	***150-A-HA***	**338.00**
2"	***200-A-HA***	**385.00**



male adapter
x male NPT

Type F

Size	Part #	Price/E
1"	***100-F-HA***	**$223.65**
1½"	***150-F-HA***	**505.00**
2"	***200-F-HA***	**597.00**



male adapter
x hose shank

Type E

Size	Part #	Price/E
1"	***100-E-HA***	**$264.00**
1½"	***150-E-HA***	**335.00**
2"	***200-E-HA***	**405.00**



female coupler
x hose shank

Type C

Size	Part #	Price/E
1"	***HAC100EZ***	**$455.40**
1½"	***HAC150EZ***	**490.00**
2"	***HAC200EZ***	**565.00**



female coupler
x female NPT

Type D

Size	Part #	Price/E
1"	***HAD100EZ***	**$455.50**
1½"	***HAD150EZ***	**565.00**
2"	***HAD200EZ***	**585.00**



female coupler
x male NPT

Type B

Size	Part #	Price/E
1"	***HAB100EZ***	**$420.40**
1½"	***HAB150EZ***	**525.40**
2"	***HAB200EZ***	**546.50**

Specialty Items



coupler x adapter wye

Size	*Aluminum* Part #	Price/E *
2"	***200YDAAAL***	**$132.00**



tank truck flanged tee

Size	*Aluminum* Part #	Price/E *
4"	***400-TLT-AL***	**$249.60**

* Price subject to availability. Minimum production quantities may be required. Some parts have a colored anodized surface finish.

Dixon Standard Handle Assemblies

- Stainless steel pins are standard with all assemblies.
- Pull rings are standard on sizes 1¼" thru 6". Pull rings are optional on other sizes.





Coupler Size	Description	*Brass* Part #	Price/E	*316 Sintered Stainless Steel* Part #	Price/E	*316 Investment Stainless Steel* Part #	Price/E
½"	cam arm and pin	---	---	***50-HP-SP***	**$3.65**	---	---
¾"	cam arm and pin	---	---	***75-HP-SP***	**3.65**	---	---
1"	cam arm and pin	---	---	***100-HP-SP***	**4.50**	---	---
1¼" - 2½"	cam arm, ring and pin	***200-HRP-BR***	**$6.85**	***200-HRP-SP***	**5.75**	---	---
2"	cam arm, ring and pin	---	---	---	---	***200-HSCRP-SI***	**$10.00**
3"	cam arm, ring and pin	---	---	---	---	***300-HSCRP-SI***	**13.80**
3" - 5"	cam arm, ring and pin	***300-HRP-BR***	**8.40**	***300-HRP-SP***	**7.00**	---	---
3" - 5"	cam arm, ring and short (1½") pin	***300-HR325P-BR***	**8.40**	***300-HR325P-SP***	**7.00**	***300-HR325P-SI***	**16.60**
6"	cam arm, ring and pin	***600-HRP-BR***	**34.60**	---	---	***600-HRP-SI***	**51.60**
8"	cam arm and pin for new coupler design	***800-HNP-BR***	**66.20**	---		---	

Locking Handle for Dixon Dust Caps

- not supplied with pins

Coupler Size	Hole Diameter	*Brass* Part #	Price/E
2"	9/32"	***200-LH-BR***	**$17.30**
3"	5/16"	***300-LH-BR***	**20.00**
4"	3/8"	***400-LH-BR***	**23.30**



Paddle Handle for Dixon Couplings

- not supplied with pins

Coupler Size	*Brass* Part #	Price/E
3" and 4"	***300H-PADBR***	**$29.00**



Coupler Size	*316 Investment Cast Stainless Steel* Part #	Price/E
3" and 4"	***300H-PADSS***	**$28.50**



Boss-Lock Standard Handle Assemblies

assembly includes cam arm, pin and pull ring safety clip

Coupler Size	*Brass* Part #	Price/E	*Investment Cast Stainless Steel* Part #	Price/E	*Plated Iron* Part #	Price/E
¾" - 1"	***BHSC175***	**$11.60**	***RHSC175***	**$15.35**	---	---
1¼" - 2½"	***BHSC152***	**11.35**	***RHSC152***	**18.75**	***IHSC152***	**$9.05**
3" and 4"	***BHSC34***	**13.70**	***RHSC34***	**27.95**	***IHSC34***	**9.15**



assembly includes cam arm, pin and pull ring

Coupler Size	*Brass* Part #	Price/E	*Plated Iron* Part #	Price/E
6" and 8"	***BH6***	**$40.80**	***IH6***	**$31.75**



EZ Boss-Lock Handles

- investment cast stainless steel cam arm and lever
- 316 stainless steel spring
- stainless steel pin, washer, plated carbon steel pull ring



Coupler Size	*Stainless Steel* Part #	Price/E
¾" - 1"	***RHEZ175***	**$20.60**
1¼" - 2½"	***RHEZ152***	**23.60**
3" and 4"	***RHEZ34***	**37.10**
6" and 8"	NEW ***RHEZ6***	**60.00**

SAFETY ALERT *Under no circumstances should the EZ Boss-Lock cam arms be used on any fitting not specifically produced for their use.* The aluminum, brass and iron are made from sand castings. To ensure proper functioning of the EZ Boss-Lock cam arm assemblies, we sort the castings to ensure there is sufficient length and orientation on the lugs on the main casting to engage the lever. We also buff or grind the rougher sand cast surface to ensure that the lever will move freely. *The EZ Boss-Lock cam arms cannot be retrofitted onto existing aluminum, brass or plated iron Boss-Lock already in service.*

Bayco Replacement Handle Assemblies

for Bayco couplers only



- brass cam arm
- carbon steel ring
- stainless steel pin

Coupler Size	Part #	Price/E
1¼" - 2½"	***CARP12BZ***	**$9.60**
3" - 5"	***CARP34BZ***	**11.25**
6"	***CARP60BZ***	**46.30**
8"	***CARP80BZ***	**92.60**

Pull Ring Safety Clips for Boss-Lock Couplings



Coupler Size	*Carbon Steel* Part #	Price/E	*Stainless Steel* Part #	Price/E
¾" - 1"	**---**	**---**	***100PRSCSS***	**$2.20**
1¼" - 2½"	***200PRSCCS***	**$1.55**	***200PRSCSS***	**2.20**
3" and 4"	***300PRSCCS***	**1.60**	***300PRSCSS***	**2.40**

Stainless Steel Pull Rings



304 Stainless Steel Part #	Price/E
R200SS	**$1.30**

Clips and Lanyards for Boss-Lock Couplings



- carbon steel clip
- nylon lanyard

Coupler Size	Part #	Price/E
¾" - 1"	***ACL4***	**$2.40**
1¼" - 4"	***ACL2***	**2.40**



- carbon steel clip
- no lanyard supplied with this clip

Coupler Size	Part #	Price/E
6"	***ACL3***	**$4.90**

Carbon Steel Clip Assembly

- for use with Boss-Lock couplings
- includes a pull ring, chain and AC3 clip

Part #	Price/E
BLCA152CS	**$6.50**



Clip for Boss-Lock Couplings

- .072 stainless steel wire

Stainless Steel Part #	Price/E
AC7	**$1.85**



Lanyard for Boss-Lock Couplings

- breaking strength: 160 lbs.
- overall length: 7" eye to eye

304 Stainless Part #	Price/E
LR7	**$6.90**



Jack Chains with S-Hooks

Length	Material	Part #	Price/E	Opt Qty
6"	brass	***CH-B-6***	**$5.90**	10
12"	brass	***CH-B-12***	**7.15**	10
24"	brass	***CH-B-24***	**18.10**	--
12"	carbon steel	***CH-C-12***	**6.70**	10
6"	stainless	***CH-SS-6***	**6.85**	10
12"	stainless	***CH-SS-12***	**10.50**	10
24"	stainless	***CH-SS-24***	**17.20**	10



Sash Chains with Pull Rings

- brass chain, plated steel pull ring

Length	Part #	Price/E
4½"	***J125***	**$4.80**
6½"	***J150***	**7.60**
8½"	***J300***	**10.50**
12¾"	***J500***	**14.60**



PVC Coated Lanyards

- PVC coated carbon steel with aluminum crimp sleeves
- one end factory crimped, one end uncrimped for field installation

Length	Part #	Price/E
15"	***CAL15***	**$6.40**
25"	***CAL25***	**7.90**




Hand Swager with Cutter

- for 1/16", 3/32" and 1/8" wire rope
- designed for crimping aluminum oval sleeves
- jaws are made of forged alloy steel
- provides a clean, sharp cut on wire rope

Part #	Price/E
22-ST14C	**$450.00**



Cam and Groove Gaskets

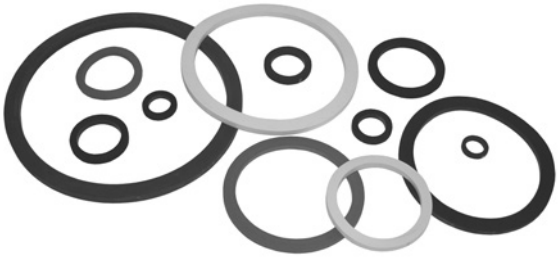

- White neoprene and white Buna-N gaskets all contain FDA approved materials.


Size	*Buna-N* *		*Viton®-A*		*extra thick Buna-N*		*Ethylene Propylene*		*Neoprene*		*white Neoprene*		*white Buna-N*		*Silicone*	
	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price
½"	***50-G-BU***	**$0.95**	***50-G-VI***	**$4.50**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**
¾"	***75-G-BU***	**0.95**	***75-G-VI***	**5.30**	**---**	**--**	***75-G-EPR***	**$1.70**	***75-G-NE***	**$1.70**	**---**	**--**	**---**	**--**	**---**	**--**
1"	***100-G-BU***	**0.95**	***100-G-VI***	**7.95**	***100GTHK***	**$1.30**	***100-G-EPR***	**1.80**	***100-G-NE***	**1.80**	**---**	**--**	**---**	**--**	**---**	**--**
1¼"	***125-G-BU***	**0.95**	***125-G-VI***	**10.95**	***125GTHK***	**1.75**	***125-G-EPR***	**1.85**	***125-G-NE***	**1.90**	**---**	**--**	**---**	**--**	**---**	**--**
1½"	***150-G-BU***	**1.10**	***150-G-VI***	**10.90**	***150GTHK***	**1.75**	***150-G-EPR***	**1.85**	***150-G-NE***	**1.95**	***150-G-WNE***	**$4.15**	**---**	**--**	***150-G-SIL***	**$3.25**
2"	***200-G-BU***	**1.00**	***200-G-VI***	**15.75**	***200GTHK***	**1.80**	***200-G-EPR***	**2.05**	***200-G-NE***	**2.10**	***200-G-WNE***	**5.85**	**---**	**--**	***200-G-SIL***	**3.55**
2½"	***250-G-BU***	**1.15**	***250-G-VI***	**19.25**	***250GTHK***	**2.25**	***250-G-EPR***	**2.25**	***250-G-NE***	**2.90**	**---**	**--**	**---**	**--**	**---**	**--**
3"	***300-G-BU***	**1.20**	***300-G-VI***	**20.00**	***300GTHK***	**2.25**	***300-G-EPR***	**2.30**	***300-G-NE***	**3.40**	***300-G-WNE***	**8.95**	***300-G-WB***	**$8.50**	***300-G-SIL***	**7.70**
4"	***400-G-BU***	**1.65**	***400-G-VI***	**33.30**	***400GTHK***	**2.85**	***400-G-EPR***	**3.15**	***400-G-NE***	**4.20**	***400-G-WNE***	**9.35**	***400-G-WB***	**8.90**	***400-G-SIL***	**8.90**
5"	***500-G-BU***	**3.10**	***500-G-VI***	**73.10**	**---**	**--**	**---**	**--**	**---**	**--**	***500-G-WNE***	**18.15**	**---**	**--**	**---**	**--**
6"	***600-G-BU***	**4.55**	***600-G-VI***	**66.80**	**---**	**--**	**---**	**--**	**---**	**--**	***600-G-WNE***	**12.75**	**---**	**--**	**---**	**--**
8"	***800-G-BU***	**20.50**	***800-G-VI***	**115.00**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**

NEW


* Buna fuel gaskets available: 3" ***300-G-BF*** **($2.30)**, 4" ***400-G-BF*** **($3.20)**

Teflon® Cam and Groove Gaskets


The torque (force) required to close the handles on a pair of cam and groove fittings will vary according to the gasket chosen. Due to the nature of the Teflon® material, the various Teflon® gasket designs will require the most torque, increasing as you go from envelope to encapsulated, and finally, accordion.



Envelope



Encapsulated




Accordion

- Teflon® white Buna filler (TFWB) and Teflon® encapsulated silicone (TES) all contain FDA approved materials.
- Teflon® accordion gaskets (TFACC) are recommended for use with viscous (thick) fluids only.
- Encapsulated gasket pressure ratings are reduced to **125 PSI** for ¾" - 4" at ambient temperature (**70°F**)
- Teflon® encapsulated Viton® (TEV) gaskets - maximum operating temperature **200°F**
- Teflon® encapsulated silicone gaskets (TES) gaskets - maximum operating temperature **225°F**
- *Maximum operating temperatures for specific chemicals may be lower*. Contact the Dixon Factory for specific recommendations.

SAFETY ALERT

	Envelope						**Encapsulated**						**Accordion**	
Size	*Teflon® with Buna filler*		*Teflon® with Viton® filler*		*Teflon® with white Buna filler*		*Teflon® with Ethylene Propylene filler*		*Teflon® encapsulated silicone*		*Teflon® encapsulated Viton®*		*Teflon® accordion*	
	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price	Part #	Price
½"	***50-G-TF***	**$7.10**	***50-G-TF-VI***	**$9.50**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**
¾"	***75-G-TF***	**7.15**	***75-G-TF-VI***	**16.30**	**---**	**--**	**---**	**--**	***75-G-TES***	**$31.65**	***75-G-TEV***	**$47.75**	***75GTFACC***	**$14.45**
1"	***100-G-TF***	**8.65**	***100GTFVI***	**19.95**	**---**	**--**	**---**	**--**	***100-G-TES***	**30.75**	***100-G-TEV***	**46.15**	***100GTFACC***	**14.60**
1¼"	***125-G-TF***	**9.15**	***125GTFVI***	**28.00**	**---**	**--**	**---**	**--**	***125-G-TES***	**35.25**	***125-G-TEV***	**55.00**	***125GTFACC***	**19.95**
1½"	***150-G-TF***	**11.30**	***150GTFVI***	**22.25**	**---**	**--**	***150GTFEP***	**$14.30**	***150-G-TES***	**35.25**	***150-G-TEV***	**55.00**	***150GTFACC***	**19.00**
2"	***200-G-TF***	**14.00**	***200GTFVI***	**28.35**	***200GTFWB***	**$14.10**	***200GTFEP***	**15.85**	***200-G-TES***	**38.65**	***200-G-TEV***	**58.00**	***200GTFACC***	**20.60**
2½"	***250-G-TF***	**22.40**	***250GTFVI***	**43.90**	**---**	**--**	**---**	**--**	***250-G-TES***	**46.20**	***250-G-TEV***	**73.60**	**---**	**--**
3"	***300-G-TF***	**17.20**	***300GTFVI***	**38.85**	***300GTFWB***	**19.50**	***300GTFEP***	**19.00**	***300-G-TES***	**52.90**	***300-G-TEV***	**81.00**	***300GTFACC***	**48.00**
4"	***400-G-TF***	**28.00**	***400GTFVI***	**62.60**	***400GTFWB***	**36.10**	**---**	**--**	***400-G-TES***	**70.80**	***400-G-TEV***	**117.00**	**---**	**--**
5"	**---**	**--**	**---**	**--**	***500GTFWB***	**68.50**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**
6"	***600-G-TF***	**72.50**	***600GTFVI***	**118.90**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**	**---**	**--**

Dixon Cam and Groove Gasket Dimensions

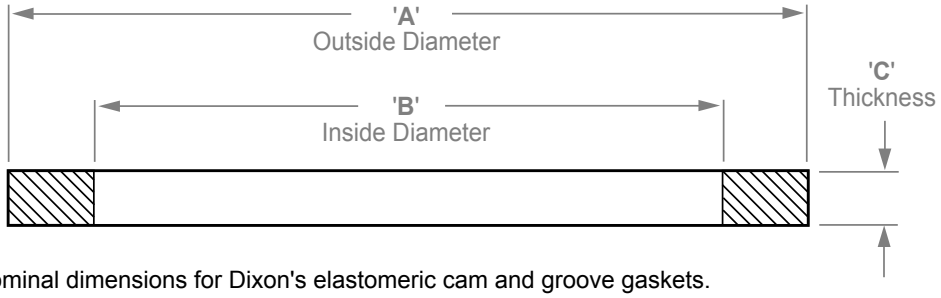

- The following are the nominal dimensions for Dixon's elastomeric cam and groove gaskets.
- The ID's of the Teflon® envelope gaskets and the Teflon® accordion gaskets are *1/16" smaller than* the ID's for the elastomeric gaskets shown below.
- Thicknesses of Teflon® accordion gaskets may vary from chart below.

Size	Part #	'A'	'B'	'C'
½"	***50-G***[1]	1-1/32"	11/16"	.156"
¾"	***75-G***	1-3/8"	7/8"	.218"
1"	***100-G***	1-9/16"	1-1/16"	.250"
1¼"	***125-G***	1-15/16"	1-23/64"	.250"
1½"	***150-G***	2-3/16"	1-5/8"	.250"
2"	***200-G***	2-5/8"	2"	.250"
2½"	***250-G***	3-1/8"	2-3/8"	.250"
3"	***300-G***	3-23/32"	3"	.250"
4"	***400-G***	4-7/8"	4"	.250"
5"	***500-G***	5-15/16"	4-7/8"	.250"
6"	***600-G***	7-1/16"	6"	.250"
8"	***800-G***[1]	9-5/16"	8-1/8"	.343"

[1] No interchange standard exists for the ½" and 8" fittings. Generally, these sizes do not interchange with other manufacturer's products. As such, the gaskets in these sizes are not suitable for use in other manufacturers' couplings. SAFETY ALERT

Dixon Cam and Groove Gasket Color Codes

Gasket Code	Gasket Material	Material Color	Color code stripes (*appear on the OD of the gasket or filler*)
-BU	Buna-N (*standard in all metal fittings*)	black	1 blue
-BF	Buna (*formulated for fuel service*)	black	1 green
-VI	Viton®	black	1 yellow
-THK	Extra Thick Buna	black	2 blue
-EPR	Ethylene Proplylene	black	1 white
-NE	Neoprene	black	1 red
-WNE	White Neoprene, *FDA approved material*	white	none
-WB	White Buna N, *FDA approved material*	white	blue
-SIL	Silicone	red	none
-TF	Teflon® (TFE) Envelope with Buna-N filler	white / black	1 blue
TFVI	Teflon® (TFE) Envelope with Viton® filler	white / black	1 yellow
TFWB	Teflon® (TFE) Envelope with White Buna-N filler, *FDA approved materials*	white / white	blue
TFEP	Teflon® (TFE) Envelope with Ethylene Propylene filler	white / black	1 white stripe
-TES	Teflon® (FEP) Encapsulated Silicone core, *FDA approved materials*	translucent / red	none
-TEV	Teflon® (FEP) Encapsulated Viton® core	translucent / black	none
TFACC	Teflon® (TFE) Accordion, *FDA approved materials*	white	none

Since other manufacturer's coding systems vary,
this chart should not be used as a reference in identifying gaskets of unknown origin. SAFETY ALERT

Storz Fittings

- designed for applications where a non-valved, locking coupling is required
- machined from forged 6061 - T6 aluminum
- hardcoat anodized components per MIL-A-8625 Type III Class 1
- Buna-N gaskets
- working pressure: **150 PSI**
- stainless steel lock lever assembly on 4", 5" and 6"
- oversize heads allow pigging without disassembly on all sizes except 6" x 6"

Storz x Rigid Male NPT



- pressure seal is shipped standard

Storz x Rigid Male NPT	Part #	Price/E
1½" x 1" NPT	***SZM1510T***	**$205.25**
2" x 1½" NPT	***SZM2015T***	**171.90**
4" x 3" NPT	***SZM4030T***	**356.60**
5" x 4" NPT	***SZM5040T***	**420.90**
6" x 6" NPT	***SZM6060T***	**597.05**

Storz x Rigid Female NPT



- pressure seal is shipped standard

Storz x Rigid Female NPT	Part #	Price/E
1½" x 1" NPT	***SZF1510T***	**$148.40**
2" x 1½" NPT	***SZF2015T***	**175.70**
3" x 2" NPT	***SZF3020T***	**212.95**
4" x 3" NPT	***SZF4030T***	**395.90**
5" x 4" NPT	***SZF5040T***	**453.35**
6" x 6" NPT	***SZF6060T***	**692.50**

Continuous Storz Swivel x Rigid Female NPT



- pressure seal is shipped standard

Continuous Storz Swivel x Rigid Female NPT	Part #	Price/E
4" x 3" NPT	***SZCSF4030T***	**$592.25**
5" x 4" NPT	***SZCSF5040T***	**750.45**
6" x 6" NPT	***SZCSF6060T***	**904.00**

Storz Dust Cap with Cable



- suction seal is shipped standard
- supplied with chain/cable

Storz Cap	Part #	Price/E
1½"	***SZC150***	**$106.40**
2"	***SZC200***	**136.15**
3"	***SZC300***	**151.15**
4"	***SZC400***	**183.75**
5"	***SZC500***	**257.25**
6"	***SZC600***	**416.25**

Storz Gaskets

- Buna-N
- gasket faces should be kept free of sand, grit, etc. and lubricated with O-ring grease or silicone

SAFETY ALERT

The pressure seals have a flat face  ; while the suction seals have a beaded face 

Storz Size	Application	Part #	Price/E
4"	pressure	***SZG400P***	**$23.10**
4"	suction	***SZG400S***	**45.00**
5"	pressure	***SZG500P***	**28.75**
5"	suction	***SZG500S***	**50.85**
6"	pressure / suction	***SZG600P***	**106.20**

Safety Break-away Couplings - Breaking Bolt Series

Industrial Version

The breaking bolt industrial breakaway coupling is designed to minimize spillage and damage associated with drive away and pull away incidents

- coupling automatically senses an excessive load, closes the valves and disconnects
- simple mechanism, no loose components lost after release
- high flow rate / low pressure drop
- female NPT is standard, optional ANSI / DIN flanges are available
- stainless steel or aluminum
- working pressure: stainless steel **360 PSI** and aluminum **230 PSI** at ambient temperature (70°F)
- Viton® is standard seal

Size	Width	Length	Weight in Lbs.		Flow Rate/ GPM
			stainless	aluminum	
2"	4.5"	7"	5	3	**200**
3"	6.2"	11"	18	8	**650**
4"	7.9"	12"	34	14	**800**

Size	DN	*Stainless Steel*		*Aluminum*	
		Part #	Price/E	Part #	Price/E
2"	50	***SBC200SS***	**$3496.20**	***SBC200AL***	**$1631.80**
3"	80	***SBC300SS***	**6182.80**	***SBC300AL***	**3169.40**
4"	100	***SBC400SS***	**9495.75**	***SBC400AL***	**4848.20**



Marine Version

The breaking bolt marine version break-away coupling is designed to minimize spillage and damage associated with pull-away incidents.

- designed to be installed within a hose string where the coupling will have a length of hose attached to both sides
- typical applications include: ship-to-offshore platform and ship-to-ship product transfer operations
- coupling automatically senses an excessive load, closes the valves and disconnects
- release is executed when force causes bolts to break
- female NPT is standard, optional ANSI / DIN flanges are available
- working pressure: **360 PSI** at ambient temperature (70°F)
- 316T1 stainless steel body with Viton® O-rings


Size	Width	Length	Weight in Lbs.	Flow Rate/ GPM
2"	4.5"	7"	5.7	**200**
3"	6.2"	11"	18.8	**650**
4"	7.9"	12"	34.1	**800**




Size	DN	*Stainless Steel*	
		Part #	Price/E
2"	50	***MSBC200SS***	**$4195.45**
3"	80	***MSBC300SS***	**7419.30**
4"	100	***MSBC400SS***	**11698.75**

How it Works

The safety break-away valve consists of two halves, each with a valve that has a flat type-sealing surface similar to a dry disconnect coupling.



When the safety break-away couplings separate, it allows the poppets to close. The two poppets close rapidly, minimizing exposure to personnel and the environment.

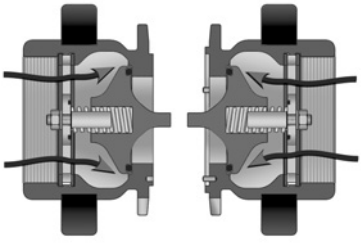

Safety Break-away Couplings - Cable Release Series

Industrial Version

Cable release series break-away couplings are designed to minimize spillage and damage associated with drive away and pull-away incidents. Couplings feature a simple mechanism and no loose components to lose after release. In some applications the necessary force of the breaking bolts may be too high to prevent damage to loading arms or other pipe and equipment; under these conditions the use of cable release safety break-aways may be more suitable.


- coupling automatically senses an excessive load, closes the valves and disconnects
- release is executed by pulling out the locking bolts with the help of a cable
- when the coupling separates, the poppets close
- 316 T1 stainless steel body with Viton® O-rings
- working pressure: **360 PSI** at ambient temperature (70°F)




Size	Width	Length	Weight	Flow Rate/GPM
1½"	3.86"	5.59"	6.8 lbs	**100**
2"	4.33"	5.67"	9.1 lbs	**132**
3"	5.71"	7.68"	18.8 lbs	**264**
4"	7.28"	8.90"	35.4 lbs	**396**

Size	DN	Part #	Price/E
1½"	40	***SBC150SS-CR***	**$POR**
2"	50	***SBC200SS-CR***	**POR**
3"	80	***SBC300SS-CR***	**POR**
4"	100	***SBC400SS-CR***	**POR**

How it Works



The safety break-away valve consists of two halves, each with a valve that has a flat type-sealing surface similar to a dry disconnect coupling.



When the safety break-away couplings separate, it allows the poppets to close. The two poppets close rapidly, minimizing exposure to personnel and the environment.

Optional Non-Closure Design


The non-closure design is an economical alternative which allows the coupling to break away due to pull-away/drive-away incidents thus protecting piping systems and equipment. This design also allows spillage of product in these instances due to the lack of valving in the coupling.

Useful in applications where non-hazardous product is being conveyed and where there are no environmental concerns. Available in both Industrial and Marine versions.

Consult the factory for more information.

Hose Swivels

Swivel function - allows the hose to relax to it's natural rest position while allowing freedom of movement without adding torque stress at the point of connection (torque stress is the largest single cause of composite, PTFE and stainless steel hose failure).

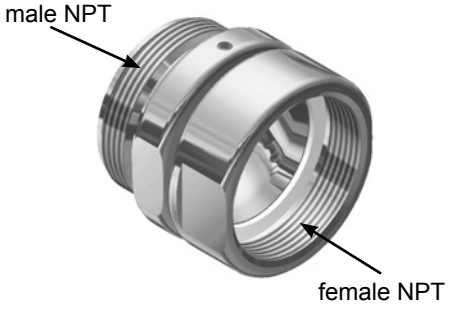

- simple design, low maintenance - each unit consists of two body halves, ball bearings and a washer
- Viton® seals are standard, Chemraz® and Kalrez® are optional
- working pressure: **150 PSI**
- maximum temperature: **300°F** (149°C)

Size	*316 Stainless Steel* Part #	Price/E	NEW *Aluminum* Part #	Price/E
¾"	***HS075SS***	**$668.85**	***HS075AL***	**$305.80**
1"	***HS100SS***	**668.85**	***HS100AL***	**305.80**
1½"	***HS150SS***	**697.85**	***HS150AL***	**360.70**
2"	***HS200SS***	**697.85**	***HS200AL***	**360.70**
3"	***HS300SS***	**1491.35**	***HS300AL***	**854.60**
4"	***HS400SS***	**2883.10**	***HS400AL***	**1548.40**

Dry Disconnect Couplings

When your product is:
- expensive
- expensive to clean up
- expensive to reprocess or dispose
- hazardous to workers or the environment
- prone to accidental spillage and product loss




Dry disconnect couplings are designed for quick and spill free connection and disconnection of hoses and pipelines. They are used by producers of ink, adhesives, fatty acids, pharmaceuticals, liquid soaps, petroleum, chemicals, agricultural and a wide variety of common caustic and specialty acids.

- Easy to handle - push and turn - free flow, turn and pull - closed
- Time saving - no need to drain hoses or pipe systems
- Economical - no loss or spillage of liquids at connection or disconnection
- Safety - the valve cannot be opened until the unit is coupled
- Environment friendly - accidental spillage eliminated
- Safe and reliable - due to rugged construction
- Product life - uncomplicated design and high quality materials ensures longer product life
- Selectivity - To avoid product contamination caused by connecting a coupler to the wrong adapter, selective versions of the adapters are available. Contact the factory for further information.
- produced according to NATO standard STANAG 3756 and ATOFINA SGM 2049.TUY.C.
- Working Pressure (at ambient temperature (70°F):
  aluminum: **260 PSI**
  brass/ gunmetal: **360 PSI**
  stainless steel: **360 PSI**
- Optional seals:
  EPDM
  NBR - nitrile
  Kalrez®
  Chemraz®
  Perlast®
- Seal kits are available


Interchanges with Avery Hardoll and Todo-matic®

How it Works

The principle of operation is identical for all sizes of couplings.

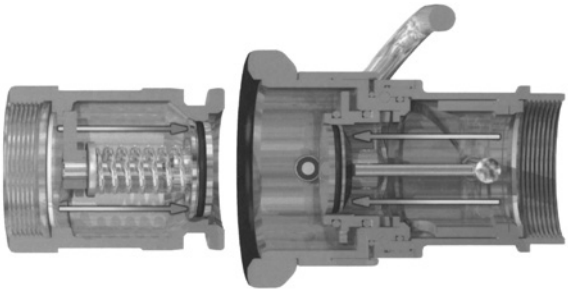

Closed:
- Turn and pull
  it's released - no spillage

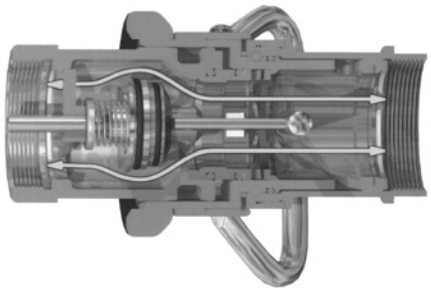

Open:
- Push and turn
  it's coupled - full flow

Dry Quick Disconnect Couplers

- coupler has built-in swivel
- stainless steel ball bearings
- shaft journal in stainless steel embedded in PTFE (Teflon®) to eliminate seizure
- riveted piston pin to minimize the risk for failure under extreme pressure conditions
- the protective ring is a specially formulated, weather resistant and electrically conductive rubber compound
- all wetted parts are stainless steel
- stainless steel couplers: rollers are Hastelloy C276 on the stainless steel shaft
- aluminum and brass couplers: rollers are aluminum-bronze on the stainless steel shaft
- Composite (Polyeten PE-HD 300) plugs provide very good protection against corrosion, and withstand hot and cold environments.

Coupler - Hose Unit




¾" and 1" design



1½" and 2" design



3" and 4" design

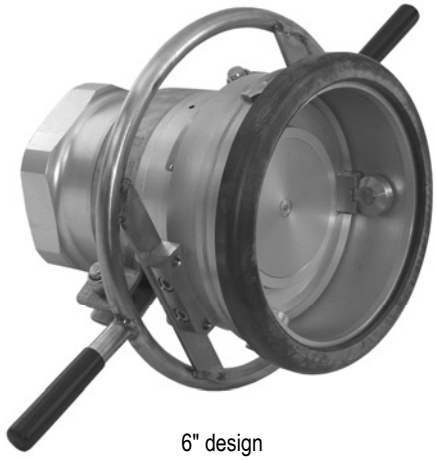


6" design

dry quick disconnect couplers x female NPT with Viton® seals

Female NPT	Body Size	*316 Stainless Steel*		*Anodized Aluminum*		*Brass / Gunmetal*	
		Part #	Price/E	Part #	Price/E	Part #	Price/E
¾"	56 mm	***DDC075SS***	**$2350.65**	***DDC075AL***	**$1227.30**	***DDC075BR***	**$1751.00**
1"	56 mm	***DDC100SS***	**2350.65**	***DDC100AL***	**1227.30**	***DDC100BR***	**1751.00**
1½"	70 mm	***DDC150SS***	**3957.70**	***DDC150AL***	**1655.05**	***DDC150BR***	**2050.80**
2"	70 mm	***DDC200SS***	**3957.70**	***DDC200AL***	**1655.05**	***DDC200BR***	**2050.80**
3"	105 mm	***DDC300SS105***	**6100.45**	***DDC300AL105***	**1838.95**	***DDC300GM105***	**2746.40**
3"	119 mm	***DDC300SS***	**6132.40**	***DDC300AL***	**1854.95**	***DDC300GM***	**3074.20**
4"	164 mm	***DDC400SS***	**10661.75**	***DDC400AL***	**4049.65**	***DDC400GM***	**5660.70**
6"	238 mm	***DDC600SS***	**27216.00**	***DDC600AL***	**18025.00**	**---**	**---**

Dust Plugs for Couplers

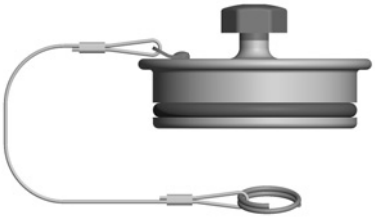

Size	Body Size	*Polyeten PE-HD 300*	
		Part #	Price/E
¾" and 1"	56 mm	***DDDP075***	**$115.95**
1½" and 2"	70 mm	***DDDP150***	**119.95**
3"	105 mm	***DDDP300105***	**123.95**
3"	119 mm	***DDDP300***	**123.95**
4"	164 mm	***DDDP400***	**247.90**
6"	238 mm	***DDDP600 ****	**679.05**

* 6" dust plug is aluminum

Dry Quick Disconnect Adapters

- adapter is usually installed on the tank or manifold
- conical valve seat eliminates the risk for "piston blow out"
- PTFE (Teflon®) bearing between the piston shaft and the piston guide eliminate the risk for seizure
- available in female NPT or 150# ASA flange
- Composite (Polyeten PE-HD 300) caps provide very good protection against corrosion and withstand hot and cold environments.

Construction:

- aluminum adapter -
  aluminum poppet, stainless steel internal parts
- stainless steel adapter -
  stainless steel poppet, stainless steel internal parts
- brass / gunmetal adapter -
  brass poppet, brass and stainless steel internal parts

Adapter - Tank Unit

dry quick disconnect adapters x female NPT with Viton® seals

Female NPT	Body Size	*316 Stainless Steel* Part #	Price/E	*Anodized Aluminum* Part #	Price/E	*Brass / Gunmetal* Part #	Price/E
¾"	56 mm	***DDA075SS***	**$855.50**	***DDA075AL***	**$615.65**	***DDA075BR***	**$711.60**
1"	56 mm	***DDA100SS***	**855.50**	***DDA100AL***	**615.65**	***DDA100BR***	**711.60**
1½"	70 mm	***DDA150SS***	**1303.25**	***DDA150AL***	**499.75**	***DDA150BR***	**587.65**
2"	70 mm	***DDA200SS***	**1303.25**	***DDA200AL***	**499.75**	***DDA200BR***	**587.65**
3"	105 mm	***DDA300SS105***	**1631.05**	***DDA300AL105***	**619.65**	***DDA300GM105***	**863.50**
3"	119 mm	***DDA300SS***	**1543.10**	***DDA300AL***	**635.65**	***DDA300GM***	**895.50**
4"	164 mm	***DDA400SS***	**3022.25**	***DDA400AL***	**1251.30**	***DDA400GM***	**2130.75**
6"	238 mm	***DDA600SS***	**11654.00**	***DDA600AL***	**7979.35**	**---**	**---**



female NPT x adapter

dry quick disconnect adapters x 150# ASA flange with Viton® seals

150# Flange	Body Size	*316 Stainless Steel* Part #	Price/E	*Anodized Aluminum* Part #	Price/E	*Brass / Gunmetal* Part #	Price/E
¾"	56 mm	***DDA075SSFL***	**$1595.10**	**---**	**---**	**---**	**---**
1"	56 mm	***DDA100SSFL***	**1595.10**	***DDA100ALFL***	**$1095.40**	***DDA100BRFL***	**$1120.00**
1½"	70 mm	***DDA150SSFL***	**1555.10**	***DDA150ALFL***	**791.55**	***DDA150BRFL***	**951.25**
2"	70 mm	***DDA200SSFL***	**1555.10**	***DDA200ALFL***	**791.55**	***DDA200BRFL***	**951.25**
3"	105 mm	***DDA300SS105FL***	**1719.00**	***DDA300AL105FL***	**919.50**	***DDA300GM105FL***	**1230.05**
3"	119 mm	***DDA300SSFL***	**2154.75**	***DDA300ALFL***	**1027.40**	***DDA300GMFL***	**1433.60**
4"	164 mm	***DDA400SSFL***	**3689.85**	***DDA400ALFL***	**1227.30**	***DDA400GMFL***	**2775.00**
6"	238 mm	***DDA600SSFL***	**16426.35**	***DDA600ALFL***	**8091.25**	**---**	**---**



150# flange x adapter

dry quick disconnect adapters x TTMA flange with Viton® seals

TTMA Flange	Body Size	*Anodized Aluminum* Part #	Price/E
3"	105 mm	***DDA300AL105TTMA***	**$919.60**
3"	119 mm	***DDA300AL119TTMA***	**1027.40**
4"	164 mm	***DDA400AL164TTMA***	**1227.30**



TTMA flange x adapter

Dust Caps for Adapters

Size	Body Size	*Polyeten PE-HD 300* Part #	Price/E
¾" and 1"	56 mm	***DDDC075***	**$176.50**
1½" and 2"	70 mm	***DDDC150***	**207.90**
3"	105 mm	***DDDC300105***	**227.90**
3"	119 mm	***DDDC300***	**251.90**
4"	164 mm	***DDDC400***	**475.75**
6"	238 mm	***DDDC600 ****	**2198.40**

* 6" dust plug is aluminum



dust cap
composite

Size	Body Size	*Rubber* Part #	Price/E
1"	56 mm	***DGDC100***	**$95.95**
2"	71 mm	***DGDC200***	**107.95**



dust cap
rubber

Dry Aviation Couplings

Dry aviation couplings are designed for use in aviation refueling systems. Manufactured to accept the international standard 2½" point bayonet, hose end refueling nozzles according to: ISO45 / MS24484 / STANAG 3105 / British Aerospace Spec. 2C14. ***They are not configured for under-wing refueling.***

Technical Information:

- body: high strength aluminum
- coupling ring: gunmetal
- bayonet flange and inner parts: stainless steel, aluminum
- all wetted parts are aluminum and stainless steel
- **150 PSI** working pressure at ambient temperature (70°F)
- Composite (Polyeten PE-HD 300) plug provides good protection against corrosion and withstand hot and cold environments.

Coupler - Hose Unit



female thread x coupler

- stainless steel ball bearings
- gunmetal coupling ring minimizes the risk of seizure
- stainless steel shaft journal embedded in PTFE (Teflon®) eliminate seizure
- PTFE (Teflon®) bearings between the driving plate and the piston guide eliminate the risk of seizure
- riveted piston pin minimizes the risk of failure under extreme pressure conditions
- the protective ring is a specially formulated, weather resistant and electrically conductive rubber compound

aviation couplers x female NPT with Viton® seals

Female NPT	Body Size	*Aluminum* Part #	Price/E
2½"	ISO 45	***DAC250AL***	**$2358.65**
3"	ISO 45	***DAC300AL***	**2358.65**

aviation couplers x female BSP with Viton® seals

Female BSP	Body Size	*Aluminum* Part #	Price/E
2½"	ISO 45	***DAC250ALBSP***	**$2358.65**
3"	ISO 45	***DAC300ALBSP***	**2358.65**

Sight Flow Indicator with Filter / Screen



- filter / screen can be inspected through the sight glass
- filter / screen is easily removed if cleaning is required
- screen is 100 mesh

aviation sight flow indicator with filter / screen

Female Thread	Male Thread	*Aluminum* Part #	Price/E
2½" NPT	2½" BSP	***ASFI25T25B***	**$1448.00**
3" NPT	3" BSP	***ASFI30T30B***	**1448.00**
2½" NPT	2½" NPT	***ASFI25T25T***	**1448.00**
3" NPT	3" NPT	***ASFI30T30T***	**1448.00**

Dust Plug for Couplers



Size	Body Size	*Polyeten PE-HD 300* Part #	Price/E
2½"	ISO 45	***DADP250***	**$291.85**

Dry Aviation Couplings

Dry aviation couplings are designed for use in aviation refueling systems. Manufactured to accept the international standard 2½" point bayonet, hose end refueling nozzles according to: ISO45 / MS24484 / STANAG 3105 / British Aerospace Spec. 2C14. ***They are not configured for under-wing refueling.***

Technical Information:


- body: high strength aluminum
- coupling ring: gunmetal
- bayonet flange and inner parts: stainless steel, aluminum
- all wetted parts are in aluminum and stainless steel
- **150 PSI** working pressure at ambient temperature (70°F)
- Composite (Polyeten PE-HD 300) cap provides good protection against corrosion and withstand hot and cold environments.

Adapter - Tank Unit

- gunmetal coupling ring minimizes the risk of seizure
- PTFE (Teflon®) bearings between the piston shaft and the piston guide eliminate the risk of seizure
- conical valve seat eliminates the risk of "piston blow out" when extreme pressure is used

aviation couplers x female NPT with Viton® seals

Female NPT	Body Size	*Aluminum* Part #	Price/E
2½"	ISO 45	***DAA250AL***	**$1395.20**
3"	ISO 45	***DAA300AL***	**1395.20**



female thread x adapter

aviation couplers x 150# ASA flange with Viton® seals

150# Flange	Body Size	*Aluminum* Part #	Price/E
2½"	ISO 45	***DAA250ALFL***	**$1619.05**
3"	ISO 45	***DAA300ALFL***	**1619.05**



150# flange x adapter

Dust Cap for Adapters

Size	Body Size	*Polyeten PE-HD 300* Part #	Price/E
2½"	ISO 45	***DADC250***	**$199.90**



Dry Break Cam and Groove Dry Disconnect Couplings

Couplers

- dry disconnect coupler has automatic closing poppet assembly
- heavy duty stainless steel crank and link provide long service life
- stainless steel handle allows product exposure to corrosive chemicals or washdown service
- strong handle attachment prevents bending of crank assembly
- fully interchangeable with Kamvalok (OPW trademark) style fittings
- aluminum fittings have stainless steel internals[1]
- for pressure ratings at other temperatures, contact the factory
- Dixon EZ Boss-Lock cam arms provide high security from accidental opening due to vibration or snagging on 1½" and 2" fittings
- large paddle type cam arms allow for an easy grip on 3" fittings

SAFETY ALERT Must be used with a DBA style adapter for coupler to operate. Adapter sold separately.

[1] stainless steel corrosion resistance is comparable to 304 stainless steel

[2] Kalrez® gasket, main seal O-ring and handle O-ring. Teflon® seals on cylinder assembly, stuffing box, and seal under poppet screw.



1½" and 2" coupler x female NPT



3" coupler x female NPT

coupler x female NPT

Female NPT	Coupler Size	Seal Material	Max. **PSI** a 70°	*Aluminum* Part #	*Aluminum* Price/E	*Stainless Steel* [1] Part #	*Stainless Steel* [1] Price/E
1½"	2"	Buna	**210**	***DBC61-150***	**$702.50**	***DBC71-150***	**$1636.25**
2"	2½"		**150**	***DBC61-200***	**739.70**	***DBC71-200***	**1818.05**
3"	4"		**120**	***DBC61-300***	**1540.95**	***DBC71-300***	**3803.30**
1½"	2"	Viton®	**210**	***DBC62-150***	**762.50**	***DBC72-150***	**1696.00**
2"	2½"		**150**	***DBC62-200***	**828.85**	***DBC72-200***	**1913.80**
3"	4"		**120**	***DBC62-300***	**1719.95**	***DBC72-300***	**4006.10**
1½"	2"	Teflon® Encapsulated Silicone & Kalrez®	**210**	***DBC63-150***	**1730.15**	***DBC73-150***	**2376.75**
2"	2½"		**150**	***DBC63-200***	**1982.85**	***DBC73-200***	**2731.35**
3"	4"		**120**	***DBC63-300***	**3212.55**	***DBC73-300***	**5372.50**
1½"	2"	EPT	**210**	***DBC64-150***	**1096.10**	***DBC74-150***	**1696.00**
2"	2½"		**150**	***DBC64-200***	**1216.25**	***DBC74-200***	**1917.80**
3"	4"		**120**	***DBC64-300***	**1993.50**	***DBC74-300***	**4006.10**
1½"	2"	Kalrez® and Teflon® [2]	**210**	**---**	**---**	***DBC76-150***	**5090.25**
2"	2½"		**150**	***DBC66-200***	**4585.20**	***DBC76-200***	**5520.30**
3"	4"		**120**	**---**	**---**	***DBC76-300***	**11122.50**
1½"	2"	Teflon® Encapsulated Viton® & Kalrez®	**210**	**---**	**---**	***DBC77-150***	**2436.50**
2"	2½"		**150**	**---**	**---**	***DBC77-200***	**2709.20**
3"	4"		**120**	**---**	**---**	***DBC77-300***	**4979.65**
3"	4"	Viton® B	**120**	***DBC69-300***	**2097.15**	***DBC79-300***	**4205.90**

greaseless coupler x female NPT

Female NPT	Coupler Size	Seal Material	Max. **PSI** at 70°	*Stainless Steel* [1] Part #	*Stainless Steel* [1] Price/E
1½"	2"	Teflon® Encapsulated Viton® & Kalrez®	**210**	***DBC77-150-GL***	**$2620.55**
2"	2½"	Teflon® Encapsulated Viton® & Kalrez®	**150**	***DBC77-200-GL***	**2891.00**



coupler x 90° swivel female NPT

Female NPT	Coupler Size	Seal Material	Max. **PSI** at 70°	*Aluminum* Part #	*Aluminum* Price/E
2"	2½"	Buna	**150**	***DBS61-200***	**$897.20**
2"	2½"	Viton®	**150**	***DBS62-200***	**1034.00**
2"	2½"	Teflon® Encapsulated Silicone & Kalrez®	**150**	***DBS63-200***	**1982.85**

Locking Kit for Couplers



Description	*Aluminum* Part #	*Aluminum* Price/E
NEW for use with 1½" and 2" dry disconnect couplers	***DBCL-200***	**$165.55**
for use with 3" dry disconnect couplers	***DBCL-300***	**165.55**

Dry Break Cam and Groove Dry Disconnect Couplings

Compatible with most cam and groove style dry disconnects. The Bayco dry disconnect helps prevent spillage from normal or accidental disconnects. A spring loaded sealing device is designed to "snap" closed should the valve become disconnected with the poppet open, significantly limiting liquid loss.

Our dry disconnect couplings are available in a wide range of sizes, metals, and seal materials. Please refer to our product description cross-reference chart for details. Contact the factory at 800-355-1991 for chemical compatibility, size, and material selection. Special configurations can be designed for your application.

Adapters

- two-piece adapter design for easy rebuilding of adapters
- fully interchangeable with Kamvalok (OPW trademark) style fittings
- aluminum fittings have aluminum nose piece and brass piston
- for pressure ratings at other temperatures, contact the factory

adapter x female NPT

Female NPT	Adapter Size	Seal Material	Max. **PSI** at 70°	*Aluminum* Part #	*Aluminum* Price/E	*Stainless Steel* [1] Part #	*Stainless Steel* [1] Price/E
1½"	2"	Buna	**210**	***DBA11-150***	**$186.60**	***DBA71-150***	**$486.35**
2"	2½"		**150**	***DBA11-200***	**202.25**	***DBA71-200***	**637.50**
3"	4"		**120**	***DBA11-300***	**411.90**	***DBA71-300***	**1228.30**
1½"	2"	Viton®	**210**	***DBA12-150***	**190.50**	***DBA72-150***	**486.35**
2"	2½"		**150**	***DBA12-200***	**208.20**	***DBA72-200***	**624.90**
3"	4"		**120**	***DBA12-300***	**426.95**	***DBA72-300***	**1244.15**
1½"	2"	Teflon®	**210**	***DBA63-150***	**259.15**	***DBA73-150***	**491.60**
2"	2½"	Encapsulated	**150**	***DBA63-200***	**298.45**	***DBA73-200***	**629.15**
3"	4"	Silicone	**120**	***DBA63-300***	**617.50**	***DBA73-300***	**1442.00**
1½"	2"	EPT	**210**	***DBA64-150***	**239.55**	***DBA74-150***	**500.05**
2"	2½"		**150**	***DBA64-200***	**272.90**	***DBA74-200***	**510.45**
3"	4"		**120**	***DBA64-300***	**530.10**	***DBA74-300***	**1350.25**
1½"	2"	Kalrez®	**210**	***DBA66-150***	**798.95**	***DBA76-150***	**1071.25**
2"	2½"		**150**	***DBA66-200***	**983.45**	***DBA76-200***	**1146.85**
3"	4"		**120**	***DBA66-300***	**1706.95**	***DBA76-300***	**2595.00**
1½"	2"	Teflon®	**210**	**---**	**---**	***DBA77-150***	**540.90**
2"	2½"	Encapsulated	**150**	**---**	**---**	***DBA77-200***	**656.45**
3"	4"	Viton®	**120**	**---**	**---**	***DBA77-300***	**1314.40**
3"	4"	Viton® B	**120**	***DBA69-300***	**623.70**	**---**	**---**



1½" and 2" adapter



3" adapter

jump size adapter x female NPT

2010 NEW

Female NPT	Adapter Size	Seal Material	Max. **PSI** at 70°	*Aluminum* Part #	*Aluminum* Price/E
2"	2"	Buna	**150**	***DBA11-1520***	**$195.00**
2"	2"	Viton®	**150**	***DBA12-1520***	**205.20**

vapor adapter x female thread

Female NPSM	Adapter Size	Seal Material	Max. **PSI** at 70°	*Stainless Steel* [1] Part #	*Stainless Steel* [1] Price/E
2"	3"	Teflon®	**150**	***DBAV73-2030***	**$665.45**



[1] stainless steel corrosion resistance is comparable to 304 stainless steel

Dry Gas Couplings

Dry gas couplings are designed for safe loading and discharge of bobtails or intermediate bulk delivery trucks. They are quick and easy to connect and can be connected to a tank unit with pressures up to **225 PSI** at ambient temperature (70°F). If the pressure is higher you can equip the couplings with a pressure relief valve. The easy to connect pressure relief valve dissipates trapped fluid pressure into the hose coupler without spillage. The primary application of dry gas couplings is in the handling of LPG - Propane and Butane.

- safe handling of LPG
- easy to use and saves time
- reliable and easy to maintain
- can be coupled against higher pressure
- minimizes the risk of cold burns
- minimizes spillage and product loss
- minimizes health risks
- keeps the environment free of hazardous vapors and liquids
- compatible with existing dry disconnect couplings

Technical Information:

- stainless steel and brass / gunmetal
- NBR90 seals
- female NPT and ASA flanges
- **360 PSI** working pressure at ambient temperature (70°F)
- Composite (Polyeten PE-HD 300) plugs provide good protection against corrosion and withstand hot and cold environments.

Coupler - Hose Unit



female NPT x coupler

dry gas couplers x female NPT with NBR90 seals

Female NPT	Body Size	*Stainless Steel* Part #	Price/E
1"	56 mm	***DGC100SS***	**$2982.25**
2"	71 mm	***DGC200SS***	**4493.40**
3"	119 mm	***DGC300SS***	**6334.15**

Dust Plugs for Couplers



Size	Body Size	*Polyeten PE-HD 300* Part #	Price/E
1"	56 mm	***DGDP100***	**$107.95**
2"	71 mm	***DGDP200***	**123.95**
3"	119 mm	***DGDP300***	**123.95**

Adapter - Tank Unit



female NPT x adapter



150# flange x adapter

dry gas adapters x female NPT with NBR90 seals

Female NPT	Body Size	*Stainless Steel* Part #	Price/E
1"	56 mm	***DGA100SS***	**$1071.40**
2"	71 mm	***DGA200SS***	**1395.20**
3"	119 mm	***DGA300SS***	**1543.10**

dry gas adapters x 150# ASA flange with NBR90 seals

150# Flange	Body Size	*Stainless Steel* Part #	Price/E
1"	56 mm	***DGA100SSFL***	**$1755.00**
2"	71 mm	***DGA200SSFL***	**1866.90**
3"	119 mm	***DGA300SSFL***	**2154.75**

Dust Caps for Adapters



Size	Body Size	*Rubber* Part #	Price/E
1"	56 mm	***DGDC100***	**$95.95**
2"	71 mm	***DGDC200***	**107.95**
3"	119 mm	***DGDC300***	**127.95**

Flomax Part Number Cross-reference

Standard Series Connectors

Dixon Part #	Caterpillar® part #	Wiggins part #
Engine Oil Nozzles		
ENBL	9S9273	OS2
ENBL-P	---	OSP2
ENBL-PLUG	9S9274	OP-12
ERJ	---	ON6
Engine Oil Receivers		
ERS	9S9271	ON2
ERS-C	---	ONC2A
ERS-CAP	9S9272	O3B12P
Coolant Fluid Nozzles		
CN	108-5455	EC280B8
CN-P	---	---
CN-PLUG	108-5456	1209-8
Coolant Fluid Receivers		
CR-S	IQ5459	EC285A8
CR-C	---	---
CR-CAP	5P3587	1208-8
Hydraulic Oil Nozzles		
HN	108-5433	6000B12
HN-P	---	---
HN-PLUG	---	6009-12
Hydraulic Oil Receivers		
HR	108-5454	6005A12
HR-C	---	---
HR-CAP	IQ-5468	6008-12
Transmission Fluid Nozzles		
TN	126-7538	C-1807
TN-P	---	---
TN-PLUG	---	P-1844
Transmission Fluid Receivers		
TR	108-5456	P-1804
TR-C	---	---
TR-CAP	SP3587	P-1880

Fuel Vent Series

Dixon Part #	Caterpillar® part #	Wiggins part #
VT	6G7803	ZV10
VT7	---	---
VT9	---	---
VTT	---	ZV10C

R Series Connectors

Dixon Part #	Caterpillar® part #	Wiggins part #
Engine Oil Nozzles		
R-EN	---	R15
R-EN-P	---	---
R-EN-PLUG	---	---
Engine Oil Receivers		
R-ER	---	R16
R-ER-C	---	---
R-ER-CAP	---	---
Coolant Fluid Nozzles		
R-CN	---	R11
R-CN-P	---	---
R-CN-PLUG	---	---
Coolant Fluid Receivers		
R-CR	---	R12
R-CR-C	---	---
R-CR-CAP	---	---
Hydraulic Oil Nozzles		
R-HN	---	R17
R-HN-P	---	---
R-HN-PLUG	---	---
Hydraulic Oil Receivers		
R-HR	---	R18
R-HR-C	---	---
R-HR-CAP	---	---
Transmission Fluid Nozzles		
R-TN	---	R13
R-TN-P	---	---
R-TN-PLUG	---	---
Transmission Fluid Receivers		
R-TR	---	R14
R-TR-C	---	---
R-TR-CAP	---	---

Diesel Fueling System

Dixon Part #	Caterpillar® part #	Wiggins part #
Nozzles		
FN600	---	ZZ99A1
FN600BL		
FN600B-PLUG	---	---
Receivers		
FRS	269000	ZN2A
FRS-C	---	ZNC2A
FRA	269000	ZN2A
FRA-C	---	ZNC2A
FR-CAP	9D0630	ZC20P
FR2	---	---
FR2-C	---	---
FR2-R	---	---
GFR-0	---	ZN6A
GFR-45	---	---
GFR-90	---	ZN6B
GFR1-0	---	ZN6B
GFR1-45	---	---
GFR1-90	---	ZN6B
FNS	---	ZS9
FNS2	---	---
FN600S	---	---
FNS10	---	---

Flomax Diesel Fueling System

Designed for on-site refueling of construction, mining, forestry and agricultural equipment. Interchanges with Caterpillar® and Wiggins systems.

Diesel Fuel Nozzle

- 1½" female NPT
- integrated high flow swivel
- integrated sealing plug
- plug/bumper assembly gives complete nose seal
- stainless steel dog latch mechanism and ball lock styles available
- tested to 180 gallons per minute
- investment cast aluminum housing
- anodized aluminum non-wear parts
- heat treated stainless steel wear components
- Delron® bushings eliminate metal-to-metal wear



Description	Part #	Price/E
dog latch mechanism with sealing plug	***FN600***	**$2787.25**
ball lock with sealing plug	***FN600BL***	**2629.75**
sealing plug for FN600	***FN600B-PLUG***	**170.00**
sealing plug for FN600BL	***FN600B***	**170.00**

Diesel Fuel Receiver

- 2" male NPT
- available in anodized aluminum or nickel-plated steel
- O-ring sealed aluminum cap
- cap has set screw attached vinyl coated cable lanyard



one-piece body

Description	Material	Part #	Price/E
one-piece receiver without cap	nickel-plated steel	***FRS***	**$371.25**
one-piece receiver with cap	nickel-plated steel	***FRS-C***	**431.75**
one-piece receiver without cap	anodized aluminum	***FRA***	**371.25**
one-piece receiver with cap	anodized aluminum	***FRA-C***	**431.75**
cap for receiver	anodized aluminum	***FR-CAP***	**123.75**

- FR2 receiver allows replacement of wear components without draining the fuel tank
- FR2 receiver has an aluminum base with nickel-plated steel nose



two-piece body

Description	Part #	Price/E
2 piece receiver with removable stainless sleeve without cap	***FR-RS***	**$624.95**
2 piece receiver with removable stainless sleeve with cap	***FR-RS-C***	**679.95**
removable sleeve replacement for 2 piece receiver	***FR-RS-R***	**212.50**

Diesel Fuel Swivels

- stainless steel male threaded base
- stainless steel ball bearings
- hand black anodized female threaded nut
- fluorosilicone sealing O-rings



standard

Thread Size	Description	Part #	Price/E
1½" male NPT x 1½" female NPT	standard	***FNS***	**$343.75**
2" male NPT x 1½" female NPT	standard	***FNS2***	**357.50**
1½" female NPT x 1½" female NPT	double	***FNSID***	**398.75**



double

Thread Size	Description	Part #	Price/E
1½" male NPS x 1½" female NPT	used with FN600	***FN600S***	**$343.75**

Flomax Diesel Fueling System

Diesel Fuel Gravity Fill Receiver

- used with the FN600 or FN600BL to convert to gravity fueling

Size	Description	*Anodized Aluminum* Part #	Price/E
1-3/8"	straight	***GFR-0***	**$494.95**
1-3/8"	45°	***GFR-45***	**522.45**
1-3/8"	90°	***GFR-90***	**522.45**
1"	straight	***GFR1-0***	**522.45**
1"	45°	***GFR1-45***	**549.95**
1"	90°	***GFR1-90***	**549.95**



GFR-0



GFR-90

Flomax Fuel Vent Series



- 2" male NPT
- billet cap provides superior impact resistance
- easily serviced all metal construction
- rigid ball cage for positive seal
- available with:
  - threaded outlet
  - half coupling
  - anti-vandalism mounting

Description	Part #	Price/E
with 5" tube	***VT***	**$453.70**
with 7" tube	***VT7***	**467.45**
with 9" tube	***VT9***	**481.20**
with 5" tube and threaded outlet	***VTT***	**462.50**



VTT

Flomax Standard Series Connectors

The Flomax standard series connectors consist of four color-coded mating connectors. They have all-metal construction with stainless steel wear components and anodized aircraft grade aluminum non-wear components. Each has easily recognizable labeling and is fully compatible and interchangeable with industry standard.

Engine Oil (red)

- universally fits all crankcase receivers, both R-series and Standard series
- incorporates 10 locking balls with a 40% deeper engagement
- resistant to clogging with a greater ease of cleaning
- smooth actuation
- larger diameter pullback lanyard
- bright red anodized aircraft grade aluminum

Nozzles	Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E
	¾" NPT	---	engine nozzle ball lock	***ENBL***	**$618.70**
	¾" NPT	---	engine nozzle ball lock with plug	***ENBL-P***	**702.05**
	---	---	engine nozzle plug	***ENBL-PLUG***	**104.50**


Receivers	Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E
	¾" NPT	---	engine receiver	***ERS***	**$261.25**
	¾" NPT	---	engine receiver with cap	***ERS-C***	**344.60**
	---	---	engine receiver cap	***ERS-CAP***	**104.50**
	¾" JIC	---	engine receiver with JIC bulkhead base	***ERJ***	**312.50**
	¾" JIC	---	engine receiver with JIC bulkhead base and cap	***ERJ-C***	**388.30**

ERJ-C

Coolant Fluid (teal)

- nickle-plated stainless steel nozzle nose and base
- standard roll-pin locking mechanism
- ergonomically engineered pullbacks and caps
- bright teal anodized aircraft grade aluminum

Nozzles	Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E
	½" NPT	---	coolant nozzle ball lock	***CN***	**$412.50**
	½" NPT	---	coolant nozzle ball lock with plug	***CN-P***	**495.80**
	---	---	coolant nozzle plug	***CN-PLUG***	**104.50**

Receivers	Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E
	½" NPT	---	coolant receiver	***CR-S***	**$220.00**
	½" NPT	---	coolant receiver with cap	***CR-C***	**303.35**
	---	---	coolant receiver cap	***CR-CAP***	**104.50**

Flomax Standard Series Connectors

The Flomax standard series connectors consist of four color-coded mating connectors. They have all-metal construction with stainless steel wear components and anodized aircraft grade aluminum non-wear components. Each has easily recognizable labeling and is fully compatible and interchangeable with industry standard.

Hydraulic Oil (gold)

- nickle-plated stainless steel wear components
- 10 steel dog latching mechanism
- ergonomically engineered pullbacks and caps
- bright gold anodized aircraft grade aluminum

Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E	**Nozzles**
---	¾" NPT	hydraulic nozzle	***HN***	**$618.70**	
---	¾" NPT	hydraulic nozzle with plug	***HN-P***	**702.05**	
---	---	hydraulic nozzle plug	***HN-PLUG***	**104.50**	

Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E	**Receivers**
¾" NPT	---	hydraulic receiver	***HR***	**$500.45**	
¾" NPT	---	hydraulic receiver with cap	***HR-C***	**583.80**	
---	---	hydraulic receiver cap	***HR-CAP***	**104.50**	

Transmission Fluid (violet)

- nickle-plated stainless steel nose and base
- 6 steel dog latching mechanism
- ergonomically engineered pullbacks and caps
- bright violet anodized aircraft grade aluminum

Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E	**Nozzles**
½" NPT	---	transmission nozzle	***TN***	**$549.95**	
½" NPT	---	transmission nozzle with plug	***TN-P***	**633.30**	
---	---	transmission nozzle plug	***TN-PLUG***	**104.50**	

Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E	**Receivers**
---	3/8" NPT	transmission receiver	***TR***	**$288.75**	
---	3/8" NPT	transmission receiver with cap	***TR-C***	**372.10**	
---	---	transmission receiver cap	***TR-CAP***	**104.50**	

Flomax R Series Connectors

The Flomax R-series connectors are fully compatible and interchangeable with industry standard. They have all-metal construction using anodized aircraft grade aluminum non-wear components.

Engine Oil (red)

- all metal construction
- standard roll-pin locking mechanism
- ergonomically engineered pullbacks and caps
- bright red anodized aircraft grade aluminum


Nozzles	Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E
	---	¾" NPT	R-series engine nozzle	***R-EN***	**$481.20**
	---	¾" NPT	R-series engine nozzle with plug	***R-EN-P***	**564.55**
	---	---	R-series engine nozzle plug	***R-EN-PLUG***	**104.50**

Receivers	Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E
	1.625-12 UN-2A	1.312-12 UN-2B	R-series engine receiver	***R-ER***	**$206.25**
	1.625-12 UN-2A	1.312-12 UN-2B	R-series engine receiver with cap	***R-ER-C***	**289.60**
	---	---	R-series engine receiver cap	***R-ER-CAP***	**104.50**

Coolant (teal)

- all metal construction
- standard roll-pin locking mechanism
- ergonomically engineered pullbacks and caps
- bright teal anodized aircraft grade aluminum

Nozzles	Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E
	---	½" NPT	R-series coolant nozzle	***R-CN***	**$453.70**
	---	½" NPT	R-series coolant nozzle with plug	***R-CN-P***	**537.05**
	---	---	R-series coolant nozzle plug	***R-CN-PLUG***	**104.50**

Receivers	Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E
	1.187-12 UN-2A	.875-14 UN-2B	R-series coolant receiver	***R-CR***	**$165.00**
	1.187-12 UN-2A	.875-14 UN-2B	R-series coolant receiver with cap	***R-CR-C***	**248.35**
	---	---	R-series coolant receiver cap	***R-CR-CAP***	**104.50**


Flomax R Series Connectors

The Flomax R-series connectors are fully compatible and interchangeable with industry standard. They have all-metal construction using anodized aircraft grade aluminum non-wear components.

Hydraulic Oil (gold)

- all metal construction
- standard roll-pin locking mechanism
- ergonomically engineered pullbacks and caps
- bright gold anodized aircraft grade aluminum

Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E	**Nozzles**
---	1" NPT	R-series hydraulic nozzle	***R-HN***	**$530.70**	
---	1" NPT	R-series hydraulic nozzle with plug	***R-HN-P***	**614.05**	
---	---	R-series hydraulic nozzle plug	***R-HN-PLUG***	**104.50**	

Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E	**Receivers**
1.875-12 UN-2A	1.625-12 UN-2B	R-series hydraulic receiver	***R-HR***	**$261.25**	
1.875-12 UN-2A	1.625-12 UN-2B	R-series hydraulic receiver with cap	***R-HR-C***	**344.60**	
---	---	R-series hydraulic receiver cap	***R-HR-CAP***	**104.50**	

Transmission Fluid (violet)

- all metal construction
- standard roll-pin locking mechanism
- ergonomically engineered pullbacks and caps
- bright violet anodized aircraft grade aluminum

Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E	**Nozzles**
---	¾" NPT	R-series transmission nozzle	***R-TN***	**$426.25**	
---	¾" NPT	R-series transmission nozzle with plug	***R-TN-P***	**509.55**	
---	---	R-series transmission nozzle plug	***R-TN-PLUG***	**104.50**	

Male Thread	Female Thread	Description	*Anodized Aluminum* Part #	Price/E	**Receivers**
1.312-12 UN-2A	1.062-12 UN-2B	R-series transmission receiver	***R-TR***	**$198.00**	
1.312-12 UN-2A	1.062-12 UN-2B	R-series transmission receiver with cap	***R-TR-C***	**281.35**	
---	---	R-series transmission receiver cap	***R-TR-CAP***	**104.50**	

Flomax High Flow Series

3/4" Series

Consists of 6 nozzle and receiver sets that are color coded for quick identification of mating parts. Each color nozzle and receiver will only couple with their matching color component. This provides complete protection against cross contamination.

- maximum flow rate of 45 gpm at 70 PSI
- working pressure rating: **200 PSI**
- The standard mounting for the nozzle is a ¾" female NPT and for the receiver is a ¾" male NPT.

Nozzles	Female NPT size	Description	*Anodized Aluminum* Part #	Price/E
	¾"	red nozzle with plug	***ENBL-P***	**$702.05**
		gold nozzle with plug	***ENBL-P2***	**702.05**
		teal nozzle with plug	***ENBL-P3***	**702.05**
		violet nozzle with plug	***ENBL-P4***	**702.05**
		navy nozzle with plug	***ENBL-P5***	**702.05**
		copper nozzle with plug	***ENBL-P6***	**702.05**

Receivers	Male NPT size	Description	*Anodized Aluminum* Part #	Price/E
	¾"	red receiver with cap	***ERS-C***	**$344.60**
		gold receiver with cap	***ERS-C2***	**344.60**
		teal receiver with cap	***ERS-C3***	**344.60**
		violet receiver with cap	***ERS-C4***	**344.60**
		navy receiver with cap	***ERS-C5***	**344.60**
		copper receiver with cap	***ERS-C6***	**344.60**

Note: ERS series is available with JIC bulkhead base. Substitute 'J' for 'S'. Example: ERJ-C2

1" Series


Consists of 7 nozzle and receiver sets that are color coded for quick identification of mating parts. Each color nozzle and receiver will only couple with their matching color component. This will provide complete protection against cross contamination.

Each of the 7 nozzles and 7 receivers has the following performance:

- The nozzle/receiver combination has a flow area equivalent to a 1" schedule 80 pipe.
- The fittings have a **500 PSI** working pressure rating with 1500 PSI minimum burst pressure.
- All wear parts are constructed of stainless steel for long life and corrosion resistance.
- All non-wear parts are constructed of colored anodized aircraft grade aluminum for high strength, lightweight and corrosion resistance.
- The standard mounting for the nozzle is a 1" female NPT and for the receiver is a 1" male NPT. The receivers also come with a 1" female NPT threaded base.
- The nozzle incorporates a "ball lock" mechanism to ensure smooth and reliable operation.

Physical Description:

- nozzle length: 3.90" (99 mm)
- receiver length: 3.44" (87 mm)
- diameter: 2.50" (64 mm)
- hex size: 2" (51 mm)
- nozzle and receiver coupled length: 5.44" (138 mm)


Nozzles	Female NPT size	Description	*Anodized Aluminum* Part #	Price/E
	1"	red nozzle with plug	***HFN-P1***	**$812.05**
		gold nozzle with plug	***HFN-P2***	**812.05**
		teal nozzle with plug	***HFN-P3***	**812.05**
		violet nozzle with plug	***HFN-P4***	**812.05**
		navy nozzle with plug	***HFN-P5***	**812.05**
		copper nozzle with plug	***HFN-P6***	**812.05**
		blue/gray nozzle with plug	***HFN-P7***	**812.05**

Receivers	Male NPT size	Description	*Anodized Aluminum* Part #	Price/E
	1"	red receiver with cap	***HFR-C1***	**$509.55**
		gold receiver with cap	***HFR-C2***	**509.55**
		teal receiver with cap	***HFR-C3***	**509.55**
		violet receiver with cap	***HFR-C4***	**509.55**
		navy receiver with cap	***HFR-C5***	**509.55**
		copper receiver with cap	***HFR-C6***	**509.55**
		blue/gray receiver with cap	***HFR-C7***	**509.55**

V-Ring Swivel Joints

V-Ring Parts Identification List


1. body
2. sleeve
3. ball bearings
4. seal retainer
5. V-ring (pressure) seal
6. spring retainer
7. spring
8. ball retainer screw
9. grease fitting
10. O-ring (dust) seal

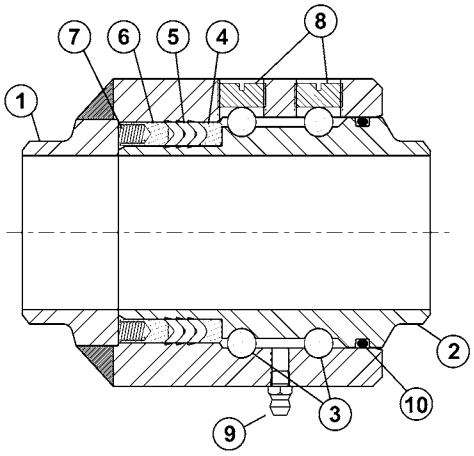


V-Ring Features:

- The spring-loaded triple V-ring sealing system ensures a leak proof seal at either high or low pressure and an extended seal life compared to the conventional single O-ring design.
- The 3" - 8" carbon steel swivels are manufactured from carbon steel with flame hardened dual raceways for greater load bearing capacity and longer life.
- The stainless steel swivels are manufactured in 316 grade stainless steel for superior corrosion resistance.
- available with pressure ratings to 1,000 PSI
- available in carbon steel, stainless steel and aluminum
- ***optional 100% full penetration welding available***


Single Plane V-Ring Style 20



weld end x weld end
sizes 2" - 8"




female NPT x female NPT
sizes 2" - 8"

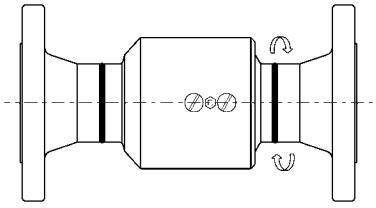


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Single Plane V-Ring Style 30




female NPT x female NPT
sizes 2" - 8"

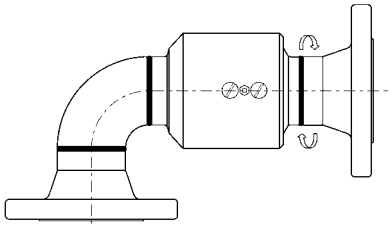


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Single Plane V-Ring Style 40

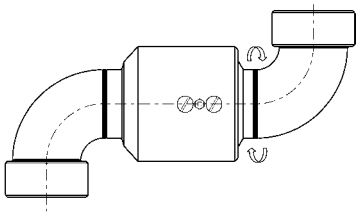


female NPT x female NPT
sizes 2" - 8"

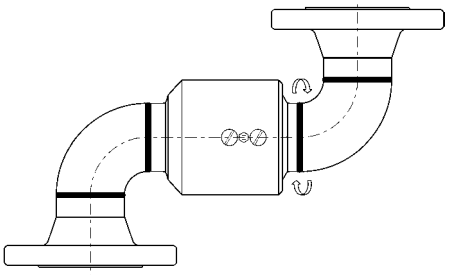


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Double Plane V-Ring Style 50




female NPT x female NPT
sizes 2" - 8"




150# ASA flange x 150# ASA flange
sizes 2" - 8"

Double Plane V-Ring Style 60




female NPT x female NPT
sizes 2" - 8"




150# ASA flange x 150# ASA flange
sizes 2" - 8"

Double Plane V-Ring Style 70

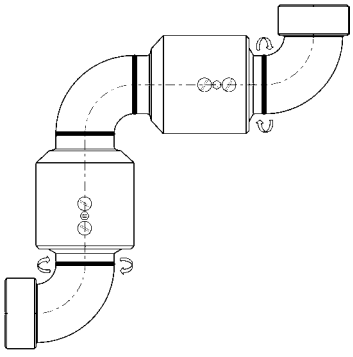


female NPT x female NPT
sizes 2" - 8"

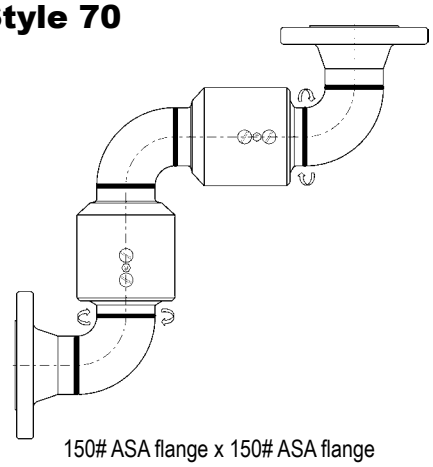


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Triple Plane V-Ring Style 80

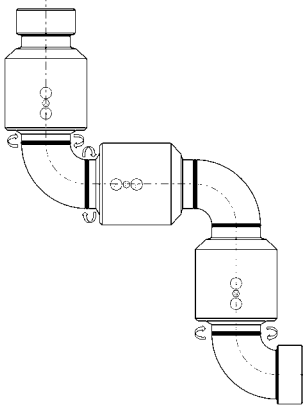


female NPT x female NPT
sizes 2" - 8"

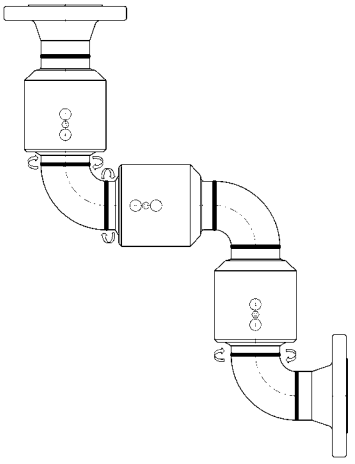


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Triple Plane V-Ring Style 10



female NPT x female NPT
sizes 2" - 8"

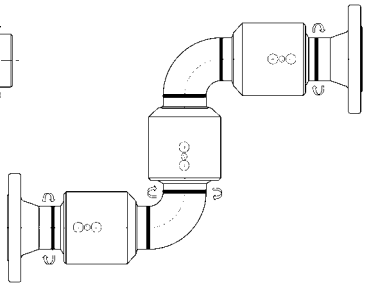


150# ASA flange x 150# ASA flange
sizes 2" - 8"

O-Ring Swivel Joints


O-Ring Parts Identification List

1. O-ring (dust) seal
2. ball retainer screw
3. O-ring (pressure) seal
4. grease fitting
5. ball bearings

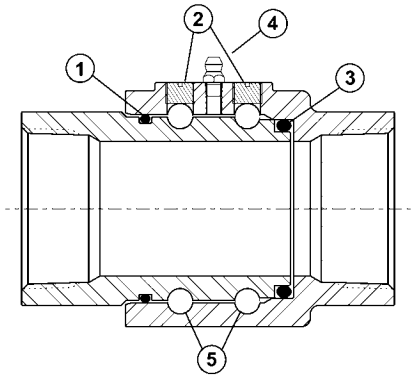


- The O-ring pressure seal ensures a leak-proof seal at either high or low pressure and smoother rotation at lower torques than multiple seal designs.
- Spring-loaded Teflon® pressure seals are available up through 3".
- Carbon steel and stainless steel O-ring type swivels provide greater strength and corrosion resistance needed for lower torque applications.
- available in carbon steel, stainless steel, aluminum, brass and iron
- ***optional 100% full penetration welding available***

Single Plane O-Ring Style 20




female NPT x female NPT
sizes 1" - 4"




150# ASA flange x 150# ASA flange
sizes 1" - 4"


Single Plane O-Ring Style 30



female NPT x female NPT
sizes 1" - 4"

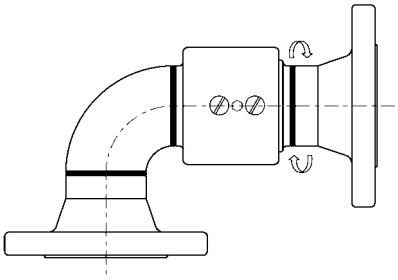


150# ASA flange x 150# ASA flange
sizes 1" - 4"

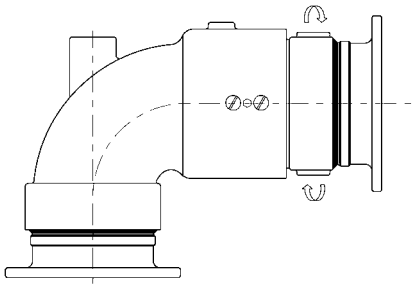


tank truck flange x tank truck flange
sizes 2" - 4"


Single Plane O-Ring Style 40



female NPT x female NPT
sizes 1" - 4"

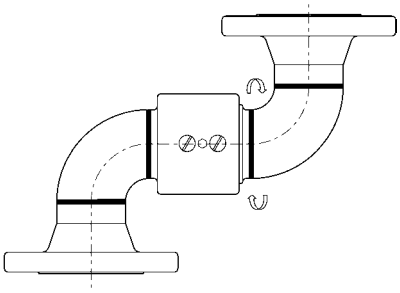


150# ASA flange x 150# ASA flange
sizes 1" - 4"

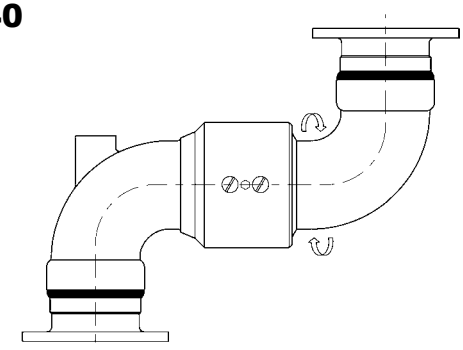


tank truck flange x tank truck flange
sizes 2" - 4"

Double Plane O-Ring Style 50

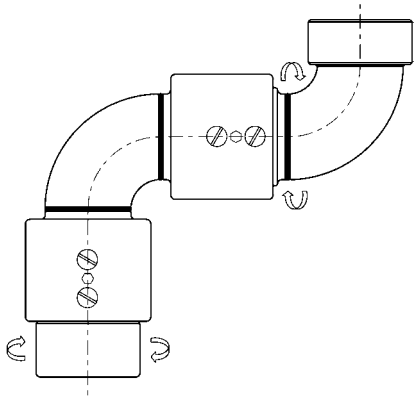


female NPT x female NPT
sizes 1" - 4"

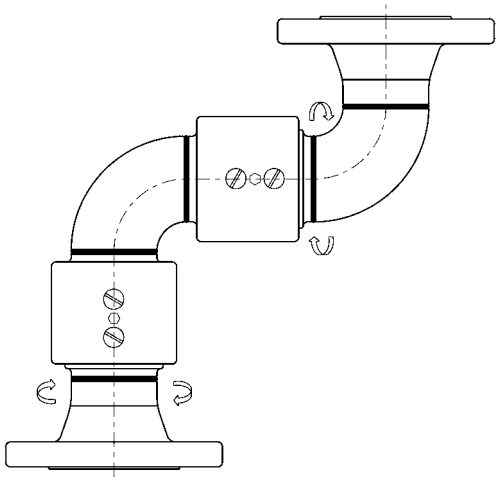


150# ASA flange x 150# ASA flange
sizes 1" - 4"

Double Plane O-Ring Style 60

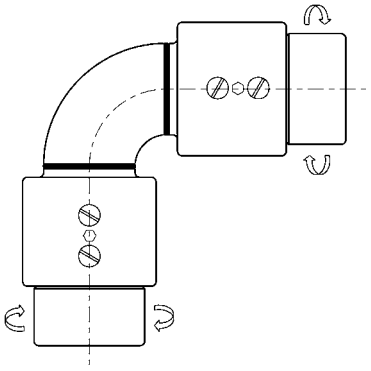


female NPT x female NPT
sizes 1" - 4"

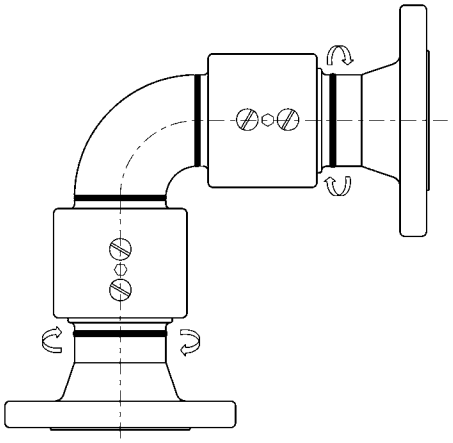


150# ASA flange x 150# ASA flange
sizes 1" - 4"

Triple Plane O-Ring Style 70

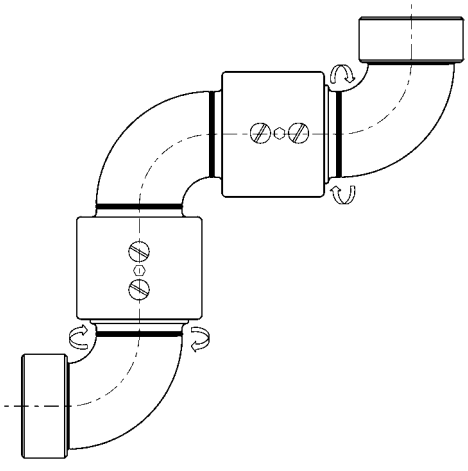

female NPT x female NPT
sizes 1" - 4"

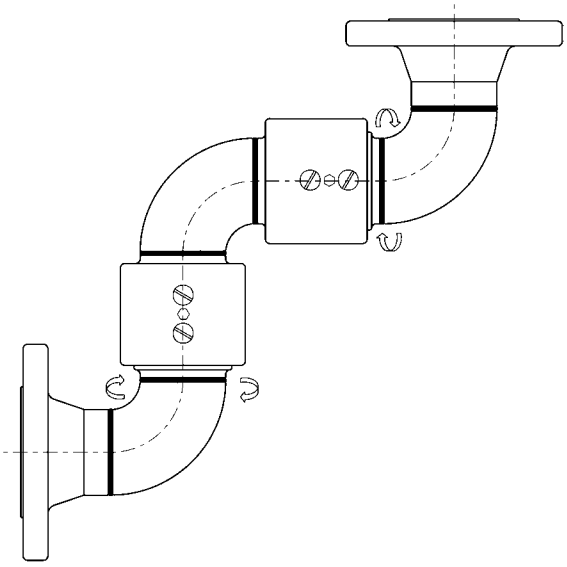

150# ASA flange x 150# ASA flange
sizes 1" - 4"

Ordering Information - Swivels

To select the proper swivel joint you need the following information:

Size: _____ Style (shape): _____

End Configuration: _____ Material: _____

Maximum Working Pressure: _____ Temperature Range: _____

Product being handled: (if a chemical, please advise concentration) _____

If for constant rotation, advise RPM: _____

If for suction service, advise maximum vacuum in inches of Mercury (Hg): _____

Our factory sales and engineering staff will be happy to help you evaluate your swivel application. Please call 800.355.1991.

	swivel size	*swivel style*	*end configuration*		*end configuration*	*swivel material*	*pressure seal (**Buna-N** standard)*	*dust seal (**Buna-N** standard)*	*retainers (V-Ring ONLY)*	*ball bearings (**carbon steel** standard)*	*grease*
Example	2	20	F	X	F	CS	0	0	1	0	0
	[A]	**[B]**	**[C]**		**[C]**	**[D]**	**[E]**	**[F]**	**[G]**	**[H]**	**[I]**

[A] Size
[B] Style (see diagrams)

[C] End Connections	**W** Weld End	**F** Female End	**FG** 150# ASA Flange	**TF** Tank Truck Flange	**PF** 300# ASA flange (not available on aluminum)
[D] Material	**CS (V-Ring)** carbon steel	**SS (V-Ring)** stainless steel	**AL** aluminum	**BR** brass	**MI** malleable iron
	OC (O-Ring) carbon steel	**OS (O-Ring)** stainless steel			

Code #	[E] Pressure Seal	[F] Dust Seal	[G] Retainers	[H] Ball Bearings	[I] Grease
0	Buna-N (standard)	Buna-N (standard)	No retainers (O-ring swivels)	Carbon steel (standard)	Standard
1	Viton®	Viton®	Aluminum (standard in CS V-ring)	440 grade stainless	FDA approved/ Food grade
2	Teflon®	---	Teflon® (standard in SS V-ring)	316 grade stainless	Silicone (required with EPR seals)
3	Ethylene Propylene (requires silicone grease)	Ethylene Propylene (requires silicone grease)	---	---	---
4	FDA Buna (O-ring only)	FDA Buna	---	---	---

The swivel should be packed so that the surfaces coming in contact with the fluid being handled are compatible with that fluid. In the case of the use of the swivel in submerged service this would include the dust seals and ball bearings.

Dixon always recommends the use of stainless steel ball bearings when building a swivel for submerged service since the standard carbon steel bearings could rust together making it impossible to disassemble the swivel and possibly affecting its operation.

Hammer Unions

- Socket weld configurations and other materials are available, contact the factory for further information.
- Hammer unions work at extremely high pressures. Mismatching components of one series with another (i.e. series 602 with series 1502) can lead to destruction of property, serious bodily injury or death.
- temperature rating: **-25°F** to **200°F**

SAFETY ALERT

Note: non-shocking cold water pressure means that the rated value is the maximum pressure at ambient temperature:

- no spikes higher than this pressure
- no instantaneous pressure increases (0-2000 PSIG in ¼ of a second
- ambient temperature: 70°F



100 Series

- used on low pressure manifolds and lines and in applications running air, water, oil or gas up to 1,000 PSI NSCWP (non-shock cold working pressure)
- yellow sub, black nut

Size	Configuration	NSCWP	*Forged Steel* Part #	Price/E
2"	threaded 100 series	1000	***HU100200***	**$48.90**
2"	buttweld 100 series	1000	***HU100200BW***	**79.65**
2½"	threaded 100 series	1000	***HU100250***	**129.40**
3"	threaded 100 series	1000	***HU100300***	**131.10**
4"	threaded 100 series	1000	***HU100400***	**197.60**
4"	buttweld 100 series	1000	***HU100400BW***	**260.40**
6"	threaded 100 series	1000	***HU100600***	**681.50**
8"	threaded 100 series	1000	***HU100800***	**973.10**

200 Series

- used in general service applications running air, water, oil or gas up to 2,000 PSI NSCWP (non-shock cold working pressure)
- grey sub, blue nut

Size	Configuration	NSCWP	*Forged Steel* Part #	Price/E
1"	threaded 200 series	2000	***HU200100***	**$33.30**
1½"	threaded 200 series	2000	***HU200150***	**109.50**
2"	threaded 200 series	2000	***HU200200***	**49.00**
2"	buttweld 200 series	2000	***HU200200BW***	**84.25**
2½"	threaded 200 series	2000	***HU200250***	**217.00**
3"	threaded 200 series	2000	***HU200300***	**201.60**
4"	threaded 200 series	2000	***HU200400***	**256.40**
6"	threaded 200 series	2000	***HU200600***	**926.00**

206 Series

- O-ring mounted sub provides excellent sealing properties
- runs air, water, oil or gas up to 2,000 PSI NSCWP (non-shock cold working pressure)
- grey sub, blue nut

Size	Configuration	NSCWP	*Forged Steel* Part #	Price/E
1"	threaded 206 series	2000	***HU206100***	**$35.80**
1½"	threaded 206 series	2000	***HU206150***	**95.30**
2"	threaded 206 series	2000	***HU206200***	**55.50**
2½"	threaded 206 series	2000	***HU206250***	**224.45**
3"	threaded 206 series	2000	***HU206300***	**210.00**
4"	threaded 206 series	2000	***HU206400***	**272.50**
6"	threaded 206 series	2000	***HU206600***	**1006.00**

602 Series

- lip type seal ring minimizes fluid flow turbulence while creating a pressure seal
- for use in mud, manifold service and truck mounting applications running air, water, oil, gas or mud up to 6,000 PSI NSCWP (non-shock cold working pressure)
- orange sub, black nut

Size	Configuration	NSCWP	*Forged Steel* Part #	Price/E
1"	threaded 602 series	6000	***HU602100***	**$127.25**
2"	threaded 602 series	6000	***HU602200***	**254.00**

1002 Series

- lip type seal ring minimizes fluid flow turbulence while creating a pressure seal
- for use in high pressure systems and truck mounting applications running air, water, oil, gas or mud up to 10,000 PSI NSCWP (non-shock cold working pressure)
- blue sub, red nut

Size	Configuration	NSCWP	*Forged Steel* Part #	Price/E
1"	threaded 1002 series	10000	***HU1002100***	**$210.50**
2"	threaded 1002 series	10000	***HU1002200***	**293.40**
4"	threaded 1002 series	10000	***HU1002400***	**715.25**

1502 Series

- lip type seal ring minimizes fluid flow turbulence while creating a pressure seal
- for use in extreme high pressure applications running air, water, oil, gas or mud up to 15,000 PSI NSCWP (non-shock cold working pressure)
- red sub, blue nut

Size	Configuration	NSCWP	*Forged Steel* Part #	Price/E
2"	threaded 1502 series	15000	***HU1502200***	**$290.80**

Products Recommended for Steam Service

Quick Disconnect Fittings

Quick disconnect fittings (socket and plug) are available in solid brass with stainless steel springs and locking balls in sizes ¼" through 1½". For further information see page 92.



GJ Boss™ Female Ground Joint Fittings

GJ Boss™ female ground joint fittings are available in plated steel and/or iron in sizes ¼" through 6". For further information see page 93.



Boss Female Washer Seal Fittings

Boss female washer seal fittings are available in plated steel and/or iron in sizes 3/8" through 6". For further information see page 94.




Boss Male Stems

Boss male stems are available in steel bar stock in sizes ¼" through 1"; iron in sizes 1¼" through 4"; 316 stainless steel in sizes ½" through 4" and brass in sizes ¾" through 3". For further information see page 95.



Boss Clamps

Boss clamps in the 2-bolt and 4-bolt style are available in plated iron in sizes ¼" through 3"; stainless steel in sizes ½" through 3" and brass in sizes ½" through 2". Boss clamps in the three-piece style are available in plated iron in sizes 3" through 6". For further information see pages 98 and 99.




180° Steam Gauge Siphon

180° steam gauge siphon is available in red brass pipe in ¼". In order to prevent live steam from entering a pressure gauge bourdon tube a siphon filled with water should be installed between the gauge and the process line. For further information see page 255.



250 PSIG Steam Ball Valve

250 lb. steam ball valves are available with a threaded bronze valve, 316 stainless steel ball and stem in sizes ½" through 2". For further information see page 504.



Note: Pressurized steam is an extremely dangerous commodity. Only hose, fittings, clamps and accessory items that have been approved for steam service should ever be used! Never use an unapproved item for steam service. Always follow the manufacturer's product recommendations for pressurized steam handling.

SAFETY ALERT

Steam Quick Disconnect Couplings

Designed exclusively for steam applications, the coupler and plug are solid brass with stainless steel springs and locking balls. The coupler has a large plated steel sleeve especially designed for easier gripping with gloves. Two ethylene propylene O-rings in the coupler and one ethylene propylene O-ring in the plug provide double protection against leaks. Rated to **100 PSI** gauge saturated steam **(338°F)**.

SAFETY ALERT ***Warning: Do Not Disconnect Under Pressure!!*** SAFETY ALERT



poppet valve coupler

Body Size	Female NPT Size	Part #	Price/E
1/4"	1/4"	***B16-200S***	**$38.78**
3/8"	3/8"	***B16-300S***	**41.78**
1/2"	1/2"	***B16-400S***	**58.29**
3/4"	3/4"	***B16-600S***	**91.26**
1"	1"	***B16-800S***	**148.17**
1-1/2"	1-1/2"	***B16-1200S***	**410.00**



poppet valve plug

Body Size	Female NPT Size	Part #	Price/E
1/4"	1/4"	***B17-200S***	**$11.98**
3/8"	3/8"	***B17-300S***	**16.95**
1/2"	1/2"	***B17-400S***	**21.30**
3/4"	3/4"	***B17-600S***	**37.40**
1"	1"	***B17-800S***	**48.90**
1-1/2"	1-1/2"	***B17-1200S***	**318.00**

Boss Coupling System

Features: The spud part of the coupling serves as one half of the connection and is usually fixed to the equipment. The stem part that is clamped to the hose is the other half. The two halves are connected or disconnected by rotating the wing nut onto the spud. When connected they achieve a mechanical, as well as, a pressure seal.


Services: Boss couplings are all-purpose hose couplings, universally recommended for steam hose connections. They are also widely used for air, water, fluid petroleum, chemicals and liquid petroleum gas up to 1" ID. Boss couplings can be applied to many types of rubber, synthetic, plastic, metallic or semi-metallic hose. Consult the factory for specific media capabilities.

Purpose: Boss couplings supply a convenient threaded fitting to connect two lengths of hose, or a single length to a male or female threaded (NPT) outlet.

Material:
- stem: ¼" - 1" plated steel, 1¼" - 4" plated iron, 6" tubular steel
- spud: ¼" - 1" plated steel, 1¼" - 6" plated iron
- wing nut: ¼" - 1" plated steel, 1¼" - 6" plated iron

Seal Types:
- ground joint: copper or polymer seats
- washer: Klingersil® C-4401


SAFETY ALERT Worn-out hose couplings can be dangerous. They should be checked regularly and replaced when necessary. Each coupling user should review applications and add safety devices where indicated.

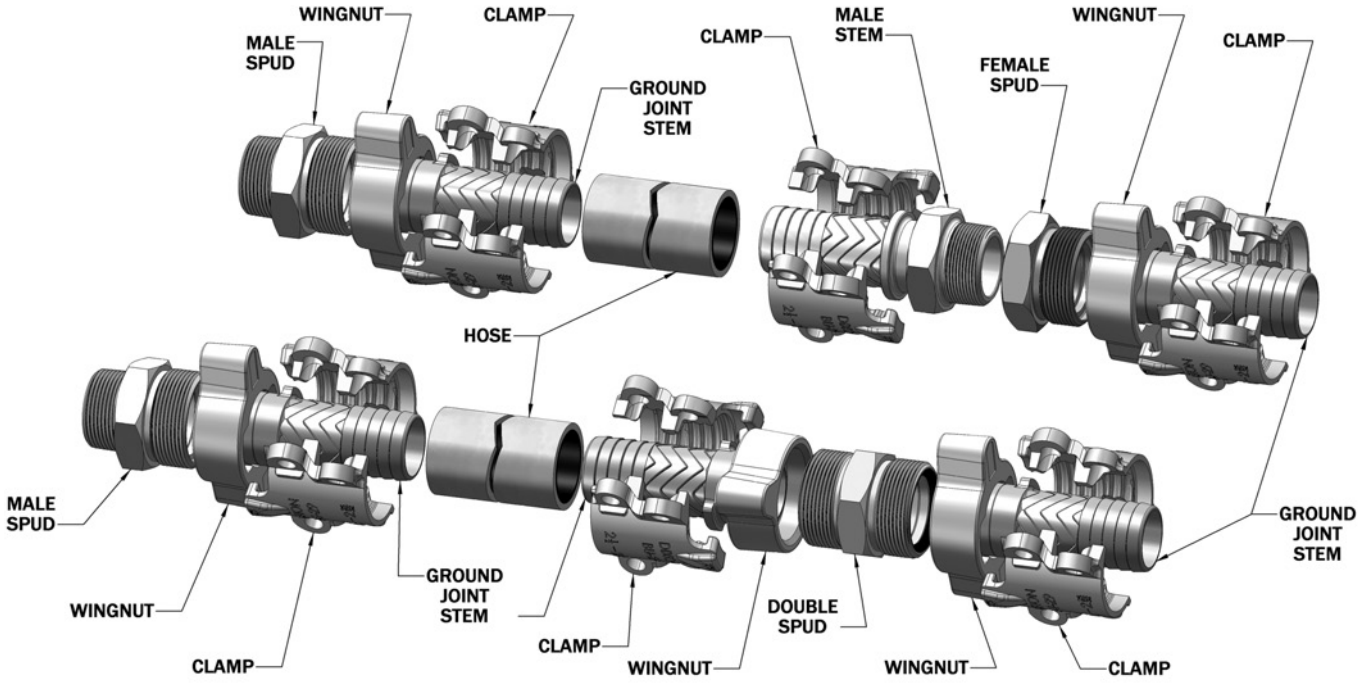

GJ Boss™ Ground Joint Seal

Positive Metal-to-Polymer Seal

- A leakproof seal is formed when the metal head of the stem makes contact with the patented polymer seat in the spud.
- The non-metallic polymer seat resists most chemicals found in manufacturing facilities. (reference corrosion resistance chart on pages 600-605)
- recommended for steam service up to **450°F** SAFETY ALERT
- easy to seal
- works with existing fittings
- *plated steel and / or iron*
- use with Boss clamps found on pages 98 and 99.

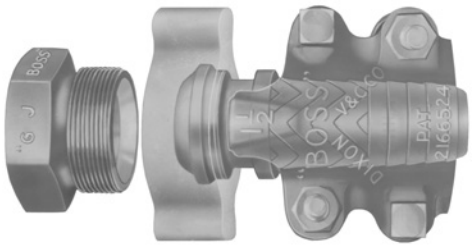



complete female



stem



wing nut




NEW 2010


knurled nut

Hose Shank x NPT	Part #	Price/E	Part #	Price/E	Opt Qty	Part #	Price/E	Opt Qty	Part #	Price/E	Opt Qty
1/4"	***GF1*** [1]	**$45.95**	***GBA***	**$17.55**	100	***BA2***	**$10.85**	100	**---**	**---**	--
3/8"	***GF3*** [1]	**38.65**	***GCA***	**8.00**	100	***CB***	**10.70**	100	**---**	**---**	--
1/2" NEW	***GF6***	**30.25**	***GB1***	**6.90**	100	***B2***	**6.30**	100	**---**	**---**	--
1/2" x 3/4"	***GF26-1***	**38.60**	***GB6-1***	**15.50**	50	***B12***	**8.30**	25	**---**	**---**	--
3/4"	***GF26***	**36.75**	***GB6***	**13.65**	50	***B12***	**8.30**	25	***KB12***	**$14.00**	25
1"	***GF36***	**37.90**	***GB11***	**14.20**	50	***B12***	**8.30**	25	***KB12***	**14.00**	25
1-1/4"	***GF51***	**67.70**	***GB16***	**20.75**	25	***B17***	**15.25**	25	**---**	**---**	--
1-1/2"	***GF61***	**63.10**	***GB21***	**18.60**	25	***B17***	**15.25**	25	**---**	**---**	--
2"	***GF81*** [2]	**75.40**	***GB26*** [2]	**20.50**	10	***B27***	**25.00**	10	**---**	**---**	--
2-1/2"	***GF96***	**197.35**	***GB31***	**50.80**	5	***B32***	**62.25**	5	**---**	**---**	--
3"	***GF111***	**205.40**	***GB36***	**60.55**	5	***B37***	**53.75**	5	**---**	**---**	--
4"	***GF141***	**464.60**	***GB46***	**143.45**	5	***B47***	**157.15**	5	**---**	**---**	--
6"	***GF201*** [1]	**1142.05**	***GB66***	**348.50**	2	***B67***	**241.35**	2	**---**	**---**	--


[1] 1/4", 3/8" and 6" come only with copper seat spuds
[2] not to be used with #250, #275 or #306 Boss clamps SAFETY ALERT



female spud



male spud

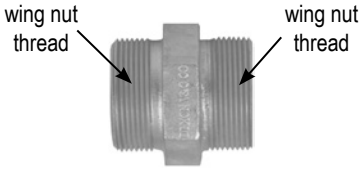

double spud

Thread	Part #	Price/E	Opt Qty	Part #	Price/E	Part #	Price/E
1/4"	***GBC*** [1]	**$17.55**	100	**---**	**---**	**---**	**---**
3/8"	***GCC*** [1]	**19.95**	100	***GMC*** [1]	**$18.25**	**---**	**---**
1/2"	***GB3***	**17.05**	100	***GM3***	**21.25**	***GDB3***	**$35.15**
3/4"	***GB8***	**14.80**	50	***GM8***	**20.25**	***GDB13***	**34.20**
1"	***GB13***	**15.40**	50	***GM13***	**21.25**	***GDB13***	**34.20**
1-1/4"	***GB18***	**31.70**	25	***GM18***	**48.40**	***GDB23***	**58.60**
1-1/2"	***GB23***	**29.25**	25	***GM23***	**46.65**	***GDB23***	**58.60**
2"	***GB28***	**29.90**	10	***GM28***	**49.10**	***GDB28***	**60.05**
2-1/2"	***GB33***	**84.30**	5	***GM33***	**120.70**	***GDB33***	**125.70**
3"	***GB38***	**91.10**	5	***GM38***	**127.40**	***GDB38***	**131.75**
4"	***GB48***	**164.00**	5	**---**	**---**	**---**	**---**
6"	***GB68*** [1]	**552.20**	2	**---**	**---**	**---**	**---**

[1] 1/4", 3/8" and 6" come only with copper seat spuds

Boss couplings and the steam quick disconnects on page 91 are the only Dixon couplings recommended for steam service. SAFETY ALERT

Boss Washer Seal



Washer Type

- A Klingersil® C-4401 washer is inserted between the stem and spud.
- A leakproof seal is formed by rotating the wing nut and hammering it tight.
- recommended for steam service up to **450°F** SAFETY ALERT
- easy to seal
- works with existing fittings
- *plated steel* and / or *iron*
- use with Boss clamps found on pages 98 and 99.



complete female



stem



wing nut


2010 NEW




knurled nut

Hose Shank x NPT	Part #	Price/E	Part #	Price/E	Opt Qty	Part #	Price/E	Opt Qty	Part #	Price/E	Opt Qty
3/8"	***WF3***	**$30.15**	***SS337***	**$6.95**	100	***CB***	**$10.70**	100	**---**	**---**	---
NEW 1/2"	***WF6***	**29.25**	***B1***	**11.05**	100	***B2***	**6.30**	100	**---**	**---**	---
1/2" x 3/4"	***WF26-1***	**38.00**	***B6-1***	**16.65**	50	***B12***	**8.30**	25	**---**	**---**	---
3/4"	***WF26***	**35.00**	***B6***	**13.65**	50	***B12***	**8.30**	25	***KB12***	**$14.00**	25
1"	***WF36***	**34.90**	***B11***	**14.40**	50	***B12***	**8.30**	25	***KB12***	**14.00**	25
1-1/4"	***WF51***	**74.00**	***B16***	**28.50**	25	***B17***	**15.25**	25	**---**	**---**	---
1-1/2"	***WF61***	**64.85**	***B21***	**21.95**	25	***B17***	**15.25**	25	**---**	**---**	---
2"	***WF81*** [1]	**81.80**	***B26*** [1]	**23.00**	10	***B27***	**25.00**	10	**---**	**---**	---
2-1/2"	***WF96***	**196.05**	***B31***	**61.50**	5	***B32***	**62.25**	5	**---**	**---**	---
3"	***WF111***	**203.50**	***B36***	**68.75**	5	***B37***	**53.75**	5	**---**	**---**	---


[1] not to be used with #250, #275 or #306 Boss clamps SAFETY ALERT



female spud



male spud



double spud



washer [1]

Thread	Part #	Price/E	Opt Qty	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/8"	***CC***	**$11.80**	100	***WMC***	**$14.20**	**---**	**---**	***WBC***	**$0.70**
1/2"	***B3***	**11.10**	100	***WM3***	**24.90**	***DB3***	**$22.70**	***W2***	**0.80**
3/4"	***B8***	**12.10**	25	***WM8***	**17.80**	***DB13***	**26.25**	***W12***	**0.95**
1"	***B13***	**11.25**	50	***WM13***	**21.25**	***DB13***	**26.25**	***W12***	**0.95**
1-1/4"	***B18***	**28.95**	25	***WM18***	**41.05**	***DB23***	**38.75**	***W17***	**1.30**
1-1/2"	***B23***	**26.35**	25	***WM23***	**49.80**	***DB23***	**38.75**	***W17***	**1.30**
2"	***B28***	**32.35**	10	***WM28***	**55.15**	***DB28***	**54.45**	***W27***	**1.45**
2-1/2"	***B33***	**70.65**	5	**---**	**---**	**---**	**---**	***W32***	**1.65**
3"	***B38***	**78.40**	5	***WM38***	**123.00**	***DB38***	**109.05**	***W37***	**2.60**


[1] washer is nitrile rubber bonded, non-asbestos Klingersil® C-4401

Boss Male Stems


steel barstock


iron


316 stainless


brass

Hose x NPT Size	*Steel Bar Stock* Part #	Price/E	Opt Qty	Size	*Iron* Part #	Price/E	Opt Qty	Size	*316 Stainless* Part #	Price/E	Size	*Brass* Part #	Price/E
1/4" x 1/8"	***MS4X2***	**$8.05**	25	---	**---**	**---**	---	½"	***RMS1***	**$60.50**	---	**---**	**---**
1/4" x 1/4"	***MSA***	**6.35**	50	---	**---**	**---**	---	¾"	***RMS6***	**60.65**	¾"	***BMS6***	**$31.50**
1/4" x 3/8"	***MSB***	**7.85**	25	---	**---**	**---**	---	1"	***RMS11***	**61.30**	1"	***BMS11***	**47.20**
3/8" x 1/4"	***MS6X4***	**7.15**	25	1¼"	***MS16***	**$20.65**	20	1¼"	***RMS16***	**118.45**	1¼"	***BMS16***	**64.00**
3/8" x 3/8"	***MSC***	**5.65**	100	1½"	***MS21***	**22.50**	20	1½"	***RMS21***	**119.50**	1½"	***BMS21***	**78.80**
3/8" x 1/2"	***MS6X8***	**10.25**	25	2"	***MS26***	**31.60**	10	2"	***RMS26***	**124.65**	2"	***BMS26***	**122.70**
1/2" x 1/4"	***MS8X4***	**7.15**	25	2½"	***MS31***	**59.20**	5	2½"	***RMS31***	**242.00**	---	**---**	**---**
1/2" x 3/8"	***MS8X6***	**7.15**	50	3"	***MS36***	**79.60**	5	3"	***RLP36*** [1]	**215.00**	3"	***BMS36***	**288.90**
1/2" x 1/2"	***MS1***	**5.95**	25	4"	***MS46***	**140.15**	2	4"	***RLP46*** [1]	**364.00**	---	**---**	**---**
1/2" x 3/4"	***MS8X12***	**16.30**	25	---	**---**	**---**	---	---	**---**	**---**	---	**---**	**---**
3/4" x 1/2"	***MS12X8***	**13.50**	25	---	**---**	**---**	---	---	**---**	**---**	---	**---**	**---**
3/4" x 3/4"	***MS6***	**9.15**	25	---	**---**	**---**	---	---	**---**	**---**	---	**---**	**---**
3/4" x 1"	***MS12X16***	**20.55**	25	---	**---**	**---**	---	---	**---**	**---**	---	**---**	**---**
1" x 3/4"	***MS16X12***	**20.50**	25	---	**---**	**---**	---	---	**---**	**---**	---	**---**	**---**
1" x 1"	***MS11***	**13.50**	25	---	**---**	**---**	---	---	**---**	**---**	---	**---**	**---**

[1] tubular steel, no hex

- Use with Boss clamps on pages 98 and 99. For safety tags and safety tape see page 592.

LP-Boss Male Stems


male NPT end


beveled end

Size	*Plated Steel* NPT Part #	Price/E	*316 Stainless* NPT Part #	Price/E	*schd.80 Plated Steel* NPT Part #	Price/E	*Unplated Steel* Beveled Part #	Price/E
1¼"	***LP16***	**$60.50**	**---**	**---**	***LP16-80*** [1]	**$64.80**	**---**	**---**
1½"	***LP21***	**57.45**	**---**	**---**	***LP21-80*** [1]	**65.45**	**---**	**---**
2"	***LP26***	**49.40**	**---**	**---**	***LP26-80*** [1]	**68.40**	***LPB26***	**$58.25**
2½"	***LP31***	**121.00**	**---**	**---**	**---**	**---**	**---**	**---**
3"	***LP36***	**121.30**	***RLP36***	**$215.00**	**---**	**---**	***LPB36***	**111.10**
4"	***LP46***	**154.00**	***RLP46***	**364.00**	**---**	**---**	**---**	**---**
6"	***LP66***	**329.45**	**---**	**---**	**---**	**---**	**---**	**---**

[1] schedule 80 stems meet NFPA 58

Boss Hose Menders

- collars engage gripping fingers of Boss clamps
- ¾" - 3" plated iron; ½" plated steel


Size	Part #	Price/E	Size	Part #	Price/E
½"	***M1***	**$9.30**	1½"	***M21***	**$19.75**
¾"	***M6***	**17.25**	2"	***M26***	**33.25**
1"	***M11***	**27.40**	2½"	***M31***	**57.35**
1¼"	***M16***	**19.75**	3"	***M36***	**67.35**



Boss Spud x Hose Shank

- polymer seat

Size	*Steel* Part #	Price/E
1"	***GH1311***	**$35.50**
2"	***GH2826***	**76.15**



316 Stainless Steel Ground Joint

recommended for steam service up to **450°F**






	complete female		stem		wing nut		female spud	
Size	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
¾"	***RGF26***	**$211.15**	***RGB6***	**$76.00**	***RB12***	**$68.20**	***RGB8***	**$66.95**
1"	***RGF36***	**232.80**	***RGB11***	**96.30**	***RB12***	**68.20**	***RGB13***	**68.30**
1¼"	***RGF51***	**347.80**	***RGB16***	**109.45**	***RB17***	**110.20**	***RGB18***	**128.15**
1½"	***RGF61***	**410.95**	***RGB21***	**115.35**	***RB17***	**110.20**	***RGB23***	**185.40**
2"	***RGF81*** [1]	**539.70**	***RGB26*** [1]	**168.90**	***RB27***	**185.40**	***RGB28***	**185.40**

[1] not to be used with #250, #275 or #306 Boss clamps SAFETY ALERT

Brass Ground Joint






	complete female		stem		wing nut		female spud	
Size	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
¾"	***BGF26***	**$140.05**	***BGB6***	**$52.45**	***BB12***	**$44.10**	***BGB8***	**$43.50**
1"	***BGF36***	**159.80**	***BGB11***	**49.65**	***BB12***	**44.10**	***BGB13***	**66.05**
1¼"	***BGF51***	**212.55**	***BGB16***	**52.80**	***BB17***	**74.15**	***BGB18***	**85.60**
1½"	***BGF61***	**236.30**	***BGB21***	**69.00**	***BB17***	**74.15**	***BGB23***	**93.15**
2"	***BGF81*** [1]	**410.95**	***BGB26*** [1]	**135.45**	***BB27***	**144.00**	***BGB28***	**131.50**

[1] not to be used with #250, #275 or #306 Boss clamps SAFETY ALERT

Stainless Steel Washer Style

shipped from factory only







	complete female		stem		wing nut		female spud		washer [2]	
Size	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
¾"	***RWF26***	**$213.65**	***RB6***	**$72.40**	***RB12***	**$68.20**	***RB8***	**$72.20**	***W12***	**$0.95**
1"	***RWF36***	**226.20**	***RB11***	**82.40**	***RB12***	**68.20**	***RB13***	**74.75**	***W12***	**0.95**
1¼"	***RWF51***	**340.15**	***RB16***	**122.70**	***RB17***	**110.20**	***RB18***	**106.10**	***W17***	**1.30**
1½"	***RWF61***	**427.55**	***RB21***	**133.90**	***RB17***	**110.20**	***RB23***	**182.30**	***W17***	**1.30**
2"	***RWF81*** [1]	**534.95**	***RB26*** [1]	**172.00**	***RB27***	**185.40**	***RB28***	**176.25**	***W27***	**1.45**

[1] not to be used with #250, #275 or #306 Boss clamps SAFETY ALERT

[2] washer is nitrile rubber bonded, non-asbestos Klingersil® C-4401

- Brass Washer Style available, consult factory for pricing and availability.

Boss Holedall Fittings

Boss Holedall fittings are designed for air and liquid applications where a permanent, low profile clamping system is desired. Both fittings are supplied with carbon steel ferrules. Consult the factory for swage and/or crimp specifications.
Not for steam service. SAFETY ALERT

Size	Hose OD From:	Hose OD To:	*Iron* Part #	*Iron* Price/E	*Stainless Steel* Part #	*Stainless Steel* Price/E
¾"	1-10/64"	1-14/64"	***GF26P1***	**$54.25**	**---**	**---**
	1-15/64"	1-18/64"	***GF26P2***	**54.25**	**---**	**---**
	1-19/64"	1-22/64"	***GF26P3***	**54.25**	**---**	**---**
1"	1-30/64"	1-34/64"	***GF36P1***	**57.70**	**---**	**---**
	1-35/64"	1-38/64"	***GF36P2***	**57.70**	**---**	**---**
	1-39/64"	1-42/64"	***GF36P3***	**57.70**	**---**	**---**
1½"	1-15/16"	2"	***GF61P1***	**108.65**	***RGF61P1***	**$434.00**
	2-1/64"	2-1/8"	***GF61P2***	**108.65**	***RGF61P2***	**434.00**
	2-9/64"	2-1/4"	***GF61P3***	**108.65**	**---**	**---**
2"	2-9/16"	2-5/8"	***GF81P1***	**110.00**	***RGF81P1***	**565.00**
	2-41/64"	2-3/4"	***GF81P2***	**110.00**	***RGF81P2***	**565.00**
	2-49/64"	2-7/8"	***GF81P3***	**110.00**	**---**	**---**
3"	3-9/16"	3-5/8"	***GF111P1***	**320.00**	**---**	**---**
	3-41/64"	3-3/4"	***GF111P2***	**320.00**	**---**	**---**
	3-49/64"	3-7/8"	***GF111P3***	**320.00**	**---**	**---**



Boss Adapters

These fittings have male or female NPT threads and are designed to fit the standard ground joint spuds on page 93. *Supplied with a wing nut, as shown.* For safety tags and safety tape, see page 592.

male NPT adapter

Size	Part #	Price/E	Pkg Qty
¾"	***GMAS6***	**$48.65**	25
1"	***GMAS11***	**50.60**	25
1½"	***GMAS21***	**83.85**	10
2"	***GMAS26*** [1]	**88.90**	10

[1] uses a special wing nut, part # B27-3.



female NPT adapter

Size	Part #	Price/E
¾"	***GFAS6***	**$98.50**
1"	***GFAS11***	**108.80**
2"	***GFAS26*** [1] NEW	**148.50**

[1] Part is produced as a welded fabrication.



Boss Wing Nut Caps


Size	Part #	Price/E	Opt Qty
¾" and 1"	***B12SC***	**$41.80**	25
1¼" and 1½"	***B17SC***	**48.70**	25
2"	***B27SC***	**74.20**	10
3"	***B37SC***	**125.60**	5




- Supplied with 12" chain and washer.
- For best results, use with washer style spuds and washers on page 96.

Note: Boss wing nut caps are not intended for pressure applications. SAFETY ALERT

Boss Clamps



two clamp sections
2-bolt type
2 gripping fingers
1/4" - 1/2" design



two clamp sections
4-bolt type
2 gripping fingers



two clamp sections
4-bolt type
4 gripping fingers

Hose ID	Hose OD From:	Hose OD To:	*Plated Iron* Part #	*Plated Iron* Price/E	Opt Qty	*Stainless Steel* Part #	*Stainless Steel* Price/E	Torque[3]	*Brass* Part #	*Brass* Price/E	Torque
1/4"	36/64"	42/64"	***BD*** [4]	**$8.25**	100	**---**	**---**	6	**---**	**---**	--
3/8"	44/64"	56/64"	***CD*** [4]	**7.70**	100	**---**	**---**	6	**---**	**---**	--
1/2"	52/64"	60/64"	***DD*** [4]	**8.75**	100	**---**	**---**	6	**---**	**---**	--
1/2"	60/64"	1-4/64"	***B4*** [4]	**7.55**	25	***RB4***	**$131.30**	12	***BB4***	**$24.00**	10
1/2"	1-4/64"	1-12/64"	***B5*** [4]	**8.65**	25	**---**	**---**	12	**---**	**---**	--
3/4"	1-10/64"	1-20/64"	***BU9*** [4]	**9.50**	50	***RBU9***	**175.10**	21	***BBU9***	**36.50**	18
3/4"	1-20/64"	1-32/64"	***B9***	**9.90**	25	***RB9***	**189.00**	21	***BB9***	**37.65**	18
3/4"	1-32/64"	1-44/64"	***B10*** [4]	**12.00**	25	**---**	**---**	21	***BB10***	**35.00**	--
1/2"	58/64"	1-2/64"	***968*** [1]	**13.50**	50	**---**	**---**	6	**---**	**---**	--
1"	1-26/64"	1-36/64"	***156*** [1, 4]	**17.20**	20	**---**	**---**	21	**---**	**---**	--
1"	1-34/64"	1-46/64"	***BU14***	**17.35**	25	***RBU14***	**181.50**	21	***BBU14***	**80.00**	18
1"	1-44/64"	1-60/64"	***B14*** [4]	**17.60**	25	***RB14***	**181.50**	21	***BB14***	**82.15**	18
1"	1-60/64"	2-8/64"	***B15***	**19.25**	20	**---**	**---**	21	**---**	**---**	--
1-1/4"	1-32/64"	1-50/64"	***BU18***	**28.20**	10	**---**	**---**	40	**---**	**---**	--
1-1/4"	1-44/64"	1-56/64"	***187*** [1]	**26.40**	10	**---**	**---**	21	**---**	**---**	--
1-1/4"	1-50/64"	2-6/64"	***BU19***	**30.95**	10	**---**	**---**	40	**---**	**---**	--
1-1/4"	1-56/64"	2-4/64"	***206*** [1]	**23.00**	20	**---**	**---**	21	**---**	**---**	--
1-1/4"	2-8/64"	2-24/64"	***B19***	**25.30**	10	***RB19***	**190.00**	40	***BB19*** [2]	**115.00**	28
1-1/2"	1-52/64"	2"	***BU22***	**31.60**	10	**---**	**---**	40	**---**	**---**	--
1-1/2"	2"	2-14/64"	***B22***	**30.00**	10	**---**	**---**	40	**---**	**---**	--
1-1/2"	2"	2-8/64"	***212*** [1]	**30.60**	10	**---**	**---**	21	**---**	**---**	--
1-1/2"	2-4/64"	2-16/64"	***225*** [1]	**31.75**	10	**---**	**---**	40	**---**	**---**	--
1-1/2"	2-12/64"	2-24/64"	***BU24***	**26.00**	10	***RBU24***	**197.00**	40	***BBU24*** [2]	**116.00**	28
1-1/2"	2-24/64"	2-36/64"	***B24***	**23.85**	10	***RB24***	**190.55**	40	**---**	**---**	--
1-1/2"	2-36/64"	2-48/64"	***B25***	**27.50**	10	**---**	**---**	40	**---**	**---**	--
2"	2-16/64"	2-32/64"	***250*** [1, 5]	**32.30**	10	**---**	**---**	40	**---**	**---**	--
2"	2-22/64"	2-34/64"	***BU28***	**36.00**	10	**---**	**---**	60	**---**	**---**	--
2"	2-32/64"	2-48/64"	***275*** [1, 5]	**37.50**	10	**---**	**---**	40	**---**	**---**	--
2"	2-32/64"	2-50/64"	***BU29***	**32.05**	10	***RBU29***	**287.00**	60	***BBU29*** [2]	**126.60**	40
2"	2-48/64"	3-4/64"	***B29***	**35.45**	10	***RB29***	**287.00**	60	***BB29*** [2]	**121.90**	40
2"	2-48/64"	3-4/64"	***306*** [1, 5]	**45.25**	10	**---**	**---**	60	**---**	**---**	--
2"	3-6/64"	3-28/64"	***B30***	**59.40**	5	**---**	**---**	60	**---**	**---**	--
2-1/2"	3-4/64"	3-32/64"	***350*** [1]	**47.80**	5	**---**	**---**	60	**---**	**---**	--
2-1/2"	3-6/64"	3-28/64"	***BU34***	**63.00**	5	**---**	**---**	60	**---**	**---**	--
2-1/2"	3-32/64"	3-60/64"	***B34***	**77.50**	5	**---**	**---**	150	**---**	**---**	--
3"	3-32/64"	3-48/64"	***375*** [1]	**58.90**	5	**---**	**---**	60	**---**	**---**	--
3"	3-32/64"	3-60/64"	***BU35***	**93.50**	5	***RBU35***	**436.00**	150	**---**	**---**	--
3"	3-48/64"	4"	***401*** [1]	**104.00**	5	**---**	**---**	150	**---**	**---**	--
3"	3-52/64"	4-4/64"	***B35***	**82.95**	5	**---**	**---**	150	**---**	**---**	--
3"	4"	4-12/64"	***418*** [1]	**113.80**	4	**---**	**---**	200	**---**	**---**	--
3"	4-4/64"	4-28/64"	***B39***	**107.75**	5	**---**	**---**	200	**---**	**---**	--
3"	4-12/64"	4-32/64"	***450*** [1]	**113.00**	2	**---**	**---**	200	**---**	**---**	--

[1] 4 gripping fingers
[2] will become obsolete as inventory is depleted
[3] torque applies to plated iron and stainless steel clamps
[4] investment cast carbon steel
[5] not to be used with GF81, GB26, WF81, B26, RGF81, RGB26, BGF81, BGB26, RWF81, RB26 SAFETY ALERT

- Replacement nuts and bolts are available, contact the factory for more information.
- The bolts used in the Boss interlocking clamps are not standard bolts. They vary from standard bolts in their length, diameter, overall thread length and material hardness. These bolts can be retorqued, but it is ***not*** recommended that the bolts or clamps be reused, as they are designed for a single bend only. Dixon recommends using only factory supplied replacement bolts. SAFETY ALERT
- Torque values for clamps are based on dry bolts. The use of lubricant on bolts will adversely effect clamp performance. *Do not lubricate nuts and bolts.* SAFETY ALERT
- See page 610 for Fraction to Decimal conversion chart.
- recommended torque rating in ft. lbs. SAFETY ALERT

Boss Clamps

Hose ID	Hose OD From:	Hose OD To:	*Plated Iron* Part #	*Plated Iron* Price/E	Opt Qty	Torque
3"	4-16/64"	4-52/64"	***BS39***	**$203.10**	2	150
4"	4-40/64"	5"	***B45***	**207.70**	2	150
4"	4-56/64"	5-16/64"	***BS49***	**316.00**	2	200
4"	5-16/64"	5-38/64"	***BU49***	**393.05**	2	200
4"	5-34/64"	5-60/64"	***B49***	**377.55**	2	200
6"	6-56/64"	7-24/64"	***750***	**398.00**	1	200
6"	7-32/64"	8"	***850***	**398.00**	1	200



three clamp sections
6-Bolt Type
3 gripping fingers

- Replacement nuts and bolts are available, contact the factory for more information.
- The bolts used in the Boss interlocking clamps are not standard bolts. They vary from standard bolts in their length, diameter, overall thread length and material hardness. These bolts can be retorqued, but it is ***not*** recommended that the bolts or clamps be reused, as they are designed for a single bend only. Dixon recommends using only factory supplied replacement bolts. SAFETY ALERT
- Torque values for clamps are based on dry bolts. The use of lubricant on bolts will adversely effect clamp performance. *Do not lubricate nuts and bolts.* SAFETY ALERT
- See page 610 for Fraction to Decimal conversion chart.
- recommended torque rating in ft. lbs. SAFETY ALERT

Ground Joint Air Hammer Couplings

- Ground Joint Type - rounded steel head of stem fits concave inserts in spuds for superior sealing.
- metal-to-metal copper seat seal
- *plated steel* and / or *iron*
- for use with Boss clamps



complete female

stem




wing nut

Style	Hose I.D. & NPT Sizes	Coarse Nut Thread	Part #	Price/E	*Plated Steel* Part #	*Plated Steel* Price/E	*Iron* Part #	*Iron* Price/E
Compact	1/2"	1-31/64" OD x 8 TPI	***GDF6***	**$40.10**	***GBA45***	**$12.25**	***J47***	**$9.40**
	3/4"		***GDF8***	**43.30**	***GBA46***	**12.90**	***J47***	**9.40**
Heavy duty	3/4"	1-47/64" OD x 8 TPI	***GDF10***	**55.60**	***GBB18***	**19.00**	***DLB12***	**12.95**
	1"		***GDF12***	**49.90**	***GBB11***	**16.40**	***DLB12***	**12.95**



female spud



male spud



double spud

Style	NPT Sizes	Coarse Spud Thread	*Plated Steel w/ copper seat* Part #	*Plated Steel w/ copper seat* Price/E	*Plated Steel w/ copper seat* Part #	*Plated Steel w/ copper seat* Price/E	*Plated Steel w/ copper seat* Part #	*Plated Steel w/ copper seat* Price/E
Compact	1/2"	1-31/64" OD x 8 TPI	***GJ65***	**$18.45**	***GJ60***	**$25.60**	***GJ75***	**$30.50**
	3/4"		***GJ55***	**21.00**	***GJ50***	**23.30**	***GJ75***	**30.50**
Heavy duty	3/4"	1-47/64" OD x 8 TPI	***GDL8***	**23.65**	***GDL7***	**31.25**	***GDL25***	**31.60**
	1"		***GDL13***	**20.55**	***GDL10***	**27.70**	***GDL25***	**31.60**

Sand Blast Couplings

Sand blast couplings are designed for use on sand blast hose.

- supplied with screws
- nozzle holders have 1¼" NPSM thread
- rated to **110 PSI** at ambient temperature (70°F)
- *Abrasive blasting equipment must have hose safety cables (page 115) or hose coupling safety locks.* SAFETY ALERT


- Installation:
  1) Ends of hose must be cut square to fit snug against metal end.
  2) Holding hose tight to end of fitting, insert screws and turn in full, putting screw 180° from first to ensure best centering.
  3) After all screws have been placed, check tube opposite screws to be sure screws have not penetrated completely through.
  4) On quick couplings, insert safety clips

Quick Couplings



Hose Size	Hose OD	*Brass* Part #	*Brass* Price/E	*Aluminum* Part #	*Aluminum* Price/E
3/4"	1-1/2"	***BSB75***	**$30.20**	***ASB75***	**$12.05**
1"	1-7/8"	***BSB100***	**30.75**	***ASB100***	**13.00**
1-1/4"	2-5/32"	***BSB125***	**55.00**	***ASB125***	**22.20**
1-1/2"	2-3/8"	***BSB150***	**61.40**	***ASB150***	**26.55**

Nozzle Holders



Hose Size	Hose OD	*Brass* Part #	*Brass* Price/E	*Aluminum* Part #	*Aluminum* Price/E
3/4"	1-1/2"	***BNH75***	**$28.00**	***ANH75***	**$10.80**
1"	1-7/8"	***BNH100***	**32.45**	***ANH100***	**12.00**
1-1/4"	2-5/32"	***BNH125***	**46.50**	***ANH125***	**16.35**
1-1/2"	2-3/8"	***BNH150***	**64.95**	***ANH150***	**21.70**

Threaded Couplings



Size	*Brass* Part #	*Brass* Price/E	*Aluminum* Part #	*Aluminum* Price/E
1-1/4"	***BSC125***	**$33.60**	***ASC125***	**$12.60**
1-1/2"	***BSC150***	**32.50**	***ASC150***	**12.60**

Replacement Parts

Part #	Description	Price/E
SBG	black nitrile replacement gasket	**$0.80**
USBG	urethane replacement gasket	**3.20**
SBCS	replacement screw	**0.25**

Dixon Mining Fittings

These lightweight fittings are designed for underground air and water service. Metal to metal taper seat, zinc-plated steel. Available with standard hex nut or iron wing nut.





Female NPT x Nut Thread


Male NPT x Nut Thread

	stem		hex nut		wing nut		female spud		male spud	
Size	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/8"	---	---	---	---	---	---	***MFFS06-16***	**$9.40**	***MFMS06-16***[1]	**$12.90**
1/2"	***MFS08-16***	**$4.70**	***MFN16***	**$3.50**	***MFB2***	**$8.20**	---	---	---	---
3/4"	***MFS12-16***	**7.20**	***MFN16***	**3.50**	***MFB2***	**8.20**	***MFFS12-16***	**9.40**	---	---
1"	***MFS16-16***	**5.10**	***MFN16***	**3.50**	***MFB2***	**8.20**	***MFFS16-16***	**9.40**	---	---
1-1/4"	***MFS20-20***	**14.80**	***MFN20***	**9.40**	---	---	---	---	---	---
1-1/2"	***MFS24-24***	**15.70**	***MFN24***	**11.20**	---	---	---	---	---	---

Note: spuds ending with -16 for use with MFN16 or MFB2

Schedule 40 Pipe Nipples

All double reamed ends


victaulic groove x male NPT pipe nipple


male NPT pipe nipple

Size	Overall Length	Part #	Price	Part #	Price/E
1"	3"	***MFVN16***[1]	**$4.80**	***MFTN16***	**$4.80**

[1] Item will be discontinued when stock is depleted.

Air King 4 - Lug Quick-Acting Couplings


- rated to **150 PSI** at ambient temperature (70°F)
- use with Boss clamps, see page 98.

SAFETY ALERT

- *Warning: Not to be used for steam service.*
- *Caution: Must use safety clips. Safety clips are same size for both 2-lug and 4-lug Universal Couplings,* see page 105.

Hose Ends

Size	*Iron* Part #	*Iron* Price/E	*Brass* Part #	*Brass* Price/E	Opt Qty
1¼"	***AM16***	**$25.85**	***AB16***	**$60.40**	25
1½"	***AM21***	**26.00**	***AB21***	**58.00**	25
2"	***AM26***	**38.40**	***AB26***	**77.85**	10



Female NPT Ends

Size	*Iron* Part #	*Iron* Price/E	*Brass* Part #	*Brass* Price/E	Opt Qty
1¼"	***AM18***	**$25.85**	***AB18***	**$69.20**	25
1½"	***AM23***	**24.50**	***AB23***	**60.40**	25
2"	***AM28***	**30.80**	***AB28***	**72.60**	20



Washer

Rubber Washer Part #	Price/E
AWR14	**$4.30**



Air King Universal Couplings

Hose Ends



- may use with Air King ferrules

Size	Iron Part #	Iron Price/E *	Opt Qty	Brass Part #	Brass Price/E *	Opt Qty	316 Stainless Steel Part #	316 Stainless Steel Price/E *
3/8"	***AMH***	**$9.80**	25	***ABH***	**$31.30**	25	***RAMH***	**$68.95**
1/2"	***AM1***	**6.20**	50	***AB1*** [1]	**22.30**	50	***RAM1***	**55.20**
5/8"	***AM5***	**9.15**	50	***AB5***	**23.60**	50	**---**	**---**
3/4"	***AM6***	**6.25**	50	***AB6*** [1]	**23.05**	50	***RAM6***	**46.60**
1"	***AM11***	**8.20**	50	***AB11*** [1]	**29.65**	50	***RAM11***	**51.55**

Male NPT Ends



Size	Iron Part #	Iron Price/E *	Opt Qty	Brass Part #	Brass Price/E *	Opt Qty	316 Stainless Steel Part #	316 Stainless Steel Price/E *
1/4"	***AMB1***	**$9.70**	25	***ABB1***	**$24.15**	25	**---**	**---**
3/8"	***AMB***	**8.35**	25	***ABB***	**29.60**	25	***RAMB***	**$77.00**
1/2"	***AM2***	**7.25**	50	***AB2*** [1]	**24.30**	50	***RAM2***	**54.00**
3/4"	***AM7***	**7.45**	50	***AB7*** [1]	**24.05**	50	***RAM7***	**47.90**
1"	***AM12***	**8.25**	50	***AB12*** [1]	**24.80**	50	***RAM12***	**51.55**

Female NPT Ends



Size	Iron Part #	Iron Price/E *	Opt Qty	Brass Part #	Brass Price/E *	Opt Qty	316 Stainless Steel Part #	316 Stainless Steel Price/E *
1/4"	***AMC1***	**$8.65**	25	***ABC1***	**$26.15**	25	**---**	**---**
3/8"	***AMC***	**8.35**	25	***ABC***	**25.75**	25	***RAMC***	**$73.00**
1/2"	***AM3***	**7.65**	50	***AB3*** [1]	**20.50**	50	***RAM3***	**55.20**
3/4"	***AM8***	**7.35**	50	***AB8*** [1]	**24.30**	50	***RAM8***	**47.90**
1"	***AM13***	**9.30**	50	***AB13*** [1]	**24.80**	50	***RAM13***	**54.00**

Blank Ends



Iron Part #	Iron Price/E *	Opt Qty	Brass Part #	Brass Price/E *	Opt Qty	316 Stainless Steel Part #	316 Stainless Steel Price/E *
AM0	**$11.90**	25	***AB0*** [1]	**$24.15**	25	***RAM0***	**$50.30**

Triple Connections



Iron Part #	Iron Price/E *	Opt Qty	Brass Part #	Brass Price/E *	Opt Qty
AM10	**$21.60**	25	***AB10*** [1]	**$49.50**	25

[1] global investment cast
* Prices for Universal couplings listed above include safety clip (not pictured).

- *The use of an Air King safety clip or wire type retainer is necessary to ensure Air King universal couplings will not become accidentally disconnected.* This guarantees the fittings are properly connected because the safety pin will not go through the holes in mating flanges until couplings are locked in place. Only one Air King safety clip or wire type retainer is required for each Air King universal coupling. SAFETY ALERT
- To provide protection against coupling breakage and related hazards, Dixon recommends the use of a whip hose. See page 6 for Whip Hose safety information. SAFETY ALERT
- Air King is rated to **150 PSI** at ambient temperature (**70°F**).
- Standard Air King fittings come with AWR4 rubber washers.
- Air King meets pressure requirements as specified in A-A-59553 commercial item description superseding Mil Spec.WWC-633D.

SAFETY ALERT **Air King is for air and water service only** *Warning: Never use any Air King coupling for steam service!*
None of Dixon's catalog information is to be interpreted to mean that this type of coupling is suitable for use on steam hose.

Global Air King Universal Couplings

Hose Ends

Size	Plated Steel Part #	Price/E *	Pkg Qty
1/2"	***GAM1***	**$3.20**	25
3/4"	***GAM6***	**3.25**	50
1"	***GAM11***	**4.15**	50



Male NPT Ends

Size	Plated Steel Part #	Price/E *	Pkg Qty
1/2"	***GAM2***	**$3.30**	25
3/4"	***GAM7***	**3.50**	50
1"	***GAM12***	**4.10**	50



Female NPT Ends

Size	Plated Steel Part #	Price/E *	Pkg Qty
1/2"	***GAM3***	**$3.30**	25
3/4"	***GAM8***	**3.50**	50
1"	***GAM13***	**4.10**	50



Blank End

Size	Plated Steel Part #	Price/E *	Pkg Qty
---	***GAM0***	**$4.00**	25



Triple Connection

Size	Plated Steel Part #	Price/E *	Pkg Qty
---	***GAM10***	**$8.05**	25



* Prices for Universal couplings listed above include safety clip.
• couplings are supplied with rubber washers

Global Air King 4 - Lug Quick-Acting Couplings

2010 NEW

- rated to **150 PSI** at ambient temperature (70°F)
- use with Boss clamps, see page 98.

SAFETY ALERT

- *Warning: Not to be used for steam service.*
- *Caution: Must use safety clips. Safety clips are same size for both 2-lug and 4-lug Universal Couplings,* see page 105.

Hose Ends

Size	Plated Steel Part #	Price/E	Opt Qty
1¼"	***GAM16***	**$12.30**	25
1½"	***GAM21***	**13.50**	25
2"	***GAM26***	**16.65**	10



Female NPT Ends

Size	Plated Steel Part #	Price/E	Opt Qty
1¼"	***GAM18***	**$11.70**	25
1½"	***GAM23***	**12.00**	25
2"	***GAM28***	**13.10**	20



Air King is for air and water service only *Warning: Never use any Air King coupling for steam service!*
None of Dixon's catalog information is to be interpreted to mean that this type of coupling is suitable for use on steam hose.

SAFETY ALERT

Air King Ferrules



Offers a low profile streamline appearance with maximum retention.
- lightweight
- can be crimped
- See page 636 for crimp recommendations and ferrule OD ranges.

Size	Ferrule ID	*Plated Steel* Part #	Price/E
1/2"	0.906	***CCF0906***	**$0.90**
	1.120	***CCF1120***	**1.40**
	1.149	***CCF1149***	**1.40**
3/4"	1.190	***CCF1190***	**1.40**
	1.218	***CCF1218***	**1.40**
	1.246	***CCF1246***	**1.40**
	1.438	***CCF1438***	**2.00**
1"	1.469	***CCF1469***	**2.00**
	1.500	***CCF1500***	**2.00**
	1.531	***CCF1531***	**2.00**

Air King Clamps



Size	Hose OD From:	Hose OD To:	*Plated Iron* Part #	Price/E	Opt Qty	Torque [1]
3/8"	44/64"	56/64"	***CD*** [3]	**$7.70**	100	6
1/2"	1"	1-12/64"	***A4***	**8.00**	50	6
3/4"	1-8/64"	1-20/64"	***A9*** [3]	**9.20**	50	21
1"	1-20/64"	1-32/64"	***A10*** [2, 3]	**12.00**	50	21
1"	1-32/64"	1-52/64"	***A14***	**15.70**	50	21

[1] recommended torque rating in ft. lbs.
[2] can be used with ***AM6*** and ***AM11***
[3] investment cast carbon steel
- Torque values for clamps are based on dry bolts. The use of lubricant on bolts will adversely effect clamp performance.

SAFETY ALERT

SAFETY ALERT

Air King is for air and water service only *Warning: Never use any Air King coupling for steam service!*
None of Dixon's catalog information is to be interpreted to mean that this type of coupling is suitable for use on steam hose.

Air King Accessories

The use of an Air King safety clip or wire type retainer is necessary to ensure couplings will not become accidentally disconnected. This guarantees the fittings are properly connected as the pin will not go through the holes in the mating flanges until couplings are locked in place. Only one Air King safety clip or wire type retainer is required for each Air King universal coupling.

Standard Safety Clip

- same size for all coupling sizes

Wire Diameter	Part #	Price/E	Pkg Qty
.080	***AC1***	**$0.25**	25



Air King Safety Pins

- heavy duty
- oversized

Wire Diameter	Part #	Price/E
.058	***AKSP1***	**$1.15**
.091	***AKSP25***	**1.40**



Stainless Steel Clip

- same size for all coupling sizes

Wire Diameter	Part #	Price/E
.072	***AC7***	**$1.85**



Lanyards

- synthetic cord
- same size for all coupling sizes

Part #	Price/E	Pkg Qty
ACL8	**$0.30**	25



- 304 stainless
- breaking strength: 160 lbs.
- overall length: 7" eye to eye

Part #	Price/E
LR7	**$6.90**



Washers

- same size for all coupling sizes
- rubber temperature range: **-20°F** to **160°F**
- neoprene temperature range: **-20°F** to **190°F**
- neoprene is oil resistant

Black natural rubber Part #	Price/E	Pkg Qty
AWR4	**$0.50**	50

Neoprene Part #	Price/E	Pkg Qty
AWS6	**$0.70**	50



Air King with Ferrules

Universal design provides quick, easy and effective coupling of air hose. Exclusive interlocking ferrule can be crimped or swaged to achieve maximum coupling sealing and retention with a low profile streamline appearance. For crimp or swage diameter recommendations see page 635.



- iron and stainless steel Air King with carbon steel ferrules can be crimped or swaged
- rated to **150 PSI** working pressure at ambient temperature (70°F)
- *for air and water service only* SAFETY ALERT

Size	Hose OD		*Iron*		*Stainless Steel*	
	From:	To:	Part #	Price/E	Part #	Price/E
1/2"	54/64"	1-2/64"	***AM1WF***	**$12.45**	**---**	**---**
3/4"	1-4/64"	1-22/64"	***AM6WF***	**10.85**	***RAM6WF***	**$62.00**
1"	1-18/64"	1-34/64"	***AM11WF-1***	**20.05**	**---**	**---**
1"	1-30/64"	1-46/64"	***AM11WF***	**13.05**	**---**	**---**


Air King with Gauge Port



- drilled with ¼" NPT for mounting gauge
- *gauge sold separately*

Size	*Iron*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E
3/4"	***AM7T***	**$20.15**	***RAM7T***	**$73.00**

In-Line Ball Valve with Air King End




- easily maintained in line valve
- one piece ball and stem
- positive on/off

Size	*Iron*	
	Part #	Price/E
3/4"	***VAM75***	**$66.10**

Air King Universal Swivels


These universal swivel fittings interchange with other Air King fittings and include a heavy-duty, free-turning joint that swivels under pressure to prevent hose kinking. Working pressure: **150 PSI** at ambient temperature (70°F). *For air and water service only.* SAFETY ALERT

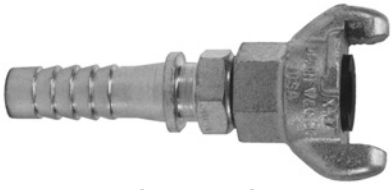

hose end



male NPT



female NPT

Size	*Iron*		*Iron*		*Iron*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/2"	**---**	**---**	***AM2SWIV***	**$56.95**	**---**	**---**
3/4"	***AM6SWIV***	**$62.50**	***AM7SWIV***	**48.40**	***AM8SWIV***	**$55.80**

SAFETY ALERT

Air King is for air and water service only *Warning: Never use any Air King coupling for steam service!*
None of Dixon's catalog information is to be interpreted to mean that this type of coupling is suitable for use on steam hose.

Surelock Quick Acting Couplings

The Surelock coupling is a multi-purpose coupling for water and air, commonly used in construction and mining. This coupling excels where ease, economy, safety and speed are paramount. They are stocked in sizes from 3/8" through 2". The pressure activated gasket allows easy coupling (less than 15 lbs. of force is required to connect the coupling) and gaskets seal upon introduction of line pressure. *Safety pin is supplied with each coupling and is required as a safety precaution.* SAFETY ALERT

Specifications:
- body: SG iron AS1831 400-250-12
- bellow seal: natural rubber (patent pending), other seal material available upon request
- working pressure: **500 PSI** at ambient temperature (70°F)

Hose Ends

Head	Size	Part #	Price/E	Pkg Qty
small	3/8"	***SL038H***	**$9.40**	50
	1/2"	***SL050H***	**9.90**	50
	3/4"	***SL075H***	**10.50**	50
	1"	***SL100H***	**11.50**	50
medium	1-1/2"	***SL150H***	**31.60**	15
	2"	***SL200H***	**37.70**	10




Male NPT Ends

Head	Size	Part #	Price/E	Pkg Qty
small	3/8"	***SL038M***	**$12.10**	50
	1/2"	***SL050M***	**11.80**	50
	3/4"	***SL075M***	**11.40**	50
	1"	***SL100M***	**12.30**	50
medium	1-1/2"	***SL150M***	**30.80**	15
	2"	***SL200M***	**34.10**	15



Female NPT Ends

Head	Size	Part #	Price/E	Pkg Qty
small	3/8"	***SL038F***	**$12.10**	50
	1/2"	***SL050F***	**11.70**	50
	3/4"	***SL075F***	**9.50**	50
	1"	***SL100F***	**11.40**	50
medium	1-1/2"	***SL150F***	**31.40**	15
	2"	***SL200F***	**32.00**	15



Surelock Quick Acting Couplings with Ferrules

Universal design provides quick, easy and effective coupling of air hose. Exclusive interlocking ferrule can be crimped or swaged to achieve maximum coupling sealing and retention with a low profile streamline appearance. See page 637 for crimp recommendations.

- Dixon recommends that all hose assemblies be tested in accordance with RMA testing procedures.
- rated to **500 PSI** working pressure at ambient temperature (70°F)
- *for air and water service only* SAFETY ALERT

Head	Size	Hose OD From:	Hose OD To:	Part #	Price/E
small	1/2"	54/64"	1-2/64"	***SL050CR***	**$14.80**
	3/4"	1-4/64"	1-22/64"	***SL075CR***	**16.00**
	1"	1-30/64"	1-46/64"	***SL100CR***	**16.75**
medium	1-1/2"	2-1/64"	2-8/64"	***SL150CR***	**70.30**
	2"	2-41/64"	2-48/64"	***SL200CR***	**75.90**



Surelock Accessories

Blank Ends


small blank end


medium blank end *

Head	Size	Part #	Price/E	Pkg Qty
small	½" to 1"	***SL00***	**$12.40**	15
medium *	1½" to 2"	***SL01***	**32.80**	3

* medium blank end comes with 1" NPT pipe plug

Three Way Connectors


small three way connector


medium three way connector *

Head	Size	Part #	Price/E	Pkg Qty
small	½" to 1"	***SL09***	**$29.70**	15
medium *	1½" to 2"	***SL10***	**108.40**	3

* medium three way connector comes with 1" NPT pipe plug

Standard Natural Rubber Seals


SLR1


SLR2

Head	Size	Part #	Price/E	Pkg Qty
small	½" to 1"	***SLR1***	**$1.50**	1
medium	1½" to 2"	***SLR2***	**1.80**	1

Safety Locking Pin

SAFETY ALERT

Warning: The use of a safety locking pin is necessary to ensure that Surelock couplings will not become accidentally disconnected. This guarantees that the fittings are properly connected as the pin will not go through the holes in both couplings until the couplings are locked into place.



Part #	Price/E	Pkg Qty
SLP1	**$0.30**	25

Seal Insertion Tools

When inserting in quantity, seal insertion tools ensure correct alignment of standard Surelock seals.


small tool


medium tool


Head	Size	Part #	Price/E
small	3/8" to 1-1/4"	***IT100SL***	**$171.70**
medium	1-1/2" to 2"	***IT200SL***	**171.70**

In-line Strainer and Lubricator

To ensure proper operation the lubricator should be installed within 10 feet of the tool to be lubricated.
To adjust the lubricator oil flow:

- Remove the plug. Using a small screw driver turn the jet clockwise to decrease flow, or counter-clockwise to increase flow
- When adjusted correctly the spray of oil exhausting should cover an area of 10 - 12" in diameter when held 18" away from the subject

- Note: econovalves are on page 523


line strainer


lubricator


Size	Description	Part #	Price/E	Pkg Qty
3/8" to 1-1/4"	in-line strainer	***SLS1***	**$148.40**	15
1" FNPT	FNPT x FNPT in-line lubricator	***SLL1***	**309.60**	1

Dix-Lock Quick Acting Couplings

- Dix-Lock is rated to **300 PSI** at ambient temperature (70°F)


Male Head x Hose End

Body Size	Hose Shank Size	Material	Part #	Price/E	Opt Qty
3/8"	1/2"	*plated steel*	***QM1***	**$51.45**	25
1/2"	3/8"	*plated steel*	***QM2***	**22.07**	25
1/2"	1/2"	*plated steel*	***QM3***	**22.51**	25
1/2"	3/4"	*plated steel*	***QM4***	**22.51**	25
1/2"	1"	*plated steel*	***QM5***	**24.91**	25
1/2"	3/8"	*brass*	***QB2***	**37.90**	--
1/2"	1/2"	*brass*	***QB3***	**37.90**	--
1/2"	3/4"	*brass*	***QB4***	**37.90**	--
1/2"	1"	*brass*	***QB5***	**38.45**	25
1/2"	3/4"	*stainless steel*	***QSS4***	**76.31**	--



Female Head x Hose End

Body Size	Hose Shank Size	Material	Part #	Price/E	Opt Qty
3/8"	1/2"	*plated steel*	***QM20***	**$44.98**	25
1/2"	3/8"	*plated steel*	***QM21***	**18.24**	25
1/2"	1/2"	*plated steel*	***QM22***	**18.24**	25
1/2"	3/4"	*plated steel*	***QM23***	**18.24**	25
1/2"	1"	*plated steel*	***QM25***	**20.10**	25
1/2"	3/8"	*brass*	***QB21***	**27.28**	--
1/2"	1/2"	*brass*	***QB22***	**27.28**	--
1/2"	3/4"	*brass*	***QB23***	**27.28**	--
1/2"	1"	*brass*	***QB25***	**29.95**	25
1/2"	3/4"	*stainless steel*	***QSS23***	**56.02**	--

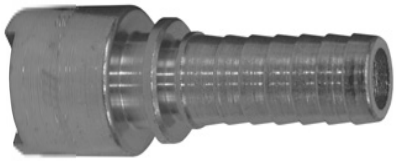

Male Head x Male NPT End

Body Size	NPT Thread Size	Material	Part #	Price/E	Opt Qty
3/8"	1/2"	*plated steel*	***QM40***	**$48.51**	25
1/2"	3/8"	*plated steel*	***QM41***	**23.26**	25
1/2"	1/2"	*plated steel*	***QM42***	**23.26**	25
1/2"	3/4"	*plated steel*	***QM43***	**23.26**	25
1/2"	1"	*plated steel*	***QM45***	**24.91**	25
1/2"	3/8"	*brass*	***QB41***	**34.00**	--
1/2"	1/2"	*brass*	***QB42***	**34.00**	--
1/2"	3/4"	*brass*	***QB43***	**34.00**	--25
1/2"	1"	*brass*	***QB45***	**35.56**	--
1/2"	3/4"	*stainless steel*	***QSS43***	**76.31**	10




Female Head x Male NPT End

Body Size	NPT Thread Size	Material	Part #	Price/E	Opt Qty
3/8"	1/2"	*plated steel*	***QM60***	**$39.98**	25
1/2"	3/8"	*plated steel*	***QM61***	**18.24**	25
1/2"	1/2"	*plated steel*	***QM62***	**18.24**	25
1/2"	3/4"	*plated steel*	***QM63***	**18.24**	25
1/2"	1"	*plated steel*	***QM65***	**32.62**	25
1/2"	3/8"	*brass*	***QB61***	**27.28**	--
1/2"	1/2"	*brass*	***QB62***	**27.28**	--
1/2"	3/4"	*brass*	***QB63***	**27.28**	--
1/2"	1"	*brass*	***QB65***	**29.83**	25
1/2"	3/4"	*stainless steel*	***QSS63***	**56.02**	--




Dix-Lock Quick Acting Couplings

- Dix-Lock is rated to **300 PSI** at ambient temperature (70°F)

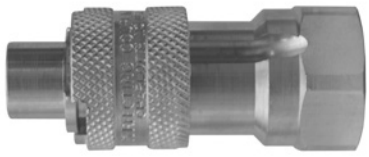Male Head x Female NPT End	Body Size	NPT Thread Size	Material	Part #	Price/E	Opt Qty
	1/2"	3/8"	*plated steel*	***QM81***	**$22.51**	25
	1/2"	1/2"	*plated steel*	***QM82***	**22.51**	25
	1/2"	3/4"	*plated steel*	***QM83***	**22.51**	25
	1/2"	1"	*plated steel*	***QM85***	**24.91**	25
	1/2"	3/8"	*brass*	***QB81***	**35.45**	--
	1/2"	1/2"	*brass*	***QB82***	**35.45**	--
	1/2"	3/4"	*brass*	***QB83***	**35.45**	--
	1/2"	1"	*brass*	***QB85***	**37.01**	25
	1/2"	3/4"	*stainless steel*	***QSS83***	**76.31**	--

Female Head x Female NPT End	Body Size	NPT Thread Size	Material	Part #	Price/E	Opt Qty
	1/2"	3/8"	*plated steel*	***QM101***	**$18.24**	25
	1/2"	1/2"	*plated steel*	***QM102***	**18.24**	25
	1/2"	3/4"	*plated steel*	***QM103***	**18.24**	25
	1/2"	1"	*plated steel*	***QM105***	**20.10**	25
	1/2"	3/8"	*brass*	***QB101***	**27.28**	-
	1/2"	1/2"	*brass*	***QB102***	**27.28**	-
	1/2"	3/4"	*brass*	***QB103***	**27.28**	-
	1/2"	1"	*brass*	***QB105***	**29.95**	25
	1/2"	3/4"	*stainless steel*	***QSS103***	**55.89**	-

Male Locking Head x Hose Shank	Body Size	Hose Shank Size	Material	Part #	Price/E
	1/2"	1/2"	*plated steel*	***QM33***	**$30.84**
	1/2"	3/4"	*plated steel*	***QM44***	**30.04**
	1/2"	1/2"	*brass*	***QB33***	**41.34**
	1/2"	3/4"	*brass*	***QB44***	**41.34**

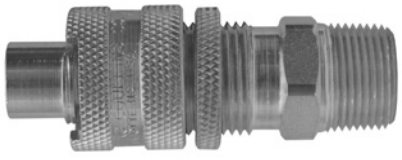Male Locking Head x Male NPT	Body Size	NPT Thread Size	Material	Part #	Price/E
	1/2"	1/2"	*plated steel*	***QM66***	**$30.84**
	1/2"	3/4"	*plated steel*	***QM88***	**30.84**
	1/2"	1/2"	*brass*	***QB66***	**41.34**
	1/2"	3/4"	*brass*	***QB88***	**41.34**

Positive safety lock
With locking nut in place sleeve cannot be moved to open coupling.


Dix-Lock Gaskets



Body Size	*Buna-N* Part #	Price/E
3/8"	***QBM1***	**$1.31**
1/2"	***QBM2***	**1.31**

Dix-Lock Converter

Body Size	*Steel* Part #	Price/E	Opt Qty
½"	***QM0***	**$60.35**	25



Dix-Lock Cap

Body Size	*Brass* Part #	Price/E	Opt Qty	*Steel* Part #	Price/E	Opt Qty
½"	***QBCAP***	**$24.56**	25	***QMCAP***	**$21.39**	25



Dix-Lock Quick-Acting Couplings with Ferrules

- rated to **300 PSI** working pressure at ambient temperature (70°F)
- for crimp recommendations see page 634
- also available in stainless steel, contact the factory for further information

Male Head

Body Size	Hose ID	Hose OD From:	Hose OD To:	Material	Part #	Price/E
1/2"	1/2"	27/32"	1-1/32"	*plated steel*	***QM3WF***	**$30.10**
1/2"	3/4"	1-5/32"	1-11/32"	*plated steel*	***QM4WF***	**30.10**
1/2"	1/2"	27/32"	1-1/32"	*brass*	***QB3WF***	**45.50**
1/2"	3/4"	1-5/32"	1-11/32"	*brass*	***QB4WF***	**45.50**



Female Head

Body Size	Hose ID	Hose OD From:	Hose OD To:	Material	Part #	Price/E
1/2"	1/2"	27/32"	1-1/32"	*plated steel*	***QM22WF***	**$25.80**
1/2"	3/4"	1-5/32"	1-11/32"	*plated steel*	***QM23WF***	**25.80**
1/2"	1/2"	27/32"	1-1/32"	*brass*	***QB22WF***	**34.85**
1/2"	3/4"	1-5/32"	1-11/32"	*brass*	***QB23WF***	**34.85**



Male Locking Head

Body Size	Hose ID	Hose OD From:	Hose OD To:	Material	Part #	Price/E
1/2"	1/2"	27/32"	1-1/32"	*plated steel*	***QM33WF***	**$38.40**
1/2"	3/4"	1-5/32"	1-11/32"	*plated steel*	***QM44WF***	**38.40**
1/2"	1/2"	27/32"	1-1/32"	*brass*	***QB33WF***	**48.90**
1/2"	3/4"	1-5/32"	1-11/32"	*brass*	***QB44WF***	**48.90**



Dual Lock Quick-Acting Couplings

- interchanges with National A type, Dixon Quick Coupling P type and Thor PHC series couplings.
- PM and PF series must be used with mating locking sleeve fittings.
- trivalent chrome plated
- spring loaded interlocking engagement
- full opening permits full flow to tool
- optional locking key prevents sleeve retraction
- **300 PSI** working pressure at ambient temperature (70°F)


Male Pipe Thread



Must be used with locking sleeve fittings below.

Body Size	NPT Thread Size	Material	Part #	Price/E	Opt Qty
1/2"	3/8"	*plated steel*	***PM6***	**$18.59**	25
1/2"	1/2"	*plated steel*	***PM8***	**18.24**	25
1/2"	3/4"	*plated steel*	***PM12***	**19.15**	25
1/2"	1"	*plated steel*	***PM16***	**21.47**	25
1/2"	1/2"	*brass*	***PMB8***	**55.41**	25
1/2"	3/4"	*brass*	***PMB12***	**59.83**	25
1/2"	1"	*brass*	***PMB16***	**59.83**	25
1/2"	3/4"	*stainless steel*	***PM12SS***	**133.40**	10

Female Pipe Thread



Must be used with locking sleeve fittings below.

Body Size	NPT Thread Size	Material	Part #	Price/E	Opt Qty
1/2"	3/8"	*plated steel*	***PF6***	**$21.43**	25
1/2"	1/2"	*plated steel*	***PF8***	**23.22**	25
1/2"	3/4"	*plated steel*	***PF12***	**23.32**	25
1/2"	1"	*plated steel*	***PF16***	**25.39**	25
1/2"	1/2"	*brass*	***PFB8***	**59.26**	25
1/2"	3/4"	*brass*	***PFB12***	**57.77**	25
1/2"	1"	*brass*	***PFB16***	**59.83**	25
1/2"	3/4"	*stainless steel*	***PF12SS***	**133.40**	10

Hose End Barb with Locking Sleeve




Body Size	Hose ID Size	Material	Part #	Price/E	Opt Qty
1/2"	3/8"	*plated steel*	***PHL6***	**$33.21**	25
1/2"	1/2"	*plated steel*	***PHL8***	**33.21**	25
1/2"	3/4"	*plated steel*	***PHL12***	**35.08**	25
1/2"	1"	*plated steel*	***PHL16***	**53.45**	25
1/2"	3/4"	*brass*	***PHLB12***	**77.98**	25
1/2"	1"	*brass*	***PHLB16***	**85.03**	25
1/2"	3/4"	*stainless steel*	***PHL12SS***	**309.00**	10

Male Pipe Thread with Locking Sleeve



Body Size	NPT Thread Size	Material	Part #	Price/E	Opt Qty
1/2"	3/8"	*plated steel*	***PML6***	**$31.42**	25
1/2"	1/2"	*plated steel*	***PML8***	**31.25**	25
1/2"	3/4"	*plated steel*	***PML12***	**31.25**	25
1/2"	3/4"	*stainless steel*	***PML12SS***	**269.43**	10

Female Pipe Thread with Locking Sleeve



Body Size	NPT Thread Size	Material	Part #	Price/E	Opt Qty
1/2"	1/2"	*plated steel*	***PFL8***	**$35.78**	25
1/2"	3/4"	*plated steel*	***PFL12***	**35.78**	25
1/2"	3/4"	*stainless steel*	***PFL12SS***	**257.83**	10

Replacement Gaskets



Buna-N		*Viton®*	
Part #	Price/E	Part #	Price/E
855206	**$2.48**	***452963***	**$6.16**

Locking Key



Body Size	*Steel*	
	Part #	Price/E
½"	***855231***	**$1.76**

fits couplings with locking sleeve

Dual Lock Quick-Acting Couplings with Ferrule

- Dual Lock couplings with ferrules are rated to **300 PSI** working pressure at ambient temperature (70°F).
- trivalent chrome plated coupling with plated steel ferrule
- also available in brass and stainless steel
- for crimp recommendations see page 634

Body Size	Hose ID	Hose OD From:	Hose OD To:	Part #	Price/E
1/2"	1/2"	54/64"	1-2/64"	***PHL8WF***	**$40.80**
1/2"	3/4"	1-10/64"	1-22/64"	***PHL12WF***	**42.65**



Dual Lock Quick-Acting Couplings with Knurled Flanged Sleeve

- large, raised collar sleeve permits easier handling when wearing gloves
- trivalent chrome plated

Body Size	Hose ID Size	Part #	Price/E	Opt Qty
1/2"	3/8"	***PHL6FS***	**$36.86**	25
1/2"	1/2"	***PHL8FS***	**36.86**	25
1/2"	3/4"	***PHL12FS***	**38.73**	25

Hose End Barb with Knurled Flanged Sleeve




Body Size	NPT Thread Size	Part #	Price/E	Opt Qty
1/2"	3/8"	***PML6FS***	**$35.07**	25
1/2"	1/2"	***PML8FS***	**34.90**	25
1/2"	3/4"	***PML12FS***	**34.90**	25

Male Pipe Thread with Knurled Flanged Sleeve




Body Size	NPT Thread Size	Part #	Price/E	Opt Qty
1/2"	1/2"	***PFL8FS***	**$39.43**	25
1/2"	3/4"	***PFL12FS***	**39.43**	25

Female Pipe Thread with Knurled Flanged Sleeve



Dual Y Valves

- dual action valve, ideal for compressor applications
- female NPT threads
- non-vented rated to **600 PSI** WOG
- vented rated to **125 PSI** CWP (Cold Working Pressure)

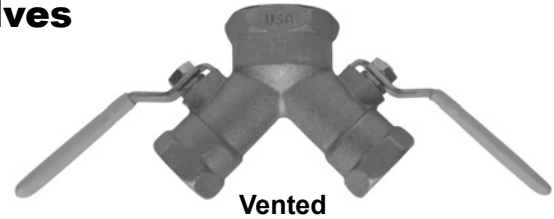

Non-Vented

Female NPT Inlet (1)	Female NPT Outlet (2)	*Brass* Part #	Price/E
1"	¾"	***BBV100DW***	**$118.50**
1¼"	¾"	***BBV125DW***	**118.50**

Vented

Female NPT Inlet (1)	Female NPT Outlet (2)	*Brass* Part #	Price/E
1"	¾"	***BBV100DWV***	**$118.50**
1¼"	¾"	***BBV125DWV***	**118.50**

Compressor Y

- converts a single supply source to a dual outlet

Female NPT Inlet (1)	Male NPT Outlet (2)	*Iron* Part #	Price/E
1"	¾"	***Y10075***	**$58.00**




In-Line Lubricators

Designed to protect portable or stationary air tools by efficiently oiling the tool mechanisms. Each time an air tool is operated, a fine mist of oil is injected into it along with the air from the compressor. Installation is recommended within 25 feet of the tool to be lubricated. Refer to the arrow for proper air flow direction. Transparent sight disc allows visual inspection of oil level. Oil flow regulated by screwdriver screw adjustment. Minimum flow rate is 30 SCFM.

SAFETY ALERT Not recommended for constant flow applications. For reciprocating tools only.

Type of oil to use:
Use any petroleum-base, non-detergent light weight oil (SAE 10/150SSU) which will readily break up into a mist, i.e., Mobil DTE light or comparable oil. *Do not use any synthetic oil or oils containing additives or solvents.* SAFETY ALERT
See page 131 for air tool lubricant.





NPT Sizes	Oil Capacity	Max. Working Pressure at ambient temperature (70°F)	Air Flow at 70 PSI	*Aluminum* Part #	*Aluminum* Price/E
½"	1.4 fluid ozs.	**500 PSI**	30 SCFM	***PL300***	**$105.50**
¾"	3.7 fluid ozs.	**200 PSI**	70 SCFM	***PL400***	**110.80**
¾"	11.0 fluid ozs.	**300 PSI**	70 SCFM	***PL400L***	**137.40**
1"	16.0 fluid ozs.	**250 PSI**	100 SCFM	***PL500***	**183.20**

Replacement Parts

Description	Part #	Price/E	Description	Part #	Price/E
(A) oil adjustment valve assembly	***851661***	**$44.95**	(D) fill plug O-ring	***700013-214***	**$1.50**
			(E) sight disk	***452532***	**2.45**
(B) valve gasket	***452531***	**2.35**	(F) sight disk seal	***700013-016***	**1.65**
(C) fill plug	**452525**	**13.10**	(G) sight disk lock nut	***452533***	**6.75**

In-Line Air Filters

Designed specifically for the protection of small air tools, such as impact wrenches, nut runners, grinders and screwdrivers. The all-anodized, lightweight aluminum housing is compact and can be used directly before the air tool.

- maximum operating pressure: **500 PSI**
- operating temperatures: **35°F** to **200°F**
- air flow is 140 SCFM
- standard element is 40 micron, which ensures minimum pressure drop
- elements can be replaced quickly



Male NPT	Overall Length	Diameter	Weight Lbs.	*Aluminum* Part #	*Aluminum* Price/E
3/4"	3-13/16"	1-1/2"	.46	***9076M***	**$65.00**

In-Line Lubricator with Filter

Combination unit consists of ***9076M*** particle filter with 40 micron sintered bronze element and ***PL400*** (3.7 ounce) or ***PL400L*** (11.0 ounce) lubricator.



NPT Sizes	Oil Capacity	Max.Work. Press. at ambient temp. (70°F)	*Aluminum* Part #	*Aluminum* Price/E
¾"	3.7 fluid ozs.	**200 PSI**	***PL400WF***	**$191.40**
¾"	11.0 fluid ozs.	**300 PSI**	***PL400LWF***	**216.75**

In-Line Lubricator Base

2010 NEW



- Base can be fitted to any existing PL lubricator, keeps lubricator from flipping or rolling over, ensuring that it provides continuous lubrication to the downstream air tool.

Description	*Aluminum* Part #	*Aluminum* Price/E
leveling base for PL300	***LB300***	**$15.00**
leveling base for PL400	***LB400***	**15.75**
leveling base for PL500	***LB500***	**16.00**

King Safety Cables

When hose, couplings or clamps fail, or there is an accidental separation of the assembly, King safety cables minimize damage to equipment and injuries to operators. King safety cable reaches across the hose fittings to provide standby safety for hose. Spring-loaded loops in the cable ends open easily to pass over the couplings for a firm grip on the hose. Thoroughly tested with years of service. A positive safeguard for air hose connections - helps you meet today's safety standards. *King safety cable must be installed in the extended position (no slack).* SAFETY ALERT

Features:
- hose-to-hose or hose-to-rigid outlet
- King cable is the low cost answer to eliminate injuries caused by broken air hose connections
- highly resistant to rust and corrosion
- no tools needed - easy to install and remove
- max. working pressure: **200 PSI**



Hose End — Tool End

Style WSR, for hose-to-tool service

Hose ID	Cable	Length	Max. Work. Press. PSI	Steel Part #	Steel Price/E	Stainless Steel Part #	Stainless Steel Price/E
½" - 1¼"	1/8"	20¼"	**200**	***WSR1***	**$18.25**	***WSR1SS***	**$47.75**
½" - 2"	3/16"	28"	**200**	***WSR3***	**26.20**	**---**	**---**
1½" - 3"	1/4"	38"	**200**	***WSR2***	**28.80**	***WSR2SS***	**100.75**
4"	3/8"	44"	**200**	***WSR4***	**63.75**	**---**	**---**



Hose End — Hose End

Style W, for hose-to-hose service

Hose ID	Cable	Length	Max. Work. Press. PSI	Steel Part #	Steel Price/E	Stainless Steel Part #	Stainless Steel Price/E
½" - 1¼"	1/8"	20¼"	**200**	***WB1***	**$18.25**	***WB1SS***	**$50.50**
½" - 2"	3/16"	28"	**200**	***WB3***	**27.05**	**---**	**---**
1½" - 3"	1/4"	38¼"	**200**	***WA2***	**29.70**	***WA2SS***	**106.00**
4"	3/8"	44"	**200**	***WA4***	**63.80**	**---**	**---**

Note: Cables are shipped with safety restraint labels attached. Labels are not pictured.


King Safety Cable Options



WSR1E
WSR1E with stainless steel marine eye




WB1C
WB1 with safety clip and lanyard



correct installation

SAFETY ALERT

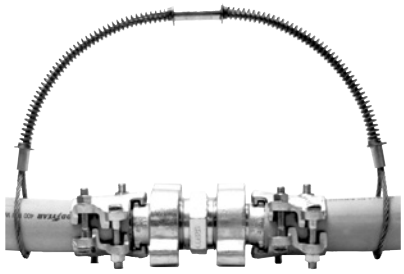

incorrect installation

Cable	Part #	Description	Max. Working Pressure PSI	Price/E
1/8"	***WSR1C***	WSR1 with safety clip and lanyard used to lock Air King couplings	**200**	**$31.75**
1/8"	***WB1C***	WB1 with safety clip and lanyard used to lock Air King couplings	**200**	**31.20**
1/8"	***WSR1E***	WSR1 with stainless steel safety marine eye used to connect safety cable to a bolt on tool	**200**	**52.70**
1/4"	***WA2B***	WA2 with bronze/copper ferrule for special environmental conditions	**200**	**59.50**

See page 5 for OSHA regulations.


Spring Guard



Protects hose against the effects of flexing at its most vulnerable point - immediately behind the coupling. End 'tang' allows end guard to be secured under a clamp or ferrule. Made of half-round galvanized steel wire to fit hose OD's from 7/8" to 3-1/4".

Guard ID	Hose OD From	Hose OD To	Wire Gauge	Over All Length	Tang Length	Approx. # of Coils	Galvanized Steel Part #	Galvanized Steel Price/E
¾"	7/8"	15/16"	0.175	12"	1"	33	***SEGC1-0.75-12***	**$9.00**
1"	15/16"	1-1/4"	0.175	12"	1"	33	***SEGC1-1.00-12***	**10.00**
1¼"	1-1/4"	1-1/2"	0.175	14"	2"	39	***SEGC1-1.25-14***	**12.00**
1½"	1-1/2"	1-3/4"	0.175	14"	2"	39	***SEGC1-1.50-14***	**14.00**
1¾"	1-3/4"	2"	0.175	16"	2"	44	***SEGC1-1.75-16***	**16.00**
2"	2"	2-1/2"	0.280	16"	2"	44	***SEGC1-2.00-16***	**20.00**
2½"	2-1/2"	3"	0.280	18"	2"	50	***SEGC1-2.50-18***	**25.00**
3"	3"	3-1/4"	0.280	18"	2"	50	***SEGC1-3.00-18***	**30.00**

ASME Air Receiver Manifold

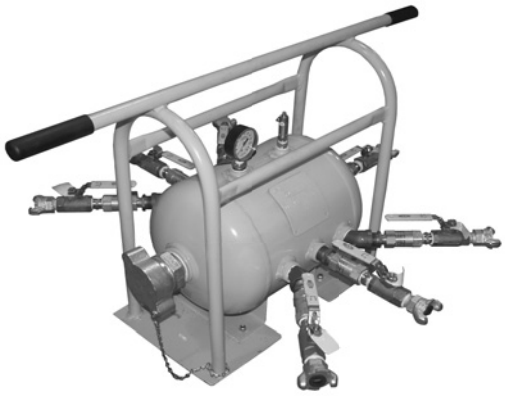


1217AR-4AK

Compressor Air Receiver:
- built to ASME Code, National Board registered
- 7 gallon capacity
- all openings are female NPT thread
- conforms to OSHA standards 1910.169 and 1926.306
- painted safety orange
- **200 PSI** working pressure



1217AR-4FR

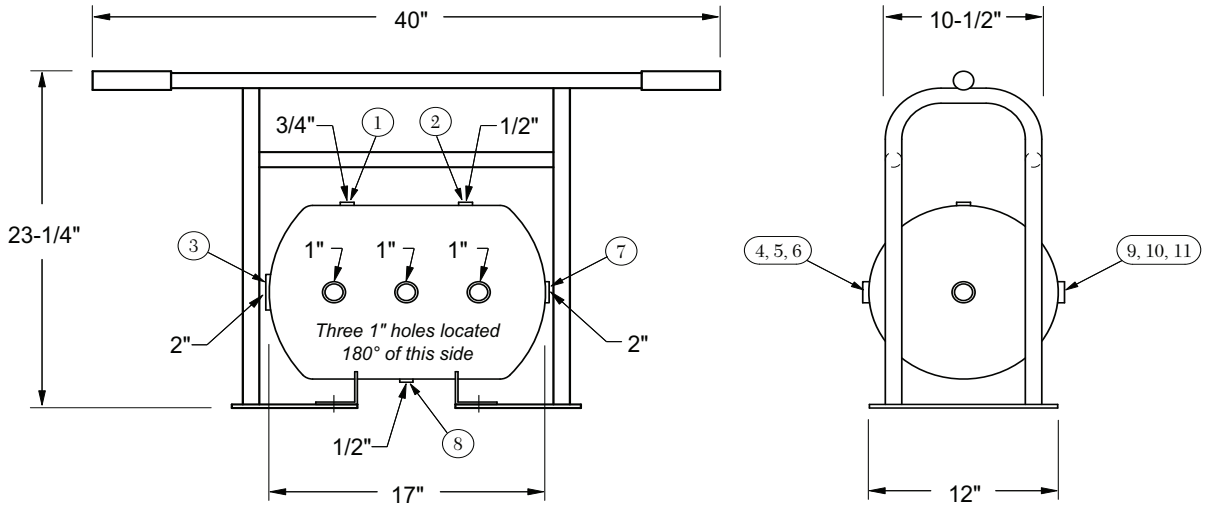


Dixon 1217AR-4AK air receiver manifold assembly with Air King outlet ports includes the following:

Part # / Locations	Description	Price/E	Price
1217AR-4	ASME compressed air receiver	**---**	**$1086.00**
1217FRAME	1 protective frame	**---**	**370.00**
Location 1	1 *HB2F6M* ¾" male x ¼" female hex bushing	**$6.11**	**6.11**
	1 *GL345* 0-300 PSI gauge	**15.25**	**15.25**
Location 2	1 *HB2F4M* ½" male x ¼" female hex bushing	**3.45**	**3.45**
	1 *SV200* safety pop-off valve	**27.50**	**27.50**
Location 3	1 *GM28* 2" male spud	**49.10**	**49.10**
	1 *B27SC* wing nut cap	**74.20**	**74.20**
Locations 4, 5, 6, 9, 10, 11	6 *HB6F8M* 1" male x ¾" female bushings	**9.01**	**54.06**
	6 *BCN75* ¾" brass hex nipples	**6.11**	**36.66**
	6 *BBLV75* ball valves	**52.90**	**317.40**
	6 *SCVS6* safety shut-off valves	**84.48**	**506.88**
	6 *AM7* Air King universal couplings	**7.45**	**44.70**
	4 *SE45100* 45° street elbow (1 each in locations 4, 6, 9 and 11 only)	**8.60**	**34.40**
Location 7	1 *HB2075* 2" male x ¾" female bushing	**7.90**	**7.90**
	1 *BCN75* ¾" brass hex nipples	**6.11**	**6.11**
	1 *BBLV75* ball valve	**52.90**	**52.90**
	1 *SCVS6* safety shut-off valve	**84.48**	**84.48**
	1 *AM7* Air King universal coupling	**7.45**	**7.45**
Location 8	1 *HB2F4M* ½" male x ¼" female hex bushing	**3.45**	**3.45**
	1 *D04* ¼" drain cock	**4.30**	**4.30**
	Labor cost for assembly of complete unit	**------**	**320.00**
1217AR-4AK	7 gallon ASME compressed air receiver manifold complete assembly with Air King	**------**	**3059.85**
NEW ***1217AR-4PHL***	7 gallon ASME compressed air receiver manifold complete assembly with Dual Lock	**------**	**3230.00**
	Tank and frame only		
1217AR-4FR	7 gallon ASME compressed air receiver with frame only	**---**	**$1456.00**

ASME Air Tank with Fittings and Watts Filter

2010 NEW

Designed to remove compressed air contaminants such as water, compressor oil, dirt, pipe scale and water particles from the air supply at the point of entry into the ASME air tank.

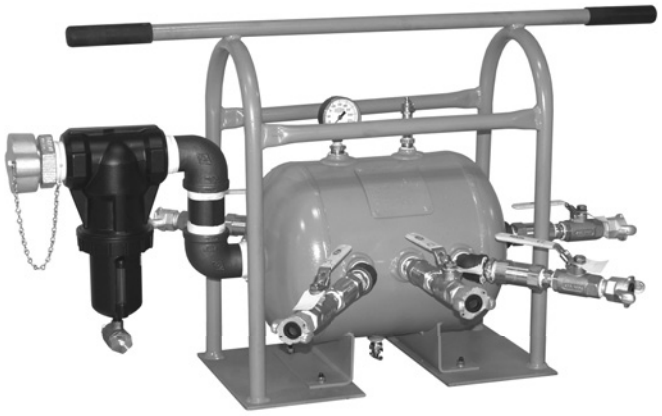

- includes basic 1217AR-4AK ASME manifold assembly
- F602-16WJR 2" auto drain filter with 26 ounce metal bowl and related plumbing installed on the inlet port of the ASME air tank
- Air supply hose connects directly to GM28 2" male spud on the filter air inlet.
- includes a B27SC wing nut cap with a chain

ASME air tank with fittings and Watts filter

Size	Part #	Price/E
2" inlet, ¾" outlets	***1217AR-4AKWF***	**$4475.00**

Wilkerson Combination Unit with Protective Frame

2010 NEW

Provides downstream air preparation with protective frame and includes the following components:





- *C31-08AMB* 1" FRL with metal bowls and auto drain filter
- *FBV100* 1" brass ball valve and *AM12* air king on inlet port
- *BBV100DTW* 2-way ball valve installed between regulator and lubricator provides option for non-lubricated air
- heavy duty frame protects air prep components
- operating conditions:
  maximum pressure: **250 PSIG**
  temperature range: **40°F** to **150°F**
  SCFM: 320


FRL with protective frame

Size	Part #	Price/E
1"	***C31-08FRAME***	**$1840.00**

Safety Check Valves

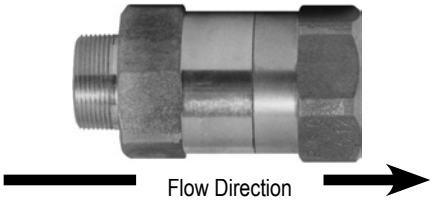


Check Valve in Open Position


Check Valve in Closed Position


Features:
- high flow valve to provide optimum performance
- controls excess air flow (SCFM) in only one direction
- automatically senses change in air flow and shuts off the flow in the event of a surge in excess of valve flow rating thus preventing hose whip
- conforms to OSHA regulation 1926.302 (b) (7) requiring a safety device at the source of the air supply and at branch air lines
- applications include temporary plant/factory air, construction sites, shipyards or utilities
- *not for use in applications where 100% of the available air is required, i.e. sand blast, pile driving rigs,expansion joint blow down pipes, etc.*
- *does not prevent backflow* SAFETY ALERT

Construction:
- solid brass body and valve
- stainless steel spring and roll pin
- maximum working pressure: **250 PSI**
- maximum temperature: **250°F**

Use:
- Safety check valves operate by using the pressure differential across the valve to operate the valve and spring assembly. The pressure differential is directly related to the flow of air (SCFM) through the valve.
- When the pressure differential is within the operating limits - below the cutoff flow - of the unit, the force on the valve exerted by the spring is greater than that caused by the pressure differential (see "Open Position" graphic above). The valve remains open and normal operation continues.
- When the pressure differential is above the cutoff limit, the force on the valve exerted by the pressure differential is greater than the force exerted by the spring, and the valve closes (see the "Closed Position" graphic above).
- After the repair is made, normal operation is automatically enabled when pressure across the valve equalizes through the bleeder hole.
- The valve spring size can be specified by determining the air flow during normal operation and by estimating the air flow if a failure or rupture occurs.

NPT and Hose ID Size	Part #	Cut-off Flow Rate (SCFM at 90 PSI)	Price/E
1/4"	***SCVL2***	23-29	**$53.00**
3/8"	***SCVM3***	39-47	**49.71**
	SCVS3	52-65	**49.71**
1/2"	***SCVM4***	70-78	**53.38**
	SCVS4	80-96	**53.38**
3/4"	***SCVL6***	72-88	**84.48**
	SCVM6	92-108	**84.48**
	SCVR6	112-128	**84.48**
	SCVJ6	132-148	**84.48**
	SCVS6	160-180	**84.48**
	SCVH6	180-200	**84.48**
1"	***SCVL8***	165-195	**95.55**
	SCVM8	220-260	**95.55**
	SCVS8	280-320	**95.55**
	SCVH8	310-340	**95.55**
1-1/4"	***SCVL10***	260-290	**$197.37**
	SCVM10	300-340	**197.37**
	SCVS10	440-500	**197.37**
	SCVH10	570-630	**197.37**
1-1/2"	***SCVL12***	300-360	**331.06**
	SCVM12	470-530	**331.06**
	SCVS12	640-720	**331.06**
	SCVH12	750-830	**331.06**
2"	***SCVL16***	510-590	**452.02**
	SCVM16	725-825	**452.02**
	SCVS16	900-1050	**452.02**
	SCVH16	1100-1200	**452.02**
3"	***SCVL24***	1200-1400	**1919.63**
	SCVS24	2400-2700	**1919.63**
	SCVH24	2850-3050	**1919.63**

Actual Size Profile Chart

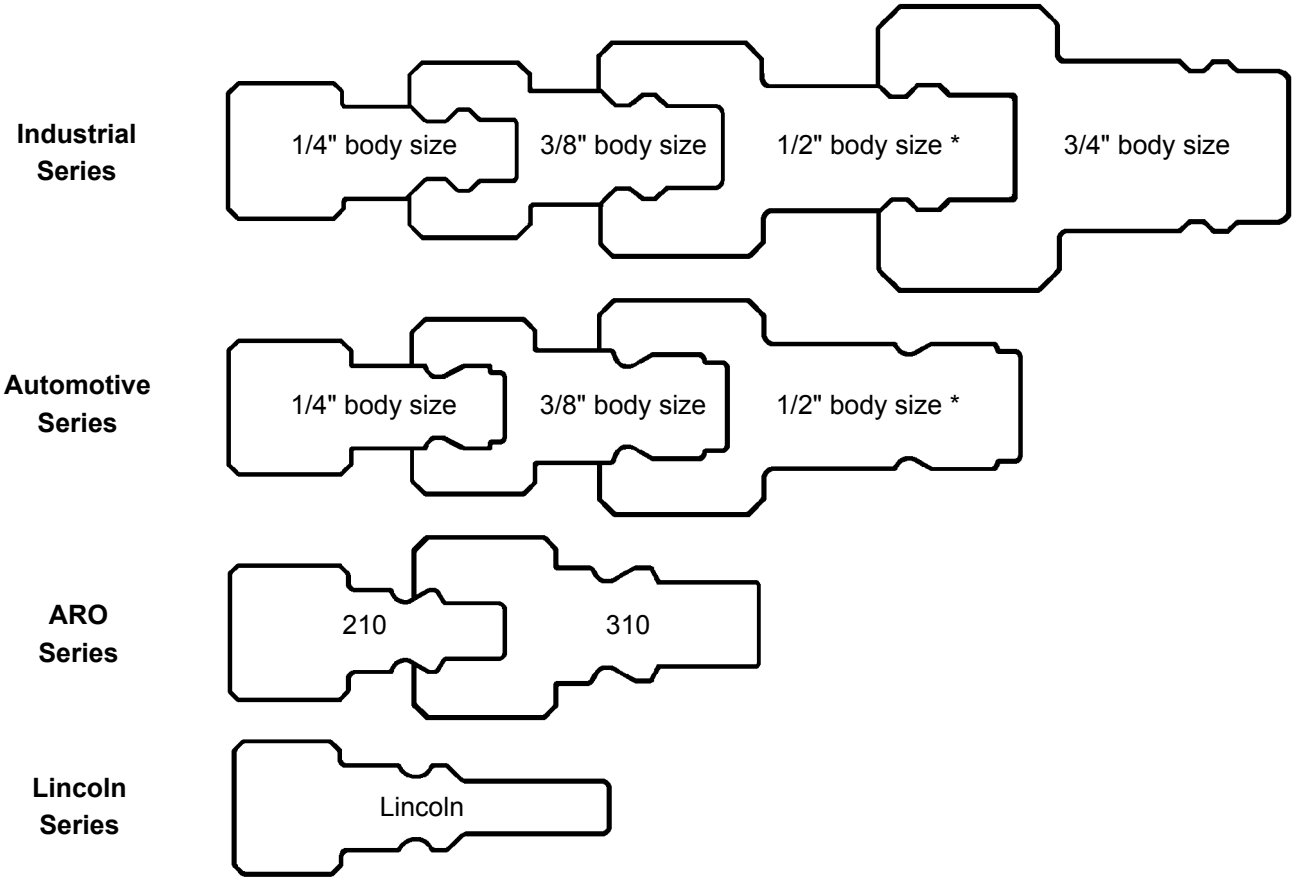


* ½" industrial series may also interchange with ½" automotive series

1/4" Ball Swivel Plugs

- material:
  - threaded portion is brass
  - plug and nut portion is nickel-plated hardened steel
- rated **250 PSI**


Size	Part #	Price/E	Opt Qty
1/4"	***DCP21SWIV***	**$12.95**	10

Male NPT Ball Swivel x Industrial Plug



Size	Part #	Price/E	Opt Qty
1/4"	***DCP37SWIV***	**$12.95**	10

Male NPT Ball Swivel x ARO Plug



Size	Part #	Price/E	Opt Qty
1/4"	***DCP1SWIV***	**$12.95**	25

Male NPT Ball Swivel x Automotive Plug



Angled Swivel Industrial Interchange Plugs

Angled swivel plugs are lightweight and streamlined. They can be used in the automotive and electronics industries, workstations, commercial and residential construction, and robotic joints. Helps alleviate carpal tunnel syndrome and back stress resulting in fewer lost time injuries.

- 360° circular rotation and 45° angled rotation
- material:
  - body is nickel-plated steel
  - dust cover is polyurethane
- rated to **145 PSI**
- temperature range: **20°F** to **140°F**
- *for air service only*



Male Thread	Body Size	NPT Thread Size	Part #	Price/E
	1/4"	1/8"	***DCP2101ANSW***	**$68.35**
	1/4"	1/4"	***DCP21ANSW***	**59.40**
	1/4"	3/8"	***DCP2103ANSW***	**63.25**
	3/8"	1/4"	***DCP2502ANSW***	**66.15**
	3/8"	3/8"	***DCP25ANSW***	**73.15**

Air Chief Industrial Interchange Quick-Connect Plugs

Air Chief industrial quick-connect plugs are the popular industrial interchange design and will interchange with many other makes. Couplers shut-off when disconnected.

- rated to **300 PSI**
- temperature range: **-40°F** to **250°F**
- *for air service only*
- interchanges with MIL Spec. MIL-C-4109F/A-A-59439



Female Pipe Thread	Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
	1/4"	1/8"	*steel*	37 CFM	***DCP2021***	**$3.00**	20
	1/4"	1/4"	*steel*	37 CFM	***DCP20***	**2.40**	20
	1/4"	3/8"	*steel*	37 CFM	***DCP2023***	**4.95**	20
	3/8"	1/4"	*steel*	70 CFM	***DCP2622***	**3.95**	10
	3/8"	3/8"	*steel*	70 CFM	***DCP26***	**4.60**	10
	3/8"	1/2"	*steel*	70 CFM	***DCP2624***	**8.80**	10
	1/2"	3/8"	*steel*	150 CFM	***DCP1823***	**8.70**	10
	1/2"	1/2"	*steel*	150 CFM	***DCP18***	**7.40**	10
	1/2"	3/4"	*steel*	150 CFM	***DCP1826***	**12.95**	10
	3/4"	1/2"	*steel*	200 CFM	***DCP7024***	**14.90**	10
	3/4"	3/4"	*steel*	200 CFM	***DCP7026***	**16.25**	5
	3/4"	1"	*steel*	200 CFM	***DCP7028***	**29.60**	5
	1/4"	1/4"	*brass*	37 CFM	***DCP20B***	**3.00**	20
	1/4"	3/8"	*brass*	37 CFM	***DCP2023B***	**4.60**	20
	1/4"	1/4"	*303 stainless*	37 CFM	***DCP20S***	**9.90**	5
	3/8"	3/8"	*303 stainless*	70 CFM	***DCP26S***	**22.50**	5
	1/2"	1/2"	*303 stainless*	150 CFM	***DCP18S***	**24.50**	5

Air Chief Industrial Interchange Quick-Connect Plugs

Air Chief industrial quick-connect plugs are the popular industrial interchange design and will interchange with many other makes. Couplers shut-off when disconnected.

- rated to **300 PSI**
- temperature range: **-40°F** to **250°F**
- *for air service only*
- interchanges with MIL Spec. MIL-C-4109F/A-A-59439

Male Pipe Thread

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/8"	*steel*	37 CFM	***DCP2101***	**$2.45**	20
1/4"	1/4"	*steel*	37 CFM	***DCP21***	**2.10**	20
1/4"	3/8"	*steel*	37 CFM	***DCP2103***	**3.45**	20
3/8"	1/4"	*steel*	70 CFM	***DCP2502***	**3.60**	10
3/8"	3/8"	*steel*	70 CFM	***DCP25***	**3.60**	10
3/8"	1/2"	*steel*	70 CFM	***DCP2504***	**7.55**	10
1/2"	3/8"	*steel*	150 CFM	***DCP1703***	**6.05**	10
1/2"	1/2"	*steel*	150 CFM	***DCP17***	**6.05**	10
1/2"	3/4"	*steel*	150 CFM	***DCP1706***	**11.45**	10
3/4"	1/2"	*steel*	200 CFM	***DCP7104***	**13.55**	10
3/4"	3/4"	*steel*	200 CFM	***DCP7106***	**13.75**	5
3/4"	1"	*steel*	200 CFM	***DCP7108***	**21.50**	5
1/4"	1/8"	*brass*	37 CFM	***DCP2101B***	**3.20**	20
1/4"	1/4"	*brass*	37 CFM	***DCP21B***	**2.10**	20
1/4"	3/8"	*brass*	37 CFM	***DCP2103B***	**4.00**	20
1/4"	1/4"	*303 stainless*	37 CFM	***DCP21S***	**7.80**	5
3/8"	3/8"	*303 stainless*	70 CFM	***DCP25S***	**16.00**	5
1/2"	1/2"	*303 stainless*	150 CFM	***DCP17S***	**24.50**	5



Standard Hose Barb

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*steel*	37 CFM	***DCP2142***	**$3.19**	20
1/4"	5/16"	*steel*	37 CFM	***DCP2143***	**4.25**	20
1/4"	3/8"	*steel*	37 CFM	***DCP2144***	**4.15**	20
3/8"	1/4"	*steel*	70 CFM	***DCP2542***	**6.00**	10
3/8"	3/8"	*steel*	70 CFM	***DCP2544***	**4.65**	10
3/8"	1/2"	*steel*	70 CFM	***DCP2545***	**7.05**	10
1/2"	3/8"	*steel*	150 CFM	***DCP1744***	**6.50**	10
1/2"	1/2"	*steel*	150 CFM	***DCP1745***	**6.00**	10
1/2"	3/4"	*steel*	150 CFM	***DCP1746***	**9.40**	10
3/4"	1/2"	*steel*	200 CFM	***DCP7145***	**19.30**	5
3/4"	3/4"	*steel*	200 CFM	***DCP7146***	**18.90**	5
3/4"	1"	*steel*	200 CFM	***DCP7148***	**28.75**	5
1/4"	1/4"	*brass*	37 CFM	***DCP2142B***	**3.45**	20
1/4"	3/8"	*brass*	37 CFM	***DCP2144B***	**4.07**	20
1/4"	1/4"	*303 stainless*	37 CFM	***DCP2142S***	**10.20**	5
3/8"	3/8"	*303 stainless*	70 CFM	***DCP2544S***	**16.50**	5
1/2"	1/2"	*303 stainless*	150 CFM	***DCP1745S***	**24.50**	5





DCP7145

Push-On Hose Barb

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*steel*	37 CFM	***DCP2142L***	**$3.19**	25
1/4"	3/8"	*steel*	37 CFM	***DCP2144L***	**3.75**	25
3/8"	1/4"	*steel*	70 CFM	***DCP2542L***	**6.05**	25
3/8"	3/8"	*steel*	70 CFM	***DCP2544L***	**5.45**	25



Air Chief Industrial Interchange Quick-Connect Couplers

Air Chief industrial quick-connect couplers are the popular Industrial Interchange design and will interchange with many other makes. Couplers shut-off when disconnected.

- rated to **300 PSI**
- temperature range: **-40°F** to **250°F**
- *for air service only*
- interchanges with MIL Spec. MIL-C-4109F/A-A-59439

Female Pipe Thread

semi-automatic pull sleeve to connect



Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/8"	*brass*	37 CFM	***DC2021***	**$13.35**	10
1/4"	1/4"	*brass*	37 CFM	***DC20***	**8.80**	10
1/4"	3/8"	*brass*	37 CFM	***DC2023***	**12.00**	10
3/8"	1/4"	*steel*	70 CFM	***DC2622***	**19.80**	10
3/8"	3/8"	*steel*	70 CFM	***DC26***	**18.60**	10
3/8"	1/2"	*steel*	70 CFM	***DC2624***	**23.70**	10
1/2"	3/8"	*steel*	150 CFM	***DC1023***	**27.10**	10
1/2"	1/2"	*steel*	150 CFM	***DC10***	**25.40**	10
1/2"	3/4"	*steel*	150 CFM	***DC1026***	**33.25**	10
3/4"	1/2"	*brass*	200 CFM	***DC7024*** *	**61.90**	1
3/4"	3/4"	*brass*	200 CFM	***DC7026*** *	**63.30**	1
3/4"	1"	*brass*	200 CFM	***DC7028*** *	**68.85**	1
1/4"	1/4"	*303 stainless*	37 CFM	***DC20S***	**42.00**	5
3/8"	3/8"	*303 stainless*	70 CFM	***DC26S***	**73.00**	5
1/2"	1/2"	*303 stainless*	150 CFM	***DC10S***	**92.00**	5

* 3/4" are automatic sleeve

Male Pipe Thread

semi-automatic pull sleeve to connect



Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/8"	*brass*	37 CFM	***DC2101***	**$11.30**	10
1/4"	1/4"	*brass*	37 CFM	***DC21***	**9.35**	10
1/4"	3/8"	*brass*	37 CFM	***DC2103***	**11.15**	10
3/8"	1/4"	*steel*	70 CFM	***DC2502***	**18.55**	10
3/8"	3/8"	*steel*	70 CFM	***DC25***	**19.25**	10
3/8"	1/2"	*steel*	70 CFM	***DC2504***	**23.15**	10
1/2"	3/8"	*steel*	150 CFM	***DC903***	**25.20**	10
1/2"	1/2"	*steel*	150 CFM	***DC9***	**22.40**	10
1/2"	3/4"	*steel*	150 CFM	***DC906***	**30.05**	10
3/4"	1/2"	*brass*	200 CFM	***DC7104*** *	**61.90**	1
3/4"	3/4"	*brass*	200 CFM	***DC7106*** *	**63.30**	1
3/4"	1"	*brass*	200 CFM	***DC7108*** *	**70.25**	1
1/4"	1/4"	*303 stainless*	37 CFM	***DC21S***	**39.00**	5
3/8"	3/8"	*303 stainless*	70 CFM	***DC25S***	**70.00**	5
1/2"	1/2"	*303 stainless*	150 CFM	***DC9S***	**95.29**	5

* 3/4" are automatic sleeve

Standard Hose Barb

semi-automatic pull sleeve to connect




Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*brass*	37 CFM	***DC2042***	**$11.35**	10
1/4"	5/16"	*brass*	37 CFM	***DC2043***	**12.10**	10
1/4"	3/8"	*brass*	37 CFM	***DC2044***	**11.45**	10
3/8"	1/4"	*steel*	70 CFM	***DC2642***	**22.44**	10
3/8"	3/8"	*steel*	70 CFM	***DC2644***	**19.95**	10
3/8"	1/2"	*steel*	70 CFM	***DC2645***	**21.25**	10
1/2"	3/8"	*steel*	150 CFM	***DC1044***	**28.85**	10
1/2"	1/2"	*steel*	150 CFM	***DC1045***	**27.20**	10
1/2"	3/4"	*steel*	150 CFM	***DC1046***	**29.10**	10
3/4"	1/2"	*brass*	200 CFM	***DC7045*** *	**68.00**	1
3/4"	3/4"	*brass*	200 CFM	***DC7046*** *	**68.85**	1
3/4"	1"	*brass*	200 CFM	***DC7048*** *	**71.10**	1
1/4"	1/4"	*303 stainless*	37 CFM	***DC2042S***	**48.00**	5
3/8"	3/8"	*303 stainless*	70 CFM	***DC2644S***	**74.00**	5
1/2"	1/2"	*303 stainless*	150 CFM	***DC1045S***	**95.29**	5

* 3/4" are automatic sleeve

Push-On Hose Barb

semi-automatic pull sleeve to connect



Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*brass*	37 CFM	***DC2042L***	**$11.50**	25
1/4"	3/8"	*brass*	37 CFM	***DC2044L***	**11.80**	25
3/8"	1/4"	*steel*	70 CFM	***DC2642L***	**28.95**	25
3/8"	3/8"	*steel*	70 CFM	***DC2644L***	**21.55**	25

Parker Ez-Mate Industrial Interchange Couplers

2010 NEW

Ez-mate couplings combine push-to-connect, exhaust-style action with a self-locking valve sleeve to guard against accidental disconnection. Simply follow the direction of the on-off arrow stamped on the yellow chromate valve sleeve. Valve sleeve acts as an integral shut-off valve that allows connection and disconnection at zero pressure. When the sleeve is moved to shut off air flow, it automatically vents downstream allowing for disconnection at zero pressure and eliminating the risk of hose whip.

- rated to **300 PSI**
- temperature range (standard seals): **-40°F** to **+250°F**
- Meet ISO 4414 requirements for a controlled pressure release system.
- not recommended for vacuum service

Female Pipe Thread

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"-18	*steel*	37 CFM	***DC20SE***	**$44.55**	10
1/4"	3/8"-18	*steel*	37 CFM	***DC2023SE***	**48.40**	10
3/8"	3/8"-18	*steel*	70 CFM	***DC26SE***	**54.10**	5
3/8"	1/2"-14	*steel*	70 CFM	***DC2624SE***	**59.60**	5
1/2"	1/2"-14	*steel*	150 CFM	***DC10SE***	**58.65**	5
1/2"	3/4"-14	*steel*	150 CFM	***DC1026SE***	**72.10**	5
3/4"	3/4"-14	*steel*	200 CFM	***DC7026SE***	**99.90**	5
3/4"	1"-11-1/2	*steel*	200 CFM	***DC7028SE***	**109.90**	5




Male Pipe Thread

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"-18	*steel*	37 CFM	***DC21SE***	**$51.80**	10
1/4"	3/8"-18	*steel*	37 CFM	***DC2103SE***	**60.40**	10
3/8"	3/8"-18	*steel*	70 CFM	***DC25SE***	**65.65**	5
1/2"	1/2"-14	*steel*	150 CFM	***DC9SE***	**70.25**	5
3/4"	3/4"-14	*steel*	200 CFM	***DC7106SE***	**132.05**	5



Standard Hose Barb

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*steel*	37 CFM	***DC2042SE***	**$62.05**	10
1/4"	3/8"	*steel*	37 CFM	***DC2044SE***	**48.40**	10
3/8"	3/8"	*steel*	70 CFM	***DC2644SE***	**69.60**	5
1/2"	1/2"	*steel*	150 CFM	***DC1045SE***	**75.45**	5



Push-Lock Hose Barb

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*steel*	37 CFM	***DC2042LSE***	**$71.75**	10
1/4"	3/8"	*steel*	37 CFM	***DC2044LSE***	**62.50**	10
3/8"	3/8"	*steel*	70 CFM	***DC2644LSE***	**67.60**	5
1/2"	1/2"	*steel*	150 CFM	***DC1045LSE***	**75.10**	5



Legris Automatic Industrial Interchange Safety Couplers

- composite, non-marring body
- 1/4" body size ensures an excellent flow and total security due to disconnection in two steps
- compatible with industrial interchange plugs
- Perfectly suited for numerous installations including:
  - pneumatic tools
  - blow guns
  - pneumatic automotive equipment



1. vents plug side



2. disconnects



male NPT straight body

NPT Size	Body Size	Part #	Price/E
1/4"	1/4"	***9405U0614***	**$29.50**
3/8"	1/4"	***9405U0618***	**29.50**



female NPT straight body

NPT Size	Body Size	Part #	Price/E
1/4"	1/4"	***9415U0614***	**$29.50**
3/8"	1/4"	***9415U0618***	**29.50**

Air Chief Industrial Interchange Quick-Connect Couplers

Air Chief industrial quick-connect couplers are the popular industrial interchange design and will interchange with many other makes. Couplers shut-off when disconnected.

- rated to **300 PSI**
- temperature range: **-40°F** to **250°F**
- *for air service only*
- interchanges with MIL Spec. MIL-C-4109F/A-A-59439

Female Pipe Thread

automatic push to connect



Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*brass*	37 CFM	***DCB20***	**$11.26**	24
1/4"	3/8"	*brass*	37 CFM	***DCB2023***	**13.29**	24
3/8"	1/4"	*brass*	70 CFM	***DCB2622***	**22.90**	12
3/8"	3/8"	*brass*	70 CFM	***DCB26***	**22.00**	12
3/8"	1/2"	*brass*	70 CFM	***DCB2624***	**24.00**	12
1/2"	3/8"	*brass*	150 CFM	***DCB1023***	**31.00**	6
1/2"	1/2"	*brass*	150 CFM	***DCB10***	**31.00**	6
1/2"	3/4"	*brass*	150 CFM	***DCB1026***	**31.00**	6
3/4"	1/2"	*brass*	200 CFM	***DC7024***	**61.90**	1
3/4"	3/4"	*brass*	200 CFM	***DC7026***	**63.30**	1
3/4"	1"	*brass*	200 CFM	***DC7028***	**68.85**	1
1/4"	1/4"	*303 stainless*	37 CFM	***DCS20***	**57.56**	5
3/8"	3/8"	*303 stainless*	70 CFM	***DCS26***	**86.00**	5
1/2"	1/2"	*303 stainless*	150 CFM	***DCS10***	**116.00**	5

Male Pipe Thread

automatic push to connect



Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*brass*	37 CFM	***DCB21***	**$11.26**	24
1/4"	3/8"	*brass*	37 CFM	***DCB2103***	**13.29**	24
3/8"	1/4"	*brass*	70 CFM	***DCB2502***	**22.90**	12
3/8"	3/8"	*brass*	70 CFM	***DCB25***	**22.00**	12
3/8"	1/2"	*brass*	70 CFM	***DCB2504***	**23.27**	12
1/2"	3/8"	*brass*	150 CFM	***DCB903***	**29.06**	6
1/2"	1/2"	*brass*	150 CFM	***DCB9***	**28.27**	6
1/2"	3/4"	*brass*	150 CFM	***DCB906***	**29.83**	6
3/4"	1/2"	*brass*	200 CFM	***DC7104***	**61.90**	1
3/4"	3/4"	*brass*	200 CFM	***DC7106***	**63.30**	1
3/4"	1"	*brass*	200 CFM	***DC7108***	**70.25**	1
1/4"	1/4"	*303 stainless*	37 CFM	***DCS21***	**52.00**	5
3/8"	3/8"	*303 stainless*	70 CFM	***DCS25***	**83.45**	5
1/2"	1/2"	*303 stainless*	150 CFM	***DCS9***	**109.74**	5

Standard Hose Barb

automatic push to connect



Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
1/4"	1/4"	*brass*	37 CFM	***DCB2042***	**$11.50**	24
1/4"	3/8"	*brass*	37 CFM	***DCB2044***	**13.30**	24
3/8"	1/4"	*brass*	70 CFM	***DCB2642***	**24.00**	12
3/8"	3/8"	*brass*	70 CFM	***DCB2644***	**21.00**	12
3/8"	1/2"	*brass*	70 CFM	***DCB2645***	**25.00**	12
1/2"	3/8"	*brass*	150 CFM	***DCB1044***	**30.45**	6
1/2"	1/2"	*brass*	150 CFM	***DCB1045***	**30.88**	6
1/2"	3/4"	*brass*	150 CFM	***DCB1046***	**31.16**	6
3/4"	1/2"	*brass*	200 CFM	***DC7045***	**68.00**	1
3/4"	3/4"	*brass*	200 CFM	***DC7046***	**68.85**	1
3/4"	1"	*brass*	200 CFM	***DC7048***	**71.10**	1
1/4"	1/4"	*303 stainless*	37 CFM	***DCS2042***	**63.00**	5
3/8"	3/8"	*303 stainless*	70 CFM	***DCS2644***	**84.00**	5
1/2"	1/2"	*303 stainless*	150 CFM	***DCS1045***	**98.98**	5

Air Chief Automotive Interchange Quick-Connect Plugs

Air Chief automotive quick-connect plugs will interchange with the popular makes of automotive quick-connect fittings such as Amflo, Dill, Milton and Truflate. There are some makes however, which do not interchange with any others. If you plan to interchange these couplings, make sure you have plug ends with the proper configuration.

- rated **300 PSI**
- temperature range: **-40°F** to **250°F**

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty	**Female Pipe Thread**
1/4"	1/8"	*steel*	37 CFM	***DCP221***	**$2.95**	25	
1/4"	1/4"	*steel*	37 CFM	***DCP2***	**2.70**	20	
1/4"	3/8"	*steel*	37 CFM	***DCP223***	**5.70**	20	
3/8"	1/4"	*steel*	70 CFM	***DCP8***	**3.50**	10	
3/8"	3/8"	*steel*	70 CFM	***DCP6***	**6.70**	10	
3/8"	1/2"	*steel*	70 CFM	***DCP624***	**9.85**	10	
1/2"	3/8"	*steel*	150 CFM	***DCP1823***	**8.70**	10	
1/2"	1/2"	*steel*	150 CFM	***DCP18***	**7.40**	10	
1/2"	3/4"	*steel*	150 CFM	***DCP1826***	**12.95**	10	




Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty	**Male Pipe Thread**
1/4"	1/8"	*steel*	37 CFM	***DCP101***	**$3.60**	20	
1/4"	1/4"	*steel*	37 CFM	***DCP1***	**2.10**	20	
1/4"	3/8"	*steel*	37 CFM	***DCP103***	**4.05**	20	
3/8"	1/4"	*steel*	70 CFM	***DCP7***	**3.40**	10	
3/8"	3/8"	*steel*	70 CFM	***DCP5***	**3.95**	10	
1/2"	3/8"	*steel*	150 CFM	***DCP1703***	**6.05**	10	
1/2"	1/2"	*steel*	150 CFM	***DCP17***	**6.05**	20	
1/2"	3/4"	*steel*	150 CFM	***DCP1706***	**11.45**	10	



Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty	**Standard Hose Barb**
1/4"	1/4"	*steel*	37 CFM	***DCP142***	**$4.10**	20	
1/4"	3/8"	*steel*	37 CFM	***DCP144***	**4.10**	20	
3/8"	1/4"	*steel*	70 CFM	***DCP542***	**6.70**	10	
3/8"	3/8"	*steel*	70 CFM	***DCP544***	**5.45**	25	
1/2"	3/8"	*steel*	150 CFM	***DCP1744***	**6.50**	10	
1/2"	1/2"	*steel*	150 CFM	***DCP1745***	**6.00**	10	
1/2"	3/4"	*steel*	150 CFM	***DCP1746***	**9.40**	10	



Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty	**Push-On Hose Barb**
1/4"	1/4"	*steel*	37 CFM	***DCP142L***	**$4.60**	25	
1/4"	3/8"	*steel*	37 CFM	***DCP144L***	**4.60**	25	
3/8"	3/8"	*steel*	70 CFM	***DCP544L***	**5.70**	25	




Air Chief Automotive Interchange Quick-Connect Couplers

Air Chief automotive quick-connect couplers will interchange with the popular makes of automotive quick-connect fittings such as Amflo, Dill, Milton and Truflate. There are some makes however, which do not interchange with any others. If you plan to interchange these couplings, make sure you have plug ends with the proper configuration.

- rated **300 PSI**
- temperature range: **-40°F** to **250°F**


Female Pipe Thread	Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
semi-automatic pull sleeve to connect	1/4"	1/8"	*brass*	37 CFM	***DC221***	**$12.55**	25
	1/4"	1/4"	*brass*	37 CFM	***DC2***	**9.45**	25
	1/4"	3/8"	*brass*	37 CFM	***DC223***	**13.10**	10
	3/8"	1/4"	*steel*	70 CFM	***DC8***	**19.10**	10
	3/8"	3/8"	*steel*	70 CFM	***DC6***	**18.65**	10
	3/8"	1/2"	*steel*	70 CFM	***DC624***	**26.00**	10
	1/2"	3/8"	*steel*	150 CFM	***DC1023***	**27.10**	10
	1/2"	1/2"	*steel*	150 CFM	***DC10***	**25.40**	10
	1/2"	3/4"	*steel*	150 CFM	***DC1026***	**33.25**	10




Male Pipe Thread	Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
semi-automatic pull sleeve to connect	1/4"	1/8"	*brass*	37 CFM	***DC101***	**$11.80**	10
	1/4"	1/4"	*brass*	37 CFM	***DC1***	**9.35**	10
	1/4"	3/8"	*brass*	37 CFM	***DC103***	**12.00**	10
	3/8"	1/4"	*steel*	70 CFM	***DC7***	**19.20**	10
	3/8"	3/8"	*steel*	70 CFM	***DC5***	**18.80**	10
	3/8"	1/2"	*steel*	70 CFM	***DC504***	**23.00**	10
	1/2"	3/8"	*steel*	150 CFM	***DC903***	**25.20**	10
	1/2"	1/2"	*steel*	150 CFM	***DC9***	**22.40**	10
	1/2"	3/4"	*steel*	150 CFM	***DC906***	**30.05**	10



Standard Hose Barb	Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
semi-automatic pull sleeve to connect	1/4"	1/4"	*brass*	37 CFM	***DC242***	**$12.60**	10
	1/4"	5/16"	*brass*	37 CFM	***DC243***	**9.90**	10
	1/4"	3/8"	*brass*	37 CFM	***DC244***	**12.55**	10
	3/8"	1/4"	*steel*	70 CFM	***DC642***	**29.25**	10
	3/8"	3/8"	*steel*	70 CFM	***DC644***	**19.75**	10
	3/8"	1/2"	*steel*	70 CFM	***DC645***	**21.65**	10
	1/2"	3/8"	*steel*	150 CFM	***DC1044***	**28.85**	10
	1/2"	1/2"	*steel*	150 CFM	***DC1045***	**27.20**	10
	1/2"	3/4"	*steel*	150 CFM	***DC1046***	**29.10**	10




Push-On Hose Barb	Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Opt Qty
semi-automatic pull sleeve to connect	1/4"	1/4"	*brass*	37 CFM	***DC242L***	**$12.25**	25
	1/4"	3/8"	*brass*	37 CFM	***DC244L***	**12.25**	25
	3/8"	1/4"	*steel*	70 CFM	***DC642L***	**32.40**	25
	3/8"	3/8"	*steel*	70 CFM	***DC644L***	**22.05**	25



Air Chief ARO Speed Quick-Connect Plugs

These semi-automatic quick connects interchange with both the ARO 210 and 310 Design.
- rated **300 PSI** at ambient temperature (70°F)

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Female Pipe Thread**
1/4"	1/4"	*steel*	37 CFM	***DCP38***	**$2.45**	10	
1/4"	3/8"	*steel*	37 CFM	***DCP3823***	**6.95**	10	
3/8"	3/8"	*steel*	70 CFM	***DCP36***	**8.15**	25	

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Male Pipe Thread**
1/4"	1/4"	*steel*	37 CFM	***DCP37***	**$2.35**	10	
1/4"	3/8"	*steel*	37 CFM	***DCP3703***	**5.40**	10	
3/8"	3/8"	*steel*	70 CFM	***DCP35***	**7.30**	25	


Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Standard Hose Barb**
1/4"	1/4"	*steel*	37 CFM	***DCP3742***	**$4.15**	10	
1/4"	3/8"	*steel*	37 CFM	***DCP3744***	**4.20**	25	


Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Push-On Hose Barb**
1/4"	1/4"	*steel*	37 CFM	***DCP3742L***	**$5.15**	25	
1/4"	3/8"	*steel*	37 CFM	***DCP3744L***	**8.80**	25	


Air Chief ARO Speed Quick-Connect Couplers

These semi-automatic quick connects interchange with both the ARO 210 and 310 design. Couplers shut-off when disconnected.
- rated **300 PSI** at ambient temperature (70°F)

semi-automatic - pull sleeve to connect

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Female Pipe Thread**
1/4"	1/4"	*brass*	37 CFM	***DC38***	**$10.15**	10	
1/4"	3/8"	*brass*	37 CFM	***DC3823***	**13.60**	10	
3/8"	3/8"	*steel*	70 CFM	***DC36***	**30.05**	25	

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Male Pipe Thread**
1/4"	1/4"	*brass*	37 CFM	***DC37***	**$10.75**	10	
1/4"	3/8"	*brass*	37 CFM	***DC3703***	**13.40**	10	
3/8"	3/8"	*steel*	70 CFM	***DC35***	**27.35**	25	

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Standard Hose Barb**
1/4"	1/4"	*steel*	37 CFM	***DC3842***	**$16.65**	10	
1/4"	3/8"	*steel*	37 CFM	***DC3844***	**19.75**	25	

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Push-On Hose Barb**
1/4"	1/4"	*brass*	37 CFM	***DC3842L***	**$12.95**	25	
1/4"	3/8"	*brass*	37 CFM	***DC3844L***	**13.85**	25	

Air Chief A Series Quick-Connect Plugs

Air Chief A series are intended for use in compressed air service where the convenience of one hand operation and a compact profile is desired. Machined from solid brass bar stock, stainless steel balls and springs maximize corrosion resistance.

- maximum working pressure: **500 PSI** at ambient temperature (70°F)

Female Pipe Thread	Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty
	1/8"	1/8"	*brass*	7 CFM	***A1F1-B***	**$6.75**	20
	1/4"	1/4"	*brass*	25 CFM	***A2F2-B***	**6.75**	20

Male Pipe Thread	Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty
	1/8"	1/8"	*brass*	7 CFM	***A1M1-B***	**$6.75**	20
	1/4"	1/4"	*brass*	25 CFM	***A2M2-B***	**6.75**	20

Hose Barb	Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty
	1/8"	1/8"	*brass*	7 CFM	***A1S1-B***	**$6.75**	20

Air Chief A Series Quick-Connect Couplers

automatic - push to connect

Female Pipe Thread	Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty
	1/8"	1/8"	*brass*	7 CFM	***1AF1-B***	**$22.00**	20
	1/4"	1/4"	*brass*	25 CFM	***2AF2-B***	**23.00**	20


Male Pipe Thread	Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty
	1/8"	1/8"	*brass*	7 CFM	***1AM1-B***	**$22.00**	20
	1/4"	1/4"	*brass*	25 CFM	***2AM2-B***	**23.00**	20


Hose Barb	Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty
	1/8"	1/8"	*brass*	7 CFM	***1AS1-B***	**$24.00**	20
	1/4"	1/4"	*brass*	25 CFM	***2AS2-B***	**25.00**	20


Air Chief Universal Quick-Connect Fittings

U-series are the first 6-in-1 couplers, works with: ARO 210, MIL-C-4109F, Truflate, Lincoln, Italian Standard, and CEJN 320. Euro-style valving ensures maximum flow performance and automatic connection with minimal force required. Couplers have a sleeve-guard lip to reduce the risk of accidental disconnection while in service.

automatic - push to connect

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	**Female Pipe Thread**
1/4"	1/4"	*brass*	37 CFM	***UDC20***	**$15.03**	
1/4"	3/8"	*brass*	37 CFM	***UDC2023***	**15.57**	

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	**Male Pipe Thread**
1/4"	1/4"	*brass*	37 CFM	***UDC21***	**$15.03**	
1/4"	3/8"	*brass*	37 CFM	***UDC2103***	**16.47**	

Body Size	Hose ID	Material	Flow Rating at 100 PSI	Part #	Price/E	**Standard Hose Barb**
1/4"	1/4"	*brass*	37 CFM	***UDC2042***	**$15.97**	
1/4"	3/8"	*brass*	37 CFM	***UDC2044***	**16.47**	

Air Chief Lincoln Series Quick-Connect Plugs

These sockets and plugs are interchangeable with Lincoln's long stem series. Couplers shut-off when disconnected.

- rated **300 PSI** at ambient temperature (70°F)

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Female Pipe Thread**
1/4"	1/4"	*steel*	37 CFM	***DCP28***	**$6.30**	10	


Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Male Pipe Thread**
1/4"	1/4"	*steel*	37 CFM	***DCP27***	**$5.25**	10	


Air Chief Lincoln Series Quick-Connect Couplers

These sockets and plugs are interchangeable with Lincoln's long stem series. Couplers shut-off when disconnected.

- rated **300 PSI**

semi-automatic - pull sleeve to connect

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Female Pipe Thread**
1/4"	1/4"	*brass*	37 CFM	***DC28***	**$15.15**	10	

Body Size	NPT Thread Size	Material	Flow Rating at 100 PSI	Part #	Price/E	Pkg Qty	**Male Pipe Thread**
1/4"	1/4"	*brass*	37 CFM	***DC27***	**$15.95**	10	

Dixon Keychain

- halves separate like a coupler and plug



Plated Steel	
Part #	Price/E
DKC1	**$17.15**

Breather Vents

Breather vents have many applications, including vacuum relief or pressure equalization on gear boxes, oil tanks or reservoirs. Common uses can be found on single acting cylinders or valves to prevent dirt and foreign particles from entering ports open to the atmosphere.

- standard pipe thread fittings for quick assembly and removal for cleaning
- nickel plated steel insert with a bronze filter
- The filter element is rated for 40 micron filtration.
- maximum operating pressure: **150 PSI**
- operating temperatures: **35°F** to **300°F**



NPT Thread Size	Overall Length	*Nickel Plated Steel*	
		Part #	Price/E
1/8"	7/16"	***ASP-1BV***	**$2.15**
1/4"	5/8"	***ASP-2BV***	**2.30**
3/8"	3/4"	***ASP-3BV***	**3.40**
1/2"	7/8"	***ASP-4BV***	**4.80**
3/4"	1"	***ASP-6BV***	**7.75**
1"	1-5/16"	***ASP-8BV***	**15.50**

Conical Mufflers

Conical mufflers are easy to install, threading the exhaust ports of air tool, valves, cylinders and other pneumatic equipment. They offer an economical method of reducing the noise levels below 90 dBA, conforming with OSHA standards.

- The bronze filter element is rated for 40 micron filtration. The element is bonded directly to the fitting. *These elements are not replaceable.*
- maximum operating pressure: **300 PSI**
- operating temperature: **35°F** to **300°F**



NPT Thread Size	Overall Length	*Nickel Plated Steel*	
		Part #	Price/E
1/8"	1-1/8"	***CMF18***	**$3.60**
1/4"	1-3/8"	***CMF28***	**4.30**
3/8"	1-1/2"	***CMF38***	**5.60**
1/2"	1-7/8"	***CMF48***	**7.50**
3/4"	2-1/8"	***CMF68***	**12.40**
1"	2-7/8"	***CMF88***	**18.15**

Speed Control Mufflers

Speed control mufflers provide an infinite variation of metering air flow at an acceptable sound level on exhaust ports of air valves with complete safety. The speed of an operating cylinder or air tool may be increased or decreased with the adjusting screw. The final position is then locked in place by the lock nut. Objectionable exhaust air noise is eliminated by the surrounding sleeve of sintered bronze.



aluminum



brass


- maximum operating pressure: **300 PSI**
- operating temperature: **35°F** to **300°F**

NPT Thread Size	Approx. Full Oper. Height	Maximum Adjusted SCFM	*2011T3 Aluminum*		*Brass*	
			Part #	Price/E	Part #	Price/E
1/8"	1-5/16"	20	***ASCM18***	**$8.00**	***SCM18***	**$5.50**
1/4"	1-9/16"	30	***ASCM28***	**9.10**	***SCM28***	**6.35**
3/8"	1-5/8"	40	***ASCM38***	**12.10**	***SCM38***	**9.25**
1/2"	2"	60	***ASCM48***	**16.50**	***SCM48***	**14.25**
3/4"	2-3/8"	70	***ASCM68***	**28.95**	***SCM68***	**18.90**
1"	2-1/2"	100	***ASCM88***	**35.85**	***SCM88***	**30.60**

Mini In-Line Lubricators

- can be refilled under line pressure
- oil capacity is ¼ fluid ounce
- flow rating is 22 SCFM at 100 PSIG
- maximum operating conditions: **200 PSIG** and **175°F**

Female NPT Inlet	NPT Outlet	*Aluminum* Part #	Price/E
1/4"	1/4" female	***ML200***	**$68.00**
1/4"	1/4" male	***ML200M***	**68.00**
3/8"	3/8" male	***ML300M***	**68.00**




Mini In-Line Filter

- either port may be used as an inlet port
- filter element rated at 5 microns
- flow rating is 17 SCFM inlet pressure at 100 PSIG
- maximum operating conditions: **200 PSIG** and **175°F**

Female NPT	Male NPT	*Aluminum* Part #	Price/E
1/4"	1/4"	***MF200***	**$41.10**

Description	Part #	Price/E
Replacement element	***FRP-95-199***	**$14.00**



In-Line Air Filter

Designed specifically for the protection of small air tools, such as impact wrenches, nut runners, grinders and screwdrivers. The all-anodized, lightweight aluminum housing is compact and can be used directly before the air tool.

- standard element is 40 micron, which ensures minimum pressure drop
- elements can be replaced quickly
- maximum operating pressure: **500 PSI**
- operating temperatures: **35°F** to **200°F**
- air flow is 140 SCFM

Male NPT	Overall Length	Diameter	Weight Lbs.	*Aluminum* Part #	Price/E
3/4"	3-13/16"	1-1/2"	.46	***9076M***	**$65.00**



Miniature Non-Repairable General Purpose Regulators

- Relieving piston design allows reduction of downstream pressure when the system is dead-ended.
- reliable pressure regulation at air flows up to 13 SCFM
- left to right flow
- 5 to 125 PSIG outlet pressure adjustment range
- compact design and light weight construction
- wrench flats for easy installation
- *model supplied with a GC620 gauge*

with gauge			without gauge		
Size	Part #	Price/E	Size	Part #	Price/E
¼"	***R46-200RG***	**$54.50**	¼"	***R46-200R***	**$38.15**



Air Tool Lubricants

A specially formulated high grade lubricant that prolongs the service life of air tools, cylinders and accessories while permitting maximum performance. It is a #10 weight lubricant. This compound is superior in performance to ordinary lubricants. Prohibits rust and removes moisture as it lubricates. It is non-corrosive, non-reactive and does not decompose. The easy pour spout helps prevent costly spills. Use with the in-line lubricators on page 114.

Size	Part #	Price/E	Opt Qty
1 pint	***DATL016***	**$13.00**	12
1 gallon	***DATL128***	**56.60**	4



1 gallon



1 pint

Anti-Freeze Lubricants

Winter grade air tool lubricant that prevents air line, air tool and in-line lubricator freeze-up..



1 pint



1 gallon

- can be poured directly into tool or used with air line lubricators
- performance is good to **-45°F**


Size	Part #	Price/E	Opt Qty
1 pint	***DATL016W***	**$21.00**	12
1 gallon	***DATL128W***	**135.40**	4

Bar Manifolds

The bar manifold can be mounted on a wall or work bench, safely distributing four hose lines to a work area.

- maximum working pressure is **300 PS**I at ambient temperature (70°F)
- brass hex head plugs sold on page 303



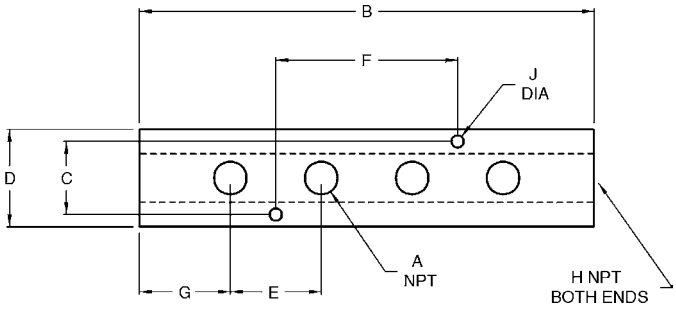

Aluminum Part #	Price/E	A	B	C	D	E	F	G	H	J
AMF32	**$71.95**	1/4"	7-5/8"	7/8"	1-1/4"	1-7/8"	3-3/4"	1"	3/8"	.20"
AMF42	**71.95**	1/4"	7-5/8"	1-1/8"	1-1/2"	1-7/8"	3-3/4"	1"	1/2"	.20"
AMF43	**71.95**	3/8"	8"	1-1/8"	1-1/2"	2"	4"	1"	1/2"	.20"

3 in 1 Manifolds

Applications:

- supplies 3 air operated tools from a single hose, permits use of air by more than one mechanic
- mount to pipe at workbench or overhead
- different tools in the shop use different styles of couplers, mount 3 different style couplers on one manifold



NPT Inlet (1)	NPT Outlet (3)	*Aluminum* Part #	Price/E
1/4"	1/4"	***D3404***	**$18.55**
3/8"	1/4"	***D3406***	**17.80**
1/2"	1/4"	***D3408***	**18.85**

2 in 1 Manifolds

Applications:

- supplies 2 air operated tools from a single hose, permits use of air by more than one mechanic
- mount to pipe at workbench or overhead
- different tools in the shop use different styles of couplers, mount 2 different style couplers on one manifold



NPT Inlet (1)	NPT Outlet (2)	*Aluminum* Part #	Price/E
1/4"	1/4"	***D2404***	**$10.00**
3/8"	1/4"	***D2406***	**10.00**
1/2"	1/4"	***D2408***	**10.00**

Flat Hex Manifolds

The flat hex manifold is designed to lay flat on the floor, safely distributing three hose lines to the work area.

NPT Inlet (1)	NPT Outlet (3)	*Brass* Part #	Price/E
1/4"	1/4"	***3122***	**$18.45**
3/8"	1/4"	***3132***	**22.05**
3/8"	3/8"	***3133***	**25.75**



Safety Pop-Off Valves

Heavy Duty, High Capacity Safety Pop-Off Valves

ASME Code, National Board Certified Safety Valves are designed to protect un-fired pressure vessels from over-pressure.

- all brass construction with chrome steel ball on a precision machined brass seat
- equipped with a pull ring for manual testing
- maximum temperature **400°F (204°C)**

1/2" male NPT

Preset Pressure PSI	SCFM	*Brass* Part #	Price/E
30	73	***SV30HD***	**$64.65**
100	192	***SV100HD***	**64.65**
125	234	***SV125HD***	**64.65**
150	277	***SV150HD***	**64.65**
175	319	***SV175HD***	**64.65**
200	361	***SV200HD***	**64.65**



Standard Safety Pop-Off Valves

ASME Code, National Board Certified Safety Valves are designed to protect un-fired pressure vessels from over-pressure.

- Brass valves are supplied with a stainless steel ball.
- Stainless valves are all stainless construction.
- maximum operating temperature is **400°F (204°C)**

1/4" male NPT

Preset Pressure PSI	SCFM	*Brass* Part #	*Brass* Price/E	*Stainless Steel* Part #	*Stainless Steel* Price/E
30	24	***SV30***	**$27.50**	***SV30SS***	**$197.75**
100	64	***SV100***	**27.50**	***SV100SS***	**197.75**
125	78	***SV125***	**27.50**	***SV125SS***	**197.75**
150	92	***SV150***	**27.50**	***SV150SS***	**197.75**
175	106	***SV175***	**27.50**	***SV175SS***	**197.75**
200	120	***SV200***	**27.50**	***SV200SS***	**197.75**



Soft Seat Safety Pop-Off Valves

ASME Code, National Board Certified Safety Valve for compressed air service applications. Designed for Original Equipment Manufacturers, utilizing ASME Code un-fired pressure vessels in their finished product.

- constructed of precision machined brass bar stock, with a silicone disc seating on brass
- maximum operating temperature is **400°F (204°C)**


1/4" male NPT

Preset Pressure PSI	SCFM	*Brass* Part #	Price/E
100	33	***KSV10-100***	**$12.95**
125	40	***KSV10-125***	**12.95**
150	47	***KSV10-150***	**12.95**
175	54	***KSV10-175***	**12.95**




Brass Lever External Drains

- *for air service only*
- maximum working pressure: **30 PSI** at ambient temperature (70°F)



LDC2

Female NPT	Male NPT	*Brass* Part #	Price/E
1/4"	1/4"	***LDC2***	**$25.85**



LDCM2

Male NPT	Male NPT	*Brass* Part #	Price/E
1/4"	1/4"	***LDCM2***	**$28.80**



LDCF2

Female NPT	Female NPT	*Brass* Part #	Price/E
1/4"	1/4"	***LDCF2***	**$27.45**

Brass External Drain Cocks



- designed for low pressure water and air applications
- maximum working pressure: **150 PSI** at ambient temperature (70°F)

NPT Size	*Brass* Part #	Price/E
1/8"	***D02***	**$3.20**
1/4"	***D04***	**4.30**

Brass Needle Valves

- metal-to-metal seats allow positive sealing and flow adjustment
- designed for air and water applications
- maximum working pressure: **150 PSI PSI** at ambient temperature (70°F)



Female NPT	Female NPT	*Brass* Part #	Price/E
1/8"	1/8"	***NV2F***	**$8.60**
1/4"	1/4"	***NV4F***	**12.35**



Male NPT	Male NPT	*Brass* Part #	Price/E
1/4"	1/4"	***NV4M***	**$11.70**

Brass Check Valves - Series C



- provides free flow in one direction and dependable shutoff in the opposite direction
- maximum operating pressure: **2000 PSI** at ambient temperature (70°F)
- cracking pressure: **5 PSI**
- also available in steel, see page 349

Female NPT	Free Flow GPM	*Brass* Part #	Price/E
1/8"	3	***BCV200***	**$39.75**
1/4"	5	***BCV400***	**37.80**
3/8"	8	***BCV600***	**61.00**
1/2"	15	***BCV800***	**78.00**

Brass Flow Control Valves

Series F

- Flow control valves provide precision flow control and full shutoff in one flow direction and automatically allow unrestricted free flow in the opposite direction.
- Two-step needle provides fine adjustments at low flow with the first three turns of the adjusting knob.The next three turns give full-open needle position and conventional throttling control.
- When flow is reversed, the heavy-duty poppet/retainer permits full-flow return capacity.
- Exclusive color coded reference scale on the adjusting knob greatly simplifies flow setting, resetting, adjusting and return to an original flow.
- A simple set screw locks the valve on any desired setting.
- maximum operating pressure: **2000 PSI** at ambient temperature (70°F)
- also available in steel, see page 349

Thread	*Brass*	
	Part #	Price/E
1/8"	***BFC200***	**$69.70**
1/4"	***BFC400***	**74.25**
3/8"	***BFC600***	**96.60**
1/2"	***BFC800***	**136.50**
3/4"	***BFC1200***	**215.75**



Series PF

- Utilizes a ball type check that meters flow of air in one direction and allows free flow in the reverse direction.
- Used to control actuator speed by acting as a restriction.
- maximum operating pressure: **2000 PSI** at ambient temperature (70°F)
- cracking pressure: **5 PSI**
- also available in steel, see page 349

Thread	*Brass*	
	Part #	Price/E
1/8"	***BPF200***	**$50.60**
1/4"	***BPF400***	**52.75**
3/8"	***BPF600***	**67.75**
1/2"	***BPF800***	**99.40**



Series N

- Ideal for use as speed controls on pneumatic systems where a reverse flow check valve is not needed.
- Provides excellent control and reliable shutoff in a very small envelope.
- Color coded reference scale on the adjusting knob simplifies setting, resetting, adjusting and quick return to a previous speed setting.
- maximum operating pressure: **2000 PSI** at ambient temperature (70°F)
- also available in steel, see page 349

Thread	*Brass*	
	Part #	Price/E
1/8"	***BN200***	**$66.70**
1/4"	***BN400***	**62.50**
3/8"	***BN600***	**89.00**
1/2"	***BN800***	**125.00**
3/4"	***BN1200***	**175.50**



Air Chief Safety Blow Gun

This basic safety blow gun is designed to conform to OSHA Standard 1910.242 (B) permitting a maximum of 30 PSI outlet pressure when dead ended based on a maximum of 150 PSI inlet pressure as well as OSHA Standard 1910.95 regulating occupational noise level exposure. *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

- Blow gun body is designed to comfortably fit the contour of the hand, minimizing user fatigue.
- Large lever with black vinyl grip further adds to the ergonomic design and allows for easy air flow activation.
- Recessed internal slotted screw allows easy access to valve assembly for repairs or replacement.
- Chrome plated zinc die cast body, nickel plated steel lever, vinyl thumb grip, stainless steel spring, brass valve, Buna-N seals and nickel plated brass tip combine for superior corrosion resistance as well as a contemporary look.
- ¼" female NPT inlet



Part #	Price/E
D204-30	**$17.50**

SAFETY ALERT Note: The Air Chief safety blow gun has a safety tip which prevents buildup of tip pressure in the event the outlet is obstructed or "dead ended". It complies with the requirements for OSHA 1910.242 (B) and 1910.95 when used on air lines of 150 PSI or less.

Premium Safety Blow Gun

The premium safety blow gun features a distinctive black powder coat finish to give it a rich appearance as well as long term protection from corrosion and rough handling. Designed to conform to OSHA Standard 1910.242 (B) permitting a maximum of 30 PSI outlet pressure when dead ended based on a maximum of 150 PSI inlet pressure as well as OSHA Standard 1910.95 regulating occupational noise level exposure. *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

- Blow gun body is designed to comfortably fit the contour of the hand, minimizing user fatigue.
- Large lever with vinyl grip further adds to the ergonomic design and allows for easy air flow activation.
- Zinc die cast body with a black powder coat finish, nickel plated steel lever, vinyl thumb grip, stainless steel spring, brass valve, Buna-N seals and nickel plated brass tip.
- ¼" female NPT inlet



Part #	Price/E
D204-30P	**$18.50**

SAFETY ALERT Note: The premium safety blow gun has a safety tip which prevents buildup of tip pressure in the event the outlet is obstructed or "dead ended". It complies with the requirements for OSHA 1910.242 (B) and 1910.95 when used on air lines of 150 PSI or less.

Safety Air Booster Blow Gun

The multiple holes in the safety booster tip of the safety air booster gun create a venturi effect that increases air flow (working capacity) while still remaining compliant with OSHA Standard 1910.242 (B). *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

- Blow gun body is designed to comfortably fit the contour of the hand, minimizing user fatigue.
- Large lever with vinyl grip further adds to the ergonomic design and allows for easy air flow activation.
- Chrome plated zinc die cast body, nickel plated steel lever, vinyl thumb grip, stainless steel spring, brass valve, Buna-N seals and nickel plated brass Safety Booster tip provide superior corrosion resistance.
- ¼" female NPT inlet



Part #	Price/E
D204-30SB	**$21.75**

Note: The safety air booster blow gun has a safety tip which prevents buildup of tip pressure in the event the outlet is obstructed or "dead ended". It complies with the requirements for OSHA 1910.242 (B) and 1910.95 when used on air lines of 150 PSI or less. SAFETY ALERT

Non-Safety Brass Tip Blow Gun

The ventless, nickel-plated tip provides the most economical means of achieving a concentrated stream of air for many blow-off applications. All other components and design features are the same as our Air Chief safety blow gun (D204-30). *Must be used on air lines having a maximum regulated pressure of 30 PSI in order to comply with OSHA Standard 1910.242 (B). Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

- Blow gun body is designed to comfortably fit the contour of the hand, minimizing user fatigue.
- Large lever with vinyl grip further adds to the ergonomic design and allows for easy air flow activation.
- Chrome plated zinc die cast body, nickel plated steel lever, vinyl thumb grip, stainless steel spring, brass valve, Buna-N seals and ventless, nickel plated brass tip provide superior corrosion resistance.
- ¼" female NPT inlet



Part #	Price/E
D605	**$16.25**

Caution: This blow gun **does not** have a safety by-pass to prevent buildup of tip pressure in the event of tip blockage. It may be used for cleaning purposes only if the air supply (inlet pressure) has been reduced to 30 PSI or less. SAFETY ALERT

Non-Safety Rubber Tipped Blow Gun

The rubber tip will not scratch or mar delicate surfaces. The conical, rubber tip can also be used to create a seal between the blow gun and fluid lines (or any other opening). Base of the tip is nickel-plated brass for additional corrosion resistance. *Must be used on air lines having a maximum regulated pressure of 30 PSI in order to comply with OSHA Standard 1910.242 (B). Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

- Blow gun body is designed to comfortably fit the contour of the hand, minimizing user fatigue.
- Large lever with vinyl grip further adds to the ergonomic design and allows for easy air flow activation.
- Chrome plated zinc die cast body, nickel plated steel lever, vinyl thumb grip, stainless steel spring, brass valve, Buna-N seals and rubber tip with a nickel plated brass base provide superior corrosion resistance.
- ¼" female NPT inlet



Part #	Price/E
D201	**$20.30**

Caution: This blow gun **does not** have a safety by-pass to prevent buildup of tip pressure in the event of tip blockage. It may be used for cleaning purposes only if the air supply (inlet pressure) has been reduced to 30 PSI or less. SAFETY ALERT

Blow Gun Extensions


These extension tips allow easier access to blow-off applications in high or hard to reach places. Supplied with 1/8" male NPT connections. Can be used with all Dixon Air Chief lever operated blow guns as well as most blow guns from other manufacturers. Made from a brass base with a rugged steel extension tube, all nickel plated.



Size Extension	Part #	Price/E
6"	***BGE6***	**$12.90**
10"	***BGE10***	**16.00**
12"	***BGE12***	**17.25**
18"	***BGE18***	**27.60**
24"	***BGE24***	**30.25**


Blow Gun Tips

Nickel plated brass safety tip with 1/8" male NPT connection can be used with all Dixon Air Chief lever operated blow guns as well as most blow guns from other manufacturers.



Part #	Price/E
SST10	**$2.95**

Rubber non-safety tip with nickel-plated brass 1/8" male NPT connection can be used with all Dixon Air Chief lever operated blow guns as well as most blow guns from other manufacturers.



Part #	Price/E
D201RT	**$7.45**

2010 NEW

Cannon Blow Guns

High Volume Cannon® Blow Gun

Ideal where a large air supply is available to move heavy, stubborn debris. Designed for, but not limited to, outdoor use. Compliant with OSHA Standard 1910.242 (B). *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

- ¾" female NPT inlet
- minimum inlet pressure 90 PSI on ½" hose
- consumes 135 CFM at 100 PSI
- 48" long extension



Part #	Price/E
9000-48S	**$350.00**

Multi-Jet Cannon® Blow Gun

Ideal where a large air supply is available to move heavy, stubborn debris. Designed for, but not limited to, outdoor use. Compliant with OSHA Standard 1910.242 (B). *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

- ¾" female NPT inlet
- minimum inlet pressure 90 PSI on ½" hose
- consumes 120 CFM at 100 PSI
- 2" long extension



Part #	Price/E
9000-MJ	**$375.00**

Heavy Duty - High Volume Blow Guns

- heavy duty - high volume safety blow guns
- requires high volume coupler and plug for optimum performance
- lightweight and ergonomic
- pistol grip / hanging hook handle
- made from high quality aluminum casting
- maximum operating pressure: **150 PSI**
- ¼" female NPT inlet
- *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

Blow Gun with Safety Tip

- reduced to 30 PSI when tip is blocked

Part #	Description	Price/E
HTBG	gun with *no* extension	**$59.00**
HTBG6	gun with 6" extension	**60.00**
HTBG12	gun with 12" extension	**63.20**
HTBG24	gun with 24" extension	**68.00**
HTBG36	gun with 36" extension	**74.00**



Note: The safety air booster blow gun has a safety tip which prevents buildup of tip pressure in the event the outlet is obstructed or "dead ended". It complies with the requirements for OSHA 1910.242 (B) and 1910.95 when used on air lines of 150 PSI or less. SAFETY ALERT

Blow Gun with Quiet Conical Tip

- 7.0 CFM

Part #	Description	Price/E
HTBG-CT	gun with tip only	**$49.50**



High Volume Typhoon Blow Guns

2010 NEW

- chrome plated aluminum body
- variable flow control
- silicone free for use in paint applications
- ¼" female NPT inlet
- 34 CFM at 125 PSI
- Compliant with OSHA Standard 1910.242 (B). *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

Part #	Description	Price/E
TYP2501-12	gun with 12" extension	**$80.00**
TYP2501-24	gun with 24" extension	**84.00**
TYP2501-36	gun with 36" extension	**91.00**



Accessories

Part #	Description	Material	Price/E	Part #	Description	Material	Price/E
HTBG6EXT	6" extension with safety tip	aluminum	**$37.75**	***HTBGS***	safety tip	aluminum	**$26.50**
HTBG12EXT	12" extension with safety tip	aluminum	**40.25**	***HTBGC***	conical tip	aluminum	**26.90**
HTBG24EXT	24" extension with safety tip	aluminum	**45.75**	***HTBGA***	tip adapter	aluminum	**7.20**
HTBG36EXT	36" extension with safety tip	aluminum	**51.00**	***DC41***	high flow female coupler	brass	**20.75**
				DCP41	high flow male plug	brass	**13.75**

Pistol Grip Safety Blow Gun



Part #	Price/E
PG700	**$53.75**

- conforms to U.S. Department of Labor, OSHA Standard 1910.242 (B) allowing a maximum of 30 PSI outlet pressure at the nozzle when dead-ended
- conforms to U.S. Department of Labor, OSHA Standard 1910.95 regulating noise level exposure
- conforms to Title 41, Walsh-Healy Rules and Regulations P50-204.8, Safety and Health Standards
- Contoured pistol-grip for safe, comfortable handling, even with greasy hands.
- convenient hang-up hook
- ¼" female NPT inlet
- *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

Extended Nozzle Pistol Grip Safety Blow Gun



Part #	Price/E
ENBG1	**$29.00**

- conforms to U.S. Dept. of Labor, OSHA Standard 1910.242 (B) allowing a maximum of 30 PSI outlet pressure at the nozzle when dead-ended
- conforms to U.S. Dept. of Labor, OSHA Standard 1910.95 regulating noise level exposure
- conforms to Title 41, Walsh-Healy Rules and Regulations P50-204.8 Safety and Health Standards
- Slender 4" extended nozzle allows access to hard to reach places and holes as small as .200".
- variable output trigger enables user to control air flow
- Hook design near trigger provides finger protection as well as easy storage.
- lightweight to help minimize user fatigue.
- Side holes allow air to escape if nozzle tip is dead-ended, thus preventing back pressure buildup.
- pressure rating: **150 PSI**
- ¼" female NPT inlet
- *Safety glasses or shield must be worn when using any blow gun.* SAFETY ALERT

Hydro-Blast Cleaning Tool and Siphon

should not be used with mineral spirits



Part #	Price/E
D230	**$210.00**

- uses siphon to spray solvents or detergent solutions
- uses regular garden hose plus compressed air to blast off dirt and residue
- can be used with hot or cold water, valve body stays cool even when used with hot water
- used in garages and factories to blast caked-on dirt from vehicles and equipment
- ¼" female NPT inlet
- complete, ready to use, includes: valve body, 2" and 15" extensions, six foot siphon tubing and adapter for garden hose

SAFETY ALERT The tubing supplied is vinyl and the internal seals in the valve body are Buna-N. Consult chemical resistance charts for compatibility of solvents before putting gun into solvent service. Use safety equipment when using this tool. Eye and skin protection are necessary.

Polyurethane Whip Hose

fittings included

NEW 2010

- bright orange
- for use with jack hammers, chipping hammers, rock drills and other large pneumatic tools
- ½" male NPT swivels on each end
- abrasion resistant
- oil and grease resistant
- working pressure: **200 PSI** at **70°F**
- strain relief steel spring bend restrictors



Hose ID	Length	Male NPT	Part #	Price/E
½"	6'	½"	***PFD068***	**$115.00**
½"	10'	½"	***PFD108***	**130.00**
½"	25'	½"	***PFD125***	**185.00**

Polyurethane Air Hose

fittings included

A sturdy, nylon-reinforced braid between the inner and outer tube allows for a higher working pressure.

- durable
- lightweight
- excellent flexibility
- oil resistant
- durometer: Shore A 85
- temperature range: **-40°F** to **155°F**
- working pressure at 70°F: **210 PSI**



Hose ID	Length	Male NPT	Part #	Price/E
1/4"	50'	1/4"	***450-4S***	**$67.30**
3/8"	50'	1/4"	***650-4S***	**130.00**
3/8"	50'	3/8"	***650-6S***	**140.00**

Polyurethane Self-Storing Air Hose

fittings included

- extremely flexible - resists kinking
- impervious to abrasions, heat and oil
- superior elasticity and coil memory
- blue
- Polyurethane working pressure: **125 PSI** at **70°F**
- both ends swivel



Hose ID	Length	Male NPT	Part #	Price/E
1/4"	10'	1/4"	***PU1410***	**$37.15**
1/4"	15'	1/4"	***PU1415***	**42.85**
1/4"	25'	1/4"	***PU1425***	**51.35**
3/8"	15'	3/8"	***PU3815***	**70.00**
3/8"	20'	3/8"	***PU3820***	**85.75**
3/8"	25'	3/8"	***PU3825***	**98.00**
3/8"	50'	3/8"	***PU3850***	**193.50**
1/2"	15'	1/2"	***PU1215***	**137.60**

Repair Kits

Tubing Size		Size	Type	Part #	Price/E
ID	OD				
1/4"	3/8"	1/4"	swivel male	***PSM0404***	**$10.15**
3/8"	9/16"	1/4"	swivel male	***PSM0604***	**13.45**

Coil-Chief Self-Storing Air Hose



- yellow
- nylon working pressure: **200 PSI** at **70°F**
- coil-chief comes standard with swivel on one end

bulk hose - no fittings

Hose ID	Length	Part #	Price/E
1/4"	100'	***CC14100B***	**$88.60**
3/8"	100'	***CC38100B***	**178.00**
1/2"	100'	***CC12100B***	**305.00**

Note: bulk hose needs assembly kits for ends

fittings included

Hose ID	Length	Male NPT	Part #	Price/E
1/4"	12'	1/4"	***CC1412***	**$22.75**
1/4"	25'	1/4"	***CC1425***	**31.55**
1/4"	50'	1/4"	***CC1450***	**56.15**
3/8"	25'	3/8"	***CC3825***	**54.90**
3/8"	50'	3/8"	***CC3850***	**96.60**
1/2"	25'	1/2"	***CC1225***	**111.00**
1/2"	50'	1/2"	***CC1250***	**168.80**

Repair Kits

- Repair/assembly kits include fittings, nut, insert, ferrule and spring guard.

Size	Fitting Type	Part #	Price/E
1/4"	rigid male	***RK090***	**$7.30**
1/4"	swivel male	***RK092***	**9.65**
3/8"	rigid male	***RK110***	**10.15**
3/8"	swivel male	***RK112***	**13.75**
1/2"	rigid male	***RK118***	**21.50**
1/2"	swivel male	***RK119***	**24.55**

Tire Pressure Gauges and Accessories

Heavy Duty Tire Gauge

- 12" hose with swivel dual foot chuck inflator
- tapered chuck nut fits wheel cover holes on cars and light trucks
- calibrated in 2 PSI increments from **10** to **120 PSI**



Part #	Price/E
D101	**$96.50**

Passenger Car Tire Gauge

- 12" hose with straight-on chuck
- straight chuck nut fits wheel cover holes on cars and light trucks
- ideal for use on wells and reels
- calibrated in 2 PSI increments from **10** to **90 PSI**



Part #	Price/E
D150	**$73.35**

Professional Tire Pressure Gauge

- permanently lubricated
- easy to read, dual calibrated (PSI and kPa), four-sided nylon indicator bar
- body is made of chrome-plated brass, head is chrome-plated zinc
- pocket clip
- calibrated in 2 PSI increments from **10** to **50 PSI**



Part #	Price/E
DFG5	**$11.35**

Dual Foot Gauges

- heavy duty hang-up ring
- calibrated in 2 PSI increments from **10** to **130 PSI**



Part #	Price/E
DFG2	**$34.50**

- handy pocket clip
- calibrated in 2 PSI increments from **20** to **120 PSI**



Part #	Price/E
DFG1	**$16.20**

Brass Tire Inflator Chuck

- ball foot chuck
- for direct connection to live air only
- features a built-in shutoff valve (will not work on inflator gauges)
- ¼" NPT female thread
- maximum pressure is **300 PSI**



Part #	Price/E	Opt Qty
D104	**$7.30**	10

Ball and Push-On Ball Swivels

Ball Swivels

- brass and hardened steel construction
- O-ring seals
- wobble action for increased flexibility with air driven tools



Hose Size	Male NPT	Part #	Price/E	Opt Qty
1/4"	1/4"	***D444S***	**$16.75**	25
3/8"	1/4"	***D446S***	**15.40**	25

Push-On Ball Swivels

- special barb design for secure grip in push-on type air hoses



Hose Size	Male NPT	Part #	Price/E	Opt Qty
1/4"	1/4"	***D444SL***	**$16.45**	25
3/8"	1/4"	***D446SL***	**17.05**	25

In-Line Swivels

- heavy-duty, free turning steel swivel
- *for air service only*
- rated to **250 PSI** at ambient temperature (70°F), minimum **35 PSI**



Male NPT	Female NPT	*Steel* Part #	Price/E
3/8"	1/2"	***SV17***	**$65.50**
1/2"	1/2"	***SV20***	**70.40**
3/4"	3/4"	***SV26***	**73.75**

- *for air service only*
- rated to **150 PSI** at ambient temperature (70°F)



Male NPT	Female NPT	*Brass* Part #	Price/E
1/4"	1/4"	***D344R***	**$10.50**
3/8"	3/8"	***D366R***	**22.75**

Angled Swivel Fittings

Angled swivel plugs are lightweight and streamlined. They can be used in the automotive and electronics industries, workstations, commercial and residential construction, and robotic joints. Helps alleviate carpal tunnel syndrome and back stress resulting in fewer lost time injuries.

- 360° circular rotation and 45° angled rotation
- Material:
  - body is nickel-plated steel
  - dust cover is polyurethane
- rated to **145 PSI**
- temperature range: **20°F** to **140°F**
- *for air service only*

male x male



Male Pipe Thread	Male Pipe Thread	Part #	Price/E
1/4"	1/4"	***D244ANSW***	**$55.00**
3/8"	3/8"	***D266ANSW***	**58.25**

male x female



Male Pipe Thread	Female Pipe Thread	Part #	Price/E
1/8"	1/4"	***D324ANSW***	**$85.00**
1/4"	1/4"	***D344ANSW***	**51.50**
3/8"	1/4"	***D364ANSW***	**74.25**
3/8"	3/8"	***D366ANSW***	**68.50**

male x hose barb



Male Pipe Thread	Hose Barb	Part #	Price/E
1/8"	1/4"	***D424ANSW***	**$60.75**
1/4"	1/4"	***D444ANSW***	**67.00**
1/4"	3/8"	***D446ANSW***	**67.30**
3/8"	3/8"	***D466ANSW***	**68.25**

Steel Bent Stem Swivels

- bent stem swivels are designed for normal operation at **90 PSI** at ambient temperature (70°F)

1/2" hose barb

- 7/8" thread fits the following tool brands: Ingersoll-Rand, Thor, Black & Decker, Harper, Jet, Texas Pneumatic, Kent and Sullair
- 1/2" thread fits all tools with 1/2" female NPT thread



Description	*Steel* Part #	Price/E	Opt Qty
7/8" - 24 thread x 1/2" hose barb	***ATS7812H***	**$47.25**	50
1/2" NPT thread x 1/2" hose barb	***ATS1212H***	**47.25**	50

3/8" female pipe thread

- 7/8" thread fits most chipping hammers



Description	*Steel* Part #	Price/E	Opt Qty
7/8" - 24 thread x 3/8" female NPT	***ATS7838F***	**$62.00**	25

3/8" male pipe thread

- 7/8" thread fits most chipping hammers



Description	*Steel* Part #	Price/E	Opt Qty
7/8" - 24 thread x 3/8" male NPT	***ATS7838M***	**$47.25**	50

Air Tool Swivels

- swivels at two locations so air hose can drop directly to the floor
- rated to **150 PSI** at ambient temperature (70°F)



Size	*Aluminum* Part #	Price/E
1/4"	***D344U*** *	**$41.50**
3/8"	***D346U***	**121.40**
1/2"	***D348U***	**164.90**

* D344U is a non-marring composite.

Spring Driven Hose Reels

Reelcraft® 5000 Series

- reel inlet 3/8" NPTF
- all steel construction
- full shaft and swivel
- furnished standard with PVC hose
- maximum temperature is **150°F**
- Compressed air hose should not be converted to oxygen service. Compressed air hoses are often contaminated with an oil coating, which can react explosively when oxygen is introduced. SAFETY ALERT



with hose

Hose ID	Hose Length	Service	PSI	Weight lbs.	Part #	Price/E
1/4"	50'	air / water	**300**	26	***5450LP***	**$710.00**
3/8"	35'	air / water	**300**	25	***5635LP***	**675.00**
3/8"	50'	air / water	**300**	37	***5650LP***	**815.00**

without hose

Hose Capacity	Service	PSI	Weight lbs.	Part #	Price/E
50' of 1/4" or 35' of 3/8"	air / water	**500**	21	***5600LP***	**$582.00**
50' of 3/8"	air / water	**500**	31	***5605LP***	**678.00**

Reelcraft® 7000 Series

- all steel construction
- *"LP" Low Pressure reels:*
  - maximum temperature **150°F**
  - reel inlet 1/2" NPTF
  - PVC hose is standard
- *"MP" Medium Pressure reels:*
  - maximum temperature **210°F**
  - reel inlet 1/2" NPTF
  - SAE 100 R1T 1-wire braid hose available
- *"HP" High Pressure reels:*
  - maximum temperature **210°F**
  - reel inlet 1/4" NPTF
  - SAE 100 R2T 2-wire braid hose available



with hose

Hose ID	Hose Length	Service	PSI	Weight lbs.	Part #	Price/E
3/8"	70'	air / water	**300**	50	***7670LP***	**$1085.00**
1/2"	50'	air / water	**300**	51	***7850LP***	**1061.00**

without hose

Hose Capacity	Service	PSI	Weight lbs.	Part #	Price/E
70' of 3/8", 50' of 1/2"	air / water	**500**	43	***7800LP***	**$857.00**
50' of 3/8" or 50' of 1/2"	oil	**3000**	44	***7800MP***	**997.00**
50' of 1/4" or 50' of 3/8"	grease	**5000**	46	***7600HP***	**1152.00**

Reelcraft® 80000 Series

- reel inlet 3/4" NPTF
- Five-in-one heat treated aluminum casting incorporates main shaft, ratchet, spring arbor and inlet/outlet plumbing in one piece casting.
- furnished standard with PVC hose
- The most compact 3/4" x 50' hose reel of its capacity available.
- maximum temperature is **150°F** *with hose*
- maximum temperature is **210°F** *without hose*



See next page for bumper stops. Consult factory for uses other than stated services.

with hose


Hose ID	Hose Length	Service	PSI	Weight lbs.	Part #	Price/E
1/2"	75'	air / water	**300**	90	***82075LP***	**$1625.00**
1/2"	100'	air / water	**300**	99	***82100LP***	**1692.00**
3/4"	50'	air / water	**250**	89	***83050LP***	**1625.00**

without hose

Hose Capacity	Service	PSI	Weight lbs.	Part #	Price/E
50' of 3/4" or 100' of 1/2"	air / water	**500**	74	***83000LP***	**$1435.00**

Adjustable Hose Bumper Stops

Hose ID	Hose OD From:	Hose OD To:	Dimensions B,C,E	Dimensions D	Reel Series Used On	Part #	Price/E
1/4"	.438"	.625"	2-1/2"	1-1/4"	5000 series	***1-HR1004A***	**$28.85**
3/8"	.625"	.749"	2-1/2"	1-1/4"	5000 series	***1-HR1004***	**28.85**
3/8"	.625"	.749"	3"	1-1/4"	7000 series	***1-HR1004-3***	**28.85**
1/2" or 3/8" 2-wire	.750"	1.050"	3"	1-1/4"	7000 series	***2-HR1004-3***	**28.85**
3/4"	1.060"	1.300"	3"	1-1/4"	7000 series	***3-HR1004-3***	**28.85**
1/2"	.750"	1.050"	3-1/2"	2-7/8"	9000 series	***2-HR1005***	**66.70**
3/4"	1.060"	1.380"	3-1/2"	2-7/8"	9000 series	***3-HR1005***	**66.70**
1"	1.390"	1.550"	3-1/2"	2-7/8"	9000 series	***4-HR1005***	**66.70**

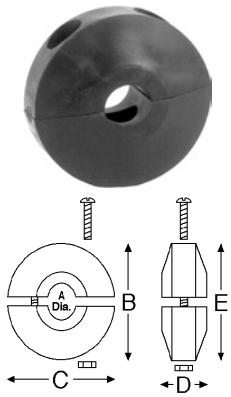

Adjustable Hose Bumper Stops are not included on hose reels ordered without hose. Order separately.

Reelcraft® 30,000 Manual Driven Hose Reels

- unitized construction: reel frame, spool and drum are fabricated from heavy gauge steel
- all bolted construction - no welds
- manual driven standard
- motor drive available
- ½" inlet



without hose

Hose ID	Hose Capacity	Spool Width	PSI	Weight lbs.	Part #	Price/E
¾"	100'	12"	1000	46	***C33112L***	**$767.00**
½"	200'	12"	3000	46	***C32112M***	**661.00**

Hose Racks

- can be used for fire or water hose
- fabricated of heavy, 12 gauge sheet steel for rugged industrial and shipboard use
- provides compact and economical hose storage
- curved saddle design avoids sharp bends in the hose prolonging hose life
- red enamel finish



Hose Size	Hose Capacity Rack	Hose Capacity Single Jacket	Hose Capacity Double Jacket	Wt. Lbs.	Part #	Price/E
1½" - 1¾"	50'	---	---	---	***HR1610-3***	**$110.65**
1½" - 1¾"	100'	---	---	---	***HR1610-6***	**130.12**
1½" - 2½"	200'	150'	100'	7.8	***HR1610***	**162.80**
2" - 2½"	50'	---	---	---	***HR1610-4***	**119.43**

Hung Up On Dixon Hose Racks



DHR1
single hose rack

- can be used for fire or water hose
- aluminum rack can be easily mounted
- single and double racks have 5 pre-drilled 5/16" mounting holes
- two racks can be bolted face to face to create extra hose capacity
- single rack overall dimensions 19-1/2" x 6" x 9-3/16"
- double rack overall dimensions 19-1/2" x 12" x 9-3/16"



DHR2
double hose rack

Description	Weight lbs.	Part #	Price/E
single hose rack	3.5	***DHR1***	**$201.50**
double hose rack	9.5	***DHR2***	**415.00**

LP Gas Hose Couplings and Adapters

- female Acme filler hose couplings
- Acme x NPT adapters
- Products meet or exceed the requirements of Compressed Gas Association (CGA), the National Fire Protection Association (NFPA), the Canadian Gas Association, American Society of Mechanical Engineers (ASME) and Underwriters Laboratories (UL)

Brass Male Acme x MNPT Adapters



ME217



ME233



ME503-16

Male Acme thread	Male NPT thread	*Brass* Part #	Price/E
1¾"	1¼"	***ME217***	**$28.75**
2¼"	1¼"	***ME233***	**112.50**
3¼"	2"	***ME503-16***	**141.00**

Brass Male Acme x FNPT Adapter



ME252-16

Male Acme thread	Female NPT thread	*Brass* Part #	Price/E
NEW 1¾"	1"	***ME214***	**$28.90**
3¼"	2"	***ME252-16***	**128.40**

Steel Male Acme x MNPT Adapters



ME217S



ME503S-16

Male Acme thread	Male NPT thread	*Steel* Part #	Price/E
1¾"	1¼"	***ME217S***	**$70.70**
2¼"	1¼"	***ME233S***	**138.35**
3¼"	2"	***ME503S-16***	**293.85**

Steel Male Acme x FNPT Adapter



ME252S-16

Male Acme thread	Female NPT thread	*Steel* Part #	Price/E
3¼"	2"	***ME252S-16***	**$200.50**

LP Gas Hose Couplings and Adapters

Female Acme x MNPT Filler Couplings, Brass Nut


ME112


ME130


ME120

Female Acme thread	Male NPT thread	Material	Part #	Price/E
1¾"	1"	brass nut, brass nipple	***ME112***	**$36.40**
2¼"	1¼"	brass nut, brass nipple	***ME120***	**169.30**
2¼"	1¼"	brass nut, steel nipple	***ME120S***	**174.15**
3¼"	2"	brass nut, steel nipple	***ME130***	**247.45**

Female Acme x MNPT Filler Couplings, Steel Nut


ME112S


ME130S


ME121S

Female Acme thread	Male NPT thread	Material	Part #	Price/E
1¾"	1"	steel nut and nipple	***ME112S***	**$82.00**
2¼"	1¼"	steel nut and nipple	***ME121S***	**177.00**
3¼"	2"	steel nut and nipple	***ME130S***	**202.85**

Acme Gaskets

2010 NEW

Size	Material	Part #	Price/E
1¾"	nitrile	***MEW2***	**$0.55**
2¼"	nitrile	***MEW5***	**2.90**
3¼"	nitrile	***MEW6***	**3.10**

Clamp Style Hose Couplings

- Clamp sections and hose barbs are made of steel and ductile iron.
- The 32B and 32S size offers a female Acme swivel to eliminate the need to add additional weight and bulk to the hose assembly.


ME3162-20


ME3162-32B

Hose Barb Size	Thread Size	Material	Part #	Price/E
1"	1" MNPT	steel nipple with 2 piece ductile iron clamp	***ME3162-16***	**$76.70**
1¼"	1¼" MNPT	steel nipple with 2 piece ductile iron clamp	***ME3162-20***	**123.15**
1½"	1½" MNPT	steel nipple with 2 piece ductile iron clamp	***ME3162-24***	**160.85**
2"	2" MNPT	steel nipple with 2 piece ductile iron clamp	***ME3162-32***	**183.80**
2"	3¼" female Acme	steel nipple and brass nut with 2 piece ductile iron clamp	***ME3162-32B***	**365.00**
2"	3¼" female Acme	steel nipple and steel nut with 2 piece ductile iron clamp	***ME3162-32S***	**360.90**

Wrench



Description	*Brass* Part #	Price/E
Acme spanner wrench for 2¼", 3¼" and 4¼" fittings	***MEP120B***	**$89.10**

LP Gas Hose Couplings and Adapters

Female Acme x Male Acme Adapters



ME612



ME612S

Female Acme thread	Male Acme thread	Material	Part #	Price/E
3¼"	1¾"	brass	***ME612***	**$214.10**
3¼"	1¾"	steel	***ME612S***	**316.05**

Metal Acme Caps



ME229



ME441F

Female Acme thread	Description	Part #	Price/E
1¾"	cap with ring and chain, brass	***ME229-1***	**$56.05**
1¾"	cap with ring and chain, steel	***ME229S-1***	**97.15**
2¼"	cap with knob plug and chain, brass	***ME431F-1***	**144.25**
2¼"	cap with knob plug, ring, chain, steel	***ME431FS-1***	**163.00**
3¼"	cap knob with ring and chain, brass	***ME441F-1***	**218.10**
3¼"	cap with knob plug, ring and chain, steel	***ME441FS-1***	**238.90**

Plastic Acme Caps



ME109



ME109-NH3

Female Acme thread	Description	Part #	Price/E
1¾"	cap with ring and chain, yellow plastic	***ME109-1***	**$6.85**
1¾"	cap with chain assembly, for anyhydrous service	***ME109-NH3-1***	**7.65**

Plastic Dust Plugs



ME179



ME180



ME181

Male Acme thread	Description	Part #	Price/E
1¾"	plug with dust seal and chain assembly, yellow plastic	***ME179-1***	**$25.70**
2¼"	plug with dust seal and chain assembly, yellow plastic	***ME180-1***	**31.40**
3¼"	plug with dust seal and chain assembly, yellow plastic	***ME181-1***	**68.85**

Dry Gas Couplings

Dry gas couplings are designed for safe loading and discharge of bobtails or intermediate bulk delivery trucks. They are quick and easy to connect and can be connected to a tank unit with pressures up to **225 PSI** at ambient temperature (70°F). If the pressure is higher you can equip the couplings with a pressure relief valve. The easy to connect pressure relief valve dissipates trapped fluid pressure into the hose coupler without spillage. The primary application of dry gas couplings is in the handling of LPG - Propane and Butane.

- safe handling of LPG
- easy to use and saves time
- reliable and easy to maintain
- can be coupled against higher pressure
- minimizes the risk of cold burns
- minimizes spillage and product loss
- minimizes health risks
- keeps the environment free of hazardous vapors and liquids
- compatible with existing dry disconnect couplings

Technical Information:

- stainless steel and brass / gunmetal
- NBR90 seals
- female NPT and ASA flanges
- **360 PSI** working pressure at ambient temperature (70°F)
- Composite (Polyeten PE-HD 300) plugs provide good protection against corrosion and withstand hot and cold environments.

Coupler - Hose Unit



female NPT x coupler

dry gas couplers x female NPT with NBR90 seals

Female NPT	Body Size	*Stainless Steel* Part #	Price/E
1"	56 mm	***DGC100SS***	**$2982.25**
2"	71 mm	***DGC200SS***	**4493.40**
3"	119 mm	***DGC300SS***	**6334.15**

Dust Plugs for Couplers



Size	Body Size	*Polyeten PE-HD 300* Part #	Price/E
1"	56 mm	***DGDP100***	**$107.95**
2"	71 mm	***DGDP200***	**123.95**
3"	119 mm	***DGDP300***	**123.95**

Adapter - Tank Unit



female NPT x adapter

dry gas adapters x female NPT with NBR90 seals

Female NPT	Body Size	*Stainless Steel* Part #	Price/E
1"	56 mm	***DGA100SS***	**$1071.40**
2"	71 mm	***DGA200SS***	**1395.20**
3"	119 mm	***DGA300SS***	**1543.10**



150# flange x adapter

dry gas adapters x 150# ASA flange with NBR90 seals

150# Flange	Body Size	*Stainless Steel* Part #	Price/E
1"	56 mm	***DGA100SSFL***	**$1755.00**
2"	71 mm	***DGA200SSFL***	**1866.90**
3"	119 mm	***DGA300SSFL***	**2154.75**

Dust Caps for Adapters



Size	Body Size	*Rubber* Part #	Price/E
1"	56 mm	***DGDC100***	**$95.95**
2"	71 mm	***DGDC200***	**107.95**
3"	119 mm	***DGDC300***	**127.95**

CBC-Lok® Tube Fittings

Applications:
- high pressure
- high temperature
- nitrogen
- helium
- flammable gases
- hydraulic gases
- corrosive media

Safety Guidelines:
- Never connect, disconnect or remake a fitting with pressure in the system.
- Make sure all fittings are properly installed.
- It is not recommended to go beyond the pressure rating of the tubing. Elongation could occur in the tubing, shrinking the wall thickness and cause potential harm.
- For proper sealing it is recommended that the tubing and fittings be of like material.
- Always use proper thread lubricant and sealants on tapered pipe threads.
- Never bleed a system by loosening a fitting.

Suggested Working Pressures For Tubing

Tube OD	Tube Wall	PSI
1/4"	0.28	**4000**
	0.35	**5100**
	0.49	**7500**
	0.65	**10100**
3/8"	0.35	**3300**
	0.49	**4800**
	0.65	**6600**
1/2"	0.49	**3800**
	0.65	**5100**
	0.83	**6700**

CBC-Lok® fittings come completely assembled.


Installation Instructions:
1. Cut tubing squarely and clean tube end thoroughly to remove burrs.
2. Insert the tubing into the assembly making sure the tubing seats firm against the shoulder of the body and the nut is finger tight.
3. Tighten the nut with a wrench 1¼ turns, while holding the body with a second wrench.

Features:
- fully interchangeable with Swagelok® and Parker A-Lok® fittings
- double collet (ferrule) swaging action
- two positive seal points
- Ty-Cor™ process applied to rear collet (ferrule)
- ASTM material construction
- material: 316 stainless steel
- temperature ratings: **-325°F** to **1200°F** (-198°C to 648°C)
- pressure ratings: see charts below and to the left
  Ratings listed are for reference only.

Suggested Working Pressures For Pipe Threads

Tube OD	Pipe Thread	PSI
1/4"	male	**7500**
	female	**6100**
3/8"	male	**7250**
	female	**5000**
1/2"	male	**6900**
	female	**4700**

Male Connectors



Tube OD	Male NPT	Inter-changes	*316 Stainless Steel* Part #	Price/E	Pkg Qty
1/4"	1/8"-27	400-1-2	***4-DMC-2***	**$18.20**	10
	1/4"-18	400-1-4	***4-DMC-4***	**18.95**	10
	3/8"-18	400-1-6	***4-DMC-6***	**24.00**	10
	1/2"-14	400-1-8	***4-DMC-8***	**32.40**	10
3/8"	1/4"-18	600-1-4	***6-DMC-4***	**25.90**	10
	3/8"-18	600-1-6	***6-DMC-6***	**29.10**	10
	1/2"-14	600-1-8	***6-DMC-8***	**34.90**	10
1/2"	1/4"-18	810-1-4	***8-DMC-4***	**37.50**	10
	3/8"-18	810-1-6	***8-DMC-6***	**39.00**	10
	1/2"-14	810-1-8	***8-DMC-8***	**43.40**	10

Female Connectors



Tube OD	Female NPT	Inter-changes	*316 Stainless Steel* Part #	Price/E	Pkg Qty
1/4"	1/4"-18	400-7-4	***4-DFC-4***	**$30.60**	10
3/8"	1/4"-18	600-7-4	***6-DFC-4***	**31.25**	10
1/2"	1/2"-14	810-7-8	***8-DFC-8***	**61.25**	10

Male Elbows




Tube OD	Male NPT	Inter-changes	*316 Stainless Steel* Part #	Price/E	Pkg Qty
1/4"	1/8"-27	400-2-2	***4-DME-2***	**$33.50**	10
	1/4"-18	400-2-4	***4-DME-4***	**36.10**	10
3/8"	1/4"-18	600-2-4	***6-DME-4***	**44.75**	10
	3/8"-18	600-2-6	***6-DME-6***	**53.90**	10
1/2"	1/2"-14	810-2-8	***8-DME-8***	**79.00**	10

CBC-LOK® Tube Fittings

Union Tees

Tube OD	Inter-changes	316 Stainless Steel Part #	Price/E	Pkg Qty
1/4"	400-3	***4-DTTT-4***	**$60.00**	10
3/8"	600-3	***6-DTTT-6***	**78.30**	10
1/2"	810-3	***8-DTTT-8***	**119.00**	10




Unions

Tube OD	Inter-changes	316 Stainless Steel Part #	Price/E	Pkg Qty
1/4"	400-6	***4-DU***	**$29.10**	10
3/8"	600-6	***6-DU***	**41.90**	10
1/2"	810-6	***8-DU***	**62.00**	10



Bulkhead Unions

Tube OD	Inter-changes	316 Stainless Steel Part #	Price/E	Pkg Qty
1/4"	400-61	***4-DBHU-4***	**$43.40**	10
3/8"	600-61	***6-DBHU-6***	**62.50**	10
1/2"	810-61	***8-DBHU-8***	**90.70**	10



Caps

Tube OD	Inter-changes	316 Stainless Steel Part #	Price/E	Pkg Qty
1/4"	400-C	***4-DCAP***	**$14.95**	10
3/8"	600-C	***6-DCAP***	**20.40**	10
1/2"	810-C	***8-DCAP***	**29.80**	10



Plugs

Tube OD	Inter-changes	316 Stainless Steel Part #	Price/E	Pkg Qty
1/4"	400-P	***4-DFPLUG***	**$14.55**	10
3/8"	600-P	***6-DFPLUG***	**16.40**	10
1/2"	810-P	***8-DFPLUG***	**24.40**	10



Front Collets

Tube OD	Inter-changes	316 Stainless Steel Part #	Price/E	Pkg Qty
1/4"	403-1	***DFC-4***	**$2.85**	10
3/8"	603-1	***DFC-6***	**3.50**	10
1/2"	813-1	***DFC-8***	**5.00**	10



Rear Collets

Tube OD	Inter-changes	316 Stainless Steel Part #	Price/E	Pkg Qty
1/4"	404-1	***DRC-4***	**$2.55**	10
3/8"	604-1	***DRC-6***	**3.25**	10
1/2"	814-1	***DRC-8***	**4.60**	10



Nuts

Tube OD	Inter-changes	316 Stainless Steel Part #	Price/E	Pkg Qty
1/4"	402-1	***DN-4***	**$5.55**	10
3/8"	602-1	***DN-6***	**7.65**	10
1/2"	812-1	***DN-8***	**12.50**	10



Brass SAE 45° Flare Fittings

Advantages:
- economical fitting resists mechanical pullout
- easy to disassemble and may be reassembled repeatedly, for a leak-proof connection
- manufactured from CA 360, CA 345, or CA377 brass
- manufactured especially for hard-to-hold liquids and gases

Specifications:
- Listed with Underwriter's Laboratories for flammable liquid, marine, refrigeration and gas applications. Meets functional requirements of SAE J512 and J513, ASA and MS (Military Standards).
- temperature range: **-65°F** to **250°F**

Applications:
- use with copper, brass, aluminum and welded steel hydraulic tubing that can be flared

Working Pressure Ranges:
Temperature and type of tubing used are important factors, the following table is a good guide for proper selection. The PSI rating given is based on a temperature of **73°F** using copper tubing.

PSI	Tube OD	Tube Wall
1400	1/4"	.030
1000	3/8"	.032
750	1/2"	.032
650	5/8"	.035
550	3/4"	.035

Assembly Instructions:
1. Cut tubing squarely and clean tube end thoroughly to remove burrs.
2. Place nut onto tube. Place threaded end of nut toward end of tube.
3. Flare tube end with flaring tool to provide 45° flare. (flare tools are available, please contact the factory for pricing and availability)
4. Clamp tube flare between nut and nose of fitting body by screwing nut on finger-tight. Tighten with a wrench an additional ¼ turn for a metal-to-metal seal.

Long Nuts



- long nut offers additional vibration capacity
- reference SAE 010111

Tube Size	Straight Thread	Hex	*Brass* Part #	Price/E
1/4"	7/16-20	9/16"	***41FL-4***	**$1.90**
3/8"	5/8-18	3/4"	***41FL-6***	**5.40**
1/2"	3/4-16	7/8"	***41FL-8***	**6.65**

Short Nuts



- short nut may be used when vibration is minimal
- reference SAE 010110

Tube Size	Straight Thread	Hex	*Brass* Part #	Price/E
1/4"	7/16-20	9/16"	***41FS-4***	**$1.55**
3/8"	5/8-18	3/4"	***41FS-6***	**2.65**
1/2"	3/4-16	7/8"	***41FS-8***	**3.70**

Brass SAE 45° Flare Fittings

Unions

- reference SAE 010101

Tube Size	Straight Thread	Hex	*Brass* Part #	Price/E
1/4"	7/16-20	7/16"	***42F-4***	**$1.60**
3/8"	5/8-18	5/8"	***42F-6***	**3.35**
1/2"	3/4-16	3/4"	***42F-8***	**4.50**



Union Tees

- reference SAE 010401

Tube Size	Straight Thread	*Brass* Part #	Price/E
1/4"	7/16-20	***144F-4***	**$6.20**
3/8"	5/8-18	***144F-6***	**10.80**
1/2"	3/4-16	***144F-8***	**12.85**



Female Connectors

- reference SAE 010103

Tube Size	Pipe Size	Straight Thread	Hex	*Brass* Part #	Price/E
1/4"	1/4"	7/16-20	11/16"	***46F-4-4***	**$3.20**
1/4"	3/8"	7/16-20	13/16"	***46F-4-6***	**5.45**
3/8"	1/4"	5/8-18	11/16"	***46F-6-4***	**3.50**
3/8"	3/8"	5/8-18	13/16"	***46F-6-6***	**5.95**
3/8"	1/2"	5/8-18	1"	***46F-6-8***	**10.45**
1/2"	1/4"	3/4-16	3/4"	***46F-8-4***	**5.35**
1/2"	3/8"	3/4-16	13/16"	***46F-8-6***	**5.95**
1/2"	1/2"	3/4-16	1"	***46F-8-8***	**9.55**
5/8"	3/8"	7/8-14	7/8"	***46F-10-6***	**7.00**



Male Connectors

- reference SAE 010102

Tube Size	Pipe Size	Straight Thread	Hex	*Brass* Part #	Price/E
1/4"	1/4"	7/16-20	9/16"	***48F-4-4***	**$1.85**
1/4"	3/8"	7/16-20	11/16"	***48F-4-6***	**3.20**
1/4"	1/2"	7/16-20	7/8"	***48F-4-8***	**5.40**
3/8"	1/8"	5/8-18	5/8"	***48F-6-2***	**3.55**
3/8"	1/4"	5/8-18	5/8"	***48F-6-4***	**2.85**
3/8"	3/8"	5/8-18	11/16"	***48F-6-6***	**3.20**
3/8"	1/2"	5/8-18	7/8"	***48F-6-8***	**4.70**
1/2"	1/4"	3/4-16	3/4"	***48F-8-4***	**3.80**
1/2"	3/8"	3/4-16	3/4"	***48F-8-6***	**3.70**
1/2"	1/2"	3/4-16	7/8"	***48F-8-8***	**5.10**
5/8"	3/8"	7/8-14	7/8"	***48F-10-6***	**5.25**
3/4"	3/4"	1-1/16-14	1-1/16"	***48F-12-12***	**9.60**



Brass SAE 45° Flare Fittings


Male Elbows



- reference SAE 010202

Tube Size	Pipe Size	Straight Thread	Brass Part #	Brass Price/E
1/4"	1/8"	7/16-20	***149F-4-2***	**$3.50**
1/4"	1/4"	7/16-20	***149F-4-4***	**4.70**
1/4"	3/8"	7/16-20	***149F-4-6***	**10.20**
3/8"	1/4"	5/8-18	***149F-6-4***	**5.45**
3/8"	3/8"	5/8-18	***149F-6-6***	**5.65**
3/8"	1/2"	5/8-18	***149F-6-8***	**9.30**
1/2"	1/4"	3/4-16	***149F-8-4***	**9.55**
1/2"	3/8"	3/4-16	***149F-8-6***	**7.05**
1/2"	1/2"	3/4-16	***149F-8-8***	**6.95**
5/8"	1/2"	7/8-14	***149F-10-8***	**8.60**
3/4"	3/4"	1-1/16-14	***149F-12-12***	**17.00**

Female Elbows



- reference SAE 010203

Tube Size	Pipe Size	Straight Thread	Brass Part #	Brass Price/E
1/4"	1/8"	7/16-20	***150F-4-2***	**$4.20**
1/4"	1/4"	7/16-20	***150F-4-4***	**8.80**
3/8"	1/4"	5/8-18	***150F-6-4***	**9.35**
3/8"	3/8"	5/8-18	***150F-6-6***	**12.25**
3/8"	1/2"	5/8-18	***150F-6-8***	**18.00**
1/2"	3/8"	3/4-16	***150F-8-6***	**11.95**
1/2"	1/2"	3/4-16	***150F-8-8***	**13.55**

Union Elbows



- reference SAE 010201

Tube Size	Straight Thread	Brass Part #	Brass Price/E
1/4"	7/16-20	***155F-4***	**$6.70**
3/8"	5/8-18	***155F-6***	**12.25**
1/2"	3/4-16	***155F-8***	**9.90**

45° Elbows



- reference SAE 010302

Tube Size	Pipe Size	Straight Thread	Brass Part #	Brass Price/E
1/4"	1/4"	7/16-20	***159F-4-4***	**$7.85**
3/8"	1/4"	5/8-18	***159F-6-4***	**5.95**
3/8"	3/8"	5/8-18	***159F-6-6***	**5.40**
1/2"	1/4"	3/4-16	***159F-8-4***	**11.45**
1/2"	3/8"	3/4-16	***159F-8-6***	**5.75**
1/2"	1/2"	3/4-16	***159F-8-8***	**10.90**

90° Swivel Elbows



Tube Size	Straight Thread	Brass Part #	Brass Price/E
1/4"	7/16-20	***166FSV-4-4***	**$11.30**
3/8"	5/8-18	***166FSV-6-6***	**13.85**
1/2"	3/4-16	***166FSV-8-8***	**18.05**

Brass Compression Fittings

Advantages:
- no flaring, soldering or other preparation of tubing necessary to assemble
- manufactured for low and medium pressure tubing connection work where excessive vibration or tube movement is not involved

Specifications:
Listed with Underwriter's Laboratories for flammable liquid. Compression fittings meet functional requirements of SAE J-512 and ASA.

Applications:
- use with copper, aluminum and Parflex thermoplastic tubing
- not recommended for steel tubing
- not recommended for application using gaseous media

Assembly Instructions:
1. Slide nut, then sleeve onto tubing. The thread end of the nut must face out.
2. Insert the tube into the fitting. Be sure the tube is bottomed on the fitting shoulder.
3. Assemble nut to body, and tighten hand-tight. Then follow the number of wrench turns as indicated in the table to the right.

Fitting Size	Tube Size	Turns required to seal from hand-tight	
		60C Series with soft metal tubing	60PT Series with thermoplastic tubing
2	1/8	1-1/4	-
3	3/16	1-1/4	-
4	1/4	1-1/4	2
5	5/16	1-1/4	2
6	3/8	2-1/4	2
8	1/2	2-1/4	2
10	5/8	2-1/4	2
12	3/4	2-1/4	2
14	7/8	2-1/4	-

Delrin® Sleeves



Tube Size	*Delrin®* Part #	Price/E
1/4"	***60PT-04***	**$0.67**
5/16"	***60PT-05***	**0.83**
3/8"	***60PT-06***	**0.75**
1/2"	***60PT-08***	**0.91**
5/8"	***60PT-10***	**1.33**
3/4"	***60PT-12***	**2.37**

Brass Sleeves



- reference SAE 060115

Tube Size	*Brass* Part #	Price/E
1/8"	***60C-02***	**$0.62**
3/16"	***60C-03***	**0.62**
1/4"	***60C-04***	**0.62**
5/16"	***60C-05***	**0.62**
3/8"	***60C-06***	**0.62**
7/16"	***60C-07***	**0.91**
1/2"	***60C-08***	**0.91**
5/8"	***60C-10***	**1.25**
3/4"	***60C-12***	**1.70**
7/8"	***60C-14***	**3.57**

Long Nuts



- reference SAE 060111

Tube Size	Straight Thread	*Brass* Part #	Price/E
1/4"	7/16-24	***61CL-04***	**$2.08**
5/16"	1/2-24	***61CL-05***	**9.05**
3/8"	9/16-24	***61CL-06***	**3.36**
1/2"	11/16-20	***61CL-08***	**7.64**
5/8"	13/16-18	***61CL-10***	**9.26**
3/4"	1-18	***61CL-12***	**16.32**

Nuts



- reference SAE 060110

Tube Size	Straight Thread	*Brass* Part #	Price/E
1/8"	5/16-24	***61C-02***	**$0.96**
3/16"	3/8-24	***61C-03***	**1.04**
1/4"	7/16-24	***61C-04***	**0.96**
5/16"	1/2-24	***61C-05***	**1.33**
3/8"	9/16-24	***61C-06***	**1.21**
7/16"	5/8-24	***61C-07***	**2.87**
1/2"	11/16-20	***61C-08***	**2.58**
5/8"	13/16-18	***61C-10***	**3.45**
3/4"	1-18	***61C-12***	**8.18**
7/8"	1-1/8-18	***61C-14***	**8.68**

Brass Compression Fittings

Unions



- reference SAE 060101 BA

Tube Size	Brass Part #	Price/E
1/8"	***62C-02***	**$5.77**
3/16"	***62C-03***	**4.24**
1/4"	***62C-04***	**3.86**
5/16"	***62C-05***	**5.48**
3/8"	***62C-06***	**4.90**
7/16"	***62C-07***	**19.40**
1/2"	***62C-08***	**11.67**
5/8"	***62C-10***	**15.74**
3/4"	***62C-12***	**32.73**
7/8"	***62C-14***	**38.33**

Union Reducers



- reference SAE 060101 BA

Tube Size	Brass Part #	Price/E
3/16" x 1/4"	***62C-0403***	**$11.01**
1/4" x 3/8"	***62C-0604***	**11.30**
3/8" x 1/2"	***62C-0806***	**14.79**
3/8" x 5/8"	***62C-1006***	**15.45**

Union Tees



- reference SAE 060401 BA

Tube Size	Brass Part #	Price/E
1/8"	***164C-02***	**$18.03**
3/16"	***264C-03***	**13.79**
1/4"	***164C-04***	**9.55**
5/16"	***164C-05***	**14.58**
3/8"	***164C-06***	**12.63**
1/2"	***164C-08***	**24.42**
5/8"	***164C-10***	**40.66**
3/4"	***164C-12***	**85.39**

Union Elbows



- reference SAE 060201 BA

Tube Size	Brass Part #	Price/E
1/8"	***165C-02***	**$11.50**
3/16"	***165C-03***	**8.68**
1/4"	***165C-04***	**9.06**
5/16"	***165C-05***	**14.00**
3/8"	***165C-06***	**8.31**
7/16"	***165C-07***	**20.68**
1/2"	***165C-08***	**19.81**
5/8"	***165C-10***	**22.64**
3/4"	***165C-12***	**41.74**

Brass Inserts



Tube Size	Wall Thickness	Brass Part #	Price/E
1/8"	.016	***63PT-0216***	**$0.83**
1/8"	.023	***63PT-0223***	**0.96**
1/8"	.032	***63PT-0232***	**1.04**
3/16"	.025	***63PT-0325***	**0.91**
3/16"	.040	***63PT-0340***	**0.75**
1/4"	.040	***63PT-0440***	**0.62**
1/4"	.062	***63PT-0462***	**1.04**
5/16"	.040	***63PT-0540***	**1.54**
5/16"	.062	***63PT-0562***	**0.96**
3/8"	.062	***63PT-0662***	**0.67**
1/2"	.062	***63PT-0862***	**0.91**
5/8"	.062	***63PT-1062***	**1.79**

Note: Delrin® sleeves and brass inserts convert standard compression fittings for use with industrial grades of thermoplastic tubing. See page 157 for Delrin® sleeves.


Bulkhead Unions



Tube Size	Brass Part #	Price/E
1/4"	***62CBH-04***	**$11.88**
3/8"	***62CBH-06***	**18.61**

Brass Compression Fittings

Female Connectors



Tube Size	Pipe Thread	Brass Part #	Price/E
1/8"	1/8"	***66C-0202***	**$4.44**
3/16"	1/8"	***66C-0302***	**4.69**
3/16"	1/4"	***66C-0304***	**12.13**
1/4"	1/8"	***66C-0402***	**3.07**
1/4"	1/4"	***66C-0404***	**7.60**
5/16"	1/8"	***66C-0502***	**6.65**
5/16"	1/4"	***66C-0504***	**12.83**
3/8"	1/8"	***66C-0602***	**4.74**
3/8"	1/4"	***66C-0604***	**7.60**
3/8"	3/8"	***66C-0606***	**8.02**
3/8"	1/2"	***66C-0608***	**12.25**
1/2"	1/4"	***66C-0804***	**13.12**
1/2"	3/8"	***66C-0806***	**11.21**
1/2"	1/2"	***66C-0808***	**16.70**
5/8"	1/2"	***66C-1008***	**15.91**

Male Connectors



Tube Size	Pipe Thread	Brass Part #	Price/E
1/8"	1/8"	***68C-0202***	**$3.07**
3/16"	1/8"	***68C-0302***	**3.07**
3/16"	1/4"	***68C-0304***	**5.28**
1/4"	1/8"	***68C-0402***	**2.58**
1/4"	1/4"	***68C-0404***	**3.74**
1/4"	3/8"	***68C-0406***	**5.86**
1/4"	1/2"	***68C-0408***	**9.35**
5/16"	1/8"	***68C-0502***	**3.95**
5/16"	1/4"	***68C-0504***	**4.11**
3/8"	1/8"	***68C-0602***	**3.86**
3/8"	1/4"	***68C-0604***	**4.15**
3/8"	3/8"	***68C-0606***	**5.28**
3/8"	1/2"	***68C-0608***	**7.52**
7/16"	1/4"	***68C-0704***	**11.30**
1/2"	1/4"	***68C-0804***	**8.02**
1/2"	3/8"	***68C-0806***	**7.52**
1/2"	1/2"	***68C-0808***	**9.35**
5/8"	3/8"	***68C-1006***	**12.46**
5/8"	1/2"	***68C-1008***	**11.75**
5/8"	3/4"	***68C-1012***	**16.99**
3/4"	1/2"	***68C-1208***	**19.19**
3/4"	3/4"	***68C-1212***	**24.55**
7/8"	3/4"	***68C-1412***	**23.97**

Male Elbows



Tube Size	Pipe Thread	Brass Part #	Price/E
1/8"	1/8"	***269C-0202***	**$5.28**
3/16"	1/8"	***169C-0302***	**7.81**
3/16"	1/4"	***169C-0304***	**10.72**
1/4"	1/8"	***169C-0402***	**6.27**
1/4"	1/4"	***169C-0404***	**6.44**
1/4"	3/8"	***169C-0406***	**15.53**
5/16"	1/8"	***169C-0502***	**9.64**
5/16"	1/4"	***169C-0504***	**10.51**
5/16"	3/8"	***169C-0506***	**22.89**
3/8"	1/8"	***169C-0602***	**9.14**
3/8"	1/4"	***169C-0604***	**7.10**
3/8"	3/8"	***169C-0606***	**8.60**
3/8"	1/2"	***169C-0608***	**15.45**
1/2"	1/4"	***169C-0804***	**17.07**
1/2"	3/8"	***169C-0806***	**12.75**
1/2"	1/2"	***169C-0808***	**16.90**
5/8"	1/2"	***169C-1008***	**20.93**
3/4"	1/2"	***169C-1208***	**33.31**
3/4"	3/4"	***169C-1212***	**33.77**

Female Elbows



Tube Size	Pipe Thread	Brass Part #	Price/E
1/8"	1/8"	***170C-0202***	**$9.35**
3/16"	1/8"	***170C-0302***	**10.80**
1/4"	1/8"	***170C-0402***	**8.89**
1/4"	1/4"	***170C-0404***	**13.29**
3/8"	1/4"	***170C-0604***	**13.91**
3/8"	3/8"	***170C-0606***	**15.82**
7/16"	1/4"	***170C-0704***	**23.84**
1/2"	3/8"	***170C-0806***	**16.78**

Brass Compression Fittings

Male Run Tees



Tube Size	Pipe Thread	Brass Part #	Price/E
1/8"	1/8"	***171C-0202***	**$13.50**
1/4"	1/8"	***171C-0402***	**9.55**
1/4"	1/4"	***171C-0404***	**12.09**
3/8"	1/4"	***171C-0604***	**14.45**

Male Branch Tees



Tube Size	Pipe Thread	Brass Part #	Price/E
1/8"	1/8"	***172C-0202***	**$12.75**
3/16"	1/8"	***172C-0302***	**12.71**
1/4"	1/8"	***172C-0402***	**9.14**
1/4"	1/4"	***172C-0404***	**11.67**
3/8"	1/8"	***172C-0602***	**14.79**
3/8"	1/4"	***172C-0604***	**12.54**
3/8"	3/8"	***172C-0606***	**17.78**
1/2"	3/8"	***172C-0806***	**22.43**

45° Elbows




Tube Size	Pipe Thread	Brass Part #	Price/E
1/4"	1/8"	***179C-0402***	**$11.09**
1/4"	1/4"	***179C-0404***	**13.12**
3/8"	1/8"	***179C-0602***	**16.62**
3/8"	1/4"	***179C-0604***	**13.33**
3/8"	3/8"	***179C-0606***	**15.74**
1/2"	3/8"	***179C-0806***	**22.51**

Straight Through Tank Fittings



Tube Size	Pipe Thread	Brass Part #	Price/E
3/16"	1/8"	***682C-0302***	**$10.05**
3/8"	3/8"	***682C-0606***	**13.33**
1/2"	1/2"	***682C-0808***	**20.56**

Adapter Tee



Pipe Thread	Straight Thread	Brass Part #	Price/E
1/8"	7/16-24	***176C-0402***	**$10.63**

Female Branch Tee



Tube Size	Pipe Thread	Brass Part #	Price/E
1/4"	1/8"	***177C-0402***	**$14.45**

Seal Plug



Tube Size	Brass Part #	Price/E
1/4"	***639C-04***	**$3.74**

Sharkbite® Push-Fit Fittings

2010 NEW

- for ***water***, ***dry, clean air*** or ***100% glycol solutions*** only
- connects copper, CPVC, and PEX pipe in any combination
- no soldering, clamps, unions or glue needed
- certified to **200 PSI** and **200°F**
- approved for use underground and behind walls without access panels
- integral tube liner for PEX installations
- Fittings can be rotated after assembly for easier installation in tight spaces.
- easy to disconnect if needed
- design certified and listed to ASSE 1061/NSF 61
- listed by IAMPO
- meet UPC, IPC and cUPC requirements

Straight Couplings

Tube Size	*Forged Brass* Part #	Price/E
½" x ½"	***U008***	**$14.80**
¾" x ¾"	***U016***	**16.95**
1" x 1"	***U020***	**35.70**



Reducing Couplings

Tube Size	*Forged Brass* Part #	Price/E
¾" x ½"	***U058***	**$16.55**
1" x ¾"	***U060***	**41.20**



Straight Connectors

Tube Size	Female NPT	*Forged Brass* Part #	Price/E
½"	½"	***U072***	**$11.80**
¾"	¾"	***U088***	**13.80**
1"	1"	***U094***	**26.50**



Tube Size	Male NPT	*Forged Brass* Part #	Price/E
½"	½"	***U120***	**$11.95**
¾"	¾"	***U134***	**13.45**
1"	1"	***U140***	**27.55**



Reducing Connectors

Tube Size	Female NPT	*Forged Brass* Part #	Price/E
½"	¾"	***U068***	**$13.75**



Tube Size	Male NPT	*Forged Brass* Part #	Price/E
½"	¾"	***U116***	**$13.40**



Sharkbite® Push-Fit Fittings

2010 NEW

Elbows



Tube Size	Forged Brass Part #	Price/E
½" x ½"	***U248***	**$15.35**
¾" x ¾"	***U256***	**19.15**
1" x 1"	***U260***	**36.50**

Drop Ear Elbow



Tube Size	Female NPT	Forged Brass Part #	Price/E
½"	½"	***U334***	**$14.90**

Tees



Tube Size	Tube Size	Tube Size	Forged Brass Part #	Price/E
½"	½"	½"	***U362***	**$21.20**
¾"	¾"	¾"	***U370***	**26.10**

Reducing Tee



Tube Size	Tube Size	Tube Size	Forged Brass Part #	Price/E
¾"	¾"	½"	***U412***	**$25.05**

End Stops



Tube Size	Forged Brass Part #	Price/E
½"	***U514***	**$12.40**
¾"	***U518***	**15.55**
1"	***U520***	**33.85**

Slip Couplings



- for use with copper only

Tube Size	Forged Brass Part #	Price/E
½"	***U3008***	**$25.95**
¾"	***U3016***	**31.80**

Disconnect Clips



Size	ABS Plastic Part #	Price/E
½"	***U710***	**$3.60**
¾"	***U712***	**3.60**
1"	***U714***	**4.00**

Brass Push-In Fittings

- Quick connect: simply push tubing in, no tools required. Saves up to 75% of assembly time versus the standard compression fittings.
- Quick disconnect: hold two fingers on insert and pull tubing out, no tools required.
- reusable: connect and disconnect numerous times
- Full flow design provides up to 60% more flow than conventional fittings with internal tube supports.
- positive seal: no leaks, after tubing is inserted, seal is made
- secure tube retention: pulling on tubing only serves to tighten the connection.
- Pre-applied Teflon® based pipe sealant on all male pipe threads saves customer additional labor.
- Working pressure: fittings are suitable for use up to the maximum working pressure of the plastic tubing used. Also suitable for vacuum service.
- working temperature: **-10°F** to **200°F**

Male Swivel Elbows



tube to male NPTF

Tube OD	Male NPTF	*Forged Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***69S4x4***	**$7.75**	10
5/32"	10-32 *	***69S5x10***	**14.00**	10
5/32"	1/8"	***69S5x4***	**8.45**	10
5/32"	1/4"	***69S5x8***	**12.80**	10
1/4"	10-32 *	***69S8x10***	**12.15**	10
1/4"	1/8"	***69S8x4***	**8.10**	10
1/4"	1/4"	***69S8x8***	**9.35**	10
1/4"	3/8"	***69S8x12***	**19.10**	10
3/8"	1/8"	***69S12x4***	**16.75**	10
3/8"	1/4"	***69S12x8***	**12.80**	10
3/8"	3/8"	***69S12x12***	**13.60**	5
3/8"	1/2"	***69S12x16***	**23.55**	5
1/2"	3/8"	***69S16x12***	**17.00**	5
1/2"	1/2"	***69S16x16***	**20.30**	5

* UNF - Straight thread, supplied with gasket

Male Elbows



tube to male NPTF

Tube OD	Male NPTF	*Forged Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***694x4***	**$7.00**	10
5/32"	1/8"	***695x4***	**6.80**	10
3/16"	1/8"	***696x4***	**7.45**	10
1/4"	1/8"	***698x4***	**6.35**	10
1/4"	1/4"	***698x8***	**6.80**	10
1/4"	3/8"	***698x12***	**12.00**	10
3/8"	1/8"	***6912x4***	**9.60**	10
3/8"	1/4"	***6912x8***	**9.95**	10
3/8"	3/8"	***6912x12***	**12.00**	10
1/2"	1/4"	***6916x8***	**13.60**	5
1/2"	3/8"	***6916x12***	**13.15**	5

Unions



tube to tube

Tube OD	*Brass* Part #	Price/E	Opt Qty
1/8"	***624***	**$7.45**	20
5/32"	***625***	**6.75**	10
1/4"	***628***	**8.30**	10
3/8"	***6212***	**10.35**	10
1/2"	***6216***	**13.45**	5

Bulkhead Unions




tube to male thread

Tube OD	Thread	*Brass* Part #	Price/E	Opt Qty
1/8"	7/16-20	***824***	**$18.05**	10
5/32"	7/16-20	***825***	**12.60**	10
3/16"	1/2-20	***826***	**15.70**	10
1/4"	1/2-20	***828***	**15.15**	10
3/8"	3/4-16	***8212***	**19.60**	5
1/2"	15/16-16	***8216***	**25.20**	5

Brass Push-In Fittings

Male Connectors




tube to male NPTF

Tube OD	Male NPTF	Brass Part #	Price/E	Opt Qty
1/8"	10-32 *	***684x10***	**$5.95**	20
1/8"	1/8"	***684x4***	**5.05**	20
5/32"	10-32 *	***685x10***	**5.65**	20
5/32"	1/8"	***685x4***	**4.60**	20
5/32"	1/4"	***685x8***	**7.35**	10
3/16"	10-32 *	***686x10***	**8.60**	20
3/16"	1/8"	***686x4***	**5.90**	20
1/4"	10-32 *	***688x10***	**8.40**	20
1/4"	1/8"	***688x4***	**5.05**	20
1/4"	1/4"	***688x8***	**5.80**	10
1/4"	3/8"	***688x12***	**7.60**	10
3/8"	1/8"	***6812x4***	**7.25**	10
3/8"	1/4"	***6812x8***	**7.10**	10
3/8"	3/8"	***6812x12***	**8.20**	10
3/8"	1/2"	***6812x16***	**13.05**	5
1/2"	1/4"	***6816x8***	**10.80**	5
1/2"	3/8"	***6816x12***	**11.90**	5
1/2"	1/2"	***6816x16***	**15.15**	5

* UNF - Straight thread, supplied with gasket

Female Connectors



tube to female NPTF

Tube OD	Female NPTF	Brass Part #	Price/E	Opt Qty
1/8"	1/8"	***664x4***	**$12.80**	10
5/32"	1/8"	***665x4***	**13.50**	10
1/4"	1/8"	***668x4***	**9.40**	10
1/4"	1/4"	***668x8***	**12.25**	10
3/8"	1/4"	***6612x8***	**17.85**	10
3/8"	3/8"	***6612x12***	**21.70**	5

Female Elbows



tube to female NPTF

Tube OD	Female NPTF	Forged Brass Part #	Price/E	Opt Qty
5/32"	1/8"	***705x4***	**$9.70**	10
1/4"	1/8"	***708x4***	**12.00**	10
1/4"	1/4"	***708x8***	**14.40**	5
3/8"	1/4"	***7012x8***	**17.95**	5

Union Elbows



tube to tube

Tube OD	Forged Brass Part #	Price/E	Opt Qty
1/8"	***654***	**$10.30**	10
5/32"	***655***	**10.55**	10
1/4"	***658***	**9.10**	10
3/8"	***6512***	**12.70**	10
1/2"	***6516***	**19.60**	5

Union Tees



tube to tube

Tube OD	Forged Brass Part #	Price/E	Opt Qty
1/8"	***644***	**$10.65**	10
5/32"	***645***	**10.30**	10
3/16"	***646***	**11.15**	10
1/4"	***648***	**12.00**	10
3/8"	***6412***	**16.95**	5
1/2"	***6416***	**23.80**	5

Brass Push-In Fittings

Male Swivel Branch Tees



tube to male NPTF

Tube OD	Male NPTF	*Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***72S4x4***	**$18.40**	10
5/32"	10-32 *	***72S5x10***	**18.95**	10
5/32"	1/8"	***72S5x4***	**19.10**	10
1/4"	1/8"	***72S8x4***	**13.60**	10
1/4"	1/4"	***72S8x8***	**14.40**	5
3/8"	1/4"	***72S12x8***	**17.60**	5
3/8"	3/8"	***72S12x12***	**20.05**	5
1/2"	3/8"	***72S16x12***	**30.25**	5
1/2"	1/2"	***72S16x16***	**33.50**	5

* UNF - Straight thread, supplied with gasket.

Male Branch Tees



tube to male NPTF

Tube OD	Male NPTF	*Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***724x4***	**$10.15**	10
5/32"	1/8"	***725x4***	**11.60**	10
3/16"	1/8"	***726x4***	**12.70**	10
1/4"	1/8"	***728x4***	**12.00**	10
1/4"	1/4"	***728x8***	**12.80**	5
3/8"	1/8"	***7212x4***	**15.15**	5
3/8"	1/4"	***7212x8***	**16.75**	5
3/8"	3/8"	***7212x12***	**18.40**	5
1/2"	3/8"	***7216x12***	**22.30**	5


Male Run Tees



tube to male NPTF

Tube OD	Male NPTF	*Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***714x4***	**$10.15**	10
5/32"	1/8"	***715x4***	**11.05**	10
3/16"	1/8"	***716x4***	**12.85**	10
1/4"	1/8"	***718x4***	**12.00**	10
1/4"	1/4"	***718x8***	**12.80**	5
3/8"	1/8"	***7112x4***	**15.85**	5
3/8"	1/4"	***7112x8***	**17.60**	5
3/8"	3/8"	***7112x12***	**20.05**	5
1/2"	3/8"	***7116x12***	**21.50**	5

Male Swivel Run Tees



tube to male NPTF

Tube OD	Male NPTF	*Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***71S4x4***	**$18.40**	10
5/32"	10-32 *	***71S5x10***	**18.95**	10
5/32"	1/8"	***71S5x4***	**20.75**	5
1/4"	1/8"	***71S8x4***	**13.60**	5
1/4"	1/4"	***71S8x8***	**14.40**	5
3/8"	1/4"	***71S12x8***	**22.40**	5
3/8"	3/8"	***71S12x12***	**26.00**	5
1/2"	3/8"	***71S16x12***	**28.50**	5
1/2"	1/2"	***71S16x16***	**32.00**	5

* UNF - Straight thread, supplied with gasket.

Stainless Steel Legris Push-In Fittings

Suitable for many industries such as: chemical, food, packaging and medical.

Technical characteristics:
- working temperature: **-4°F** to **250°F**
- working pressure: **290 PSI** maximum
  Maximum circuit pressure depends equally on the type and diameter of the tube used. SAFETY ALERT
- no silicone

Compatible with a range of tubes:
- semi-rigid nylon tube
- flexible polyurethane tube
- low density polyethylene
- Teflon® tube FEP 140
- stainless steel and copper tube (when grooved)

Materials of construction:
- body - AISI 316 stainless steel
- backup washer - 304L stainless steel
- collet - 303L stainless steel
- seal - Viton® O-ring
- Thread sealant does not come pre-applied on male threads, allowing the appropriate sealant for the application to be applied by the user.


Male Elbows



tube to male NPT

Tube OD	Male NPTF	Stainless Steel Part #	Stainless Steel Price/E	Pkg Qty
1/4"	1/8"	***38895611***	**$81.00**	10
1/4"	1/4"	***38895614***	**91.00**	10
3/8"	1/4"	***38896014***	**148.00**	10
3/8"	3/8"	***38896018***	**156.00**	10
1/2"	3/8"	***38896218***	**184.00**	10
1/2"	1/2"	***38896222***	**193.00**	10

Straight Male Connectors



tube to male NPT

Tube OD	Male NPT	Stainless Steel Part #	Stainless Steel Price/E	Pkg Qty
1/4"	1/8"	***38055611***	**$56.00**	10
1/4"	1/4"	***38055614***	**59.00**	10
3/8"	1/4"	***38056014***	**70.00**	10
3/8"	3/8"	***38056018***	**73.00**	10
1/2"	3/8"	***38056218***	**95.00**	10
1/2"	1/2"	***38056222***	**101.00**	10

Unions



tube to tube

Tube OD	Stainless Steel Part #	Stainless Steel Price/E	Pkg Qty
1/4"	***38065600***	**$63.00**	10
3/8"	***38066000***	**87.00**	10
1/2"	***38066200***	**111.00**	10

Equal Elbow Union



tube to tube

Tube OD	Stainless Steel Part #	Stainless Steel Price/E	Pkg Qty
1/4"	***38025600***	**$77.00**	10

Union Tees



tube to tube to tube

Tube OD	Stainless Steel Part #	Stainless Steel Price/E	Pkg Qty
1/4"	***38045600***	**$108.00**	10
3/8"	***38046000***	**164.00**	10
1/2"	***38046200***	**196.00**	10

Bulkhead Connectors



tube to tube

Tube OD	Stainless Steel Part #	Stainless Steel Price/E	Pkg Qty
1/4"	***38165600***	**$128.00**	10
3/8"	***38166000***	**138.00**	10
1/2"	***38166200***	**158.00**	10

Nickel-Plated Brass Legris Push-In Fittings

Technical characteristics and materials of construction:
- brass body with external and internal nickel plating
- chemical (electroless) nickel plated
- working temperature: **5°F** to **180°F**
- seal: Buna-N
- pressure: vacuum to **290 PSI**
  Maximum circuit pressure depends equally on the type and diameter of the tube used.
  SAFETY ALERT
- thread: length of threads in accordance with ISO 7.1 standards
- pre-applied thread sealant on all male NPT threads
- no silicone

Features and benefits:
- nickel-plated brass push-to-connect fitting
- tube compatibility: urethane, nylon, polyethylene, Teflon®, metallic tubes (stainless steel and copper, when grooved)

Applications:
- A solution for pneumatic applications and fluids in aggressive environments where stainless steel is not necessary.
- various fluids: compressed air and fluids compatible with materials of construction
- typical industries: automotive, packaging, paper mills, wood working, factories with wash-down processes

Female Connectors



tube to female NPT

Tube OD	Female NPT	*Nickel-plated Brass* Part #	Price/E	Pkg Qty
5/32"	1/4"	***32150414***	**$11.30**	10
1/4"	1/8"	***32155611***	**7.15**	10
1/4"	1/4"	***32155614***	**9.40**	10
3/8"	1/4"	***32156014***	**14.55**	10
3/8"	3/8"	***32156018***	**15.00**	10
1/2"	3/8"	***32156218***	**15.15**	10
1/2"	1/2"	***32156222***	**15.70**	10

Male Connectors



tube to male NPT

Tube OD	Male NPT	*Nickel-plated Brass* Part #	Price/E	Pkg Qty
5/32"	10-32 *	***32010420***	**$4.35**	10
5/32"	1/8"	***32750411***	**4.10**	10
5/32"	1/4"	***32750414***	**6.40**	10
1/4"	10-32 *	***32015620***	**5.80**	10
1/4"	1/8"	***32755611***	**4.85**	10
1/4"	1/4"	***32755614***	**5.35**	10
1/4"	3/8"	***32755618***	**6.50**	10
3/8"	1/8"	***32756011***	**9.55**	10
3/8"	1/4"	***32756014***	**7.45**	10
3/8"	3/8"	***32756018***	**9.65**	10
3/8"	1/2"	***32756022***	**12.15**	10
1/2"	3/8"	***32756218***	**12.15**	10
1/2"	1/2"	***32756222***	**12.35**	10

* UNF - Straight thread, supplied with gasket

Male Swivel Elbows



tube to male NPT

Tube OD	Male NPT	*Nickel-plated Brass* Part #	Price/E	Pkg Qty
5/32"	10-32 *	***32990420***	**$8.70**	10
5/32"	1/8"	***32090411***	**6.95**	10
5/32"	1/4"	***32090414***	**8.70**	10
1/4"	1/8"	***32095611***	**5.50**	10
1/4"	1/4"	***32095614***	**6.30**	10
1/4"	3/8"	***32095618***	**9.05**	10
3/8"	1/4"	***32096014***	**13.20**	10
3/8"	3/8"	***32096018***	**10.80**	10
3/8"	1/2"	***32096022***	**13.40**	10
1/2"	1/2"	***32096222***	**16.65**	10

* UNF - Straight thread, supplied with gasket

Male Run Swivel Tees



tube to male NPT

Tube OD	Male NPT	*Nickel-plated Brass* Part #	Price/E	Pkg Qty
5/32"	10-32 *	***32930420***	**$14.20**	10
5/32"	1/8"	***32030411***	**10.40**	10
5/32"	1/4"	***32030414***	**12.60**	10
1/4"	1/8"	***32035611***	**11.50**	10
1/4"	1/4"	***32035614***	**12.30**	10
1/4"	3/8"	***32035618***	**13.20**	10
3/8"	1/4"	***32036014***	**17.35**	10
3/8"	3/8"	***32036018***	**18.75**	10
3/8"	1/2"	***32036022***	**20.15**	10

* UNF - Straight thread, supplied with gasket

Nickel-Plated Brass Legris Push-In Fittings

Equal Unions



tube to tube

Tube OD	*Nickel-plated Brass* Part #	Price/E
5/32"	***32060400***	**$6.15**
1/4"	***32065600***	**6.95**
3/8"	***32066000***	**13.90**
1/2"	***32066200***	**14.55**

Union Elbows



tube to tube

Nickel-plated Brass Part #	Price/E
32020400	**$5.95**
32025600	**6.40**
32026000	**11.75**
32026200	**15.30**

Equal Union Tees




tube to tube

Nickel-plated Brass Part #	Price/E	Pkg Qty
32040400	**$7.75**	10
32045600	**8.70**	10
32046000	**15.30**	10
32046200	**19.40**	10

Nylon/Nickel-Plated Brass Legris Push-In Fittings

- materials:
  - nickel-plated brass construction; black body is glass-filled nylon; Buna-N O-ring seal; polypropylene release button; silicone free
- positive seal: sealing and holding is accomplished instantaneously
- reusable: connect and disconnect numerous times
- full flow: fitting seals on outside diameter of tubing
- working pressure: fittings rated to **290 PSI** at ambient temperature. *Maximum circuit pressure depends equally on the type and diameter of the tube used.* SAFETY ALERT
- working temperature: **-4°F** to **175°F**
- pre-applied thread sealant on all male pipe threads
- compatible tubing: semi-rigid nylon, polyurethane and polyethylene tube
- vacuum capability: vacuum of 28" Hg (99% vacuum)

Gripping Ring Technology



Quick Connect and Disconnect:
- To connect, simply push tubing in.
- To disconnect, press the release ring towards the fitting and pull tubing out.
- No tools required.

Male Swivel Branch Tees



tube to male NPT

Tube OD	Male NPT	*Nylon/Nickel-plated Brass* Part #	Price/E	Pkg Qty
1/8"	10-32 *	***31085320***	**$10.15**	10
1/8"	1/8"	***31085311***	**7.60**	10
5/32"	10-32 *	***31080420***	**10.90**	10
5/32"	1/8"	***31080411***	**7.15**	10
5/32"	1/4"	***31080414***	**10.60**	10
1/4"	1/8"	***31085611***	**6.40**	10
1/4"	1/4"	***31085614***	**6.95**	10
1/4"	3/8"	***31085618***	**8.45**	10
5/16"	1/8"	***31080811***	**9.90**	10
5/16"	1/4"	***31080814***	**10.30**	10
5/16"	3/8"	***31080818***	**10.60**	10
3/8"	1/8"	***31086011***	**13.50**	10
3/8"	1/4"	***31086014***	**9.90**	10
3/8"	3/8"	***31086018***	**11.50**	10
3/8"	1/2"	***31086022***	**15.00**	10
1/2"	1/4"	***31086214***	**13.00**	10
1/2"	3/8"	***31086218***	**16.20**	10
1/2"	1/2"	***31086222***	**18.35**	10

* UNF - Straight thread, supplied with gasket

Male Swivel Run Tees



tube to male NPT

Tube OD	Male NPT	*Nylon/Nickel-plated Brass* Part #	Price/E	Pkg Qty
1/8"	10-32 *	***31035320***	**$10.30**	10
1/8"	1/16"	***31035308***	**10.60**	10
1/8"	1/8"	***31035311***	**8.00**	10
5/32"	10-32 *	***31030420***	**11.20**	10
5/32"	1/8"	***31030411***	**7.90**	10
5/32"	1/4"	***31030414***	**10.90**	10
1/4"	1/8"	***31035611***	**6.45**	10
1/4"	1/4"	***31035614***	**6.95**	10
1/4"	3/8"	***31035618***	**8.55**	10
5/16"	1/8"	***31030811***	**9.65**	10
5/16"	1/4"	***31030814***	**10.15**	10
3/8"	1/8"	***31036011***	**13.05**	10
3/8"	1/4"	***31036014***	**10.90**	10
3/8"	3/8"	***31036018***	**12.10**	10
1/2"	1/4"	***31036214***	**13.25**	10
1/2"	3/8"	***31036218***	**16.20**	10
1/2"	1/2"	***31036222***	**17.95**	10

* UNF - Straight thread, supplied with gasket

Nylon/Nickel-Plated Brass Legris Push-In Fittings

"Hybrid" Male Connectors



fractional inch tube to male BSPT

Tube OD	Male BSPT	*Nylon/Nickel-plated Brass* Part #	Price/E	Opt Qty
1/4"	1/8"	***31755610***	**$6.65**	10
1/4"	1/4"	***31755613***	**6.70**	10
3/8"	1/4"	***31756013***	**10.10**	10


Male Connectors



tube to male NPT

Tube OD	Male NPT	*Nylon/Nickel-plated Brass* Part #	Price/E	Opt Qty
1/8"	1/16"	***31755308***	**$5.10**	10
1/8"	1/8"	***31755311***	**4.10**	10
1/8"	1/4"	***31755314***	**6.80**	10
5/32"	1/8"	***31750411***	**3.20**	10
5/32"	1/4"	***31750414***	**6.20**	10
1/4"	1/8"	***31755611***	**4.20**	10
1/4"	1/4"	***31755614***	**4.20**	10
1/4"	3/8"	***31755618***	**5.30**	10
5/16"	1/8"	***31750811***	**6.85**	10
5/16"	1/4"	***31750814***	**6.90**	10
5/16"	3/8"	***31750818***	**7.95**	10
3/8"	1/8"	***31756011***	**7.60**	10
3/8"	1/4"	***31756014***	**5.60**	10
3/8"	3/8"	***31756018***	**6.95**	10
3/8"	1/2"	***31756022***	**9.60**	10
1/2"	1/4"	***31756214***	**9.65**	10
1/2"	3/8"	***31756218***	**9.85**	10
1/2"	1/2"	***31756222***	**10.10**	10

Female Connectors



tube to female NPT

Tube OD	Female NPT	*Nylon/Nickel-plated Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***30145311***	**$6.05**	10
1/8"	1/4"	***30145314***	**6.95**	10
5/32"	1/8"	***30140411***	**7.45**	10
5/32"	1/4"	***30140414***	**8.95**	10
1/4"	1/8"	***30145611***	**5.75**	10
1/4"	1/4"	***30145614***	**7.55**	10
5/16"	1/8"	***30140811***	**10.10**	10
5/16"	1/4"	***30140814***	**10.15**	10
3/8"	1/8"	***30146011***	**9.55**	10
3/8"	1/4"	***30146014***	**11.40**	10
3/8"	3/8"	***30146018***	**12.40**	10

Male Swivel Elbows



tube to male NPT

Tube OD	Male NPT	*Nylon/Nickel-plated Brass* Part #	Price/E	Opt Qty
1/8"	10-32 *	***31095320***	**$7.20**	10
1/8"	1/16"	***31095308***	**9.00**	10
1/8"	1/8"	***31095311***	**4.80**	10
1/8"	1/4"	***31095314***	**7.05**	10
5/32"	10-32 *	***31090420***	**6.45**	10
5/32"	1/8"	***31090411***	**4.00**	10
5/32"	1/4"	***31090414***	**8.45**	10
1/4"	10-32 *	***31095620***	**7.00**	10
1/4"	1/8"	***31095611***	**4.45**	10
1/4"	1/4"	***31095614***	**4.95**	10
1/4"	3/8"	***31095618***	**6.40**	10
5/16"	1/8"	***31090811***	**8.95**	10
5/16"	1/4"	***31090814***	**8.95**	10
5/16"	3/8"	***31090818***	**9.40**	10
3/8"	1/8"	***31096011***	**7.60**	10
3/8"	1/4"	***31096014***	**6.65**	10
3/8"	3/8"	***31096018***	**7.60**	10
3/8"	1/2"	***31096022***	**10.75**	10
1/2"	1/4"	***31096214***	**8.35**	10
1/2"	3/8"	***31096218***	**10.90**	10
1/2"	1/2"	***31096222***	**12.00**	10

* UNF - Straight thread, supplied with gasket

Female Swivel Elbows



tube to female NPT

Tube OD	Female NPT	*Nylon/Nickel-plated Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***30095311***	**$8.40**	10
5/32"	1/4"	***30090414***	**10.85**	10
1/4"	1/8"	***30095611***	**5.50**	10
1/4"	1/4"	***30095614***	**8.40**	10
5/16"	1/8"	***30090811***	**11.50**	10
5/16"	1/4"	***30090814***	**11.75**	10
3/8"	1/4"	***30096014***	**10.80**	10
1/2"	3/8"	***30096218***	**15.30**	10

Nylon/Nickel-Plated Brass Legris Push-In Fittings

45° Male Elbows



fractional inch tube to male NPT

Tube OD	Male NPT	*Nylon/Nickel-plated Brass* Part #	Price	Pkg Qty
1/4"	1/8"	***31135611***	**$5.50**	10
1/4"	1/4"	***31135614***	**6.05**	10
3/8"	1/4"	***31136014***	**8.05**	10
3/8"	3/8"	***31136018***	**8.20**	10


Extended Male Elbows



fractional inch tube to male NPT

Tube OD	Male NPT	*Nylon/Nickel-plated Brass* Part #	Price	Pkg Qty
1/4"	1/8"	***31295611***	**$7.45**	10
1/4"	1/4"	***31295614***	**7.75**	10
3/8"	1/4"	***31296014***	**10.80**	10
3/8"	3/8"	***31296018***	**14.20**	10

Unions



tube to tube

Tube OD	*Nylon* Part #	Price/E	Pkg Qty
1/8"	***31065300***	**$5.40**	10
5/32"	***31060400***	**3.95**	10
1/4"	***31065600***	**4.45**	10
5/16"	***31060800***	**5.75**	10
3/8"	***31066000***	**6.55**	10
1/2"	***31066200***	**10.90**	10

Bulkhead Unions



tube to tube

Tube OD	*Nylon* Part #	Price/E	Pkg Qty
1/8"	***31165300***	**$6.15**	10
5/32"	***31160400***	**7.15**	10
1/4"	***31165600***	**7.60**	10
5/16"	***31160800***	**9.45**	10
3/8"	***31166000***	**11.30**	10
1/2"	***31166200***	**16.50**	10

Union Elbows



tube to tube

Tube OD	*Nylon* Part #	Price/E	Pkg Qty
1/8"	***31025300***	**$5.60**	10
5/32"	***31020400***	**4.55**	10
1/4"	***31025600***	**5.10**	10
5/16"	***31020800***	**6.10**	10
3/8"	***31026000***	**7.95**	10
1/2"	***31026200***	**10.75**	10

Y Male Swivel Connectors



tube to male NPT

Tube OD	Male NPT	*Nylon/Nickel-plated Brass* Part #	Price/E	Pkg Qty
5/32"	1/8"	***31480411***	**$9.05**	10
5/32"	1/4"	***31480414***	**9.25**	10
1/4"	1/8"	***31485611***	**9.45**	10
1/4"	1/4"	***31485614***	**9.85**	10

Y Connectors



tube to tube

Tube OD	*Nylon* Part #	Price/E	Pkg Qty
1/8"	***31405300***	**$6.10**	10
5/32"	***31400400***	**6.00**	10
1/4"	***31405600***	**6.65**	10
5/16"	***31400800***	**8.40**	10
3/8"	***31406000***	**12.25**	10

Union Tees



tube to tube

Tube OD	*Nylon* Part #	Price/E	Pkg Qty
1/8"	***31045300***	**$7.90**	10
5/32"	***31040400***	**6.05**	10
1/4"	***31045600***	**6.80**	10
5/16"	***31040800***	**8.40**	10
3/8"	***31046000***	**9.55**	10
1/2"	***31046200***	**15.50**	10



Plugs

tube

Tube OD	*Plastic* Part #	Price/E	Pkg Qty
1/8"	***31265300***	**$1.80**	10
5/32"	***31260400***	**0.70**	10
1/4"	***31265600***	**1.75**	10
5/16"	***31260800***	**1.95**	10
3/8"	***31266000***	**2.05**	10
1/2"	***31266200***	**2.25**	10

Push-In Fitting Kit

Kit includes plastic case with threaded connectors, threaded elbows and several tube to tube connector configurations found on pages 166-170. A tubing cutter is also included in the kit.


Part #	Price/E
TFK	**$995.00**

Kit contains the following parts:

Part #	Qty	Description
31755311	10	tube to male NPT connector
31750411	10	tube to male NPT connector
31755611	10	tube to male NPT connector
31755614	10	tube to male NPT connector
31756014	5	tube to male NPT connector
31756018	5	tube to male NPT connector
31090411	10	tube to male NPT elbow
31095611	10	tube to male NPT elbow
31095614	10	tube to male NPT elbow
31096011	5	tube to male NPT elbow
31096014	5	tube to male NPT elbow
31096018	5	tube to male NPT elbow
31060400	10	tube to tube union
31065600	10	tube to tube union
31066000	5	tube to tube union
31400400	10	Y connector
31405600	10	Y connector
31406000	5	Y connector
31040400	10	tube to tube union tee
31045600	5	tube to tube union tee
31046000	5	tube to tube union tee
30007100	1	tubing cutter



Legris Modular Manifolds





Manifold with push-to-connect ports

OD	NPT Size	Number of Outlets	A	B	C	D	E	Part #	Price/E
5/32"	1/4"	8	.55	1.30	4.49	4.09	.45	***33150414***	**$81.60**
1/4"	1/4"	8	.55	1.30	4.92	4.53	.50	***33155614***	**83.05**
3/8"	3/8"	6	---	1.57	5.73	5.33	.67	***33156018***	**96.80**

Legris Composite Mini Ball Valves

Mini ball valves enable in-line opening and closing of a pneumatic circuit. Compact and light weight, they are suited to all types of installations. Their screwdriver slot allows opening and closing even when access is difficult. The handle is differentiated by a blue color and marked with the corresponding pneumatic symbol in order to enable immediate identification by the user. 2-way, non-venting valve

Materials:
- nylon body
- nickel-plated brass ball



Technical specifications:
- suitable fluid: compressed air
- maximum pressure: **145 PSI**
- vacuum capability: vacuum of 28" Hg (99% of vacuum)
- working temperature: **-4°F** to **175°F**

Size	Part #	Price/E
5/32"	***79100400***	**$31.10**
1/4"	***79105600***	**29.95**
5/16"	***79100800***	**32.15**
3/8"	***79106000***	**34.75**

Legris Quick Exhaust Valves

The quick exhaust valve can be used in all pneumatic equipment. It dramatically increases system efficiency and speed of a cylinder by purging cylinder air at the cylinder port rather than the control valve.

Materials:
- body: nickel-plated brass
- piston: polyurethane
- seals: nylon



Technical specifications:
- working pressure: **10 PSI** to **150 PSI**
- working temperature: **0°F** to **160°F**

NPT Thread	Part #	Price/E
1/8"	***79821111***	**$13.30**
1/4"	***79821414***	**14.80**
3/8"	***79821818***	**21.75**
1/2"	***79822222***	**29.60**

Legris Flow Control Valves

Push-to connect, unidirectional flow control valves, with one-piece design. Controls the speed of a cylinder by regulating air exhaust. Intake air flows freely through the flow control and exhaust air is metered out through a specially designed fine adjustment screw. Control pressure range: **15 PSI** to **145 PSI**. Temperature range: **30°F** to **160°F**.





compact flow control valves

Tube OD	NPT Size	Part #	Price/E	Pkg Qty
5/32"	1/8"	***70650411***	**$21.90**	10
1/4"	1/8"	***70655611***	**24.05**	10
1/4"	1/4"	***70655614***	**26.35**	10
3/8"	1/4"	***70656014***	**43.70**	10
3/8"	3/8"	***70656018***	**52.60**	10

miniature exhaust flow control valves

Tube OD	NPT Size	Part #	Price/E	Pkg Qty
5/32"	10-32 *	***76600420***	**$19.35**	10
5/32"	1/8"	***76650411***	**19.45**	10
1/4"	10-32 *	***76605620***	**23.90**	10
1/4"	1/8"	***76655611***	**23.90**	10
1/4"	1/4"	***76655614***	**23.90**	10

* UNF - Straight thread, supplied with gasket

Legris In-Line Flow Control Valves

Push-to connect flow control valve for use where cylinder access is difficult or another fitting is attached to the cylinder port. Stackable using 2 joining clips supplied, or panel mountable using existing holes.

Materials:
- body: nylon
- gripping ring: stainless steel
- adjustment screw: nickel-plated brass
- locking nut: nickel-plated brass



Technical specifications:
- working fluid: compressed air
- working pressure: **15 PSI** to **145 PSI**
- working temperature: **30°F** to **160°F**

Tube OD	Part #	Price/E	Pkg Qty
5/32"	***77700400***	**$41.00**	10
1/4"	***77705600***	**39.25**	10
3/8"	***77706000***	**59.95**	10
1/2"	***77706200***	**64.40**	10

Legris Threaded In-Line Flow Control Valves

Threaded in-line flow control valves are unidirectional flow control valves. Intake air flows freely through the flow control; exhaust air is metered out through a specially designed adjustment screw. An arrow on the body of the valve indicates the direction of controlled flow. The valves may be installed as meter in or meter out devices.

Technical specifications:
- working fluid: compressed air
- working pressure: **15 PSI** to **145 PSI**
- working temperature: **30°F** to **160°F**

Materials:
- body: nylon with nickel plated brass thread
- adjustment screw: nickel-plated brass
- locking nut: nickel-plated brass
- threads: nickel-plated brass

Tube OD	Part #	Price/E
1/8"	***77751111***	**$38.10**
1/4"	***77751414***	**41.95**
3/8"	***77751818***	**59.15**
1/2"	***77752222***	**67.65**



Legris Non-Return In-Line Check Valves

Allows air to pass in one direction while blocking flow in the other direction. A pressure of more than 7 PSI will overcome the spring pressure and allow flow. An arrow indicates free flow direction. Maximum working pressure: **145 PSI** at ambient temperature (70°F)

Tube OD	Part #	Price/E	Pkg Qty
5/32"	***79960400***	**$23.20**	10
6mm	***79960600***	**24.00**	10
1/4"	***79965600***	**25.85**	10
5/16"	***79960800***	**30.00**	10



Legris In-Line Check Valves

These in-line check valves allow air to pass in one direction while blocking flow in the other direction. Their extreme compactness and light weight make them suitable as a safety item in compressed air circuits. The body of the fitting contains an arrow to indicate the direction of flow. A pressure of more than 7 PSI will overcome the spring pressure, which is keeping the valve closed, thus allowing the passage of air. Meter out check valve.

Technical specifications:
- working pressure: **15 PSI** to **145 PSI** at ambient temperature (70°F)

Materials:
- body: nylon with nickel plated brass base
- pre-applied thread sealant on tapered threads

Tube OD	NPT Size	Part #	Price/E
5/32"	10-32 *	***79940420***	**$22.30**
5/32"	1/8"	***79950411***	**23.30**
1/4"	1/8"	***79955611***	**25.40**
1/4"	1/4"	***79955614***	**26.50**
3/8"	1/4"	***79956014***	**31.75**
3/8"	3/8"	***79956018***	**36.95**

* UNF - Straight thread, supplied with gasket



Stainless Steel Legris Uni-Directional Check Valves

Stainless steel valve blocks the fluid passage when the pressure differential is lower than 3.6 PSI.

Technical specifications:
- working pressure: **7 PSI** to **580 PSI**
- working temperature: **-4°F** to **360°F**

Materials:
- body: 316L stainless steel
- shut-off valve: 316L stainless steel
- return spring: 302 stainless steel
- seals: Viton®

NPT Thread	Part #	Price/E
1/8"	***48951111***	**$142.55**
1/4"	***48951414***	**142.55**
3/8"	***48951818***	**165.35**
1/2"	***48952222***	**172.00**



Tubing

Polyurethane Tubing

- naturally transparent
- temperature range: **-40°F** to **165°F** (working pressure given at 75°F)
- designed for use with the push-in fittings sold on pages 163-171
- excellent memory, flexibility and resistance to kinking
- good resistance to fuels and oils
- low gas and vapor permeability
- high compressive strength
- low compressive set and extractability levels
- outstanding abrasion resistance



Size OD	Size ID	Wall Thickness	Working Pressure @ 75°F	Length	Part #	Price/Length
1/8"	.062"	.0295	**233**	*250' roll*	***04063***	**$35.80**
5/32"	.094"	.0315	**176**	*100' roll*	***05094***	**25.15**
1/4"	.160"	.0450	**148**	*100' roll*	***08160***	**53.65**
3/8"	.250"	.0650	**147**	*100' roll*	***12250***	**100.80**
1/2"	.320"	.0900	**140**	*50' roll*	***16320***	**134.60**

Polyethylene Tubing

- designed for FDA applications
- temperature range: **-50°F** to **140°F** (working pressure given at 70°F)
- designed for use with the push-in fittings sold on pages 163-171
- flexible, lightweight, low-density polyethylene (LDPE) tubing
- for use with plastic or metal inserts with outersleeve; ferrule or clamps
- formulated to resist stress cracking



Size OD	Size ID	Wall Thickness	Working Pressure @ 70°F	Length	Tubing Color	Part #	Price/Length
1/4"	.125"	.062	**150**	*100' roll*	natural	***0804***	**$12.70**
1/4"	.170"	.040	**150**	*100' roll*	natural	***0817***	**11.50**
3/8"	.250"	.062	**150**	*100' roll*	natural	***1208***	**23.35**
1/2"	.375"	.062	**125**	*100' roll*	natural	***1612***	**31.80**

Size OD	Size ID	Wall Thickness	Working Pressure @ 70°F	Length	Tubing Color	Part #	Price/Length
NEW 1/4"	.170"	.040	**150**	*100' roll*	blue	***0817BL100***	**$16.65**
1/4"	.170"	.040	**150**	*500' roll*	blue	***0817BL***	**55.80**
1/4"	.170"	.040	**150**	*500' roll*	black	***0817BR***	**55.80**
1/4"	.170"	.040	**150**	*500' roll*	natural	***0817CR***	**55.80**
3/8"	.250"	.062	**150**	*500' roll*	black	***1208BR***	**116.80**
3/8"	.250"	.062	**150**	*500' roll*	natural	***1208CR***	**116.80**

Nylon 12 Tubing

- naturally transparent
- temperature range: **-60°F** to **200°F** (working pressure given at 75°F)
- designed for use with the push-in fittings sold on pages 163-171
- recommended for applications requiring low density, lightweight toughness, flexibility and chemical resistance
- 100' lengths are packaged in plastic bags.



Size OD	Size ID	Wall Thickness	Working Pressure @ 75°F	Length	Part #	Price/Length
1/8"	.093"	.016	**225**	*100' roll*	***04093***	**$20.65**
5/32"	.106"	.025	**275**	*100' roll*	***05106***	**25.05**
3/16"	.138"	.025	**225**	*100' roll*	***06138***	**31.85**
1/4"	.170"	.040	**265**	*100' roll*	***08170***	**52.90**
1/4"	.180"	.035	**250**	*100' roll*	***08180***	**50.35**
3/8"	.275"	.050	**220**	*100' roll*	***12275***	**107.50**
1/2"	.375"	.062	**200**	*100' roll*	***16375***	**161.85**

Tubing cutters sold on page 296

Legris Tubing
Nylon 12 Tubing



Nylon tubing is ideal for many industrial applications. It has optimum mechanical properties and good chemical, humidity and abrasive resistance.

- semi rigid tubing
- working temperature: **-4°F** to **175°F** (working pressure given at 75°F)

Size OD	Size ID	Wall Thickness	Working Pressure at 75°F	Length	Clear Part #	Clear Price/Length	Black Part #	Black Price/Length	Blue Part #	Blue Price/Length
1/8"	.093"	.016	**225**	*50' roll*	***1091P5300***	**$18.95**	***1091P5301***	**$18.40**	***1091P5304***	**$19.75**
5/32"	.106"	.025	**275**	*50' roll*	***1091P0400***	**18.40**	***1091P0401***	**16.80**	***1091P0404***	**16.80**
3/16"	.138"	.025	**225**	*50' roll*	***1091P5500*** *	**30.35**	***1091P5501*** *	**31.65**	**---**	**---**
1/4"	.18"	.035	**265**	*50' roll*	***1091P5600***	**34.10**	***1091P5601***	**36.15**	***1091P5604***	**32.55**
5/16"	.232"	.040	**220**	*50' roll*	***1091P0800***	**49.55**	***1091P0801***	**49.50**	***1091P0804***	**49.50**
3/8"	.275"	.050	**220**	*50' roll*	***1091P6000***	**68.90**	***1091P6001***	**69.80**	***1091P6004***	**65.45**
1/2"	.375"	.063	**200**	*50' roll*	***1091P6200***	**116.00**	***1091P6201***	**110.50**	***1091P6204***	**111.25**

Size OD	Size ID	Wall Thickness	Working Pressure at 75°F	Length	Clear Part #	Clear Price/Length	Black Part #	Black PriceLength	Blue Part #	Blue Price/Length
1/8"	.093"	.016	**225**	*100' roll*	***1094P5300***	**$32.20**	***1094P5301***	**$32.95**	***1094P5304***	**$32.20**
5/32"	.106"	.025	**275**	*100' roll*	***1094P0400***	**34.40**	***1094P0401***	**31.45**	***1094P0404***	**31.45**
3/16"	.138"	.025	**225**	*100' roll*	***1094P5500*** *	**56.80**	***1094P5501*** *	**56.80**	**---**	**---**
1/4"	.18"	.035	**265**	*100' roll*	***1094P5600***	**63.60**	***1094P5601***	**64.80**	***1094P5604***	**58.30**
5/16"	.232"	.040	**220**	*100' roll*	***1094P0800***	**86.70**	***1094P0801***	**86.25**	***1094P0804***	**89.30**
3/8"	.275"	.050	**220**	*100' roll*	***1094P6000***	**123.95**	***1094P6001***	**125.35**	***1094P6004***	**117.95**
1/2"	.375"	.063	**200**	*100' roll*	***1094P6200***	**208.45**	***1094P6201***	**205.80**	***1094P6204***	**200.20**

* 3/16" size is nylon 11

Polyurethane - 95 Durometer Tubing



Polyurethane tubing has high flexibility and a small bend radius and thus is very good for applications where space is tight. For applications where the tubing will be exposed black tubing is recommended.

- working temperature: **-40°F** to **165°F** (working pressure given at 75°F)

Size OD	Size ID	Wall Thickness	Working Pressure at 75°F	Length	Clear Part #	Clear Price/Length	Black Part #	Black Price/Length	Blue Part #	Blue Price/Length
1/8"	.066"	.030	**233**	*50' roll*	***1091U53R00***	**$19.75**	***1091U5301***	**$19.35**	***1091U5304***	**$20.60**
5/32"	.094"	.031	**176**	*50' roll*	***1091U04R00***	**27.70**	***1091U0401***	**26.50**	***1091U0404***	**26.50**
1/4"	.160"	.045	**148**	*50' roll*	***1091U56R00***	**46.10**	***1091U5601***	**46.80**	***1091U5604***	**45.50**
5/16"	.216"	.048	**155**	*50' roll*	***1091U08R00***	**73.00**	***1091U0801***	**74.00**	***1091U0804***	**75.00**
3/8"	.245"	.065	**147**	*50' roll*	***1091U60R00***	**86.10**	***1091U6001***	**93.30**	***1091U6004***	**85.55**
1/2"	.32"	.090	**140**	*50' roll*	***1091U62R00***	**167.85**	***1091U6201***	**160.15**	***1091U6204***	**174.85**

Size OD	Size ID	Wall Thickness	Working Pressure at 75° F	Length	Clear Part #	Clear Price/Length	Black Part #	Black Price/Length	Blue Part #	Blue Price/Length
1/8"	.066"	.030	**233**	*100' roll*	***1094U53R00***	**$35.45**	***1094U5301***	**$36.10**	***1094U5304***	**$38.40**
5/32"	.094"	.031	**176**	*100' roll*	***1094U04R00***	**48.40**	***1094U0401***	**45.45**	***1094U0404***	**48.30**
1/4"	.160"	.045	**148**	*100' roll*	***1094U56R00***	**82.95**	***1094U5601***	**87.50**	***1094U5604***	**79.15**
5/16"	.216"	.048	**155**	*100' roll*	***1094U08R00***	**131.75**	***1094U0801***	**121.50**	***1094U0804***	**129.05**
3/8"	.245"	.065	**147**	*100' roll*	***1094U60R00***	**160.95**	***1094U6001***	**167.40**	***1094U6004***	**159.80**
1/2"	.32"	.090	**140**	*100' roll*	***1094U62R00***	**302.15**	***1094U6201***	**299.30**	***1094U6204***	**314.75**

Fluoropolymer FEP 140 Tubing



Fluoropolymer tubing is of food quality and provides excellent resistance to aggressive and corrosive agents as well as high temperatures.


- FDA compliant materials
- max. working temperature: **300°F** (working pressure given at 75°F)

Size OD	Size ID	Wall Thickness	Working Pressure at 75°F	Length	Clear Part #	Clear Price/Length
1/8"	.06"	.033	**304**	*25' roll*	***1092T5300***	**$63.35**
1/4"	.17"	.040	**246**	*25' roll*	***1092T5600***	**144.85**
3/8"	.30"	.038	**166**	*25' roll*	***1092T6000***	**226.35**
1/2"	.42"	.040	**108**	*25' roll*	***1092T6200***	**306.75**

Metric Push-In Fittings

- materials:
  - nickel-plated brass construction; black body is glass-filled nylon; Buna-N O-ring seal; polypropylene release button; silicone free
- positive seal: sealing and holding is accomplished instantaneously
- reusable: connect and disconnect numerous times
- full flow: fitting seals on outside diameter of tubing
- working pressure: fittings rated to **290 PSI** at ambient temperature
- working temperature: **-4°F** to **175°F**
- pre-applied thread sealant on all male pipe threads
- compatible tubing: semi-rigid nylon, polyurethane and polyethylene tube
- vacuum capability: vacuum of 28" Hg (99% vacuum)

Gripping Ring Technology



Quick Connect and Disconnect:
- To connect, simply push tubing in.
- To disconnect, press the release ring towards the fitting and pull tubing out.
- No tools required.


Male Connectors



tube to male BSPT

Tube OD	Male BSPT	Part #	Price/E	Pkg Qty
4 mm	1/8"	***31750410***	**$4.35**	10
4 mm	1/4"	***31750413***	**6.40**	10
6 mm	1/8"	***31750610***	**4.50**	10
6 mm	1/4"	***31750613***	**5.10**	10
8 mm	1/8"	***31750810***	**6.60**	10
8 mm	1/4"	***31750813***	**6.60**	10
8 mm	3/8"	***31750817***	**7.80**	10
10 mm	1/4"	***31751013***	**8.25**	10
10 mm	3/8"	***31751017***	**9.25**	10

Female Connectors



tube to female BSPP

Tube OD	Female BSPP	Part #	Price/E	Pkg Qty
4 mm	1/8"	***31140410***	**$7.10**	10
4 mm	1/4"	***31140413***	**9.60**	10
6 mm	1/8"	***31140610***	**7.15**	10
6 mm	1/4"	***31140613***	**8.10**	10
8 mm	1/8"	***31140810***	**9.10**	10
8 mm	1/4"	***31140813***	**8.60**	10

Male Swivel Elbows



tube to male BSPT

Tube OD	Male BSPT	Part #	Price/E	Pkg Qty
4 mm	1/8"	***31090410***	**$5.35**	10
4 mm	1/4"	***31090413***	**8.30**	10
6 mm	1/8"	***31090610***	**5.70**	10
6 mm	1/4"	***31090613***	**5.85**	10
8 mm	1/8"	***31090810***	**8.45**	10
8 mm	1/4"	***31090813***	**8.45**	10
8 mm	3/8"	***31090817***	**10.70**	10
10 mm	1/4"	***31091013***	**14.35**	10
10 mm	3/8"	***31091017***	**14.65**	10

Male Swivel Branch Tees



tube to male BSPT

Tube OD	Male BSPT	Part #	Price/E	Pkg Qty
4 mm	1/8"	***31080410***	**$7.65**	10
4 mm	1/4"	***31080413***	**11.20**	10
6 mm	1/8"	***31080610***	**8.05**	10
6 mm	1/4"	***31080613***	**8.20**	10
8 mm	1/8"	***31080810***	**10.10**	10
8 mm	1/4"	***31080813***	**10.60**	10

Nylon Metric Tubing Rolls



- translucent color
- resistant to fungus, abrasion, moisture and UV radiation
- temperature range **-60°F** to **200°F** (working pressure given at 75°F)


Size OD	Size ID	Wall Thickness	Working Pressure @75°F	Length	Part #	Price/Length
4 mm x 2.7 mm		.65 mm	**275**	25 m	***1025P0400***	**$28.90**
6 mm x 4 mm		1 mm	**280**	25 m	***1025P0600***	**52.10**
8 mm x 6 mm		1 mm	**210**	25 m	***1025P0800***	**78.15**

Tubing cutters sold on page 322

Metric Push-In Fittings

2010 NEW

Unions



tube to tube

Tube OD	Tube OD	Part #	Price/E	Pkg Qty
4 mm	6 mm	***31060406***	**$9.00**	10
6 mm	6 mm	***31060600***	**5.10**	10
10 mm	10 mm	***31061000***	**12.85**	10

Union Tees



tube to tube

Tube OD	Tube OD	Part #	Price/E	Pkg Qty
6 mm	6 mm	***31040600***	**$7.55**	10
10 mm	10 mm	***31041000***	**17.70**	10

Union Elbows



tube to tube


Tube OD	Tube OD	Part #	Price/E	Pkg Qty
6 mm	6 mm	***31020600***	**$5.60**	10
10 mm	10 mm	***31021000***	**12.40**	10

Bulkhead Unions



Tube OD	Tube OD	Part #	Price/E	Pkg Qty
6 mm	6 mm	***31160600***	**$8.25**	10

Y Connectors



Tube OD	Tube OD	Part #	Price/E	Pkg Qty
6 mm	6 mm	***31400600***	**$7.55**	10

Plugs



Tube OD	Tube OD	Part #	Price/E	Pkg Qty
6 mm	6 mm	***31260600***	**$1.80**	10
10 mm	10 mm	***31261000***	**3.85**	10

Male Connectors



tube to thread

Tube OD	Thread	Part #	Price/E	Pkg Qty
4 mm	M5	***31010419***	**$5.60**	10
4 mm	1/8 BSPP	***31010410***	**4.65**	10
6 mm	M5	***31010619***	**7.55**	10
6 mm	1/8 BSPP	***31010610***	**5.35**	10
6 mm	1/4 BSPP	***31010613***	**6.15**	10
8mm	1/8 BSPP	***31010810***	**6.90**	10
8mm	1/4 BSPP	***31010813***	**7.30**	10
10mm	1/4 BSPP	***31011013***	**12.15**	10

Male Elbows



tube to thread

Tube OD	Thread	Part #	Price/E	Pkg Qty
4 mm	M5	***31990419***	**$6.00**	10
4 mm	1/8 BSPP	***31990410***	**6.45**	10
6 mm	M5	***31990619***	**6.45**	10
6 mm	1/8 BSPP	***31990610***	**6.55**	10
6 mm	1/4 BSPP	***31990613***	**9.00**	10
8mm	1/8 BSPP	***31990810***	**10.20**	10
8mm	1/4 BSPP	***31990813***	**10.20**	10
10mm	1/8 BSPP	***31991013***	**14.10**	10

D.O.T. Push-In Fittings

- materials:
  - body (straights) tube, supports and grippers: brass CA360
  - forged elbows and tees: brass CA377
  - O-ring: Buna-N
- working pressure: Fittings are suitable for use up to the maximum working pressure of the plastic tubing used. Also suitable for vacuum service.
- working temperature: **-40°F** to **212°F**
- pre-applied thread sealant (Loctite 516) on all male pipe threads
- compatible tubing: SAE J844
- specifications: meets D.O.T FMVSS 571.106 and SAE J1131, SAE J2494-1 and SAE J2494-3

Male Elbows



tube to male NPT

Tube OD	Male NPT	Part #	Price/E	Pkg Qty
1/4"	1/8"	***AQ69DOT4x2***	**$8.45**	10
1/4"	1/4"	***AQ69DOT4x4***	**9.55**	10
3/8"	1/4"	***AQ69DOT6x4***	**11.65**	10

Swivel Male Elbows



tube to male NPT

Tube OD	Male NPT	Part #	Price/E	Pkg Qty
1/4"	1/8"	***AQ69DOTS4x2***	**$9.95**	10
1/4"	1/4"	***AQ69DOTS4x4***	**10.75**	10
1/4"	3/8"	***AQ69DOTS4x6***	**15.50**	10
3/8"	1/4"	***AQ69DOTS6x4***	**15.10**	10
3/8"	3/8"	***AQ69DOTS6x6***	**17.00**	5

Male Connectors



tube to male NPT

Tube OD	Male NPT	Part #	Price/E	Pkg Qty
1/4"	1/8"	***AQ68DOT4x2***	**$5.80**	10
1/4"	1/4"	***AQ68DOT4x4***	**6.55**	10
1/4"	3/8"	***AQ68DOT4x6***	**8.50**	5
3/8"	1/4"	***AQ68DOT6x4***	**9.60**	10
3/8"	3/8"	***AQ68DOT6x6***	**10.30**	10


Swivel Male Run Tees



tube to male NPT

Tube OD	Male NPT	Part #	Price/E	Pkg Qty
1/4"	1/8"	***AQ71DOTS4x2***	**$16.90**	10
1/4"	1/4"	***AQ71DOTS4x4***	**16.90**	5

Union Connectors



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
1/4"	***AQ62DOT4***	**$10.80**	10
3/8"	***AQ62DOT6***	**12.25**	10

Swivel Male Branch Tees



tube to tube

Tube OD	Male NPT	Part #	Price/E	Pkg Qty
1/4"	1/8"	***AQ72DOTS4x2***	**$16.90**	10
1/4"	1/4"	***AQ72DOTS4x4***	**17.70**	5

Union Tees



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
1/4"	***AQ64DOT4***	**$16.05**	10
3/8"	***AQ64DOT6***	**19.60**	10

Legris D.O.T. Push-In Fittings

- materials:
  - bases are brass and bodies are glass reinforced nylon 12
  - seals are low temperature Buna-N
- silicone free
- working pressure: vacuum to **275 PSI** at ambient temperature
- maximum circuit pressure depends equally on the type and diameter of the tube used
- working temperature: **-40°F** to **230°F**
- suitable fluids: compressed air only, lubricated or non-lubricated
- compatible tubing: SAE J844 which also meets NHTSA FMVSS 106
- specifications: meets D.O.T FMVSS 571.106 and SAE J1131, and SAE J2494-3
- *These fittings are designed for use on all pneumatic circuits other than air brake assemblies between the frame and axle or between towed and towing vehicle.*

SAFETY ALERT


Straight Male Connectors



tube to male NPTF

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
5/32"	1/8"	***31150411DOT***	**$4.75**	10
5/32"	1/4"	***31150414DOT***	**6.65**	10
3/16"	1/8"	***31155511DOT***	**6.55**	10
3/16"	1/4"	***31155514DOT***	**8.30**	10
1/4"	1/8"	***31155611DOT***	**4.45**	10
1/4"	1/4"	***31155614DOT***	**4.65**	10
1/4"	3/8"	***31155618DOT***	**5.90**	10
3/8"	1/8"	***31156011DOT***	**8.95**	10
3/8"	1/4"	***31156014DOT***	**6.25**	10
3/8"	3/8"	***31156018DOT***	**7.95**	10
3/8"	1/2"	***31156022DOT***	**11.45**	10
1/2"	1/4"	***31156214DOT***	**17.45**	10
1/2"	3/8"	***31156218DOT***	**17.60**	10
1/2"	1/2"	***31156222DOT***	**13.00**	10

Straight Female Connectors



tube to female NPTF

Tube OD	Female NPTF	Part #	Price/E	Pkg Qty
5/32"	1/8"	***31140411DOT***	**$9.35**	10
3/16"	1/8"	***31145511DOT***	**10.85**	10
1/4"	1/8"	***31145611DOT***	**8.80**	10
1/4"	1/4"	***31145614DOT***	**8.45**	10
3/8"	1/4"	***31146014DOT***	**13.25**	10
3/8"	3/8"	***31146018DOT***	**15.55**	10

Male Elbows



tube to male NPTF

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
5/32"	1/8"	***31090411DOT***	**$7.45**	10
3/16"	1/8"	***31095511DOT***	**10.45**	10
1/4"	1/8"	***31095611DOT***	**4.95**	10
1/4"	1/4"	***31095614DOT***	**5.95**	10
1/4"	3/8"	***31095618DOT***	**13.95**	10
3/8"	1/4"	***31096014DOT***	**13.95**	10
3/8"	3/8"	***31096018DOT***	**14.85**	10
3/8"	1/2"	***31096022DOT***	**13.95**	10
1/2"	1/4"	***31096214DOT***	**16.55**	10
1/2"	3/8"	***31096218DOT***	**14.90**	10
1/2"	1/2"	***31096222DOT***	**18.25**	10

Note: This fitting can be oriented 360° allowing proper positioning of the fitting.

Male Branch Tees



tube to male NPTF to tube

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
5/32"	1/8"	***31080411DOT***	**$13.65**	10
5/32"	1/4"	***31080414DOT***	**16.55**	10
3/16"	1/8"	***31085511DOT***	**13.70**	10
1/4"	1/8"	***31085611DOT***	**7.25**	10
1/4"	1/4"	***31085614DOT***	**7.95**	10
1/4"	3/8"	***31085618DOT***	**14.30**	10
3/8"	1/4"	***31086014DOT***	**12.80**	10
3/8"	3/8"	***31086018DOT***	**16.00**	10
3/8"	1/2"	***31086022DOT***	**16.80**	10
1/2"	1/4"	***31086214DOT***	**20.55**	10
1/2"	3/8"	***31086218DOT***	**20.35**	10
1/2"	1/2"	***31086222DOT***	**23.30**	10

Note: This fitting can be oriented 360° allowing proper positioning of the fitting.

Legris D.O.T. Push-In Fittings

Male Run Tees



tube to tube to male NPTF

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
3/16"	1/8"	***31035511DOT***	**$14.50**	10
1/4"	1/8"	***31035611DOT***	**7.25**	10
1/4"	1/4"	***31035614DOT***	**7.95**	10
1/4"	3/8"	***31035618DOT***	**14.45**	10
3/8"	1/4"	***31036014DOT***	**14.15**	10
3/8"	3/8"	***31036018DOT***	**17.05**	10
3/8"	1/2"	***31036022DOT***	**17.30**	10
1/2"	1/4"	***31036214DOT***	**20.80**	10
1/2"	3/8"	***31036218DOT***	**20.80**	10
1/2"	1/2"	***31036222DOT***	**23.30**	10

Note: This fitting can be oriented 360° allowing proper positioning of the fitting.

Y Connectors



male NPTF to tube

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
5/32"	1/8"	***31480411DOT***	**$14.15**	10
1/4"	1/8"	***31485611DOT***	**12.15**	10
1/4"	1/4"	***31485614DOT***	**13.00**	10

Note: This fitting can be oriented 360° allowing proper positioning of the fitting.

Unions



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
5/32"	***31060400DOT***	**$6.20**	10
3/16"	***31065500DOT***	**9.75**	10
1/4"	***31065600DOT***	**4.95**	10
3/8"	***31066000DOT***	**7.80**	10
1/2"	***31066200DOT***	**13.30**	10

Union Elbows



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
5/32"	***31020400DOT***	**$6.65**	10
1/4"	***31025600DOT***	**6.20**	10
3/8"	***31026000DOT***	**10.60**	10
1/2"	***31026200DOT***	**13.30**	10

Union Tees



tube to tube to tube

Tube OD	Part #	Price/E	Pkg Qty
5/32"	***31040400DOT***	**$9.30**	10
3/16"	***31045500DOT***	**13.70**	10
1/4"	***31045600DOT***	**7.65**	10
3/8"	***31046000DOT***	**10.50**	10
1/2"	***31046200DOT***	**17.50**	10

Y Unions



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
5/32"	***31400400DOT***	**$9.30**	10
1/4"	***31405600DOT***	**10.00**	10
3/8"	***31406000DOT***	**15.60**	10

Legris D.O.T. Push-In Fittings

Plug In Elbow



Tube OD	Part #	Price/E	Pkg Qty
1/4"	***31825600DOT***	**$3.30**	10

Plug In Run Tee



Tube OD	Part #	Price/E	Pkg Qty
1/4"	***31835600DOT***	**$9.40**	10

Reducers



Tube OD	Tube OD	Part #	Price/E	Pkg Qty
5/32"	1/4"	***31660456DOT***	**$3.35**	10
1/4"	3/8"	***31665660DOT***	**3.95**	10

Bulkhead Unions



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
5/32"	***31160400DOT***	**$9.05**	10
1/4"	***31165600DOT***	**10.20**	10
3/8"	***31166000DOT***	**12.50**	10
1/2"	***31166200DOT***	**20.60**	10

Expander



Tube OD	Tube OD	Part #	Price/E	Pkg Qty
1/4"	5/32"	***31685604DOT***	**$3.85**	10

D.O.T. Air Brake Tubing Rolls

- meets Department of Transportation FMVSS-106 nylon material conforming to SAE J844
- shipped in lengths of 100' roll
- working pressure: **150 PSI**
- temperature range: **-40°F** to **200°F**

Size OD	Tubing Color	Part #	Price/E
3/16"	black	***J844-03-BL-100***	**$43.65**
1/4"	black	***J844-04-BL-100***	**51.25**
1/4"	blue	***J844-04-B-100***	**51.25**
1/4"	red	***J844-04-R-100***	**51.25**
3/8"	black	***J844-06-BL-100***	**127.80**
3/8"	blue	***J844-06-B-100***	**127.80**
3/8"	red	***J844-06-R-100***	**127.80**
1/2"	black	***J844-08-BL-100***	**176.05**
5/8"	black	***J844-10-BL-100***	**320.00**
3/4"	black	***J844-12-BL-100***	**474.40**



Tubing cutters sold on page 322

Air Brake Fittings

Compression style air brake fittings utilizes ribbed sleeve for compression and postive grip.

- materials: machined from CA360, CA345, or CA377 brass
- pre-applied thread sealant (Locite Vibra-Seal 516) on all male pipe threads
- working pressure: **150 PSI** maximum
- working temperature: **-40°F** to **200°F**
- compatible tubing: SAE J844 type A and B
- specifications: meets D.O.T FMVSS 571.106 and SAE J1131, and SAE J2494
- *These fittings are designed for use in air brake systems or in cab controls.*

Assembly Instructions:

1. Cut tubing squarely - maximum of 15° angle allowable.
2. Check that port or mating part is clean and free of debris.
3. Insert tubing into fittings until it bottoms on seat.
4. Tighten nut with wrench until one thread remains visible on the fittings body; (this will allow for a number of remakes) or, the nut should be screwed down finger tight, then wrench-tightened as indicated in the chart below.

Tube Size	Turns required to seal from hand-tight
3/16"	2½
1/4"	3
3/8" & 1/2"	4
5/8" & 3/4"	3½


Sleeves



- ref. SAE 100115

Tube OD	Part #	Price/E	Pkg Qty
3/16"	***60NAB3***	**$0.83**	100
1/4"	***60NAB4***	**0.75**	100
3/8"	***60NAB6***	**0.83**	100
1/2"	***60NAB8***	**0.87**	100
5/8"	***60NAB10***	**2.78**	100
3/4"	***60NAB12***	**5.23**	50

Inserts



- for SAE J844 Tubing

Tube OD	*302/304 Stainless Steel* Part #	Price/E	Pkg Qty
1/4"	***63NAB4***	**$0.96**	200
3/8"	***63NAB6***	**1.08**	200
1/2"	***63NAB8***	**1.50**	100
5/8"	***63NAB10***	**3.99**	100
3/4"	***63NAB12***	**5.03**	100


Nuts



- ref. SAE 100110

Tube OD	Straight Thread	Part #	Price/E	Pkg Qty
3/16"	5/16-24	***61NAB3***	**$1.91**	100
1/4"	7/16-24	***61NAB4***	**1.16**	100
3/8"	17/32-24	***61NAB6***	**1.58**	100
1/2"	11/16-20	***61NAB8***	**3.28**	50
5/8"	13/16-18	***61NAB10***	**7.02**	25
3/4"	1-18	***61NAB12***	**8.22**	25

Female Connectors



- ref. SAE 100103 BA

Tube OD	Pipe Thread	Straight Thread	Part #	Price/E	Pkg Qty
1/4"	1/8"	7/16-24	***66NAB42***	**$10.18**	25
1/4"	1/4"	7/16-24	***66NAB44***	**11.88**	10
3/8"	1/8"	17/32-24	***66NAB62***	**10.72**	10
3/8"	1/4"	17/32-24	***66NAB64***	**12.79**	10
1/2"	3/8"	11/16-20	***66NAB86***	**23.47**	10
1/2"	1/2"	11/16-20	***66NAB88***	**22.39**	10
5/8"	3/8"	13/16-18	***66NAB106***	**60.72**	10
5/8"	1/2"	13/16-18	***66NAB108***	**59.23**	10

Male Connectors



- ref. SAE 100102 BA

Tube OD	Pipe Thread	Straight Thread	Part #	Price/E	Pkg Qty
3/16"	1/16"	5/16-24	***68NAB31VS***	**$18.44**	25
3/16"	1/8"	5/16-24	***68NAB32VS***	**13.54**	50
3/16"	1/4"	5/16-24	***68NAB34VS***	**17.90**	25
1/4"	1/8"	7/16-24	***68NAB42VS***	**6.23**	50
1/4"	1/4"	7/16-24	***68NAB44VS***	**6.52**	50
1/4"	3/8"	7/16-24	***68NAB46VS***	**7.27**	10
3/8"	1/8"	17/32-24	***68NAB62VS***	**7.44**	25
3/8"	1/4"	17/32-24	***68NAB64VS***	**6.98**	25
3/8"	3/8"	17/32-24	***68NAB66VS***	**8.60**	25
3/8"	1/2"	17/32-24	***68NAB68VS***	**13.79**	25
1/2"	1/4"	11/16-20	***68NAB84VS***	**9.26**	10
1/2"	3/8"	11/16-20	***68NAB86VS***	**8.97**	25
1/2"	1/2"	11/16-20	***68NAB88VS***	**15.41**	25
5/8"	3/8"	13/16-18	***68NAB106VS***	**17.90**	10
5/8"	1/2"	13/16-18	***68NAB108VS***	**16.41**	10
3/4"	3/8"	1-18	***68NAB126VS***	**42.61**	10
3/4"	1/2"	1-18	***68NAB128VS***	**33.68**	10
3/4"	3/4"	1-18	***68NAB1212VS***	**33.77**	10

Air Brake Fittings

Unions



Tube OD	Straight Thread	Part #	Price/E	Pkg Qty
1/4"	7/16-24	***62NAB4***	**$9.01**	10
3/8"	17/32-24	***62NAB6***	**9.68**	10
1/2"	11/16-20	***62NAB8***	**12.42**	10
5/8"	13/16-18	***62NAB10***	**25.50**	10
3/4"	1-18	***62NAB12***	**55.20**	10

Bulkhead Unions



NAB and air brake

Tube OD	Straight Thread	Part #	Price/E	Pkg Qty
1/4"	7/16-24	***62NABH4***	**$35.59**	10
3/8"	17/32-24	***62NABH6***	**48.43**	10
1/2"	11/16-20	***62NABH8***	**78.58**	10

Bulkhead Unions



Tube OD	Straight Thread	Part #	Price/E	Pkg Qty
3/16"	5/16-24	***62NBH3***	**$48.39**	10
1/4"	7/16-24	***62NBH4***	**23.47**	10
3/8"	17/32-24	***62NBH6***	**32.81**	10
1/2"	11/16-20	***62NBH8***	**29.16**	10
5/8"	13/16-18	***62NBH10***	**94.28**	10

Bulkhead Unions




Tube OD	Straight Thread	Part #	Price/E	Pkg Qty
1/4"	7/16-24	***62NFBH4***	**$14.08**	10
3/8"	17/32-24	***62NFBH6***	**35.18**	10
1/2"	11/16-20	***62NFBH8***	**26.08**	10
5/8"	13/16-18	***62NFBH10***	**39.41**	10

Bulkhead Union



Tube OD	Pipe Thread	Part #	Price/E	Pkg Qty
1/2"	3/8"	***66NBH86***	**$35.26**	10

Male Run Tees



- ref. SAE 100103 BA

Tube OD	Pipe Thread	Straight Thread	Part #	Price/E	Pkg Qty
1/4"	1/8"	7/16-24	***71NAB42VS***	**$13.58**	25
1/4"	1/4"	7/16-24	***71NAB44VS***	**16.57**	10
3/8"	1/4"	17/32-24	***71NAB64VS***	**16.57**	10
3/8"	3/8"	17/32-24	***71NAB66VS***	**20.31**	10
1/2"	3/8"	11/16-20	***71NAB86VS***	**23.59**	10
1/2"	1/2"	11/16-20	***71NAB88VS***	**37.84**	10
5/8"	1/2"	13/16-18	***71NAB108VS***	**103.25**	10


Male Branch Tees



- ref. SAE 100425 BA

Tube OD	Pipe Thread	Straight Thread	Part #	Price/E	Pkg Qty
3/16"	1/8"	7/16-24	***72NAB32VS***	**$112.55**	10
1/4"	1/8"	7/16-24	***72NAB42VS***	**14.54**	10
1/4"	1/4"	7/16-24	***72NAB44VS***	**15.82**	10
3/8"	1/8"	17/32-24	***72NAB62VS***	**18.65**	10
3/8"	1/4"	17/32-24	***72NAB64VS***	**15.66**	10
3/8"	1/4"	7/16-24 17/32-24	***72NAB644VS***	**14.00**	10
3/8"	3/8"	17/32-24	***72NAB66VS***	**16.90**	10
1/2"	1/4"	11/16-20	***72NAB84VS***	**48.76**	10
1/2"	3/8"	11/16-20	***72NAB86VS***	**22.59**	10
1/2"	1/2"	11/16-20	***72NAB88VS***	**27.99**	10
5/8"	1/2"	13/16-18	***72NAB108VS***	**44.36**	10

Union Tees



- ref. SAE 100401 BA

Tube OD	Straight Thread	Part #	Price/E	Pkg Qty
1/4"	7/16-24	***64NAB4***	**$16.20**	25
3/8"	17/32-24	***64NAB6***	**19.02**	25
1/2"	11/16-20	***64NAB8***	**28.62**	10
5/8"	13/16-18	***64NAB10***	**82.19**	10

Air Brake Fittings

Union Elbows



Tube OD	Straight Thread	Part #	Price/E	Pkg Qty
1/4"	7/16-24	***65NAB4***	**$21.85**	10
3/8"	17/32-24	***65NAB6***	**21.56**	10
1/2"	11/16-20	***65NAB8***	**22.26**	10
5/8"	13/16-18	***65NAB10***	**43.19**	10

45° Elbows



- ref. SAE 100302 BA

Tube OD	Pipe Thread	Straight Thread	Part #	Price/E	Pkg Qty
1/4"	1/8"	7/16-24	***79NAB42VS***	**$8.97**	10
1/4"	1/4"	7/16-24	***79NAB44VS***	**11.17**	10
3/8"	1/8"	17/32-24	***79NAB62VS***	**19.15**	10
3/8"	1/4"	17/32-24	***79NAB64VS***	**10.80**	10
3/8"	3/8"	17/32-24	***79NAB66VS***	**11.88**	10
3/8"	1/2"	17/32-24	***79NAB68VS***	**18.36**	10
1/2"	1/4"	11/16-20	***79NAB84VS***	**22.05**	10
1/2"	3/8"	11/16-20	***79NAB86VS***	**18.36**	10
1/2"	1/2"	11/16-20	***79NAB88VS***	**23.72**	10
5/8"	3/8"	13/16-18	***79NAB106VS***	**28.53**	10
5/8"	1/2"	13/16-18	***79NAB108VS***	**28.53**	10
3/4"	1/2"	1-18	***79NAB128VS***	**31.69**	10

Female Elbows



- ref. SAE 100203 BA

Tube OD	Pipe Thread	Straight Thread	Part #	Price/E	Pkg Qty
3/16"	1/8"	5/16-24	***70NAB32***	**$60.22**	25
1/4"	1/8"	7/16-24	***70NAB42***	**13.21**	25
1/4"	1/4"	7/16-24	***70NAB44***	**47.43**	25
3/8"	1/8"	17/32-24	***70NAB62***	**23.47**	10
3/8"	1/4"	17/32-24	***70NAB64***	**21.97**	10
3/8"	3/8"	17/32-24	***70NAB66***	**21.97**	10
1/2"	3/8"	11/16-20	***70NAB86***	**44.36**	10
1/2"	1/2"	11/16-20	***70NAB88***	**48.05**	10
5/8"	1/2"	13/16-18	***70NAB108***	**63.50**	10

Male Elbows



Tube OD	Pipe Thread	Straight Thread	Part #	Price/E	Pkg Qty
3/16"	1/8"	5/16-24	***69NAB32VS***	**$17.78**	10
3/16"	1/4"	5/16-24	***69NAB34VS***	**25.05**	10
1/4"	1/8"	7/16-24	***69NAB42VS***	**6.44**	50
1/4"	1/4"	7/16-24	***69NAB44VS***	**8.31**	50
1/4"	3/8"	7/16-24	***69NAB46VS***	**8.64**	10
3/8"	1/8"	17/32-24	***69NAB62VS***	**9.18**	10
3/8"	1/4"	17/32-24	***69NAB64VS***	**8.60**	25
3/8"	3/8"	17/32-24	***69NAB66VS***	**8.72**	25
3/8"	1/2"	17/32-24	***69NAB68VS***	**15.53**	10
1/2"	1/4"	11/16-20	***69NAB84VS***	**15.16**	10
1/2"	3/8"	11/16-20	***69NAB86VS***	**14.29**	10
1/2"	1/2"	11/16-20	***69NAB88VS***	**15.74**	10
5/8"	3/8"	13/16-18	***69NAB106VS***	**24.51**	10
5/8"	1/2"	13/16-18	***69NAB108VS***	**21.31**	5
3/4"	1/2"	1-18	***69NAB128VS***	**50.13**	5
3/4"	3/4"	1-18	***69NAB1212VS***	**89.54**	5

LIQUIfit™ Fittings

2010 NEW

The LIQUIfit fitting is suitable for water, potable liquids and natural gas applications. LIQUIfit is manufactured of a bio-based renewable material and has a compact body which is simple to install.

Features:
- EPDM seal secures connection with larger surface area than standard O-rings
- engineered polymer allows superior mechanical strength and chemical resistance
- full stainless gripping ring eliminates the need for locking clips
- release button protects and supports tubing
- bio-based body utilizes renewable resources
- FDA compliant
- NSF-51 listed for contact with food
- NSF-61 list C-Hot rated
- in compliance with the following standards:

Specifications:
- working pressure:
  - 1/4" **230 PSI** from **35°F** to **100°F**
    150 PSI at **150°F**
    60 PSI at **200°F**
  - 3/8" **190 PSI** from **35°F** to **100°F**
    100 PSI at **150°F**
    60 PSI at **200°F**
  - 1/2" **160 PSI** from **35°F** to **100°F**
    100 PSI at **150°F**
    60 PSI at **200°F**
- maximum torque valves for NPT threads:
  - 1/8" and 1/4" 1.0 ft. lbs. / 1.5Nm
  - 3/8" and 1/2" 2.2 ft. lbs. / 3.0Nm

Male Connectors



tube to male NPTF

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
1/4"	1/8"	***65055611WP2***	**$2.15**	10
1/4"	1/4"	***65055614WP2***	**3.55**	10
3/8"	1/4"	***65056014WP2***	**3.75**	10
3/8"	3/8"	***65056018WP2***	**4.30**	10
1/2"	3/8"	***65056218WP2***	**5.80**	5
1/2"	1/2"	***65056222WP2***	**6.25**	5

Faucet Connectors



tube to female UNS

Tube OD	Female UNS	Part #	Price/E	Pkg Qty
1/4"	7/16"-24	***632556133WP2***	**$4.35**	10
3/8"	7/16"-24	***632560133WP2***	**4.85**	10

Female Connectors



tube to female NPTF

Tube OD	Female NPTF	Part #	Price/E	Pkg Qty
1/4"	1/4"	***63155614WP2***	**$5.30**	10
3/8"	3/8"	***63156018WP2***	**6.15**	10

Fixed Elbows



tube to male NPTF

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
1/4"	1/8"	***65795611WP2***	**$3.40**	10
1/4"	1/4"	***65795614WP2***	**3.85**	10
1/4"	3/8"	***65795618WP2***	**4.65**	10
3/8"	1/4"	***65796014WP2***	**5.10**	10
3/8"	3/8"	***65796018WP2***	**5.20**	10

LIQUIfit™ Fittings

2010 NEW Union Elbows



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
1/4"	***63025600WP2***	**$3.65**	10
3/8"	***63026000WP2***	**5.55**	10
1/2"	***63026200WP2***	**6.55**	5

Union Tees



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
1/4"	***63045600WP2***	**$4.65**	10
3/8"	***63046000WP2***	**5.80**	10
1/2"	***63046200WP2***	**7.00**	5

Union Connectors



tube to tube

Tube OD 1	Tube OD 2	Part #	Price/E	Pkg Qty
1/4"	1/4"	***63065600WP2***	**$3.25**	10
1/4"	3/8"	***63065660WP2***	**4.35**	10
3/8"	3/8"	***63066000WP2***	**4.35**	10
3/8"	1/2"	***63066062WP2***	**6.00**	5
1/2"	1/2"	***63066200WP2***	**5.00**	5

Unequal Union Tee



tube to tube

Tube OD 1	Tube OD 2	Part #	Price/E	Pkg Qty
3/8"	1/4"	***63046056WP2***	**$7.40**	10

Bulkhead Unions



tube to tube

Tube OD	Part #	Price/E	Pkg Qty
1/4"	***63165600WP2***	**$6.15**	10
3/8"	***63166000WP2***	**8.00**	10
1/2"	***63166200WP2***	**10.45**	5

Two-Way Dividers



tube to tube to tube

Tube OD	Part #	Price/E	Pkg Qty
1/4"	***63405600WP2***	**$5.20**	10
3/8"	***63406000WP2***	**5.90**	10
1/2"	***63406200WP2***	**10.05**	5

LIQUIfit™ Fittings

Swivel Elbows



tube to male NPTF

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
1/4"	1/8"	***65095611WP2***	**$5.55**	10
1/4"	1/4"	***65095614WP2***	**5.55**	10
1/4"	3/8"	***65095618WP2***	**6.05**	10
3/8"	1/4"	***65096014WP2***	**7.75**	10
3/8"	3/8"	***65096018WP2***	**8.05**	10
1/2"	3/8"	***65096218WP2***	**10.45**	4
1/2"	1/2"	***65096222WP2***	**10.45**	4

Swivel Branch Tees

NEW 2010



tube to tube x male NPTF

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
1/4"	1/8"	***65085611WP2***	**$6.55**	10
1/4"	1/4"	***65085614WP2***	**6.55**	10
1/4"	3/8"	***65085618WP2***	**7.05**	10
3/8"	1/4"	***65086014WP2***	**8.00**	10
3/8"	3/8"	***65086018WP2***	**8.40**	10
1/2"	3/8"	***65086218WP2***	**10.90**	4
1/2"	1/2"	***65086222WP2***	**10.90**	4

Stem Adapters



tube to male NPT

Tube OD	Male NPT	Part #	Price/E	Pkg Qty
1/4"	1/8"	***65215611WP2***	**$1.25**	10
1/4"	1/4"	***65215614WP2***	**1.25**	10
1/4"	3/8"	***65215618WP2***	**1.70**	10
3/8"	1/4"	***65216014WP2***	**1.45**	10
3/8"	3/8"	***65216018WP2***	**1.90**	10
1/2"	3/8"	***65216218WP2***	**3.00**	5
1/2"	1/2"	***65216222WP2***	**3.00**	5

Swivel Male Run Tees



tube to male NPTF x tube

Tube OD	Male NPTF	Part #	Price/E	Pkg Qty
1/4"	1/8"	***65035611WP2***	**$6.55**	10
1/4"	1/4"	***65035614WP2***	**6.55**	10
1/4"	3/8"	***65035618WP2***	**7.05**	10
3/8"	1/4"	***65036014WP2***	**8.00**	10
3/8"	3/8"	***65036018WP2***	**8.40**	10
1/2"	3/8"	***65036218WP2***	**10.90**	4
1/2"	1/2"	***65036222WP2***	**10.90**	4

End Stops



tube

Tube OD	Part #	Price/E	Pkg Qty
1/4"	***63515600WP2***	**$2.05**	10
3/8"	***63516000WP2***	**2.60**	10

Plugs



tube

Tube OD	Part #	Price/E	Pkg Qty
1/4"	***63265600WP2***	**$0.95**	10
3/8"	***63266000WP2***	**1.45**	10
1/2"	***63266200WP2***	**2.25**	5

LIQUIfit™ Fittings

2010 NEW

Hose Stems



tube to hose stem

Tube OD	Stem	Part #	Price/E	Pkg Qty
1/4"	1/4"	***63225656WP2***	**$2.05**	10
3/8"	1/4"	***63226056WP2***	**2.85**	10
3/8"	5/16"	***63226008WP2***	**3.00**	10
3/8"	3/8"	***63226060WP2***	**3.25**	10
1/2"	3/8"	***63226260WP2***	**3.50**	10

Plug-in Reducers



tube to plug-in

Tube OD	Plug-in	Part #	Price/E	Pkg Qty
1/4"	5/16"	***63665608WP2***	**$3.05**	10
1/4"	3/8"	***63665660WP2***	**3.60**	10
3/8"	1/2"	***63666062WP2***	**6.70**	5

Plug-in Elbows



tube to plug-in

Tube OD	Plug-in	Part #	Price/E	Pkg Qty
1/4"	1/4"	***63825600WP2***	**$3.30**	10
3/8"	3/8"	***63826000WP2***	**5.65**	10
1/2"	1/2"	***63826200WP2***	**6.70**	5

Plug-in Tees



tube to tube x plug-in

Tube OD	Plug-in	Part #	Price/E	Pkg Qty
1/4"	1/4"	***63885600WP2***	**$4.95**	10
3/8"	3/8"	***63886000WP2***	**7.85**	10
1/2"	1/2"	***63886200WP2***	**9.30**	5

LIQUIfit™ Ball Valves

2010 NEW

These corrosion resistant, all-plastic designed ball valves are ideal for water filtration units, coffee and beverage machines and a wide variety of other fluid applications.

Features:
- extra large O-ring increases seal compression on tube
- full flow self-cleaning ball
- high-temperature, scale resistant Polysulfone ball
- glass-reinforced Polypropylene body
- FDA compliant
- NSF-51 listed for contact with food

Specifications:
- temperature range: **0°F** to **225°F** (-18°C to 107°C)
- O-ring seal material: nitrile
- Pressure rating to **150 PSI** with a 600 PSI burst pressure. Actual working pressures will be lower at elevated temperatures.

Valve Male Elbows



tube to male thread

Tube OD	Male Thread	*Polypropylene* Part #	Price/E	Pkg Qty
1/4"	1/4"	***PP4VME4-MG***	**$14.20**	10
1/4"	3/8"	***PP4VME6-MG***	**17.35**	10
1/4"	1/2"	***PP4VME8-MG***	**21.25**	10
3/8"	1/4"	***PP6VME4-MG***	**14.20**	10
3/8"	3/8"	***PP6VME6-MG***	**15.65**	10
3/8"	1/2"	***PP6VME8-MG***	**23.90**	10

Valve Female Elbows



tube to female thread

Tube OD	Female Thread	*Polypropylene* Part #	Price/E	Pkg Qty
1/4"	1/4"	***PP4VFE4-MG***	**$13.60**	10
1/4"	3/8"	***PP4VFE6-MG***	**15.65**	10
3/8"	1/4"	***PP6VFE4-MG***	**13.60**	10
3/8"	3/8"	***PP6VFE6-MG***	**14.20**	10

LIQUIfit™ Ball Valves

2010 NEW

Valve Male Connectors



male thread to tube

Tube OD	Male Thread	Part #	Price/E	Pkg Qty
1/4"	1/4"	***PP4VMC4-MG***	**$11.55**	10
1/4"	3/8"	***PP4VMC6-MG***	**14.45**	10
3/8"	1/4"	***PP6VMC4-MG***	**13.45**	10
3/8"	3/8"	***PP6VMC6-MG***	**12.75**	10

Valve Union Connectors



tube to tube

Tube OD 1	Tube OD 2	Part #	Price/E	Pkg Qty
1/4"	1/4"	***PP4VUC4-MG***	**$12.10**	10
1/4"	3/8"	***PP4VUC6-MG***	**16.05**	10
3/8"	1/4"	***PP6VUC4-MG***	**16.40**	10
3/8"	3/8"	***PP6VUC6-MG***	**13.50**	10

Valve Plug-in Elbow Unions



tube to plug-in

Tube OD	Stem	Part #	Price/E	Pkg Qty
1/4"	3/8"	***PP4VTEU6-MG***	**$17.00**	10
3/8"	3/8"	***PP6VTEU6-MG***	**17.00**	10

Valve Female Connectors



tube to female thread

Tube OD	Female Thread	Part #	Price/E	Pkg Qty
1/4"	1/8"	***PP4VFC2-MG***	**$15.95**	10
1/4"	1/4"	***PP4VFC4-MG***	**15.30**	10
1/4"	3/8"	***PP4VFC6-MG***	**15.30**	10
3/8"	1/8"	***PP6VFC2-MG***	**16.50**	10
3/8"	1/4"	***PP6VFC4-MG***	**15.85**	10
3/8"	3/8"	***PP6VFC6-MG***	**15.85**	10

Valve Elbow Unions



tube to tube

Tube OD 1	Tube OD 2	Part #	Price/E	Pkg Qty
1/4"	1/4"	***PP4VEU4-MG***	**$19.35**	10
1/4"	3/8"	***PP4VEU6-MG***	**18.60**	10
3/8"	1/4"	***PP6VEU4-MG***	**19.60**	10
3/8"	3/8"	***PP6VEU6-MG***	**11.55**	10

LIQUIfit™ Check Valves

Push-to connect check valves ensure protection against reversal of flow. The valves have an arrow molded into the body to indicate the direction of flow. Valves are designed for connection with either thermoplastic or soft metal tubing and are intended *for use with liquids only*.

- body material: acetal
- O-ring: EPDM
- metal grip edge: 300 stainless steel
- NSF-61 listed
- working pressure: up to **150 PSI**, depending on tubing used
- temperature range: **34°F** to **150°F** (1°C to 65°C)
- cracking pressure: 1/3 PSI

tube to tube


Tube OD	Part #	Price/E	Pkg Qty
1/4"	***A4VC4-MG***	**$20.20**	25
5/16"	***A5VC5-MG***	**20.60**	25
3/8"	***A6VC6-MG***	**22.80**	25



Wilkerson Miniature Filters



transparent bowl




- excellent water removal efficiency
- 5 micron element
- .5 oz. bowl
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17 bar) and **32°F** to **175°F** (0°C to 80°C)

E Air

Size	SCFM	With Transparent Bowl				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	22	***F03-01A***	**$55.75**	***F03-01M***	**$46.25**	***F03-01AMB***	**$63.25**	***F03-01MMB***	**$53.70**
1/4"	24	***F03-02A***	**55.75**	***F03-02M***	**46.25**	***F03-02AMB***	**63.25**	***F03-02MMB***	**53.70**



metal bowl




- 5 micron element
- .4 oz. bowl
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	25	***F08-01A***	**$58.65**	***F08-01M***	**$51.15**	***F08-01AMB***	**$66.30**	***F08-01MMB***	**$58.80**
1/4"	50	***F08-02A***	**58.65**	***F08-02M***	**51.15**	***F08-02AMB***	**66.30**	***F08-02MMB***	**58.80**

See pages 212-215 for filter accessories.

Wilkerson Miniature Regulators





- 2-125 PSI adjusting range
- balanced valve design
- self-relieving standard
- non-rising push/pull locking adjustment knob
- two 1/8" NPT gauge ports standard on models without gauge, one 1/8" NPT gauge port standard on models with gauge - can be used for additional outlet ports.
- models supplied without gauge use a GC620 gauge.
- panel mount nuts sold separately
- maximum operating conditions:
  0-300 PSIG (0-20.17 bar) and **32°F** to **125°F** (0°C to 52°C)

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/8"	13	***R03-01RG***	**$51.25**	***R03-01R***	**$35.35**
1/4"	15	***R03-02RG***	**51.25**	***R03-02R***	**35.35**

See pages 215-217 for regulator accessories.


SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Miniature Regulators

- 0-125 PSI adjusting range
- balanced valve design
- self-relieving standard
- non-rising push/pull locking adjustment knob
- two 1/8" NPT gauge ports standard on models without gauge, one 1/8" NPT gauge port standard on models with gauge - can be used for additional outlet ports.
- models with gauge are supplied with a 0-160 flush mount style gauge
- models supplied without gauge use a GC620 gauge.
- panel mount nuts sold separately
- maximum operating conditions:
  300 PSIG (20.7 bar) and **32°F** to **150°F** (0°C to 65.5°C)






Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/8"	29.2	***R08-01RG***	**$62.55**	***R08-01R***	**$41.30**
1/4"	44	***R08-02RG***	**62.55**	***R08-02R***	**41.30**

Wilkerson Miniature Water Regulators

- 2-125 PSI adjusting range
- suitable for water and compressed air service
- brass construction - wetted parts
- non-relieving spring-loaded diaphragm
- panel mount nut included
- two 1/8" NPT gauge ports standard
- models supplied without gauge use a GC620 gauge
- maximum operating conditions:
  300 PSIG (20.7 bar) and **40°F** to **125°F** (4.4°C to 52°C)






Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/8"	11	***RB3-01RG***	**$62.65**	***RB3-01R***	**$46.75**
1/4"	14	***RB3-02RG***	**62.65**	***RB3-02R***	**46.75**

See pages 215-217 for regulator accessories.

Wilkerson Miniature Filter / Regulators

- 2-125 PSI adjusting range
- 5 micron element
- .5 oz. bowl
- self-relieving
- supplied with a GC620 gauge
- maximum operating conditions:
  transparent bowl: **125 PSIG** (8.6 bar) and **40°F** to **125°F** (4.4°C to 52°C)
  metal bowl: **300 PSIG** (20.7 bar) and **40°F** to **125°F** (4.4°C to 52°C)

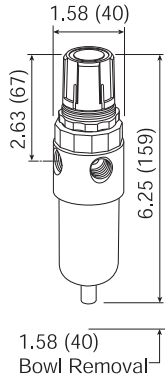


transparent bowl

Size	SCFM	With Transparent Bowl				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	13	***BB3-01AG***	**$121.25**	***BB3-01MG***	**$112.60**	***BB3-01AGMB***	**$128.95**	***BB3-01MGMB***	**$119.90**
1/4"	16	***BB3-02AG***	**121.25**	***BB3-02MG***	**112.60**	***BB3-02AGMB***	**128.95**	***BB3-02MGMB***	**119.90**

FRL's are designed for air service only, unless otherwise indicated.


SAFETY ALERT

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Miniature Filter / Regulators



metal bowl

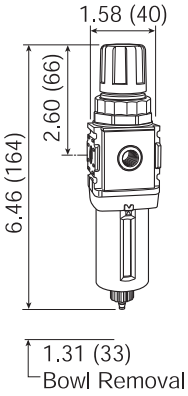

- 0-125 PSI adjusting range
- 5 micron element
- .4 oz. bowl
- self-relieving
- supplied with a 0-160 PSI flush mount style gauge
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)


Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	28.6	***B08-01AG***	**$110.80**	***B08-01MG***	**$101.50**	***B08-01AGMB***	**$130.00**	***B08-01MGMB***	**$122.50**
1/4"	42.1	***B08-02AG***	**110.80**	***B08-02MG***	**101.50**	***B08-02AGMB***	**130.00**	***B08-02MGMB***	**122.50**

See pages 220-221 for filter/regulator accessories.

Wilkerson Miniature Lubricators



transparent bowl




- 1 oz. bowl
- adjustable oil feed
- full view sight dome
- *Do not fill under pressure. Air supply must be turned off and pressure bled from unit prior to adding oil.*
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **175°F** (0°C to 80°C)

SAFETY ALERT

Size	SCFM	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1/8"	20	***L03-01A***	**$70.90**	***L03-01AMB***	**$78.35**
1/4"	20	***L03-02A***	**70.90**	***L03-02AMB***	**78.35**



metal bowl



- .6 oz. bowl
- adjustable oil feed
- full view sight dome
- fill under pressure design
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1/8"	23.5	***L08-01A***	**$72.25**	***L08-01AMB***	**$79.90**
1/4"	57.5	***L08-02A***	**72.25**	***L08-02AMB***	**79.90**

See pages 218-220 for lubricator accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Miniature Combination Units

(Filter, Regulator, Lubricator)


- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **175°F** (0°C to 80°C)

Filter series F03:
- 5 micron element
- .5 oz. bowl

Regulator series R03:
- 2-125 PSI adjusting range
- balanced valve design
- self-relieving
- supplied with a GC620 gauge
  Regulator can be mounted with knob in up or down position.

Lubricator series L03:
- 1 oz. bowl
- adjustable oil feed
- full view sight dome

Included components:
- (2) adapters

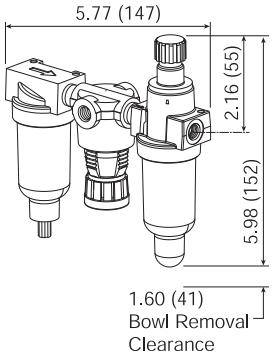



Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	20	***C03-01A***	**$221.80**	***C03-01M***	**$212.30**	***C03-01AMB***	**$236.75**	***C03-01MMB***	**$227.20**
1/4"	20	***C03-02A***	**222.60**	***C03-02M***	**213.10**	***C03-02AMB***	**237.55**	***C03-02MMB***	**228.00**


- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Filter series F08:
- 5 micron element
- .4 oz. bowl

Regulator series R08:
- 0-125 PSI adjusting range
- balanced valve design
- self-relieving
- supplied with a 0-160 PSI flush mount style gauge

Lubricator series L08:
- .6 oz. bowl
- adjustable oil feed
- full view sight dome

Included components:
- (2) mounting brackets with joiner set

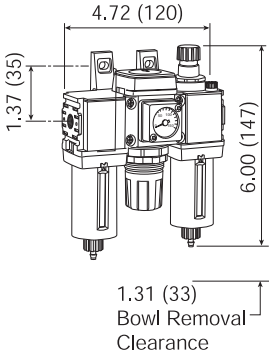



Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	29	***C08-01A***	**$261.45**	***C08-01M***	**$253.95**	***C08-01AMB***	**$276.75**	***C08-01MMB***	**$269.25**
1/4"	44	***C08-02A***	**261.45**	***C08-02M***	**253.95**	***C08-02AMB***	**276.75**	***C08-02MMB***	**269.25**

FRL's are designed for air service only, unless otherwise indicated.


SAFETY ALERT

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Airline Compact Filters



with guard




- 5 micron element
- 5 oz. bowl
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	63.0	***F16-02A***	**$159.90**	***F16-02M***	**$107.25**	***F16-02AMB***	**$176.55**	***F16-02MMB***	**$123.85**
3/8"	74.1	***F16-03A***	**159.90**	***F16-03M***	**107.25**	***F16-03AMB***	**176.55**	***F16-03MMB***	**123.85**
1/2"	80.4	***F16-04A***	**159.90**	***F16-04M***	**107.25**	***F16-04AMB***	**176.55**	***F16-04MMB***	**123.85**



with metal bowl




- high flow capacity
- 5 micron element
- 4 oz. bowl
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	110	***F18-02A***	**$146.00**	***F18-02M***	**$93.30**	***F18-02AMB***	**$160.20**	***F18-02MMB***	**$107.60**
3/8"	120	***F18-03A***	**146.00**	***F18-03M***	**93.30**	***F18-03AMB***	**160.20**	***F18-03MMB***	**107.60**
1/2"	145	***F18-04A***	**146.00**	***F18-04M***	**93.30**	***F18-04AMB***	**160.20**	***F18-04MMB***	**107.60**

Wilkerson Airline Standard Filters



with guard



- 5 micron element
- 10 oz. bowl
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	81.3	***F26-02A***	**$198.00**	***F26-02M***	**$145.30**	***F26-02AMB***	**$216.30**	***F26-02MMB***	**$163.60**
3/8"	117.8	***F26-03A***	**198.00**	***F26-03M***	**145.30**	***F26-03AMB***	**216.30**	***F26-03MMB***	**163.60**
1/2"	149.8	***F26-04A***	**198.00**	***F26-04M***	**145.30**	***F26-04AMB***	**216.30**	***F26-04MMB***	**163.60**

See pages 212-215 for filter accessories.


SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Airline Standard Filters

- high flow capacity
- 5 micron element
- 6 oz. bowl
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)






with metal bowl

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/8"	144	***F28-03A***	**$181.30**	***F28-03M***	**$128.65**	***F28-03AMB***	**$196.25**	***F28-03MMB***	**$143.60**
1/2"	160	***F28-04A***	**181.30**	***F28-04M***	**128.65**	***F28-04AMB***	**196.25**	***F28-04MMB***	**143.60**
3/4"	165	***F28-06A***	**181.30**	***F28-06M***	**128.65**	***F28-06AMB***	**196.25**	***F28-06MMB***	**143.60**

Wilkerson Airline Jumbo Filters

- 5 micron element
- 1 qt. bowl
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **150°F** (0°C to 65.5°C)






with guard

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/4"	316	***F30-06A***	**$306.90**	***F30-06M***	**$254.20**	***F30-06AMB***	**$358.70**	***F30-06MMB***	**$306.00**
1"	323	***F30-08A***	**306.90**	***F30-08M***	**254.20**	***F30-08AMB***	**358.70**	***F30-08MMB***	**306.00**

- 5 micron element
- 1 qt. bowl
- maximum operating conditions:
  metal bowl: **150 PSIG** (10.3 bar) and **32°F** to **150°F** (0°C to 65.5°C)





with metal bowl

Size	SCFM	With Heavy Duty Metal Bowl			
		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1½"	1280	***F35-0BAMB***	**$1200.95**	***F35-0BMMB***	**$1148.30**
2"	1400	***F35-0CAMB***	**1200.95**	***F35-0CMMB***	**1148.30**

See pages 212-215 for filter accessories.

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT


SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Modular Coalescing Filters

- for removal of extremely fine oil mists, oil aerosols and microscopic particles
- A standard airline filter should be installed as a pre-filter when using a coalescing filter.
- 0.5 micron 'type B' and 0.003 micron 'type D' elements are optional

SAFETY ALERT






- 0.01 micron Type C element
- 5 oz. bowl
- can be installed in modular system
- maximum operating conditions:
  150 PSIG (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)

Size	SCFM	With Compact Transparent Bowl and Guard			
		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1/4"	37.0	***M16-02A***	**$250.30**	***M16-02M***	**$197.60**
3/8"	44.7	***M16-03A***	**250.30**	***M16-03M***	**197.60**
1/2"	46.1	***M16-04A***	**250.30**	***M16-04M***	**197.60**






- 0.01 micron Type C element
- 10 oz. bowl
- can be installed in modular system
- maximum operating conditions:
  150 PSIG (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)

Size	SCFM	With Standard Transparent Bowl and Guard			
		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1/4"	55.0	***M26-02A***	**$305.55**	***M26-02M***	**$252.85**
3/8"	65.5	***M26-03A***	**305.55**	***M26-03M***	**252.85**
1/2"	79.5	***M26-04A***	**305.55**	***M26-04M***	**252.85**





- 0.01 micron Type C element
- 1 qt. bowl
- maximum operating conditions:
  150 PSIG (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)

Size	SCFM	With Jumbo Transparent Bowl and Guard	
		Automatic Drain	
		Part #	Price/E
1/2"	123	***M30-04A***	**$534.40**
3/4"	173	***M30-06A***	**534.40**
1"	203	***M30-08A***	**534.40**

See pages 212-215 for filter accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.


SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Heavy Duty Modular Coalescing Filters

- for removal of extremely fine oil mists, oil aerosols and microscopic particles
- A standard airline filter should be installed as a pre-filter when using a coalescing filter.
- 1.0 micron 'type B' and 0.003 micron 'type D' elements are optional

SAFETY ALERT


- 0.01 micron Type C element
- 1 qt. bowl
- differential pressure indicator eliminates the guesswork of element placement
- maximum operating conditions:
  150 PSIG (10.3 bar) and **32°F** to **150°F** (0°C to 65.5°C)





Size	SCFM	With Metal Bowl Automatic Drain Part #	Price/E
1¼"	741	***M32-0AAMB***	**$1573.70**

- 0.01 micron Type C element
- 1 qt. bowl
- differential pressure indicator eliminates the guesswork of element placement
- maximum operating conditions:
  150 PSIG (10.3 bar) and **32°F** to **150°F** (0°C to 65.5°C)





Size	SCFM	With Metal Bowl Automatic Drain Part #	Price/E
1½"	710	***M35-0BAMB***	**$1621.80**
2"	710	***M35-0CAMB***	**1621.80**

See pages 212-215 for filter accessories.

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT


SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Manual In-Line Desiccant Dryers

Manual air dryers are used to remove water vapor from compressed air systems, in applications such as paint spraying, laboratory instruments and small control air systems. Filtration for absorber type dryers is important to protect the desiccant bed from contamination. Cleaner incoming air will result in better performance, longer life and fewer service problems. To regenerate silica gel desiccant, it must be heated to at least 350°F for approximately 3 hours or until color has changed from pink to blue. Allow desiccant to cool to room temperature before pouring back into unit bowl.

SAFETY ALERT An after-filter should be placed downstream from the desiccant dryer to ensure solid contaminants such as desiccant dust do not migrate downstream.



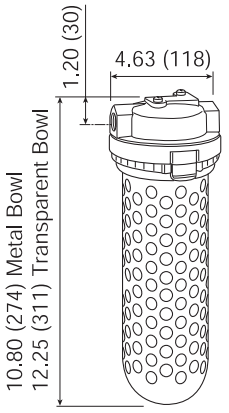

- 1.64 lb. bowl
- will dry up to 4400 standard cubic feet of air
- desiccant is good for approximately 440 minutes at maximum continuous air flow before regeneration is required
- silica gel changes from blue to pink to indicate the need to replace or regenerate the desiccant
- slotted bowl guard for visual detection of color change
- provides atmospheric dew point of -45°F with dry desiccant at **100 PSI** and **70°F**
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10 bar) and **125°F** (52°C)
  metal bowl: **150 PSIG** (10 bar) and **150°F** (66°C)
- A standard airline filter and modular coalescing filter should be used as pre-filters when using a desiccant dryer. SAFETY ALERT
- no electrical connection necessary


Size	SCFM	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1/4"	10	***X03-02***	**$305.70**	***X03-02MB***	**$407.65**

See page 212 for silica gel refill.

Wilkerson Dial Air Regulators

Dial-air regulators feature a transparent, pressure-calibrated, non-rising adjustment dial for quick adjustment of secondary pressure. The full reduced pressure range can be dialed in less than 270° of dial rotation. This feature is particularly advantageous if secondary pressure must be changed frequently. Dial air regulators can be mounted in any position so dial face is always visible. All dial-air units have a slight constant air bleed.





- 0-160 PSI adjusting range
- balanced valve design
- relieving type
- non-rising pressure adjusting dial
- piston operated
- two ¼" NPT gauge ports standard on models without gauge, one ¼" NPT gauge port standard on models with gauge - can be used for additional outlet ports.
- models supplied without gauge use a GC230 gauge
- maximum supply pressure: **300 PSIG** (20.7 bar)
- operating temperature: **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	117	***R21-02RG***	**$194.15**	***R21-02R***	**$177.45**
3/8"	180	***R21-03RG***	**194.15**	***R21-03R***	**177.45**
1/2"	195	***R21-04RG***	**194.15**	***R21-04R***	**177.45**
3/4"	220	***R21-06RG***	**194.15**	***R21-06R***	**177.45**


See pages 215-217 for regulator accessories.

SAFETY ALERT *FRL's are designed for air service only, unless otherwise indicated.*

SCFM ratings at 100 PSIG inlet pressure.

Wilkerson Compact Regulators


- self-relieving standard
- 0-125 PSI adjusting range
- for 0-60 PSI adjusting range, add an L to the end of the part number
- Regulator can be installed with the adjusting knob in any position. Attach gauge to one ¼" female gauge port and plug the other ¼" female port, or it can be used for additional outlet ports.
- models supplied without gauge use a GC230 gauge
- Turning the adjusting screw clockwise increases the regulated pressure and turning it counter clockwise decreases the regulated pressure.
- maximum supply pressure: **300 PSIG** (20.7 bar)
- operating temperature range: **32°**F to **150°F** (0°C to 65.5°C)





Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	71.5	***R16-02RG***	**$101.70**	***R16-02R***	**$85.00**
3/8"	80.5	***R16-03RG***	**101.70**	***R16-03R***	**85.00**
1/2"	88.0	***R16-04RG***	**101.70**	***R16-04R***	**85.00**

- self-relieving standard
- 0-125 PSI adjusting range
- for 0-60 PSI adjusting range, add an L to the end of the part number
- Two ¼" NPT gauge ports located on the front and rear faces of the body. These ports may be used as additional regulated ports or for pressure gauges.
- To increase regulated pressure, pull adjusting knob up and turn clockwise. To reduce pressure, turn knob counter clockwise.
- models supplied without gauge use a GC230 gauge maximum supply pressure: **300 PSIG** (20.7 bar)
- operating temperature range: **32°F** to **150°F** (0°C to 65.5°C)






Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	82	***R18-02RG***	**$88.55**	***R18-02R***	**$71.85**
3/8"	97	***R18-03RG***	**88.55**	***R18-03R***	**71.85**
1/2"	97	***R18-04RG***	**88.55**	***R18-04R***	**71.85**

Wilkerson Standard Regulators

- 0-125 PSI adjusting range
- for 0-60 PSI adjusting range, add an L to the end of the part number
- non-rising push/pull locking adjustment knob
- panel mount nut standard
- excellent flow characteristics
- Regulator can be installed with the adjusting knob in any position. Attach gauge to one ¼" female gauge port and plug the other ¼" female port, or it can be used for additional outlet ports.
- models supplied without gauge use a GC230 gauge
- maximum operating conditions:
  300 PSIG (21 bar) and **32°F** to **150°F** (0°C to 65.5°C)
- Turning the adjusting screw clockwise increases the regulated pressure and turning it counter clockwise decreases the regulated pressure.

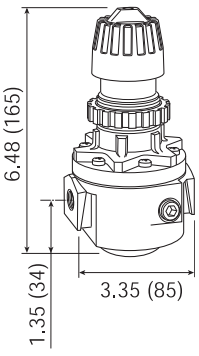



Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	112	***R26-02RG***	**$146.20**	***R26-02R***	**$129.50**
3/8"	148	***R26-03RG***	**146.20**	***R26-03R***	**129.50**
1/2"	185	***R26-04RG***	**146.20**	***R26-04R***	**129.50**

See pages 215-217 for regulator accessories.


FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.

Wilkerson Standard Regulators






- self-relieving standard
- 0-125 PSI adjusting range
- four adjusting pressure ranges available
- Two ¼" NPT gauge ports located on the front and rear faces of the body. These ports may be used as additional regulated ports or for pressure gauges.
- models supplied without gauge use a GC230 gauge
- To increase regulated pressure, pull adjusting knob up and turn clockwise. To reduce pressure, turn knob counter clockwise.
- maximum operating conditions:
  300 PSIG (20.7 bar) and **32°F** to **150°F** (0°C to 65.5°C)

E Air

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
3/8"	162	***R28-03RG***	**$128.85**	***R28-03R***	**$112.15**
1/2"	170	***R28-04RG***	**128.85**	***R28-04R***	**112.15**
3/4"	176	***R28-06RG***	**128.85**	***R28-06R***	**112.15**

Wilkerson High Flow Regulators




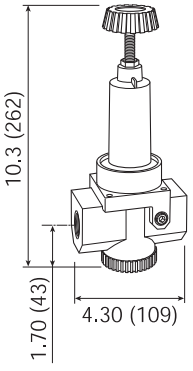

- 0-125 PSI adjusting range
- To adjust air pressure turn adjustment knob clockwise to raise the regulated pressure, and counterclockwise to lower the regulated pressure.
- self-relieving standard
- piston operated
- Regulator may be installed so that the adjusting handle is in any position. Attach the gauge to one ¼" gauge port and plug the other ¼" port, or it can be used for additional outlet ports.
- models supplied without gauge use a GC230 gauge
- maximum operating conditions:
  300 PSIG (20.7 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
¾"	480	***R30-06RG***	**$241.00**	***R30-06R***	**$224.30**
1"	500	***R30-08RG***	**241.00**	***R30-08R***	**224.30**
1¼"	800	***R30-0ARG***	**241.00**	***R30-0AR***	**224.30**



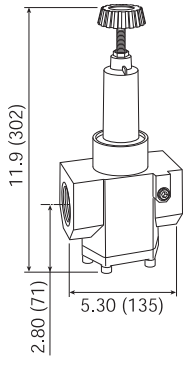

- 0-125 PSI adjusting range
- To adjust air pressure turn adjustment knob clockwise to raise the regulated pressure, and counterclockwise to lower the regulated pressure.
- self-relieving standard
- piston operated
- Regulator may be installed so that the adjusting handle is in any position. Attach the gauge to one ¼" gauge port and plug the other ¼" port, or it can be used for additional outlet ports.
- models supplied without gauge use a GC230 gauge
- maximum operating conditions:
  300 PSIG (20.7 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1½"	1200	***R40-0BRG***	**$443.55**	***R40-0BR***	**$426.85**
2"	1200	***R40-0CRG***	**443.55**	***R40-0CR***	**426.85**

See pages 215-217 for regulator accessories.


SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Wilkerson High Pressure - Compact Regulators

- 0-250 PSIG adjusting range
- Regulator can be installed with the adjusting knob in any position. Attach gauge to one ¼" female gauge port and plug the other ¼" female port, or it can be used for additional outlet ports.
- models supplied without gauge use a GC240 gauge.






Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	71.5	***R16-02RHG***	**$101.70**	***R16-02RH***	**$85.00**
3/8"	80.5	***R16-03RHG***	**101.70**	***R16-03RH***	**85.00**
1/2"	88.0	***R16-04RHG***	**101.70**	***R16-04RH***	**85.00**

Wilkerson High Pressure - Standard Regulators

- 0-250 PSIG adjusting range
- for 0-60 PSI adjusting range, add an L to the end of the part number
- self-relieving standard
- non-rising push/pull locking adjustment knob
- panel mount nut standard
- excellent flow characteristics
- Regulator can be installed with the adjusting knob in any position. Attach gauge to one ¼" female gauge port and plug the other ¼" female port, or it can be used for additional outlet ports.
- models supplied without gauge use a GC240 gauge.
- maximum operating conditions:
  300 PSIG (21 bar) and **32°F** to **150°F** (0°C to 65.5°C)

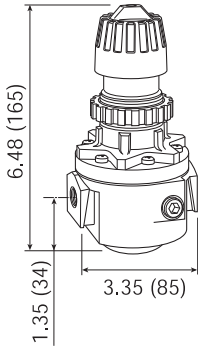



Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	112	***R26-02RHG***	**$146.20**	***R26-02RH***	**$129.50**
3/8"	148	***R26-03RHG***	**146.20**	***R26-03RH***	**129.50**
1/2"	185	***R26-04RHG***	**146.20**	***R26-04RH***	**129.50**

See pages 215-217 for regulator accessories.


FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.

Wilkerson High Pressure - High Flow Regulators




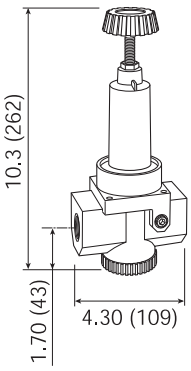

- 0-180 PSI adjusting range
- for 0-60 PSI adjusting range, add an L to the end of the part number
- self-relieving standard
- piston operated
- Regulator can be installed with the adjusting knob in any position. Attach gauge to one ¼" female gauge port and plug the other ¼" female port, or it can be used for additional outlet ports.
- models supplied without gauge use a GC240 gauge.
- maximum operating conditions:
  300 PSIG (20.7 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
¾"	480	***R30-06RHG***	**$241.00**	***R30-06RH***	**$224.30**
1"	500	***R30-08RHG***	**241.00**	***R30-08RH***	**224.30**
1¼"	800	***R30-0ARHG***	**241.00**	***R30-0ARH***	**224.30**



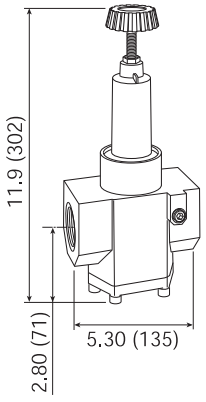

- 0-180 PSI adjusting range
- for 0-60 PSI adjusting range, add an L to the end of the part number
- self-relieving standard
- piston operated
- Regulator can be installed with the adjusting knob in any position. Attach gauge to one ¼" female gauge port and plug the other ¼" female port, or it can be used for additional outlet ports.
- models supplied without gauge use a GC240 gauge.
- maximum operating conditions:
  300 PSIG (20.7 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1½"	1200	***R40-0BRHG***	**$443.55**	***R40-0BRH***	**$426.85**
2"	1200	***R40-0CRHG***	**443.55**	***R40-0CRH***	**426.85**

See pages 215-217 for regulator accessories.

SAFETY ALERT


FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Wilkerson Compact Filter / Regulators

Over-under units are space savers and provide for installation in tight areas. One common inlet/outlet for both filter and regulator saves on piping costs.

- 0-125 PSIG adjusting range
- 5 micron reusable element
- 5 oz. bowl
- self-relieving standard
- diaphragm operated
- quick-disconnect bowl guard with integral plastic bowl and safety latch standard
- Two 1/4" gauge ports are provided in either side of the regulator body for installation of a gauge or to use as an additional outlet port. Plug unused port(s).
- supplied with GC230 gauge
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **150°F** (0°C to 65.5°C)






with guard

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	64.0	***CB6-02AG***	**$244.55**	***CB6-02MG***	**$191.90**	***CB6-02AGMB***	**$261.25**	***CB6-02MGMB***	**$208.55**
3/8"	70.0	***CB6-03AG***	**244.55**	***CB6-03MG***	**191.90**	***CB6-03AGMB***	**261.25**	***CB6-03MGMB***	**208.55**
1/2"	70.0	***CB6-04AG***	**244.55**	***CB6-04MG***	**191.90**	***CB6-04AGMB***	**261.25**	***CB6-04MGMB***	**208.55**

- 0-125 PSIG adjusting range
- 5 micron element
- 4 oz. bowl
- self-relieving standard
- spring-loaded diaphragm
- Two ¼" gauge ports located on the front and rear faces of the body. These ports may be used as additional regulated ports or for pressure gauges. Plug unused port(s).
- supplied with GC230 gauge
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)
- To increase regulated pressure, pull adjusting knob and turn clockwise. To reduce pressure, turn knob counter clockwise. To lock knob, push down.

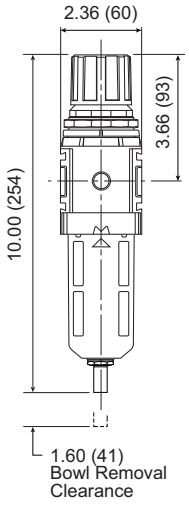



with metal bowl

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	88	***B18-02AG***	**$224.70**	***B18-02MG***	**$172.00**	***B18-02AGMB***	**$236.60**	***B18-02MGMB***	**$186.30**
3/8"	117	***B18-03AG***	**224.70**	***B18-03MG***	**172.00**	***B18-03AGMB***	**236.60**	***B18-03MGMB***	**186.30**
1/2"	121	***B18-04AG***	**224.70**	***B18-04MG***	**172.00**	***B18-04AGMB***	**236.60**	***B18-04MGMB***	**186.30**

See pages 220-221 for filter/regulator accessories.

FRL's are designed for air service only, unless otherwise indicated.


SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.

Wilkerson Standard Filter / Regulators



with metal bowl

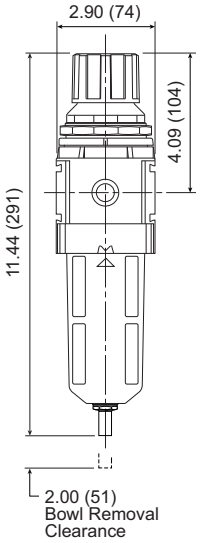

- 0-125 PSIG adjusting range
- 5 micron element
- 6 oz. bowl
- self-relieving standard
- spring-loaded diaphragm
- Two ¼" gauge ports located on the front and rear faces of the body. These ports may be used as additional regulated ports or for pressure gauges. Plug unused port(s).
- supplied with GC230 gauge
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)
- To increase regulated pressure, pull adjusting knob and turn clockwise. To reduce pressure, turn knob counter clockwise. To lock knob, push down.

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/8"	140	***B28-03AG***	**$260.70**	***B28-03MG***	**$208.05**	***B28-03AGMB***	**$273.30**	***B28-03MGMB***	**$223.00**
1/2"	165	***B28-04AG***	**260.70**	***B28-04MG***	**208.05**	***B28-04AGMB***	**273.30**	***B28-04MGMB***	**223.00**
3/4"	175	***B28-06AG***	**260.70**	***B28-06MG***	**208.05**	***B28-06AGMB***	**273.30**	***B28-06MGMB***	**223.00**

See pages 220-221 for filter/regulator accessories.


SCFM ratings at 100 PSIG inlet pressure.

Wilkerson EconOmist® Type Lubricators

Designed so that all the oil flow observed in the sight dome is broken into a mist and delivered via the airflow to the application. This lubricator allows the user to fill or replenish the oil in the bowl without interrupting airflow or bleeding pressure from the system. Once the oil-fill cap is removed, the bowl is depressurized and isolated from line pressure, and the bowl itself can then be removed, if desired, for faster refill. The bowl can also be filled right to the top.



with metal bowl



- 5 oz. bowl
- full view sight dome
- fill under pressure design
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Size	SCFM	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1/4"	36.1	***L16-02A***	**$128.05**	***L16-02AMB***	**$144.95**
3/8"	58.5	***L16-03A***	**128.05**	***L16-03AMB***	**144.95**
1/2"	64.0	***L16-04A***	**128.05**	***L16-04AMB***	**144.95**

See pages 218-220 for lubricator accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.


Wilkerson Lubricators

Flow Guide®
The elastomer disc-shaped device is located in the throat of all Wilkerson lubricators and automatically maintains a constant ratio of oil flow to airflow regardless of changing rates of airflow. This allows one lubricator to serve several pneumatic components operating together or intermittently.

Type of oil to use:
For all Wilkerson lubricators, use any petroleum-base, non-detergent light weight oil (SAE 10/150SSU) which will readily break up into a mist, i.e., Mobil DTE light or comparable oil. Do not use any synthetic oil or oils containing additives or solvents. See page 131 for air tool lubricants.

Wilkerson EconOmist® Compact Lubricators

- high flow capacity
- 4.09 oz. bowl
- can be filled under pressure
- manual drain
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)
- To adjust and set oil delivery rate the unit must be pressurized and air must be flowing through the unit. Turn the sight dome, located on the top of the unit, counter clockwise to initiate oil delivery. If flow increases or decreases, the oil delivery rate will increase or decrease proportionally. Turning the sight dome clockwise will stop all oil delivery.

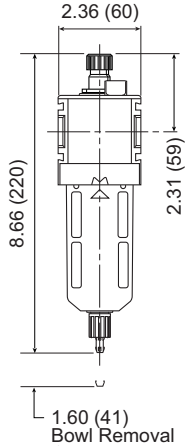




with metal bowl

Size	SCFM	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
1/4"	88	***L18-02A***	**$114.05**	***L18-02AMB***	**$128.30**
3/8"	90	***L18-03A***	**114.05**	***L18-03AMB***	**128.30**
1/2"	96	***L18-04A***	**114.05**	***L18-04AMB***	**128.30**

Wilkerson EconOmist® Standard Lubricators

- quick-disconnect metal bowl guard with integral safety latch
- siphon tube filter provides clean lubricant downstream
- 10 oz. bowl
- can be filled under pressure
- adjustable oil feed
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **150°F** (0°C to 65.5°C)
- The rate of oil delivery may be controlled by turning the adjusting screw counter clockwise for more and clockwise for less oil delivery. If flow increases or decreases, the oil delivery rate will increase or decrease proportionally.




with metal bowl

* metal bowl has sight gauge with brass petcock drain

Size	SCFM	With Transparent Bowl		With Metal Bowl *	
		Part #	Price/E	Part #	Price/E
1/4"	35	***L26-02A***	**$157.20**	***L26-02AMB***	**$175.55**
3/8"	60	***L26-03A***	**157.20**	***L26-03AMB***	**175.55**
1/2"	128	***L26-04A***	**157.20**	***L26-04AMB***	**175.55**

See pages 218-220 for lubricator accessories.

FRL's are designed for air service only, unless otherwise indicated.


SAFETY ALERT

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson EconOmist® Standard Lubricators



with metal bowl

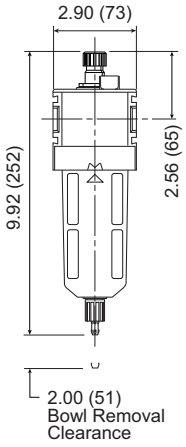


- high flow capacity
- 6.11 oz. bowl
- can be filled under pressure
- manual drain
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)
- To adjust and set oil delivery rate the unit must be pressurized and air must be flowing through the unit. Turn the sight dome, located on the top of the unit, counter clockwise to initiate oil delivery. If flow increases or decreases, the oil delivery rate will increase or decrease proportionally. Turning the sight dome clockwise will stop all oil delivery.

Size	SCFM	With Transparent Bowl		With Metal Bowl	
		Part #	Price/E	Part #	Price/E
3/8"	176	***L28-03A***	**$139.65**	***L28-03AMB***	**$154.65**
1/2"	184	***L28-04A***	**139.65**	***L28-04AMB***	**154.65**
3/4"	200	***L28-06A***	**139.65**	***L28-06AMB***	**154.65**

SCFM ratings at 150 PSIG inlet pressure.



with metal bowl

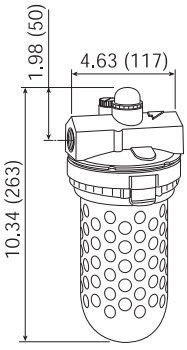

- 26 oz. bowl
- transparent bowl: no drain, hole at the bottom provides a place for drain
  metal bowl: manual drain
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **150°F** (0°C to 65.5°C)
- can be filled under pressure
- The rate of oil delivery may be controlled by turning the adjusting screw counter clockwise for more and clockwise for less oil delivery. The oil delivery rate will change automatically to deliver more oil during higher air flows and less oil for air flows lower than the one at which the setting was made.

Size	SCFM	Transparent Bowl with no drain		Metal Bowl with brass petcock drain	
		Part #	Price/E	Part #	Price/E
3/4"	196	***L30-06A***	**$251.00**	***L30-06AMB***	**$302.80**
1"	374	***L30-08A***	**251.00**	***L30-08AMB***	**302.80**

See pages 218-220 for lubricator accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 120 PSIG inlet pressure.

Wilkerson EconOmist® Standard Lubricators

- can be filled under pressure
- quick-disconnect clamp ring for easy bowl removal
- manual bottom drain standard (metal bowl with sight glass only)
- 26 oz. bowl
- full view sight dome
- adjustable oil feed
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (14 bar) and **32°F** to **150°F** (0°C to 65.5°C)
- The rate of oil delivery may be controlled by turning the adjusting screw counter clockwise for more and clockwise for less oil delivery. The oil delivery rate will change automatically to deliver more oil during higher air flows and less oil for air flows lower than the one at which the setting was made.

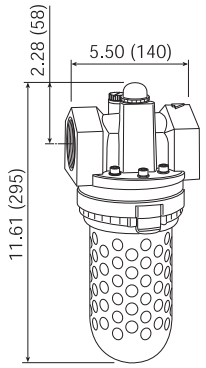


illustration represents L40 series


with metal bowl

Size	SCFM	With Transparent Bowl / Solid Bottom		With Metal Bowl / Manual Drain	
		Part #	Price/E	Part #	Price/E
1¼"	927	***L40-0AA***	**$568.40**	***L40-0AAMB***	**$620.20**
1½"	927	***L40-0BA***	**568.40**	***L40-0BAMB***	**620.20**
2"	1186	***L50-0CA***	**735.40**	***L50-0CAMB***	**787.20**

See pages 218-220 for lubricator accessories.

SCFM ratings at 120 PSIG inlet pressure.

Wilkerson Compact Combination Units


- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **175°F** (0°C to 80°C)

Filter series F16:
- 5 micron element
- 5 oz. bowl

Regulator series R16:
- 0-125 PSI adjusting range
- self-relieving
- supplied with a GC230 gauge

Lubricator series L16:
- 5 oz. bowl
- adjustable oil feed
- full view sight dome

Included components:
- (2) modular sleeves
- (2) mounting brackets (sleeve and bracket)
- (2) end blocks




with metal bowl

Size	SCFM	**With Transparent Bowl and Guard**				**Metal Bowl with Sight Glass**			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	36.1	***C16-02A***	**$559.30**	***C16-02M***	**$506.65**	***C16-02AMB***	**$592.85**	***C16-02MMB***	**$540.15**
3/8"	58.5	***C16-03A***	**559.30**	***C16-03M***	**506.65**	***C16-03AMB***	**592.85**	***C16-03MMB***	**540.15**
1/2"	64.0	***C16-04A***	**559.30**	***C16-04M***	**506.65**	***C16-04AMB***	**592.85**	***C16-04MMB***	**540.15**

FRL's are designed for air service only, unless otherwise indicated.


SAFETY ALERT

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Compact Combination Units



with metal bowl

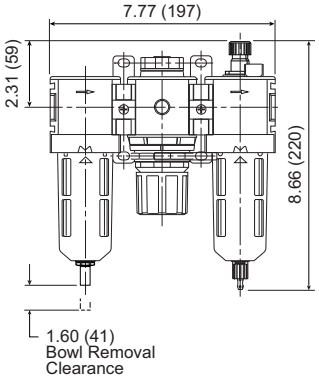

- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°C)

Filter series F18:
- 5 micron element
- 4 oz. bowl

Regulator series R18:
- 0-125 PSI adjusting range
- self-relieving
- supplied with a GC230 gauge

Lubricator series L18:
- 4.09 oz. bowl
- adjustable oil feed
- full view sight dome


Included components:
- (2) end blocks
- (2) mounting brackets with joiner set and port O-ring

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	110	***C18-02A***	**$522.30**	***C18-02M***	**$469.60**	***C18-02AMB***	**$550.75**	***C18-02MMB***	**$498.15**
3/8"	160	***C18-03A***	**522.30**	***C18-03M***	**469.60**	***C18-03AMB***	**550.75**	***C18-03MMB***	**498.15**
1/2"	160	***C18-04A***	**522.30**	***C18-04M***	**469.60**	***C18-04AMB***	**550.75**	***C18-04MMB***	**498.15**

Wilkerson Standard Combination Units



with metal bowl



- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **175°F** (0°C to 80°C)

Filter series F26:
- 5 micron element
- 10 oz. bowl

Regulator series R26:
- 0-125 PSI adjusting range
- self-relieving
- supplied with a GC230 gauge

Lubricator series L26:
- 10 oz. bowl
- adjustable oil feed
- full view sight dome

Included components:
- (2) modular sleeves
- (2) mounting brackets (sleeve and bracket)
- (2) end blocks

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	35	***C26-02A***	**$671.05**	***C26-02M***	**$618.35**	***C26-02AMB***	**$707.70**	***C26-02MMB***	**$655.00**
3/8"	60	***C26-03A***	**671.05**	***C26-03M***	**618.35**	***C26-03AMB***	**707.70**	***C26-03MMB***	**655.00**
1/2"	128	***C26-04A***	**671.05**	***C26-04M***	**618.35**	***C26-04AMB***	**707.70**	***C26-04MMB***	**655.00**

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Standard Combination Units

- modern design and appearance
- quick disconnect bowl / bowl guard


- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **150°F** (0°C to 65.5°F)
  metal bowl: **250 PSIG** (17.2 bar) and **32°F** to **150°F** (0°C to 65.5°F)

Filter series F28:
- 5 micron element
- 6 oz. bowl

Regulator series R28:
- 0-125 PSI adjusting range
- self-relieving
- supplied with a GC230 gauge

Lubricator series L28:
- 6.11 oz. bowl
- adjustable oil feed
- full view sight dome

Included components:
- (2) end blocks
- (2) mounting brackets with joiner set and port O-ring

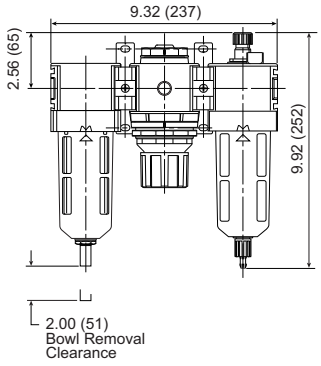



with metal bowl

Size	SCFM	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/8"	150	***C28-03A***	**$623.50**	***C28-03M***	**$570.85**	***C28-03AMB***	**$653.45**	***C28-03MMB***	**$600.80**
1/2"	175	***C28-04A***	**623.50**	***C28-04M***	**570.85**	***C28-04AMB***	**653.45**	***C28-04MMB***	**600.80**
3/4"	175	***C28-06A***	**623.50**	***C28-06M***	**570.85**	***C28-06AMB***	**653.45**	***C28-06MMB***	**600.80**

SCFM ratings at 150 PSIG inlet pressure.

Wilkerson Jumbo Combination Units

- high flow capacity
- large bowl reservoir


- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **175°F** (0°C to 80°C)

Filter series F30:
- 5 micron element
- 1 qt. bowl

Regulator series R30:
- 0-125 PSI adjusting range
- self-relieving
- supplied with a GC230 gauge

Lubricator series L30:
- 26 oz. bowl
- adjustable oil feed
- full view sight dome

Included components:
- (2) brass hex nipples





with metal bowl

Size	SCFM	With Transparent Bowl and Guard				Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
3/4"	374	***C31-06A***	**$850.50**	***C31-06M***	**$797.80**	***C31-06AMB***	**$954.10**	***C31-06MMB***	**$901.40**
1"	374	***C31-08A***	**845.70**	***C31-08M***	**793.00**	***C31-08AMB***	**949.30**	***C31-08MMB***	**896.60**

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 120 PSIG inlet pressure.

Wilkerson Combination Unit with Protective Frame

2010 NEW



Provides downstream air preparation with protective frame and includes the following components:

- *C31-08AMB* 1" FRL with metal bowls and auto drain filter
- *BBLV100* 1" brass ball valve and *AM12* air king on inlet port
- *BBV100DTW* 2-way ball valve installed between regulator and lubricator provides option for non-lubricated air
- heavy duty frame protects air prep components
- operating conditions:
  maximum pressure: **250 PSIG**
  temperature range: **40°F** to **150°F**
  SCFM: 320

FRL with protective frame

Size	Part #	Price/E
1"	***C31-08FRAME***	**$1840.00**


SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

Wilkerson Automatic Drain

As liquid contaminants collect in the bowl, they raise a closed-cell cellular float. When the liquid level reaches a given point, the float triggers a mechanism which pilots line pressure against a large area piston or diaphragm which snaps open the drain valve. The contaminants are discharged from the drain orifice at line pressure. As the liquid level falls, the pilot valve closes, line pressure against the piston/diaphragm returns to atmosphere and the drain valve snaps closed. A 1/8" NPT vent orifice is provided at the top of the units for alternate installation as shown below. A 1/8" NPT drain discharge orifice allows the liquid discharge to be piped to a container or sewer.

- 5 oz. bowl
- fully automatic, float operated
- full ½" NPT drain inlet
- quick-disconnect clamp ring for easy bowl removal when servicing
- no electrical connections
- easily installed
- maximum operating conditions:
  transparent bowl: **150 PSIG** (10.3 bar) and **32°F** to **125°F** (0°C to 52°C)
  metal bowl: **200 PSIG** (13.8 bar) and **32°F** to **150°F** (0°C to 65.5°C)





with metal bowl

Size	With Transparent Bowl		With Metal Bowl	
	Part #	Price/E	Part #	Price/E
1/2"	***X02-04***	**$120.45**	***X02-04MB***	**$134.30**

Wilkerson Automatic Drain Valve

Automatically drains liquid water and oil from compressed air receivers and systems. Drain valve automatically opens and closes every time the system pressure drops approximately 10 to 20 PSIG (0.7 to 1.4 bar) during the compressor cycle. An internal piston design, which utilizes no floats, minimizes the risks associated with drain failures.

- for up to 100 HP compressors
- maximum pressure: **200 PSIG** (13.5 bar)
- temperature range: **32°F** to **150°F** (0°C to 65.5°C)
- minimum differential pressure required: 20 PSIG (1.4 bar)
- inlet/outlet ports: ¼" NPT (F)
- screen adapter: 3/8" NPT (M) inlet, ¼" NPT (M) outlet



Size	Part #	Price/E
1/4"	***X51-02***	**$128.45**

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

Wilkerson Filter Accessories



FRP-95-115

Elements

Used On	Description	Part #	Price/E
F00	5 micron element	***FRP-95-235***	**$11.45**
F03	5 micron element	***PS403***	**32.85**
F08	5 micron element	***FRP-96-729***	**12.55**
F16	5 micron element	***FRP-95-160***	**29.30**
F18	5 micron element	***FRP-96-639***	**20.15**
F26	5 micron element	***FRP-95-115***	**29.30**
F28	5 micron element	***FRP-96-653***	**23.95**
F30	5 micron element	***FRP-95-209***	**59.35**
F35	5 micron element	***FRP-95-505***	**127.50**
F42	5 micron element	***FRP-95-566***	**147.10**



MTP-95-548

Elements

Used On	Description	Part #	Price/E
M26	type B element	***MSP-95-989***	**$55.10**
M16	type C element	***MTP-95-548***	**102.80**
M26	type C element	***MTP-95-549***	**111.90**
M30	type C element	***MTP-95-551***	**243.10**
M35	type C element	***MTP-95-502***	**516.00**

Gel Refills

Used On	Description	Part #	Price/E
X03	8 bags of silica gel refill	***DRP-85-059***	**$395.05**



FRP-95-015

Bowls and Bowl Guards

Used On	Description	Part #	Price/E
F00	plastic bowl with check valve drain	***GRP-96-310***	**$49.40**
	metal bowl with manual drain	***GRP-96-506***	**48.80**
F03	plastic bowl with piston drain	***PS408B***	**72.70**
	metal bowl with manual drain	***PS447B***	**40.50**
F08	plastic bowl with guard and manual drain	***GRP-96-712***	**25.45**
	metal bowl with manual drain	***GRP-96-714***	**43.00**
F16, M16	plastic bowl and metal bowl guard with flex tip drain	***FRP-95-014***	**80.95**
	plastic bowl and metal bowl guard with auto drain	***FRP-95-015***	**119.95**
	metal bowl with sight glass and manual drain	***GRP-95-133***	**127.85**
	metal bowl with auto drain	***FRP-95-950***	**132.45**
F18	plastic bowl, bowl guard, manual drain	***GRP-96-634***	**70.20**
	plastic bowl, bowl guard, auto drain	***GRP-96-635***	**109.50**
	metal bowl with sight glass, manual drain	***GRP-96-636***	**80.70**
	metal bowl with sight glass, auto float drain	***GRP-96-637***	**120.15**
F26, M26	plastic bowl and metal bowl guard with flex tip drain	***GRP-95-935***	**96.00**
	plastic bowl and metal bowl guard with auto drain	***GRP-95-948***	**148.50**
	metal bowl with sight glass and manual drain	***GRP-95-931***	**122.70**
	metal bowl with auto drain	***GRP-95-960***	**162.25**
F28	plastic bowl with guard, auto drain	***GRP-96-643***	**136.00**
	plastic bowl, bowl guard, manual drain	***GRP-96-642***	**77.60**
	metal bowl, with sight glass, manual drain	***GRP-96-644***	**76.10**
	metal bowl with sight glass, auto float drain	***GRP-96-645***	**147.20**
F30, M30	plastic bowl and metal bowl guard with manual drain	***FRP-95-832***	**121.25**
	plastic bowl and metal bowl guard with auto drain	***FRP-95-775***	**213.80**
	plastic bowl with flex tip drain	***FRP-96-315***	**71.45**
	metal bowl with sight glass and manual drain	***GRP-95-676***	**320.65**
	metal bowl with auto drain	***GRP-95-970***	**231.65**

Wilkerson Filter Accessories

Auto and Manual Drains

Used On	Description	Part #	Price/E
F00	automatic drain	***GRP-95-584***	**$13.60**
	manual drain	***GRP-96-102***	**25.45**
F08	automatic drain	***GRP-96-716***	**14.00**
F16, F18, F26, F28, F30, F35, M16, M26, M30, M32, M35	automatic drain with flourocarbon seal	***GRP-95-981***	**76.30**
F16, F18, F26, F28, F30, M16, M26, M30	automatic float drain with a nitrile seal	***GRP-95-973***	**68.90**
F16, F18, F26, F28, F30, F35, M16, M26, M30, M35	manual override drain	***GRP-96-001***	**46.05**
F16, F26, F30, M16, M26, M30	manual pet cock drain	***GRP-95-182***	**28.40**
F16, F26, F30, M16, M26, M30	manual flex tip drain	***FRP-95-610***	**10.40**
F18, F28	manual drain	***GRP-96-685***	**16.80**



GRP-96-001

Sight Glass

Used On	Description	Part #	Price/E
M16, M26	sight glass kit for metal bowls	***GRP-95-079***	**$15.30**



GRP-95-079

Mounting Brackets and Joiner Sets

Used On	Description	Part #	Price/E
F00	mounting bracket (L type)	***GRP-95-754***	**$15.30**
F03	mounting bracket	***PS417B***	**19.15**
F08	mounting bracket (T type) with joiner set and port O-ring	***GPA-96-737***	**14.00**
	mounting bracket (C type)	***GPA-97-010***	**11.85**
	joiner set and port O-ring	***GPA-96-738***	**8.50**
F16, M16	mounting bracket (L type)	***GPA-95-016***	**33.95**
F18	mounting bracket (C type)	***GPA-96-604***	**23.95**
	mounting bracket (L type)	***GPA-96-606***	**15.70**
F18, F28	mounting bracket (T type)	***GPA-96-602***	**17.85**
	mounting bracket (T type) with joiner set and port O-ring	***GPA-96-603***	**39.05**
	joiner set and port O-ring with nitrile O-ring	***GPA-96-601***	**21.40**
	joiner set with port O-ring with fluorocarbon O-rings	***GPA-96-614***	**33.05**
	bracket with joiner set and port O-ring	***GPA-96-754***	**40.50**
F26, M26	mounting bracket (L type)	***GPA-95-946***	**41.80**
F28	mounting bracket (C type)	***GPA-96-605***	**28.20**
	mounting bracket (L type)	***GPA-96-607***	**20.80**
F30	wall mount, U-bolt pipe clamp	***GRP-95-734***	**23.55**



GPA-96-737

Modular Sleeve with Wall Mounting Brackets

- Designed for mounting a single unit or combination of units directly to the wall.
- The sleeve and mounting bracket can be ordered assembled from the factory, or just the mounting bracket alone to be used on existing modular sleeves.

Used On	Description	Part #	Price/E
F16, F26	bracket	***GPA-95-968***	**$14.40**
	sleeve and bracket	***GPA-95-969***	**32.45**



GPA-95-969

Wilkerson Filter Accessories

Modular Sleeve


GPA-95-292

- Unique modular sleeve design easily and quickly connects one or more units and accessories together without pipe nipples.
- Hand tightening the threaded pin provides a tight seal between the units.

Used On	Description	Part #	Price/E
F16, F26	modular sleeve	***GPA-95-292***	**$17.00**

End Blocks


GPA-97-019

- When used with the modular sleeve, end blocks allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks (inlet & outlet)

Used On	Description	Part #	Price/E
F08	end block set, 1/4" NPT	***GPA-97-019***	**$35.80**
	end block set, 3/8" NPT	***GPA-97-020***	**35.80**

Modular Blocks


GPA-95-919

Manifold Block

- allows easy design flexibility
- can be installed after the filter or regulator, providing three additional ¼" NPT tapped auxiliary ports
- inlet/outlet ports are 1/2" non-tapped
- 1-17/32" width

End Block

- When used with the modular sleeve, end blocks allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks (inlet & outlet)


GPA-95-321

Used On	Description	Part #	Price/E
F16, M16, F26, M26	manifold block, three 1/4" NPT auxiliary ports	***GPA-95-919***	**$51.10**
	end block, 1/4" NPT	***GPA-95-223***	**30.75**
	end block, 3/8" NPT	***GPA-95-224***	**30.75**
	end block, 1/2" NPT	***GPA-95-225***	**30.75**
	end block, 3/4" NPT	***GPA-95-320***	**62.70**
	end block, 1" NPT	***GPA-95-321***	**62.70**
F18, F28	end block, 1/4" NPT	***GPA-96-610***	**27.80**
	end block, 3/8" NPT	***GPA-96-611***	**27.80**
	end block, 1/2" NPT	***GPA-96-612***	**27.80**
	end block, 3/4" NPT	***GPA-96-613***	**27.80**
	end block, G1/4"	***GPA-96-620***	**29.90**
	end block, G3/8"	***GPA-96-621***	**29.90**
	end block, G1/2"	***GPA-96-622***	**29.90**
	end block, G3/4"	***GPA-96-623***	**29.90**


GPA-96-610

Modular Adapters


GPA-95-037

- When used with the modular sleeve, adapter inserts allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks

Used On	Description	Part #	Price/E
F16, M16, F26, M26	1/4" NPT pipe adapter	***GPA-95-035***	**$43.50**
	3/8" NPT pipe adapter	***GPA-95-036***	**43.50**
	1/2" NPT pipe adapter	***GPA-95-037***	**43.50**

Wilkerson Filter Accessories

Modular Shut-Off Valves

- can be installed immediately upstream of a single unit or combination of units
- secured to the unit with a modular sleeve or modular sleeve wall mounting bracket
- ball-type valve operates with a 1/4 turn from open to shut position
- useful for isolating and depressurizing a downstream unit requiring maintenance or replacement
- can be locked in the open position
- left to right flow



GPA-95-098

Used On	Description	Part #	Price/E
F16, F26	1/4" NPT safety lock-out valve	***GPA-95-096***	**$135.85**
	3/8" NPT safety lock-out valve	***GPA-95-097***	**135.85**
	1/2" NPT safety lock-out valve	***GPA-95-098***	**135.85**

Differential Pressure Indicators

- used to replace damaged indicators on filters and modular coalescing filters
- Pressure loss changes color of indicator window from green to red.



DP2-01-000

Used On	Description	Part #	Price/E
M16, M26, M30, M32	indicator	***DP2-01-000***	**$29.10**
F35,M35	indicator	***DP2-01-001***	**34.80**

Wilkerson Regulator Accessories

Replacement Springs



RRP-95-222

Used On	Description	Part #	Price/E
R16	0-50 PSI spring	***RRP-95-222***	**$17.00**
	0-125 PSI spring	***RRP-95-224***	**17.00**
R18	0-125 PSI spring	***RRP-96-661***	**15.30**
R26	0-60 PSI spring	***RRP-95-962***	**15.70**
	0-125 PSI spring	***GRP-95-225***	**18.85**
R28	0-125 PSI spring	***RRP-96-165***	**19.35**

Gauges

- for units originally purchased with flush mounted gauge



GRP-96-719

Used On	Description	Part #	Price/E
R08	0-160 PSI, flush mount design	***GRP-96-719***	**$27.05**

Tamper Resistant Kit



RPA-95-006

Used On	Description	Part #	Price/E
R00,R08	ring style tamper resistant kit	***RPA-96-735***	**$7.20**
R16,R26	ring style tamper resistant kit	***RPA-95-006***	**8.30**
R18	ring style tamper resistant kit	***RRP-96-671***	**7.65**
R28	ring style tamper resistant kit	***RRP-96-672***	**8.70**

Wilkerson Regulator Accessories

Repair Kits



RRP-95-952

Used On	Description	Part #	Price/E
R16	self-relieving repair kit	***RRP-95-131***	**$56.20**
R18	relieving diaphragm assembly	***RRP-96-656***	**22.70**
R26	self-relieving repair kit	***RRP-95-952***	**37.75**
R28	relieving diaphragm assembly	***RRP-96-986***	**41.35**
R30	valve assembly: valve, spring, bottom plug O-ring	***RRP-95-159***	**46.05**
R40	valve assembly: valve, spring, retaining ring, O-ring	***RRP-95-161***	**162.55**

Mounting Brackets and Joiner Sets



GPA-96-737

Used On	Description	Part #	Price/E
R00, RB3	mounting bracket (L type) and nut	***GRP-95-747***	**$17.85**
R03	mounting bracket	***PS417B***	**19.15**
R08	mounting bracket (T type) with joiner set	***GPA-96-737***	**14.00**
	mounting bracket (C type)	***GPA-97-010***	**11.85**
	mounting bracket (L type)	***GRP-96-739***	**10.00**
	joiner set with port O-ring	***GPA-96-738***	**8.50**
R16	mounting bracket (L type) and nut	***GPA-95-011***	**22.90**
R16, R21, R26, R30, R40	bracket, wall mount, gauge port adapter with ¼" NPT	***RRP-95-590***	**28.20**
R26	mounting bracket (C type) and nut	***RPA-95-947***	**18.85**
R30	wall mount, U-bolt pipe clamp	***GRP-95-734***	**23.55**

Modular Sleeve with Wall Mounting Brackets



GPA-95-969

- Designed for mounting a single unit or combination of units directly to the wall.
- The sleeve and mounting bracket can be ordered assembled from the factory, or just the mounting bracket alone to be used on existing modular sleeves.

Used On	Description	Part #	Price/E
R16, R26	bracket	***GPA-95-968***	**$14.40**
	sleeve and bracket	***GPA-95-969***	**32.45**

Modular Sleeve



GPA-95-292

- Unique modular sleeve design easily and quickly connects one or more units and accessories together without pipe nipples.
- Hand tightening the threaded pin provides a tight seal between the units.

Used On	Description	Part #	Price/E
R16, R26	modular sleeve	***GPA-95-292***	**$17.00**

End Blocks



GPA-97-019

- When used with the modular sleeve, end blocks allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks (inlet & outlet)

Used On	Description	Part #	Price/E
R08	end block set, 1/4" NPT	***GPA-97-019***	**$35.80**
	end block set, 3/8" NPT	***GPA-97-020***	**35.80**

Wilkerson Regulator Accessories

Modular Blocks


GPA-95-919

Manifold Block
- allows easy design flexibility
- can be installed after the filter or regulator, providing three additional ¼" NPT tapped auxiliary ports
- inlet/outlet ports are 1/2" non-tapped
- 1-17/32" width

End Block
- When used with the modular sleeve, end blocks allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks (inlet & outlet)


GPA-95-321

Used On	Description	Part #	Price/E
R16, R26	manifold block, three 1/4" NPT auxiliary ports	***GPA-95-919***	**$51.10**
	end block, 1/4" NPT	***GPA-95-223***	**30.75**
	end block, 3/8" NPT	***GPA-95-224***	**30.75**
	end block, 1/2" NPT	***GPA-95-225***	**30.75**
	end block, 3/4" NPT	***GPA-95-320***	**62.70**
	end block, 1" NPT	***GPA-95-321***	**62.70**
R18, R28	end block, 1/4" NPT	***GPA-96-610***	**27.80**
	end block, 3/8" NPT	***GPA-96-611***	**27.80**
	end block, 1/2" NPT	***GPA-96-612***	**27.80**
	end block, 3/4" NPT	***GPA-96-613***	**27.80**
	end block, G1/4"	***GPA-96-620***	**29.90**
	end block, G3/8"	***GPA-96-621***	**29.90**
	end block, G1/2"	***GPA-96-622***	**29.90**
	end block, G3/4"	***GPA-96-623***	**29.90**


GPA-96-610

Modular Adapters

- When used with the modular sleeve, adapter inserts allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks


GPA-95-037

Used On	Description	Part #	Price/E
R16, R26	1/4" NPT pipe adapter	***GPA-95-035***	**$43.50**
	3/8" NPT pipe adapter	***GPA-95-036***	**43.50**
	1/2" NPT pipe adapter	***GPA-95-037***	**43.50**

Modular Shut-Off Valves

- can be installed immediately upstream of a single unit or combination of units
- secured to the unit with a modular sleeve or modular sleeve wall mounting bracket
- ball-type valve operates with a 1/4 turn from open to shut position
- useful for isolating and depressurizing a downstream unit requiring maintenance or replacement
- can be locked in the open position
- left to right flow


GPA-95-098

Used On	Description	Part #	Price/E
R16, R26	1/4" NPT safety lock-out valve	***GPA-95-096***	**$135.85**
	3/8" NPT safety lock-out valve	***GPA-95-097***	**135.85**
	1/2" NPT safety lock-out valve	***GPA-95-098***	**135.85**

see page 257 for replacement gauges

Wilkerson Lubricator Accessories



GRP-95-019

Bowls and Bowl Guards

Used On	Description	Part #	Price/E
L00	metal bowl with manual drain	***GRP-96-506***	**$48.80**
L03	plastic bowl with no drain	***PS421***	**36.90**
L08	metal bowl with manual drain	***GRP-96-714***	**43.00**
	plastic bowl with guard and manual drain	***LRP-96-736***	**30.10**
L16	metal bowl with sight glass and manual drain	***GRP-95-133***	**127.85**
	plastic bowl, bowl guard, manual drain	***GRP-95-019***	**96.05**
	plastic bowl with no drain	***LRP-96-937***	**39.90**
L18	metal bowl with sight glass, manual drain	***GRP-96-636***	**80.70**
	plastic bowl, bowl guard, manual drain	***LRP-96-701***	**70.25**
L26	metal bowl with sight glass and manual drain	***GRP-95-931***	**122.70**
	plastic bowl with no drain	***LRP-96-938***	**43.05**
L28	metal bowl with sight glass, manual drain	***GRP-96-644***	**76.10**
	plastic bowl, bowl guard, manual drain	***LRP-96-702***	**82.30**
L30, L40	metal bowl with sight glass and manual drain	***GRP-95-676***	**320.65**
L30, L40, L50	plastic bowl with no drain	***LRP-96-940***	**53.10**



GRP-96-685

Drains

Used On	Description	Part #	Price/E
L16, L26, L40, L50	manual drain	***GRP-96-102***	**$25.45**
L16, L26, L30, L40, L50	manual pet cock drain	***GRP-95-182***	**28.40**
L18, L28	manual drain	***GRP-96-685***	**16.80**



LRP-95-249

Sight Domes and Fill Plugs

Used On	Description	Part #	Price/E
L00, L08, L16, L26	sight dome kit: dome and O-ring	***LRP-95-239***	**$16.40**
L08	fill plug kit: fill plug and O-ring	***LRP-96-730***	**5.95**
L08, L18, L28	sight dome kit (old style -08)	***LRP-96-710***	**21.05**
L16, L26	sight glass kit for metal bowls	***GRP-95-079***	**15.30**
L16, L26, L30	fill plug kit: fill plug and O-ring	***LRP-95-253***	**10.65**
L18, L28	sight dome assembly (new style)	***LRP-96-310***	**16.10**
L30, L40, L50	sight dome kit: dome and O-ring	***LRP-95-249***	**22.10**
L40, L50	fill plug kit: fill plug and O-ring	***LRP-95-250***	**34.55**



GPA-96-737

Mounting Brackets

Used On	Description	Part #	Price/E
L00	mounting bracket (L type)	***GRP-95-754***	**$15.30**
L03	mounting bracket	***PS419***	**19.15**
L08	mounting bracket (T type) with joiner set and port O-ring	***GPA-96-737***	**14.00**
	mounting bracket (C type)	***GPA-97-010***	**11.85**
	joiner set and port O-ring	***GPA-96-738***	**8.50**
L16	mounting bracket (L type)	***GPA-95-016***	**33.95**
L18	mounting bracket (C type)	***GPA-96-604***	**23.95**
	mounting bracket (L type)	***GPA-96-606***	**15.70**
L18, L28	mounting bracket (T type)	***GPA-96-602***	**17.85**
	mounting bracket (T type) with joiner set and port O-ring	***GPA-96-603***	**39.05**
	joiner set with port O-ring	***GPA-96-614***	**33.05**
	bracket with joiner set and port O-ring	***GPA-96-754***	**40.50**
L26	mounting bracket (L type)	***GPA-95-946***	**41.80**
L28	mounting bracket (C type)	***GPA-96-605***	**28.20**
	mounting bracket (L type)	***GPA-96-607***	**20.80**
L30	wall mount, U-bolt pipe clamp	***GRP-95-734***	**23.55**

Wilkerson Lubricator Accessories

Modular Sleeve with Wall Mounting Brackets

- Designed for mounting a single unit or combination of units directly to the wall.
- The sleeve and mounting bracket can be ordered assembled from the factory, or just the mounting bracket alone to be used on existing modular sleeves.



GPA-95-969

Used On	Description	Part #	Price/E
L16, L26	bracket	***GPA-95-968***	**$14.40**
	sleeve and bracket	***GPA-95-969***	**32.45**

Modular Sleeve

- Unique modular sleeve design easily and quickly connects one or more units and accessories together without pipe nipples.
- Hand tightening the threaded pin provides a tight seal between the units.




GPA-95-292

Used On	Description	Part #	Price/E
L16, L26	modular sleeve	***GPA-95-292***	**$17.00**

End Blocks

- When used with the modular sleeve, end blocks allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks (inlet & outlet)



GPA-97-019

Used On	Description	Part #	Price/E
L08	end block set, 1/4" NPT	***GPA-97-019***	**$35.80**
	end block set, 3/8" NPT	***GPA-97-020***	**35.80**

Modular Blocks

Manifold Block

- allows easy design flexibility
- can be installed after the filter or regulator, providing three additional ¼" NPT tapped auxiliary ports
- inlet/outlet ports are 1/2" non-tapped
- 1-17/32" width

End Block

- When used with the modular sleeve, end blocks allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks (inlet and outlet)



GPA-95-919



GPA-95-321



GPA-96-610

Used On	Description	Part #	Price/E
L16, L26	manifold block, three 1/4" NPT auxiliary ports	***GPA-95-919***	**$51.10**
	end block, 1/4" NPT	***GPA-95-223***	**30.75**
	end block, 3/8" NPT	***GPA-95-224***	**30.75**
	end block, 1/2" NPT	***GPA-95-225***	**30.75**
	end block, 3/4" NPT	***GPA-95-320***	**62.70**
	end block, 1" NPT	***GPA-95-321***	**62.70**
L18, L28	end block, 1/4" NPT	***GPA-96-610***	**27.80**
	end block, 3/8" NPT	***GPA-96-611***	**27.80**
	end block, 1/2" NPT	***GPA-96-612***	**27.80**
	end block, 3/4" NPT	***GPA-96-613***	**27.80**
	end block, G1/4"	***GPA-96-620***	**29.90**
	end block, G3/8"	***GPA-96-621***	**29.90**
	end block, G1/2"	***GPA-96-622***	**29.90**
	end block, G3/4"	***GPA-96-623***	**29.90**

Wilkerson Lubricator Accessories

Modular Adapters




GPA-95-037

- When used with the modular sleeve, adapter inserts allow a single unit or a combination of units to be piped into the air system in the modular mode.
- allows ease of unit servicing or replacement without disturbing the air line connections
- set of 2 blocks

Used On	Description	Part #	Price/E
L16, L26	1/4" NPT pipe adapter	***GPA-95-035***	**$43.50**
	3/8" NPT pipe adapter	***GPA-95-036***	**43.50**
	1/2" NPT pipe adapter	***GPA-95-037***	**43.50**

Modular Shut-Off Valves



GPA-95-098

- can be installed immediately upstream of a single unit or combination of units
- secured to the unit with a modular sleeve or modular sleeve wall mounting bracket
- ball-type valve operates with a 1/4 turn from open to shut position
- useful for isolating and depressurizing a downstream unit requiring maintenance or replacement
- can be locked in the open position
- left to right flow

Used On	Description	Part #	Price/E
L16, L26	1/4" NPT safety lock-out valve	***GPA-95-096***	**$135.85**
	3/8" NPT safety lock-out valve	***GPA-95-097***	**135.85**
	1/2" NPT safety lock-out valve	***GPA-95-098***	**135.85**

Wilkerson Filter/Regulator Accessories

Elements



FRP-96-729

Used On	Description	Part #	Price/E
B08	5 micron element	***FRP-96-729***	**$12.55**
CB6	5 micron element	***FRP-95-160***	**29.30**
B18	5 micron element	***FRP-96-639***	**20.15**
B28	5 micron element	***FRP-96-653***	**23.95**

Bowls and Bowl Guards



GRP-96-636

Used On	Description	Part #	Price/E
B08	plastic bowl with guard and manual drain	***GRP-96-712***	**$25.45**
	metal bowl with manual drain	***GRP-96-714***	**43.00**
CB6	plastic bowl and metal bowl guard with flex tip drain	***FRP-95-014***	**80.95**
	plastic bowl and metal bowl guard with auto drain	***FRP-95-015***	**119.95**
	metal bowl with auto drain	***FRP-95-950***	**132.45**
B18	plastic bowl, bowl guard, manual drain	***GRP-96-634***	**70.20**
	plastic bowl, bowl guard, auto drain	***GRP-96-635***	**109.50**
	metal bowl with sight glass, manual drain	***GRP-96-636***	**80.70**
	metal bowl with sight glass, auto float drain	***GRP-96-637***	**120.15**
B28	plastic bowl with guard, auto drain	***GRP-96-643***	**136.00**
	plastic bowl, bowl guard, manual drain	***GRP-96-642***	**77.60**
	metal bowl, with sight glass, manual drain	***GRP-96-644***	**76.10**
	metal bowl with sight glass, auto float drain	***GRP-96-645***	**147.20**

Wilkerson Filter/Regulator Accessories

Auto and Manual Drains

Used On	Description	Part #	Price/E
B08	automatic drain	***GRP-96-716***	**$14.00**
CB6	manual pet cock drain	***GRP-95-182***	**28.40**
	manual flex tip drain	***FRP-95-610***	**10.40**
CB6, B18, B28	automatic drain with flouracarbon seal	***GRP-95-981***	**76.30**
	automatic float drain with a nitrile seal	***GRP-95-973***	**68.90**
	manual override drain	***GRP-96-001***	**46.05**
B18, B28	manual drain	***GRP-96-685***	**16.80**



GRP-96-001

Accessories

Used On	Description	Part #	Price/E
CB6	kit for metal bowl	***GRP-95-079***	**$15.30**

Replacement Springs

Used On	Description	Part #	Price/E
CB6	0-50 PSI spring	***RRP-95-222***	**$17.00**
	0-125 PSI spring	***RRP-95-224***	**17.00**
B18	0-125 PSI spring	***RRP-96-661***	**15.30**
B28	0-125 PSI spring	***RRP-96-165***	**19.35**



RRP-95-222

Tamper Resistant Kits

Used On	Description	Part #	Price/E
B08	ring style tamper resistant kit	***RPA-96-735***	**$7.20**
B18	ring style tamper resistant kit	***RRP-96-671***	**7.65**
B28	ring style tamper resistant kit	***RRP-96-672***	**8.70**

Repair Kits

Used On	Description	Part #	Price/E
B18	diaphragm assembly, relieving	***RRP-96-656***	**$22.70**
B28	diaphragm assembly, relieving	***RRP-96-986***	**41.35**

Mounting Brackets and Joiner Sets


Used On	Description	Part #	Price/E
R08	mounting bracket (T type) with joiner set	***GPA-96-737***	**$14.00**
	mounting bracket (C type)	***GPA-97-010***	**11.85**
	mounting bracket (L type)	***GRP-96-739***	**10.00**
	joiner set with port O-ring	***GPA-96-738***	**8.50**
CB6	mounting bracket (L type) and nut	***GPA-95-011***	**22.90**
	bracket, wall mount, gauge port adapter with ¼" NPT	***RRP-95-590***	**28.20**
B18	mounting bracket (C type)	***GPA-96-604***	**23.95**
	mounting bracket (L type)	***GPA-96-606***	**15.70**
B18, B28	mounting bracket (T type)	***GPA-96-602***	**17.85**
	mounting bracket (T type) with joiner set	***GPA-96-603***	**39.05**
	joiner set with port O-ring	***GPA-96-614***	**33.05**
	bracket with joiner set and port O-ring	***GPA-96-754***	**40.50**
	joiner set	***GPA-96-601***	**21.40**
B28	mounting bracket (C type)	***GPA-96-605***	**28.20**
	mounting bracket (L type)	***GPA-96-607***	**20.80**



GPA-96-737

Wilkerson FRL Display

Increase your sales with this heavy duty, point-of-purchase Dixon FRL Display, designed to highlight the features and benefits of a modular Filter-Regulator-Lubricator Combination Unit for air line services. The display is perfect for your "Will Call" or showroom sales area.

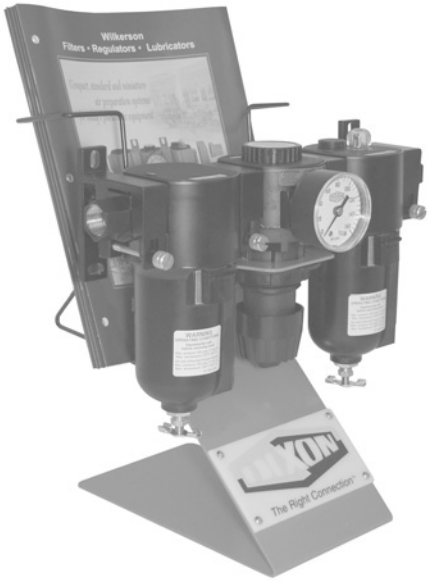


The display features:
- FRL combination unit with standard metal bowl with sight glass
- manual drain
- modular mounting clamps
- pipe adapters

Note: Assembly is required.

Part #	Price/E
WILK26DISPLAY	**$759.80**

Series 1 FRL Display

Increase your sales with this heavy duty, point-of-purchase Dixon FRL Display, designed to highlight the features and benefits of a modular Filter-Regulator-Lubricator Combination Unit for air line services. The display is perfect for your "Will Call" or showroom sales area.

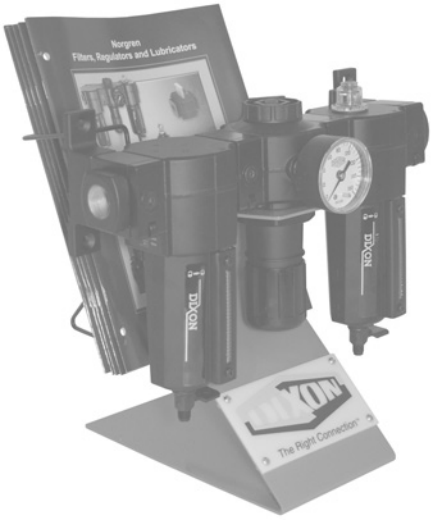


The display features:
- 74 Series basic combination unit with metal bowl with sight glass
- manual drain
- modular mounting clamps
- pipe adapters

Note: Assembly is required.

Part #	Price/E
NORG74DISPLAY	**$733.30**

Norgren Series 1 Carded Miniature FRL's

Dixon offers the Series I line of miniature filters, filter/regulators, regulators and lubricators in prepackaged clear plastic units suitable for hanging on store peg racks or displays. The primary features of each unit are printed on the packaging. Each package contains 1 miniature filter, filter/regulator, regulator or lubricator and instruction sheet.




- 5 micron element
- 1 oz. reservoir
- inlet pressure **150 PSI** maximum at ambient temperature (70°F)

Carded Miniature Filter with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	21	***F07-200AC***	**$58.60**	***F07-200MC***	**$50.45**






- **5-100 PSI** range
- relieving type
- inlet pressure **250 PSI** at ambient temperature (70°F) maximum
- model supplied with a GC620 gauge

Carded Miniature Regulator

Port Size	SCFM	with Gauge Part #	with Gauge Price/E
1/4"	22	***R07-200RGC***	**$60.30**






- **5-100 PSI** range
- relieving type
- 5 micron element
- 1 oz. reservoir
- push to lock adjusting knob
- inlet pressure **150 PSI** maximum at ambient temperature (70°F)
- model supplied with a GC620 gauge
- bowl guard not available

Carded Miniature Filter/Regulator with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	21	***B07-202AGC***	**$120.35**	***B07-202MGC***	**$109.55**






- 1 oz. reservoir
- inlet pressure **150 PSI** maximum at ambient temperature (70°F)

Carded Miniature Lubricator

Port Size	SCFM	Transparent Bowl Part #	Transparent Bowl Price/E
1/4"	14	***L07-200AC***	**$75.80**



Miniature Non-Repairable General Purpose Regulators



- **5-125 PSI** range
- lightweight construction
- left to right flow
- wrench flats for easy installation
- Relieving piston design allows reduction of downstream pressure when the system is dead-ended
- model supplied with a GC620 gauge

Compact

Port Size	SCFM	with Gauge Part #	with Gauge Price/E	without Gauge Part #	without Gauge Price/E
1/4"	13	***R46-200RG***	**$54.50**	***R46-200R***	**$38.15**



FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.


Norgren Series 1 Miniature FRL's



- 5 micron element
- 1 oz. reservoir
- inlet pressure **150 PSI** maximum at ambient temperature (70°F)

Miniature Filter with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/8"	18	***F07-100A***	**$57.25**	***F07-100M***	**$49.05**
1/4"	21	***F07-200A***	**57.25**	***F07-200M***	**49.05**




** minimum clearance to remove bowl



- **5-100 PSI** range
- relieving type
- inlet pressure **300 PSI** max. at ambient temperature (70°F)
- models supplied with a GC620 gauge
- regulation at flows up to 22 SCFM at 100 PSIG

Miniature Regulators

Port Size	SCFM	with Gauge Part #	with Gauge Price/E	without Gauge Part #	without Gauge Price/E
1/8"	22	***R07-100RG***	**$54.55**	***R07-100R***	**$38.20**
1/4"	22	***R07-200RG***	**54.55**	***R07-200R***	**38.20**






- **5-100 PSI** range
- relieving type
- 5 micron element
- 1 oz. reservoir
- push to lock adjusting knob
- inlet pressure **150 PSI** maximum at ambient temperature (70°F)
- models supplied with a GC620 gauge
- bowl guard not available

Miniature Filter/Regulators with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/8"	18	***B07-102AG***	**$106.90**	***B07-102MG***	**$98.40**
1/4"	21	***B07-202AG***	**106.90**	***B07-202MG***	**98.40**




** minimum clearance to remove bowl



- 1 oz. reservoir
- inlet pressure **150 PSI** maximum at ambient temperature (70°F)

Miniature Lubricators

Port Size	SCFM	Transparent Bowl Part #	Transparent Bowl Price/E
1/8"	14	***L07-100A***	**$74.85**
1/4"	14	***L07-200A***	**74.85**




** minimum clearance to remove bowl



- **5-125 PSI** range
- 1 oz. reservoir
- models supplied with a GC620 gauge
- inlet pressure **150 PSI** maximum at ambient temperature (70°F)

Miniature Combination Units with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/8"	14	***P1A-100A***	**$231.85**	***P1A-100M***	**$223.65**
1/4"	14	***P1A-200A***	**232.65**	***P1A-200M***	**224.45**



** minimum clearance to remove bowl


Norgren Series 1 Micro Mate Combination Units



- **5-125 PSI** range
- requires only 2 pipe connections
- inlet pressure **150 PSI** max. at ambient temperature (70°F)

Miniature Regulator/Lubricators with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E
1/8"	10	***PTH-100AG***	**$234.05**
1/4"	10	***PTH-200AG***	**234.05**




** minimum clearance to remove bowl

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Airline Filters



† Minimum clearance to remove bowl


- 40 micron element
- 2 oz. reservoir
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- particle removal per ISO 8573-1, Class 5 and Class 3
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature (70°F) metal bowl: **250 PSI** at ambient temperature (70°F)



with transparent bowl

1/4" with Transparent Bowl

Port Size	SCFM	Semi-Automatic Drain Part #	Semi-Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	55	***F72G-2A***	**$111.70**	***F72G-2M***	**$62.10**
3/8"	55	***F72G-3A***	**114.55**	***F72G-3M***	**65.10**




† Minimum clearance to remove bowl



with metal bowl

1/4" with Metal Bowl and Sight Glass

Port Size	SCFM	Semi-Automatic Drain Part #	Semi-Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	55	***F72G-2A-MB***	**$124.55**	***F72G-2M-MB***	**$75.60**
3/8"	55	***F72G-3A-MB***	**128.15**	***F72G-3M-MB***	**78.65**



** Minimum clearance required to remove bowl.


- 40 micron element
- 4 oz. reservoir
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- particle removal per ISO 8573-1, Class 5 and Class 3
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature (70°F) metal bowl: **250 PSI** at ambient temperature (70°F)



with transparent bowl

3/8" with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	53	***F73G-2A***	**$156.85**	***F73G-2M***	**$95.80**
3/8"	65	***F73G-3A***	**156.85**	***F73G-3M***	**93.00**
1/2"	69	***F73G-4A***	**156.85**	***F73G-4M***	**95.80**



** Minimum clearance required to remove bowl.



with metal bowl

3/8" with Metal Bowl and Sight Glass

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	53	***F73G-2A-MB***	**$164.50**	***F73G-2M-MB***	**$103.60**
3/8"	65	***F73G-3A-MB***	**164.50**	***F73G-3M-MB***	**103.60**
1/2"	69	***F73G-4A-MB***	**164.50**	***F73G-4M-MB***	**103.60**

See pages 240-242 for filter accessories.

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT


SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Airline Filters



with transparent bowl

- 40 micron element
- 7 oz. reservoir
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- particle removal per ISO 8573-1, Class 5 and Class 3
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature (70°F) metal bowl: **250 PSI** at ambient temperature (70°F)




1/2" with Transparent Bowl and Guard

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
3/8"	112	***F74G-3A***	**$199.00**	***F74G-3M***	**$137.90**
1/2"	140	***F74G-4A***	**199.00**	***F74G-4M***	**137.90**
3/4"	140	***F74G-6A***	**199.00**	***F74G-6M***	**137.90**



with metal bowl




1/2" with Metal Bowl and Sight Glass

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
3/8"	112	***F74G-3A-MB***	**$202.85**	***F74G-3M-MB***	**$142.00**
1/2"	140	***F74G-4A-MB***	**202.85**	***F74G-4M-MB***	**142.00**
3/4"	140	***F74G-6A-MB***	**202.85**	***F74G-6M-MB***	**142.00**



- 40 micron element
- 1 qt. reservoir
- general purpose with low pressure drop and excellent water removal characteristics
- inlet pressure: **250 PSI** at ambient temperature (70°F)

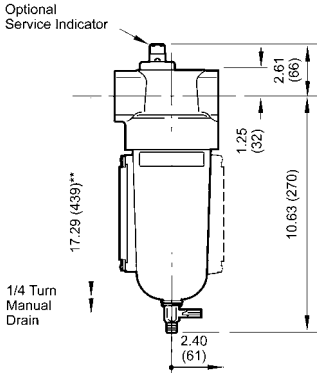


1" with Metal Bowl and Sight Glass

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
¾"	325	***F17-600A***	**$360.70**	***F17-600M***	**$299.35**
1"	425	***F17-800A***	**360.70**	***F17-800M***	**299.35**
1¼"	425	***F17-A00A***	**412.10**	***F17-A00M***	**350.50**
1½"	425	***F17-B00A***	**412.10**	***F17-B00M***	**350.50**



- 50 micron element
- 7oz. reservoir
- inlet pressure: **250 PSI** at ambient temperature (70°F)



2" with Metal Bowl and Sight Glass

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
2"	1400	***F18-C00A***	**$1247.75**	***F18-C00M***	**$1184.70**


See pages 240-242 for filter accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Oil Removal (Coalescing) Filters



- in-line or modular installation
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- provides air quality class 2 hydrocarbon and class 1 particulate removal per ISO 8573-1
- element removes particles down to 0.01mm. Maximum remaining oil content of air leaving the filter is 0.01 ppm at **70°F** (21°C) with an inlet concentration of 8 ppm.
- service life indicator turns from green to red when element needs to be replaced.
- For maximum service life install a general purpose filter upstream of the oil removal filter.

SAFETY ALERT




1/2" Standard Flow with Metal Bowl

Port Size	SCFM Saturated	SCFM Dry	Automatic Drain Part #	Automatic Drain Price/E
3/8"	35	70	***F74C-3A-MB***	**$325.20**
1/2"	35	75	***F74C-4A-MB***	**325.20**

1/2" High Flow with Metal Bowl

Port Size	SCFM Saturated	SCFM Dry	Automatic Drain Part #	Automatic Drain Price/E
1/2"	60	100	***F74H-4A-MB***	**$371.85**
3/4"	60	120	***F74H-6A-MB***	**371.85**

Norgren Series 1 Oil Vapor Removal Filters



- in-line or modular installation
- quick-release bayonet bowl
- Activated carbon cartridge filter element absorbs oil vapors and removes most hydrocarbon odors.
- provides air quality class 1 particulate removal per ISO 8573-1, when used with the F74C series
- Filter and element designs optimizes air velocity and contact time to reduce oil content of air leaving the filter to 0.003 ppm at **70°F** (21°C).
- Minimum service life of 400 hours can be expected if the vapor removal filter is protected upstream by an oil removal (coalescing) filter and if the filtration temperature is in the region of **70°** to **80°F** (21° to 26°C). Above this range, oil vapor content of compressed air increases substantially and element service life is reduced.
- Carbon cartridge element provides long service life.
- For maximum service life install a general purpose filter and an oil removal filter upstream of the oil vapor removal filter.

SAFETY ALERT



1/2" with Metal Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E
3/8"	21	***F74V-3A-MB***	**$306.85**
1/2"	21	***F74V-4A-MB***	**306.85**
3/4"	21	***F74V-6A-MB***	**306.85**

See pages 240-242 for filter accessories.

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.


Norgren Series 1 Regulators



- **5-150 PSI** range
- inlet pressure: **300 PSI** at ambient temperature (70°F)
- in-line or modular installation
- two full flow 1/8" NPT gauge ports
- models supplied with GC620 gauge
- For 0-60 PSI range, add an 'L' to the end of the part number.

1/4"

Port Size	SCFM	with Gauge Part #	with Gauge Price/E	without Gauge Part #	without Gauge Price/E
1/4"	70	***R72G-2RG***	**$70.80**	***R72G-2R***	**$54.40**
3/8"	70	***R72G-3RG***	**74.10**	***R72G-3R***	**57.70**






- **5-150 PSI** range
- inlet pressure: **300 PSI** at ambient temperature (70°F)
- in-line or modular installation
- relieving type
- two full flow 1/4" NPT gauge ports
- models supplied with GC230 gauge
- For 0-60 PSI range, add an 'L' to the end of the part number.

3/8"

Port Size	SCFM	with Gauge Part #	with Gauge Price/E	without Gauge Part #	without Gauge Price/E
1/4"	91	***R73G-2RG***	**$94.35**	***R73G-2R***	**$77.15**
3/8"	144	***R73G-3RG***	**94.35**	***R73G-3R***	**77.15**
1/2"	144	***R73G-4RG***	**94.35**	***R73G-4R***	**77.15**






- **5-150 PSI** range
- inlet pressure: **300 PSI** at ambient temperature (70°F)
- in-line or modular installation
- relieving type
- two full flow 1/4" NPT gauge ports
- models supplied with GC230 gauge
- For 0-60 PSI range, add an 'L' to the end of the part number.

1/2"

Port Size	SCFM	with Gauge Part #	with Gauge Price/E	without Gauge Part #	without Gauge Price/E
3/8"	208	***R74G-3RG***	**$137.70**	***R74G-3R***	**$120.50**
1/2"	220	***R74G-4RG***	**137.70**	***R74G-4R***	**120.50**
3/4"	220	***R74G-6RG***	**137.70**	***R74G-6R***	**120.50**






- **5-125 PSI** range
- inlet pressure: **300 PSI** at ambient temperature (70°F)
- in-line or modular installation
- relieving type
- two full flow 1/4" NPT gauge ports
- models supplied with GC230 gauge

1"

Port Size	SCFM	with Gauge Part #	with Gauge Price/E	without Gauge Part #	without Gauge Price/E
¾"	440	***R17-600RG***	**$245.75**	***R17-600R***	**$228.55**
1"	480	***R17-800RG***	**245.75**	***R17-800R***	**228.55**
1¼"	400	***R17-A00RG***	**297.15**	***R17-A00R***	**279.95**
1½"	440	***R17-B00RG***	**297.15**	***R17-B00R***	**279.95**






- **5-125 PSI** range
- inlet pressure: **450 PSI** at ambient temperature (70°F)
- relieving type
- two full flow 1/4" NPT gauge ports
- models supplied with GC230 gauge

2"

Port Size	SCFM	with Gauge Part #	with Gauge Price/E	without Gauge Part #	without Gauge Price/E
2"	2000	***R18-C05RG***	**$1472.85**	***R18-C05R***	**$1455.65**




See pages 242-243 for regulator accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Miniature Non-Repairable General Purpose Regulators



- **5-125 PSI** range
- lightweight construction
- left to right flow
- wrench flats for easy installation
- relieving piston design allows reduction of downstream pressure when the system is dead-ended
- model supplied with a GC620 gauge



Compact

Port Size	SCFM	with Gauge		without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	13	***R46-200RG***	**$54.50**	***R46-200R***	**$38.15**

Norgren Series 1 General Regulators

Floating valve pin provides positive seating and dependability. Large diaphragm provides quick response to flow demands and line pressure changes. Balanced valve reduces inlet pressure variations on outlet pressure.


- **5-125 PSI** range
- inlet pressure: **400 PSI** at ambient temperature (70°F)
- t-handle adjustment
- models supplied with GC620 gauge



Port Size	SCFM	with Gauge	
		Part #	Price/E
1/4"	110	***R11-013RG***	**$263.45**
3/8"	110	***R11-037RG***	**263.45**
1/2"	260	***R11-061RG***	**306.95**

Norgren Series 1 Manifold Regulators

Manifold up to six regulators on a single air supply. Design allows in-line installation with hex nipple or modular installation with 72 Series accessories (see page 243).



- **5-150 PSI** range
- inlet pressure: **300 PSI** at ambient temperature (70°F)
- models supplied with GC620 gauge




1/4"

Port Size	SCFM	with Gauge		without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	83	***R72M-2RG***	**$130.10**	***R72M-2R***	**$113.75**
3/8"	83	***R72M-3RG***	**133.25**	***R72M-3R***	**116.90**

Norgren Series 1 Cylinder Gas Regulator

UL listed for service with Carbon Dioxide, water, pumped air, Nitrogen, Argon, Helium, Krypton, Neon and Xenon.
Not to be used with flammable gases. SAFETY ALERT



- **5-125 PSI** range
- inlet pressure: **3000 PSI** at ambient temperature (70°F)
- relieving type
- two ports for high pressure and two ports for service



Port Size	SCFM	without Gauge	
		Part #	Price/E
1/4"	10	***R83-200R***	**$144.75**

See pages 242-243 for regulator accessories.

FRL's are designed for air service only, unless otherwise indicated. SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.


Norgren Series 1 Miniature Water Regulator

Designed for use with deionized water and potable water systems. Plastic and metals in contact with fluid are approved by the National Sanitation Foundation (NSF) or the Food and Drug Administration (FDA) for use in potable water systems. Elastomers are food grade.



- non-relieving type
- models supplied with GC620 gauge

Port Size	GPM	with Gauge Part #	with Gauge Price/E
1/4"	1.75	***R91-221RG***	**$79.95**




Norgren Series 1 Water Regulators


Used in water systems to reduce and maintain pressure at a nearly constant level despite changes in the inlet pressure and changes in downstream flow requirements. Brass body and aluminum bonnet.



- **5-125 PSI** range
- inlet pressure: **400 PSI** at ambient temperature (70°F)
- t-handle adjustment
- non-relieving type
- gauge port is full-flow and can be used as an outlet port
- models supplied with GC230 gauge

Port Size	GPM	with Gauge Part #	with Gauge Price/E
1/4"	5	***R43-201RG***	**$257.70**
3/8"	5	***R43-301RG***	**257.70**
1/2"	10	***R43-406RG***	**297.95**






Norgren Series 1 Water Pressure Regulators

Balanced valve minimizes effects of the inlet pressure variations on outlet pressure. Body, valve and bottom plug are brass. Bonnet is aluminum and steel. Elastomers are nitrile.



- inlet pressure: **400 PSI**
- t-handle adjustment
- non-relieving type
- operating temperature:
  water service: **35°** to **200°F** (2° to 93°C)
  air service: **-30°** to **200°F** (-34° to 93°C)

Port Size	GPM	without Gauge Part #	without Gauge Price/E
3/4"	27.5	***11-009-065***	**$964.95**
1"	27.5	***11-009-081***	**964.95**




See pages 242-243 for regulator accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Filter / Regulators



1/4 Turn Manual Drain

** minimum clearance required to remove bowl

- **5-150 PSI** range
- in-line or modular installation
- 40 micron element
- 2 oz. reservoir
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- particle removal per ISO 8573-1, Class 5 and Class 3
- models supplied with GC620 gauge
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature (70°F) metal bowl: **250 PSI** at ambient temperature (70°F)



with transparent bowl

1/4" with Transparent Bowl

Port Size	SCFM	Semi-Automatic Drain Part #	Semi-Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	80	***B72G-2AG***	**$171.60**	***B72G-2MG***	**$122.15**
3/8"	80	***B72G-3AG***	**174.50**	***B72G-3MG***	**125.00**


1/4" with Metal Bowl and Sight Glass

Port Size	SCFM	Semi-Automatic Drain Part #	Semi-Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	80	***B72G-2AG-MB***	**$185.05**	***B72G-2MG-MB***	**$135.55**
3/8"	80	***B72G-3AG-MB***	**188.45**	***B72G-3MG-MB***	**138.80**



Semi auto Drain

** minimum clearance required to remove bowl



1/4 Turn Manual Drain

** minimum clearance required to remove bowl

- **5-150 PSI** range
- in-line or modular installation
- 40 micron element
- 2 oz. reservoir
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- particle removal per ISO 8573-1, Class 5 and Class 3
- models supplied with GC230 gauge
- inlet pressure: transparent bowl: **150 PS** at ambient temperature (70°F) **I** metal bowl: **250 PSI** at ambient temperature (70°F)




3/8" with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	78	***B73G-2AG***	**$240.90**	***B73G-2MG***	**$180.05**
3/8"	123	***B73G-3AG***	**240.90**	***B73G-3MG***	**180.05**
1/2"	123	***B73G-4AG***	**240.90**	***B73G-4MG***	**180.05**

3/8" with Metal Bowl and Sight Glass

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	78	***B73G-2AG-MB***	**$248.65**	***B73G-2MG-MB***	**$187.70**
3/8"	123	***B73G-3AG-MB***	**248.65**	***B73G-3MG-MB***	**187.70**
1/2"	123	***B73G-4AG-MB***	**248.65**	***B73G-4MG-MB***	**187.70**



Automatic Drain

** minimum clearance required to remove bowl


with metal bowl

- **5-125 PSI** range
- 40 micron element
- 7 oz. reservoir
- non-rising adjustment with easily sealed lock ring to resist tampering
- models supplied with GC230 gauge
- relieving type
- 1/2 pint reservoir




1/2" with Transparent Bowl and Guard

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
3/8"	163	***B74G-3AG***	**$283.70**	***B74G-3MG***	**$222.75**
1/2"	212	***B74G-4AG***	**283.70**	***B74G-4MG***	**222.75**
3/4"	212	***B74G-6AG***	**283.70**	***B74G-6MG***	**222.75**


1/2" with Metal Bowl and Sight Glass

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
3/8"	163	***B74G-3AG-MB***	**$287.70**	***B74G-3MG-MB***	**$226.80**
1/2"	212	***B74G-4AG-MB***	**287.70**	***B74G-4MG-MB***	**226.80**
3/4"	212	***B74G-6AG-MB***	**287.70**	***B74G-6MG-MB***	**226.80**



Manual Drain

** minimum clearance required to remove bowl



Automatic Drain

** minimum clearance required to remove bowl


with metal bowl

See page 246 for filter/regulator accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Micro-Fog Lubricators

- Micro-fog lubricators, identified by a red adjusting screw, are used for applications containing one or more points of lubrication, cylinders and multiple or single tools.
- Air flow through the lubricator lifts oil from the reservoir to the sight-feed dome. Oil is dropped into the fog generator and atomized into a fine mist. Lightweight particles are delivered downstream for lubrication. Heavier particles fall back into the reservoir.
- The micro-fog lubricator delivers 10% of the oil drops visible through the transparent sight-feed dome.
- *Micro-fog lubricators cannot be filled under pressure.* SAFETY ALERT




with transparent bowl

- 2 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- maximum operating conditions: transparent bowl: **150 PSI** and **125°F** metal bowl: **250 PSI** and **175°F**

1/4"

Port Size	SCFM	Transparent Bowl Part #	Transparent Bowl Price/E	Metal Bowl Part #	Metal Bowl Price/E
1/4"	51	***L72M-2***	**$93.30**	***L72M-2MB***	**$107.95**
3/8"	51	***L72M-3***	**96.85**	***L72M-3MB***	**111.35**



** minimum clearance required to remove bowl




with metal bowl

- 4 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- maximum operating conditions: transparent bowl: **150 PSI** and **125°F** metal bowl: **250 PSI** and **175°F**

3/8"

Port Size	SCFM	Transparent Bowl Part #	Transparent Bowl Price/E	Metal Bowl Part #	Metal Bowl Price/E
1/4"	70	***L73M-2***	**$117.95**	***L73M-2MB***	**$125.85**
3/8"	70	***L73M-3***	**117.95**	***L73M-3MB***	**125.85**
1/2"	70	***L73M-4***	**117.95**	***L73M-4MB***	**125.85**



See pages 244-245 for lubricator accessories.


SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Micro-Fog Lubricators

- Micro-fog lubricators, identified by a red adjusting screw, are used for applications containing one or more points of lubrication, cylinders and multiple or single tools.
- Air flow through the lubricator lifts oil from the reservoir to the sight-feed dome. Oil is dropped into the fog generator and atomized into a fine mist. Lightweight particles are delivered downstream for lubrication. Heavier particles fall back into the reservoir.
- The micro-fog lubricator delivers 10% of the oil drops visible through the transparent sight-feed dome.
- *Micro-fog lubricators cannot be filled under pressure.* SAFETY ALERT




- 7 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- maximum operating conditions: transparent bowl: **150 PSI** and **125°F** metal bowl: **250 PSI** and **175°F**

1/2"

Port Size	SCFM	Transparent Bowl		Metal Bowl	
		Part #	Price/E	Part #	Price/E
3/8"	114	***L74M-3***	**$149.50**	***L74M-3MB***	**$153.40**
1/2"	154	***L74M-4***	**149.50**	***L74M-4MB***	**153.40**
3/4"	142	***L74M-6***	**149.50**	***L74M-6MB***	**153.40**



metal bowl




1 quart US (1 liter) reservoir
1/4 turn drain

- 1 qt. reservoir
- oil level sight gauge
- one turn threaded bowl attachment permits easy maintenance
- inlet pressure: **250 PSI** at ambient temperature (70°F)

1"

Port Size	SCFM	Metal Bowl with Sight Glass	
		Part #	Price/E
¾"	160	***L17-600A***	**$302.00**
1"	275	***L17-800A***	**302.00**
1¼"	275	***L17-A00A***	**353.40**
1½"	275	***L17-B00A***	**353.40**



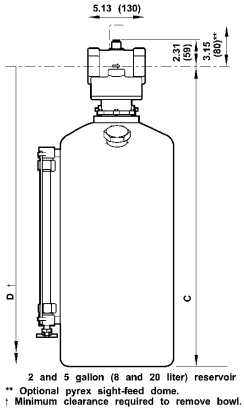

- 2 gallon reservoir
- oil flow can be positively set
- reservoir is ASME construction
- inlet pressure: **250 PSI** at ambient temperature (70°F)
- *cannot be filled under pressure* SAFETY ALERT

2" General Purpose (Oil-Fog Only)

Port Size	SCFM	Metal Bowl with Sight Glass	
		Part #	Price/E
2"	1000	***10-076-004***	**$4734.65**



See pages 244-245 for lubricator accessories.

FRL's are designed for air service only, unless otherwise indicated. SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Lubricators - Micro-Fog, Pyrex® Sight Feed Domes


- Designed for use with alcohol or other anti-freeze agents when units are installed in cold temperature environments.
- Pyrex® sight feed dome with aluminum case and fluorocarbon O-Rings and seals; Pyrex® sight glass on bowls and metal petcock drain.
- Micro-fog lubricators, identified by a red adjusting screw, are used for applications containing one or more points of lubrication, cylinders and multiple or single tools.
- Air flow through the lubricator lifts oil from the reservoir to the sight-feed dome. Oil is dropped into the fog generator and atomized into a fine mist. Lightweight particles are delivered downstream for lubrication. Heavier particles fall back into the reservoir.
- The micro-fog lubricator delivers 10% of the oil drops visible through the transparent sight-feed dome.
- *Micro-fog lubricators cannot be filled under pressure.* SAFETY ALERT



- 2 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- inlet pressure: **250 PSI**
- maximum temperature: **175°F**

1/4"

Port Size	SCFM	Metal Bowl with Sight Glass Part #	Price/E
1/4"	51	***L72M-2MBPX***	**$232.85**
3/8"	51	***L72M-3MBPX***	**209.90**






- 4 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- inlet pressure: **250 PSI**
- maximum temperature: **175°F**

3/8"

Port Size	SCFM	Metal Bowl with Sight Glass Part #	Price/E
1/4"	60	***L73M-2MBPX***	**$220.05**
3/8"	60	***L73M-3MBPX***	**238.15**
1/2"	60	***L73M-4MBPX***	**238.15**






- 7 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- inlet pressure: **250 PSI**
- maximum temperature: **175°F**

1/2"

Port Size	SCFM	Metal Bowl with Sight Glass Part #	Price/E
3/8"	114	***L74M-3MBPX***	**$290.95**
1/2"	154	***L74M-4MBPX***	**290.95**
3/4"	142	***L74M-6MBPX***	**290.95**






- 1 qt. reservoir
- oil level sight gauge
- particle removal per ISO 8573-1, class 5 and class 3
- one turn threaded bowl attachment permits easy maintenance
- inlet pressure: **250 PSI**

1/2"

Port Size	SCFM	Metal Bowl with Sight Glass Part #	Price/E
¾"	160	***L17-600APX***	**$406.50**
1"	275	***L17-800APX***	**405.65**
1¼"	275	***L17-A00APX***	**432.55**
1½"	275	***L17-B00APX***	**432.55**



See pages 244-245 for lubricator accessories.

SAFETY ALERT


FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Oil-Fog Lubricators

- Oil-fog lubricators, identified by a green adjusting screw, are used for lubricating a single air tool or air motor, and are located as near the device as possible.
- All the oil visible dropping through the transparent sight-feed dome goes to the airstream.
- L72C, L73C and L74C OIL-FOG lubricators can be filled under pressure.

- 2 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- can be filled under pressure
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- maximum operating conditions: transparent bowl: **150 PSI** and **125°F** metal bowl: **250 PSI** and **175°F**




1/4"

Port Size	SCFM	Transparent Bowl Part #	Transparent Bowl Price/E	Metal Bowl Part #	Metal Bowl Price/E
1/4"	51	***L72C-2***	**$97.10**	***L72C-2MB***	**$112.20**
3/8"	51	***L72C-3***	**100.55**	***L72C-3MB***	**115.80**



with transparent bowl

- 4 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- can be filled under pressure
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- maximum operating conditions: transparent bowl: **150 PSI** and **125°F** metal bowl: **250 PSI** and **175°F**



3/8"

Port Size	SCFM	Transparent Bowl Part #	Transparent Bowl Price/E	Metal Bowl Part #	Metal Bowl Price/E
1/4"	60	***L73C-2***	**$117.95**	***L73C-2MB***	**$125.85**
3/8"	60	***L73C-3***	**117.95**	***L73C-3MB***	**125.85**
1/2"	60	***L73C-4***	**117.95**	***L73C-4MB***	**125.85**



with metal bowl

See pages 244-245 for lubricator accessories.

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Oil-Fog Lubricators

- Oil-fog lubricators, identified by a green adjusting screw, are used for lubricating a single air tool or air motor, and are located as near the device as possible.
- All the oil visible dropping through the transparent sight-feed dome goes to the airstream.
- L72C, L73C and L74C OIL-FOG lubricators can be filled under pressure.




metal bowl

- 7 oz. reservoir
- in-line or modular installation
- quick release bayonet bowl
- micro-fog design delivers aerosol mist
- can be filled under pressure
- recommended lubricants: misting type oil rated 50 to 200 SSU (ISO Grade 7 to 46) at **100°F**
- maximum operating conditions: transparent bowl: **150 PSI** and **125°F** metal bowl: **250 PSI** and **175°F**

1/2"

Port Size	SCFM	Transparent Bowl		Metal Bowl	
		Part #	Price/E	Part #	Price/E
3/8"	118	***L74C-3***	**$149.50**	***L74C-3MB***	**$153.40**
1/2"	192	***L74C-4***	**149.50**	***L74C-4MB***	**153.40**
3/4"	186	***L74C-6***	**149.50**	***L74C-6MB***	**153.40**






- 1 qt. reservoir
- oil level sight gauge
- *cannot be filled under pressure* SAFETY ALERT
- one turn threaded bowl attachment permits easy maintenance
- inlet pressure: **250 PSI** at ambient temperature (70°F)

1"

Port Size	SCFM	Metal Bowl with Sight Glass	
		Part #	Price/E
¾"	160	***L17-600D***	**$302.00**
1"	275	***L17-800D***	**302.00**
1¼"	275	***L17-A00D***	**353.40**
1½"	275	***L17-B00D***	**353.40**






- 2 gallon reservoir
- oil flow can be positively set
- *cannot be filled under pressure* SAFETY ALERT
- reservoir is ASME construction
- inlet pressure: **250 PSI** at ambient temperature (70°F)

2" General Purpose (Oil-Fog Only)

Port Size	SCFM	Metal Bowl with Sight Glass	
		Part #	Price/E
2"	1000	***10-076-004***	**$4734.65**

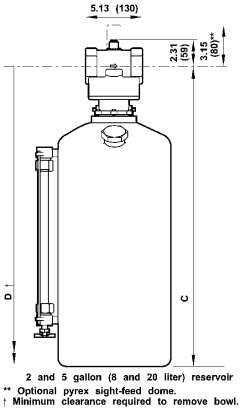

See pages 244-245 for lubricator accessories.


SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Combination Units

These units are intended for use in industrial compressed air systems only. They must not be used where pressure or temperature may exceed maximum rated operating conditions. See specifications. The polycarbonated plastic bowls used on these units can be damaged and possibly burst if exposed to such substances as certain solvents, strong alkalies, compressor oils that contain ester-based additives or synthetic oils. Fumes of these substances in contact with the polycarbonate bowl, externally or internally, can also result in damage. Clean with warm water only. Use metal bowl in applications where a plastic bowl might be exposed to substances that are incompatible with polycarbonates. Not for use with fluids. Combination Units are supplied with micro-fog lubricators.




- **5-125 PSI** range
- 1 oz. reservoir
- inlet pressure **150 PSI** maximum at ambient temperature (70°F)
- models supplied with a GC620 gauge



Miniature Combination Units with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/8"	14	***P1A-100A***	**$231.85**	***P1A-100M***	**$223.65**
1/4"	14	***P1A-200A***	**232.65**	***P1A-200M***	**224.45**

- **5-150 PSI** range
- 2 oz. reservoir
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature (70°F) metal bowl: **250 PSI** at ambient temperature (70°F)
- models supplied with a GC620 gauge
- connected modularly
- Includes 2 clamp and wall mounting brackets # 4214-52, 2 clamps # 4214-51 and 2 NPT pipe adapters. See modular components on pages 241, 243 and 245 for other options.






1/4" Combination Units with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	36	***E72-2A***	**$424.55**	***E72-2M***	**$374.95**
3/8"	36	***E72-3A***	**434.25**	***E72-3M***	**384.85**

1/4" Combination Units with Metal Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	36	***E72-2A-MB***	**$452.10**	***E72-2M-MB***	**$403.10**
3/8"	36	***E72-3A-MB***	**462.40**	***E72-3M-MB***	**412.90**

- **5-150 PSI** range
- 2 oz. reservoir
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature (70°F) metal bowl: **250 PSI** at ambient temperature (70°F)
- models supplied with a G230 gauge
- connected modularly
- Includes 2 clamp and wall mounting brackets # 4214-52, 2 clamps # 4214-51 and 2 NPT pipe adapters. See modular components on pages 241, 243 and 245 for other options.





3/8" Combination Units with Transparent Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	70	***E73-2A***	**$554.20**	***E73-2M***	**$493.20**
3/8"	70	***E73-3A***	**554.20**	***E73-3M***	**493.20**
1/2"	70	***E73-4A***	**554.20**	***E73-4M***	**493.20**

3/8" Combination Units with Metal Bowl

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
1/4"	70	***E73-2A-MB***	**$569.75**	***E73-2M-MB***	**$508.85**
3/8"	70	***E73-3A-MB***	**569.75**	***E73-3M-MB***	**508.85**
1/2"	70	***E73-4A-MB***	**569.75**	***E73-4M-MB***	**508.85**

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Combination Units


- **5-150 PSI** range
- 7 oz. reservoir
- inlet pressure: transparent bowl: **150 PSI** at ambient temperature (70°F) metal bowl: **250 PSI** at ambient temperature (70°F)
- models supplied with a GC230 gauge
- connected modularly
- Includes 2 clamp and wall mounting brackets # 4314-52, 2 clamps # 4314-51 and 2 NPT pipe adapters. See modular components on pages 241, 243 and 245 for other options.



with metal bowls

1/2" Combination Units with Transparent Bowl and Guard

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
3/8"	110	***E74-3A***	**$671.20**	***E74-3M***	**$610.10**
1/2"	150	***E74-4A***	**671.20**	***E74-4M***	**610.10**
3/4"	140	***E74-6A***	**671.20**	***E74-6M***	**610.10**



1/2" Combination Units with Metal Bowl and Sight Glass


Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
3/8"	110	***E74-3A-MB***	**$678.95**	***E74-3M-MB***	**$618.15**
1/2"	150	***E74-4A-MB***	**678.95**	***E74-4M-MB***	**618.15**
3/4"	140	***E74-6A-MB***	**678.95**	***E74-6M-MB***	**618.15**



- **5-125 PSI** range
- 1 qt. reservoir
- inlet pressure: **250 PSI** at ambient temperature (70°F)

1" Combination Units with Metal Bowl and Sight Glass

Port Size	SCFM	Automatic Drain Part #	Automatic Drain Price/E	Manual Drain Part #	Manual Drain Price/E
3/4"	160	***P8A-660A***	**$961.55**	***P8A-660M***	**$900.20**
1"	275	***P8A-860A***	**956.60**	***P8A-860M***	**895.25**



Desiccant Compressed Air Dryers

- Compressed air dryers help to eliminate condensation at the point of use. A replaceable element filters outlet air to help prevent desiccant dust migration downstream.
- Silica gel desiccant changes color from blue to pink when desiccant replacement is needed. Desiccant can be dried and reused by heating to 275°F, or replaced. Moisture indicator on top of body.
- An after filter should be placed downstream from the desiccant dryer to ensure solid contaminants such as desiccant dust do not migrate downstream.

7 oz. reservoir:
- uses 1 gel packet
- nominal air drying capacity 750 cubic feet at **100 PSI** and **77°F**
- maximum inlet pressure: **150 PSI**
- maximum temperature: **175°F**

1 qt. reservoir:
- uses 5 gel packets
- nominal air drying capacity 6000 cubic feet at **100 PSI** and **77°F**
- maximum inlet pressure: **250 PSI**
- maximum temperature: **175°F**

- in-line or modular installation
- 1.25 lb. bowl capacity
- quick release bayonet bowl



7 oz. reservoir 1 qt. reservoir

1/4"

Reservoir Size	SCFM	Metal Bowl with Guard Part #	Metal Bowl with Guard Price/E
7 oz.	5	***W74D-2A-MB7***	**$216.75**
1 qt.	10	***W74D-2A-MB32***	**469.95**


See page 240 for silica gel refills.

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 100 PSIG inlet pressure.

Norgren Series 1 Drip Leg Automatic Drain

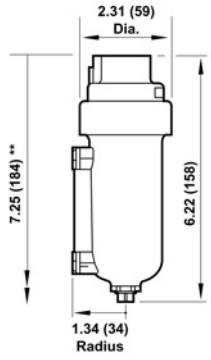

** Minimum clearance to remove bowl.

Used in compressed air systems to automatically expel liquids from piping systems. Installed at low points in piping and at end of pipe network, where water is likely to accumulate.

- metal bowl
- drain is ported to 1/8" NPT
- inlet for metal bowl: **250 PSIG** at ambient temperature (70°F)

Port Size	Part #	Price/E
1/2"	***17-016-107***	**$202.40**



Norgren Series 1 Three-Way Shut-Off Valves


- Shut-off valves, typically attached to the inlet end of a combination unit, are manually operated, slide type valves that open and close with a short 1" movement of the slide.
- The valve slide can be locked in the closed position with a customer supplied padlock.
- The standard valve is a 3-way valve that exhausts downstream air in the closed position.
- recommended pressure is **250 PSI** at ambient temperature (70°F)
- for use with 73 Series filters, regulators and lubricators on pages 225-235.
- conforms to OSHA lockout regulation



Size	Part #	Price/E
1/4"	***T73E-2***	**$63.60**
3/8"	***T73E-3***	**63.60**
1/2"	***T73E-4***	**63.60**

Brass Hex Nipples


Size	Part #	Price/E	Opt Qty
1/8" x 1/8"	***BCN12***	**$1.91**	100
1/4" x 1/4"	***BCN25***	**2.37**	100
3/8" x 3/8"	***BCN37***	**3.20**	50
1/2" x 1/2"	***BCN50***	**4.78**	25
3/4" x 3/4"	***BCN75***	**6.11**	100
1" x 1"	***BCN100***	**14.74**	50



Carbon Steel Close Nipples

- Stainless steel close nipples are available on pages 284 and 548.
- Brass close nipples are available on page 304.

Size	Part #	Price/E	Opt Qty
1" x 1"	***CN100***	**$3.40**	10
1-1/4" x 1-1/4"	***CN125***	**4.35**	10
1-1/2" x 1-1/2"	***CN150***	**5.30**	10
2" x 2"	***CN200***	**7.25**	10



Do not use pipe nipples as hose inserts.

SAFETY ALERT

Norgren Series 1 Filter Accessories



5 micron element
5925-03

Elements

Used On	Description	Part #	Price/E
F07	5 micron	***3652-11***	**$18.05**
F08	5 micron	***3161-16***	**20.00**
	40 micron	***3161-18***	**17.00**
F17	5 micron	***5311-01***	**118.90**
	25 micron	***5311-02***	**118.90**
	40 micron	***5311-03***	**107.05**
F18	5 micron	***5882-11***	**320.10**
	25 micron	***5882-12***	**320.10**
	40 micron	***5882-13***	**320.10**
F72	5 micron	***5925-03***	**8.50**
	40 micron	***5925-02***	**8.15**
F73	5 micron	***4438-01***	**12.90**
	40 micron	***4438-03***	**12.90**
	5 micron	***4338-04***	**19.75**
F74	40 micron	***4338-05***	**17.95**
F74C	oil removal filter	***4344-01***	**115.65**
F74H	oil removal filter	***4344-02***	**171.45**
F74V	vapor removal filter	***4341-01***	**216.50**

Gel Refills

Used On	Description	Part #	Price/E
W74D	5 silica gel refills, .25 lb. ea	***4385-700***	**$190.90**



transparent bowl and guard
4325-51R

Bowls and Bowl Guards

Used On	Description	Part #	Price/E
F07	polycarbonate bowl with auto drain	***3646-51***	**$27.30**
	polycarbonate bowl with manual drain	***3646-53***	**20.10**
F08	transparent bowl with manual drain	***3776-50***	**74.00**
	transparent bowl with auto drain	***3776-51***	**275.25**
F17	metal bowl with drain	***5390-77***	**305.05**
F72	transparent bowl with manual drain	***4266-50RF***	**40.45**
	transparent bowl with semi-automatic drain	***4266-52RF***	**67.80**
F73	transparent bowl with manual drain, ¼ turn	***4425-50RF***	**59.35**
	transparent bowl with auto drain	***4425-51RF***	**117.65**
F74	transparent bowl and guard	***4325-51R***	**64.45**
	transparent bowl assy with manual drain, ¼ turn	***4325-52R***	**103.45**
	bowl guard only	***4326-01***	**26.65**



auto drain
3000-10

Auto and Manual Drains

Used On	Description	Part #	Price/E
F08,F17	auto drain	***3000-10***	**$83.90**
	manual drain assembly	***2796-52***	**13.85**
F72	semi-automatic drain	***5379-RK***	**49.95**
F72, F73	auto drain	***4000-51R***	**76.80**
F74	auto drain	***3000-10***	**83.90**
F72, F73, F74	manual drain	***619-50***	**9.05**



liquid level lens kit
4380-030

Lens Kits

Used On	Description	Part #	Price/E
F73	liquid level lens kit	***4380-030***	**$19.25**
F72	liquid level lens kit	***4380-020***	**19.35**
F74	Pyrex® sight glass kit	***4380-051***	**29.90**

Norgren Series 1 Filter Accessories

Indicator Conversion Kit

- allows addition of service life indicator in the field
- for general purpose and oil removal filters

Used On	Description	Part #	Price/E
F72, F73, F74	service life indicator	***5797-50***	**$61.75**



service life indicator

Mounting Brackets

Used On	Description	Part #	Price/E
F07	mounting bracket only	***5939-06***	**$8.80**
F08	mounting bracket only	***3783-52***	**44.80**
F17	mounting bracket kit for ¾" and 1" ported units	***6212-50***	**110.90**
	mounting bracket kit for 1¼" and 1½" ported units	***6212-51***	**121.30**



mounting bracket
6212-50

Wall Mounting Brackets

- For use instead of quick-clamps and pipe adapters to secure to a wall, machine panel or other flat surface
- Use close nipples to connect combination unit and then place in bracket.

Used On	Description	Part #	Price/E
F72	wall mounting bracket for all F72 series	***4224-50***	**$16.90**
F73	wall mounting bracket for all F73 series	***4424-50***	**18.30**
F74	wall mounting bracket for all F74 series	***4324-50***	**22.45**



4324-50

Quick Clamps and Brackets

Quick-clamp

- provides modular installation capability
- flanges on the products slide into V grooves in clamp
- face-sealing O-rings provide a positive seal when clamp is closed and screw tightened

Bracket for quick-clamp

- provides secure mounting to a wall, machine panel or other flat surface

Used On	Description	Part #	Price/E
F72	quick-clamp	***4214-51***	**$15.20**
	quick-clamp service kit (2 O-rings)	***4384-570***	**1.55**
	wall bracket for quick-clamp (uses 3/16" screws)	***4213-89***	**5.35**
	quick-clamp and bracket assembly	***4214-52***	**20.35**
F73, F74	quick-clamp	***4314-51***	**18.70**
	quick-clamp service kit (2 O-rings)	***4384-770***	**7.15**
	wall bracket for quick-clamp (uses 7/32" screws)	***4313-50***	**10.05**
	quick-clamp and bracket assembly	***4314-52***	**28.45**



quick-clamp



bracket



quick-clamp with bracket

Blocks

- installs with quick-clamps
- provides additional outlets and manifolding capability

Used On	Description	Part #	Price/E
F72	porting block, three 1/4" PTF outlets	***4216-50***	**$35.55**
	manifold block, three 3/8" PTF outlets	***4228-01***	**80.15**
F73, F74	porting block, three 1/4" PTF outlets	***4316-50***	**37.10**
	manifold block, three 3/4" PTF outlets	***4328-50***	**72.60**



porting block




manifold block

Adapters


- installs with quick-clamps
- provides PTF connections to system piping
- sold individually

Used On	Description	Part #	Price/E
F72	1/4" PTF connections	***4215-02***	**$18.30**
	3/8" PTF connections	***4215-03***	**18.30**
F73, F74	1/4" PTF connections	***4315-01***	**24.85**
	3/8" PTF connections	***4315-02***	**24.85**
	1/2" PTF connections	***4315-03***	**24.85**
	3/4" PTF connections	***4315-04***	**24.85**



pipe adapters

Norgren Series 1 Filter Accessories



4380-700

Service Kits

Used On	Description	Part #	Price/E
F08	o-rings, seals, and gaskets	***3163-05***	**$8.40**
F17	o-rings, seals, and gaskets	***5578-05***	**29.75**
F18	o-rings, seals, and gaskets	***5945-50***	**40.05**
F72	o-rings, seals, and gaskets	***4380-500***	**12.90**
F73	o-rings, seals, and gaskets	***4380-600***	**6.80**
F74	o-rings, seals, and gaskets	***4380-700***	**7.15**

Norgren Series 1 Regulator Accessories



4432-02

Replacement Springs

Used On	Description	Part #	Price/E
R72	5-60 PSI	***4232-02***	**$12.90**
	5-150 PSI	***4232-03***	**12.90**
R73	5-60 PSI	***4432-01***	**12.90**
	5-150 PSI	***4432-02***	**12.90**
R74	5-60 PSI	***4332-01***	**12.90**
	5-150 PSI	***4332-02***	**12.90**



tamper resistant cover

Tamper Resistant Cover and Seal Wire

- helps prevent unauthorized adjustment to the pressure setting
- cover can be locked in place with up to four padlocks
- installs on adjusting knob

Used On	Description	Part #	Price/E
R72	tamper proof kit	***4255-51***	**$15.10**
R73	tamper proof kit	***4455-51***	**21.40**
R74	tamper proof kit	***4355-51***	**21.40**



panel nut

Panel Nuts

Used On	Description	Part #	Price/E
R07	plastic panel nut	***2962-89***	**$5.60**
R08	plastic panel nut	***5191-89***	**6.70**
R17	metal panel nut	***5226-97***	**33.60**
R22	stainless steel panel nut	***5988-02***	**95.95**
R72	plastic panel nut	***4248-89***	**4.55**
R73	zinc panel nut	***5191-88***	**11.35**
R74	zinc panel nut	***4348-89***	**9.70**



3407-01



4381-700

Repair Kits

Used On	Description	Part #	Price/E
R06	diaphragm, relieving	***3407-01***	**$27.95**
R07	diaphragm, relieving	***3407-02***	**27.95**
R08	diaphragm, relieving	***5298-14***	**60.40**
R11	diaphragm, relieving	***529-03***	**99.55**
R17	diaphragm, relieving	***5578-02***	**111.25**
R18	seal kit only	***5945-40***	**32.20**
R72	diaphragm, relieving	***4381-500***	**23.95**
R73	diaphragm, relieving	***4381-600***	**33.50**
R74	diaphragm, relieving	***4381-700***	**36.85**

Norgren Series 1 Regulator Accessories

Mounting Brackets

Used On	Description	Part #	Price/E
R07	mounting bracket with plastic panel nut	***18-025-003***	**$16.00**
R08	mounting bracket with plastic panel nut	***5203-06***	**29.90**
R17	mounting bracket with plastic panel nut	***5570-04***	**42.70**
R22	mounting bracket	***18-001-962***	**81.30**
	mounting bracket with panel nut	***18-001-959***	**233.40**



18-025-003



5203-06

Wall Mounting Brackets

- For use instead of quick-clamps and pipe adapters to secure to a wall, machine panel or other flat surface
- Use close nipples to connect combination unit and then place in bracket.

Used On	Description	Part #	Price/E
R72	wall mounting bracket for all R72 series	***4224-50***	**$16.90**
R73	wall mounting bracket for all R73 series	***4424-50***	**18.30**
R74	wall mounting bracket for all R74 series	***4324-50***	**22.45**



4324-50

Quick Clamps and Brackets

Quick-clamp
- provides modular installation capability
- flanges on the products slide into V grooves in clamp
- face-sealing O-rings provide a positive seal when clamp is closed and screw tightened

Bracket for quick-clamp
- provides secure mounting to a wall, machine panel or other flat surface

Used On	Description	Part #	Price/E
R72	quick-clamp	***4214-51***	**$15.20**
	quick-clamp service kit (2 O-rings)	***4384-570***	**1.55**
	wall bracket for quick-clamp (uses 3/16" screws)	***4213-89***	**5.35**
	quick-clamp and bracket assembly	***4214-52***	**20.35**
R73, R74	quick-clamp	***4314-51***	**18.70**
	quick-clamp service kit (2 O-rings)	***4384-770***	**7.15**
	wall bracket for quick-clamp (uses 7/32" screws)	***4313-50***	**10.05**
	quick-clamp and bracket assembly	***4314-52***	**28.45**



quick-clamp



bracket



quick-clamp with bracket

Blocks

- installs with quick-clamps
- provides additional outlets and manifolding capability

Used On	Description	Part #	Price/E
R72	porting block, three 1/4" PTF outlets	***4216-50***	**$35.55**
	manifold block, three 3/8" PTF outlets	***4228-01***	**80.15**
R73, R74	porting block, three 1/4" PTF outlets	***4316-50***	**37.10**
	manifold block, three 3/4" PTF outlets	***4328-50***	**72.60**



porting block




manifold block

Adapters

- installs with quick-clamps
- provides PTF connections to system piping
- sold individually

Used On	Description	Part #	Price/E
R72	1/4" PTF connections	***4215-02***	**$18.30**
	3/8" PTF connections	***4215-03***	**18.30**
R73, R74	1/4" PTF connections	***4315-01***	**24.85**
	3/8" PTF connections	***4315-02***	**24.85**
	1/2" PTF connections	***4315-03***	**24.85**
	3/4" PTF connections	***4315-04***	**24.85**



pipe adapters

see page 257 for replacement gauges

Norgren Series 1 Lubricator Accessories

Bowls and Bowl Guards



3776-54

Used On	Description	Part #	Price/E
L07	polycarbonate bowl with manual drain	***3646-54***	**$16.65**
L08	transparent bowl with manual drain	***3776-54***	**63.95**
L72	metal bowl with Pyrex® liquid level indicator and ¼ turn manual drain	***4203-51RF***	**60.25**
L73	transparent bowl with manual drain	***4425-50RL***	**66.15**
L74	metal bowl with Pyrex® liquid level indicator and ¼ turn manual drain	***4303-77R***	**136.60**
	transparent bowl with manual drain	***4325-50R***	**64.45**
	bowl guard only	***4326-01***	**26.65**

Auto and Manual Drain



2796-52

Used On	Description	Part #	Price/E
L08, L17	manual drain assembly	***2796-52***	**$13.85**

Seal Wire



seal wire

- provides tamper resistant protection of the lubricator drip rate setting

Used On	Description	Part #	Price/E
L73, L74	metal	***2117-01***	**$12.90**

Domes, Caps and Plugs



18-011-021



5605-50

Used On	Description	Part #	Price/E
L08	quick fill cap	***18-011-024***	**$27.95**
L17, L74	quick fill cap	***18-011-021***	**35.05**
L72	acetal fill plug	***4272-99***	**7.25**
L73, L74	aluminum fill plug	***5301-55***	**8.95**
L72, L74, L73	sight feed dome (micro-fogging design)	***4055-50***	**25.35**
	sight feed dome (oil-fogging design)	***4055-51***	**28.20**
L72, L74	Pyrex® sight feed dome	***5605-50***	**231.15**
L74	liquid level indicator repair kit	***4380-050***	**30.50**

Seal Kits



5771-02

Used On	Description	Part #	Price/E
L17	o-rings, seals, and gaskets	***5771-02***	**$13.85**
L72	o-rings, seals, and gaskets	***4382-500***	**12.90**
	Viton® seal	***2325-10***	**8.75**
	buna seal	***720-01***	**12.90**
L73	o-rings, seals, and gaskets	***4382-600***	**8.70**
L74	o-rings, seals, and gaskets	***4382-700***	**11.50**
	Viton® seal	***2325-13***	**9.80**

Mounting Brackets



mounting bracket
6212-50

Used On	Description	Part #	Price/E
L07	mounting bracket only	***5095-17***	**$12.55**
L08	mounting bracket only	***3783-52***	**44.80**
L17	mounting bracket kit for ¾" and 1" ported units	***6212-50***	**110.90**
	mounting bracket kit for 1¼" and 1½" ported units	***6212-51***	**121.30**

Norgren Series 1 Lubricator Accessories

Wall Mounting Brackets

- For use instead of quick-clamps and pipe adapters to secure to a wall, machine panel or other flat surface
- Use close nipples to connect combination unit and then place in bracket.



4324-50

Used On	Description	Part #	Price/E
L72	wall mounting bracket for all L72 series	***4224-50***	**$16.90**
L73	wall mounting bracket for all L73 series	***4424-50***	**18.30**
L74	wall mounting bracket for L74 series	***4324-50***	**22.45**
	wall mounting bracket for L74 series with 1 quart reservoir	***4324-51***	**39.80**

Quick Clamps and Brackets

Quick-clamp
- provides modular installation capability
- flanges on the products slide into V grooves in clamp
- face-sealing O-rings provide a positive seal when clamp is closed and screw tightened

Bracket for quick-clamp
- provides secure mounting to a wall, machine panel or other flat surface



quick-clamp



bracket

Used On	Description	Part #	Price/E
L72	quick-clamp	***4214-51***	**$15.20**
	quick-clamp service kit (2 O-rings)	***4384-570***	**1.55**
	wall bracket for quick-clamp (uses 3/16" screws)	***4213-89***	**5.35**
	quick-clamp and bracket assembly	***4214-52***	**20.35**
L73, L74	quick-clamp	***4314-51***	**18.70**
	quick-clamp service kit (2 O-rings)	***4384-770***	**7.15**
	wall bracket for quick-clamp (uses 7/32" screws)	***4313-50***	**10.05**
	quick-clamp and bracket assembly	***4314-52***	**28.45**



quick-clamp with bracket

Blocks

- installs with quick-clamps
- provides additional outlets and manifolding capability



porting block




manifold block

Used On	Description	Part #	Price/E
L72	porting block, three 1/4" PTF outlets	***4216-50***	**$35.55**
	manifold block, three 3/8" PTF outlets	***4228-01***	**80.15**
L73, L74	porting block, three 1/4" PTF outlets	***4316-50***	**37.10**
	manifold block, three 3/4" PTF outlets	***4328-50***	**72.60**

Adapters

- installs with quick-clamps
- provides PTF connections to system piping
- sold individually



pipe adapters

Used On	Description	Part #	Price/E
L72	1/4" PTF connections	***4215-02***	**$18.30**
	3/8" PTF connections	***4215-03***	**18.30**
L73, L74	1/4" PTF connections	***4315-01***	**24.85**
	3/8" PTF connections	***4315-02***	**24.85**
	1/2" PTF connections	***4315-03***	**24.85**
	3/4" PTF connections	***4315-04***	**24.85**

Norgren Series 1 Filter/Regulator Accessories



4325-51R

Bowls and Bowl Guards

Used On	Description	Part #	Price/E
B74	transparent bowl with manual drain	***4325-51R***	**$64.45**
	transparent bowl with auto drain	***4325-52R***	**103.45**
	bowl guard only	***4326-01***	**26.65**



tamper resistant cover

Tamper Resistant Cover and Seal Wire

- helps prevent unauthorized adjustment to the pressure setting
- cover can be locked in place with up to four padlocks
- installs on adjusting knob

Used On	Description	Part #	Price/E
B72	tamper proof kit	***4255-51***	**$15.10**
B73	tamper proof kit	***4455-51***	**21.40**
B74	tamper proof kit	***4355-51***	**21.40**



panel nut

Panel Nuts

Used On	Description	Part #	Price/E
B08	plastic panel nut	***5191-89***	**$6.70**
B72	plastic panel nut	***4248-89***	**4.55**
B73	zinc panel nut	***5191-88***	**11.35**
B74	zinc panel nut	***4348-89***	**9.70**



18-025-003


Mounting Brackets

Used On	Description	Part #	Price/E
B07	mounting bracket	***18-025-003***	**$16.00**
B08	mounting bracket kit	***5203-06***	**29.90**

see page 257 for replacement gauges

Watts Filters

- 40 micron polypropylene element
- 5 oz. bowl
- zinc body
- operating conditions:
  temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
  pressure: **150 PSIG** (10.2 bar) maximum




Compact Polycarbonate Bowl with Plastic Bowl Guard

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1/4"	55	***F602-02BJR***	**$169.40**	***F602-02BJ***	**$111.40**
3/8"	75	***F602-03BJR***	**169.40**	***F602-03BJ***	**111.40**



- 40 micron polypropylene element
- 8 oz. bowl
- zinc body
- operating conditions:
  temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
  pressure: **150 PSIG** (10.2 bar) maximum




Standard Polycarbonate Bowl with Plastic Bowl Guard

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1/2"	110	***F602-04BJR***	**$211.10**	***F602-04BJ***	**$153.10**



- 40 micron polypropylene element
- 16 oz. bowl
- zinc body
- automatic drain operating conditions:
  temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
  pressure: **175 PSIG** (12 bar) maximum
- manual drain operating conditions:
  temperature range: **40°F** (4.4°C) to **150°F** (65.6°C)
  pressure: **250 PSIG** (17 bar) maximum



Standard Zinc Bowl with Sight Glass

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
3/4"	250	***F602-06WJR***	**$356.30**	***F602-06WJ***	**$298.15**
1"	340	***F602-08WJR***	**356.30**	***F602-08WJ***	**298.15**



See page 252 for filter accessories.

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 150 PSIG inlet pressure.


Watts Filters

- 40 micron polypropylene element
- 16 oz. bowl
- zinc body
- automatic drain operating conditions: temperature range: **40°F** (4.4°C) to **120°F** (48.9°C) pressure: **175 PSIG** (12 bar) maximum
- manual drain operating conditions: temperature range: **40°F** (4.4°C) to **150°F** (65.6°C) pressure: **250 PSIG** (17 bar) maximum



Standard Zinc Bowl with Sight Glass

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1½"	380	***F602-12WJR***	**$417.10**	***F602-12WJ***	**$358.95**




- 40 micron polypropylene element
- 26 oz. bowl
- aluminum body
- automatic drain operating conditions: temperature range: **40°F** (4.4°C) to **120°F** (48.9°C) pressure: **175 PSIG** (12 bar) maximum
- manual drain operating conditions: temperature range: **40°F** (4.4°C) to **150°F** (65.6°C) pressure: **250 PSIG** (17 bar) maximum



Standard Zinc Bowl with Sight Glass

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
2"	1125	***F602-16WJR***	**$1224.50**	***F602-16WJ***	**$1166.35**




See page 252 for filter accessories.

Watts Filter / Regulator



- **2 - 125 PSIG** (.15 - 8.5 bar) range
- 40 micron filter
- 4 oz. bowl
- zinc body
- relieving
- diaphragm operated
- spring adjustment mechanism
- glass-filled acetal plastic spring cage
- tamper resistant, snap lock, removable knobs
- temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
- standard gauge is GC230 (not supplied)

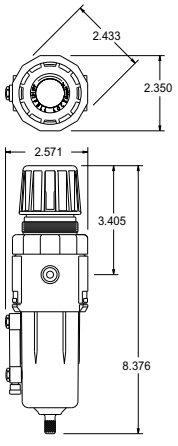

Zinc Bowl with Sight Glass

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1/4"	60	***B11-02WJCR***	**$257.15**	***B11-02WJC***	**$199.10**
3/8"	70	***B11-03WJCR***	**257.15**	***B11-03WJC***	**199.10**
1/2"	80	***B11-04WJCR***	**257.15**	***B11-04WJC***	**199.10**


See page 252-253 for filter/regulator accessories.

SAFETY ALERT

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.

Watts Regulators

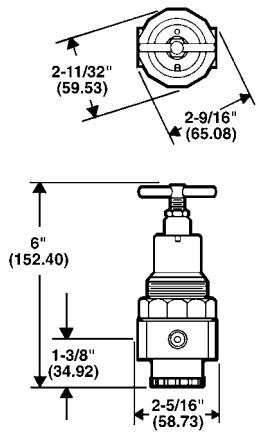


- **2 - 125 PSIG** (.15 - 8.5 bar) range
- zinc body
- relieving
- diaphragm operated
- spring adjustment mechanism
- t-Handle design
- supply pressure: **300 PSIG** (20.4 bar) maximum
- temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
- standard gauge is GC230



Compact

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	60	***R11-02CG***	**$109.75**	***R11-02C***	**$93.05**
3/8"	70	***R11-03CG***	**109.75**	***R11-03C***	**93.05**
1/2"	80	***R11-04CG***	**109.75**	***R11-04C***	**93.05**

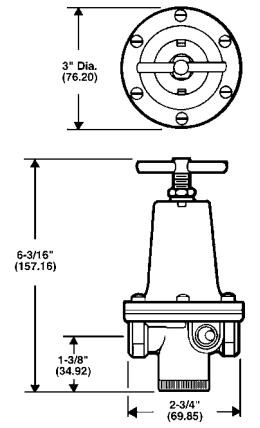


- **2 - 125 PSIG** (.15 - 8.5 bar) range
- zinc body
- relieving
- diaphragm operated
- spring adjustment mechanism
- t-Handle design
- brass bottom plug
- aluminum spring cage
- supply pressure: **300 PSIG** (20.4 bar) maximum
- temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
- standard gauge is GC230



Standard

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
1/4"	60	***R119-02CG***	**$132.60**	***R119-02C***	**$115.90**
3/8"	80	***R119-03CG***	**132.60**	***R119-03C***	**115.90**
1/2"	100	***R119-04CG***	**154.15**	***R119-04C***	**137.45**

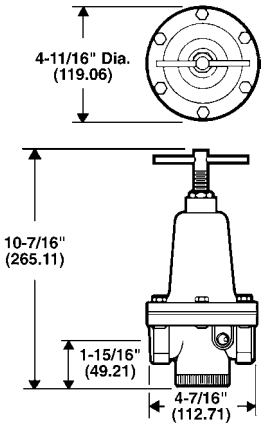

- **2 - 125 PSIG** (.15 - 8.5 bar) range
- zinc body
- relieving
- diaphragm operated
- spring adjustment mechanism
- t-handle design
- acetal bottom plug
- aluminum spring cage
- supply pressure: **300 PSIG** (20.4 bar) maximum
- temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
- standard gauge is GC230



Standard

Size	SCFM	With Gauge		Without Gauge	
		Part #	Price/E	Part #	Price/E
¾"	200	***R119-06CG***	**$243.80**	***R119-06C***	**$227.10**
1"	220	***R119-08CG***	**243.80**	***R119-08C***	**227.10**
1½"	250	***R119-12CG***	**307.00**	***R119-12C***	**290.30**

See page 253 for regulator accessories.

FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 150 PSIG inlet pressure.


Watts Lubricators

- general purpose
- high performance over a very wide flow range
- lubricator is fillable while under pressure
- rate of lubrication is automatically proportioned to air flow eliminating readjustment




- 5 oz. bowl
- zinc body

- operating conditions:
  temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
  pressure: **150 PSIG** (10.2 bar) maximum



Compact


Size	SCFM	Polycarbonate Bowl with Plastic Bowl Guard Part #	Price/E
1/4"	60	***L606-02B***	**$138.60**
3/8"	90	***L606-03B***	**138.60**






- 8 oz. bowl
- zinc body

- operating conditions:
  temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
  pressure: **150 PSIG** (10.2 bar) maximum



Standard


Size	SCFM	Polycarbonate Bowl with Plastic Bowl Guard Part #	Price/E
1/2"	125	***L606-04B***	**$165.80**






- 16 oz. bowl
- zinc body

- operating conditions:
  temperature range: **40°F** (4.4°C) to **150°F** (65.6°C)
  pressure: **250 PSIG** (17 bar) maximum



Standard


Size	SCFM	Zinc Bowl with Sight Glass Part #	Price/E
3/4"	275	***L606-06W***	**$302.30**
1"	320	***L606-08W***	**302.30**






- 16 oz. bowl
- zinc body

- operating conditions:
  temperature range: **40°F** (4.4°C) to **150°F** (65.6°C)
  pressure: **250 PSIG** (17 bar) maximum



Standard

Size	SCFM	Zinc Bowl with Sight Glass Part #	Price/E
1½"	550	***L606-12W***	**$363.80**



See page 253 for lubricator accessories.

SAFETY ALERT


FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.

Watts Combination Units

- 5 oz. bowl
- 40 micron polypropylene element
- zinc body

- operating conditions:
  temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
  pressure: **150 PSIG** (10.2 bar) maximum




Compact Polycarbonate Bowl with Plastic Bowl Guard

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1/4"	60	***C11-02A***	**$462.45**	***C11-02M***	**$404.45**
3/8"	90	***C11-03A***	**464.05**	***C11-03M***	**406.06**




- 8 oz. bowl
- 40 micron polypropylene element
- zinc body

- operating conditions:
  temperature range: **40°F** (4.4°C) to **120°F** (48.9°C)
  pressure: **150 PSIG** (10.2 bar) maximum




Standard Polycarbonate Bowl with Plastic Bowl Guard

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1/2"	125	***C119-04A***	**$580.35**	***C119-04M***	**$522.35**



- 16 oz. bowl
- 40 micron polypropylene element
- zinc body

- operating conditions:
  temperature range: **40°F** (4.4°C) to **150°F** (65.6°C)
  pressure: **250 PSIG** (17 bar) maximum




Standard Zinc Bowl with Sight Glass

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
3/4"	275	***C119-06AMB***	**$954.00**	***C119-06MMB***	**$895.85**
1"	320	***C119-08AMB***	**949.20**	***C119-08MMB***	**891.05**



- 16 oz. bowl
- 40 micron polypropylene element
- zinc body

- operating conditions:
  temperature range: **40°F** (4.4°C) to **150°F** (65.6°C)
  pressure: **250 PSIG** (17 bar) maximum



Standard Zinc Bowl with Sight Glass

Size	SCFM	Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E
1½"	550	***C119-12AMB***	**$1138.50**	***C119-12MMB***	**$1080.35**



FRL's are designed for air service only, unless otherwise indicated.

SAFETY ALERT

SCFM ratings at 150 PSIG inlet pressure.

Watts Filter Accessories



40 micron filter
EK602G

Elements

Used On	Description	Part #	Price/E
F602-02, F602-03	5 micron	***EK602VY***	**$23.45**
F602-02, F602-03	40 micron	***EK602Y***	**23.45**
F602-04	5 micron	***EK602VA***	**36.45**
F602-04	40 micron	***EK602A***	**36.45**
F602-06, F602-08, F602-12	5 micron	***EK602VB***	**62.40**
F602-06, F602-08, F602-12	40 micron	***EK602B***	**62.40**
F602-16	40 micron	***EK602G***	**73.60**



polycarbonate bowl
BK602Y

Bowls and Sight Glass Repair Kit

Used On	Description	Part #	Price/E
F602-02, F602-03	polycarbonate bowl	***BK602Y***	**$56.60**
F602-04	polycarbonate bowl with plastic bowl guard	***BK602A***	**74.35**



internal auto drain
SA602MD

Auto and Manual Drains

Used On	Description	Part #	Price/E
F602	internal auto drain	***SA602MD***	**$58.15**
F602	internal auto drain repair kit	***RK602MD***	**28.15**
F602	manual drain	***SA600Y7-1***	**4.60**



mounting bracket
SA200AW57

Accessories

Used On	Description	Part #	Price/E
F602 compact	mounting bracket	***SAF602-0571***	**$15.95**
F602 standard	mounting bracket	***SAF602-0572***	**23.95**
F602 ¾"	mounting bracket (2 required)	***SA200AW57***	**24.35**
F602 1"	mounting bracket (2 required)	***SA200CW57***	**24.35**

Watts Regulator Accessories

Repair Kits

Used On	Description	Part #	Price/E
R11	relieving diaphragm, valve assembly	***RKR10Y***	**$38.85**
R119-02, R119-03	relieving diaphragm, valve assembly	***RK119Y***	**41.90**
R119-04	relieving diaphragm, valve assembly	***RK119A***	**51.70**
R119-06, R119-08	relieving diaphragm, valve assembly	***RK119B***	**92.50**
R119-12	relieving diaphragm, valve assembly	***RK119D***	**95.75**



repair kit
RK119B

Accessories

Used On	Description	Part #	Price/E
R11	mounting bracket with panel nut	***SAR10Y57***	**$12.70**
R119-02, R119-03	mounting bracket	***SA15Y57***	**13.80**
R119-04	mounting bracket	***18A57***	**16.50**
R119-06, R119-08, R119-12	mounting bracket	***18B57***	**41.00**



mounting bracket
SAR10Y57



mounting bracket
SA15Y57

Watts Lubricator Accessories

Bowls and Sight Glass Repair Kit

Used On	Description	Part #	Price/E
L606-02, L606-03	polycarbonate bowl with plastic bowl guard	***BK606Y***	**$54.05**
L606-04	polycarbonate bowl with plastic bowl guard	***BK606A***	**72.55**
L606-06, L606-08, L606-12	sight glass repair kit	***RKB605WB***	**21.40**



polycarbonate bowl
BK602Y

Accessories

Used On	Description	Part #	Price/E
L606-02, L606-03	mounting bracket	***SAF602-0571***	**$15.95**
L606-04	mounting bracket	***SAF602-0572***	**23.95**
L606-06	mounting bracket (2 required)	***SA200AW57***	**24.35**
L606-08	mounting bracket (2 required)	***SA200CW57***	**24.35**



mounting bracket
SA200AW57

Bi-Metal Thermometers

- case: sturdy, corrosion resistant series 304 stainless steel case and bezel
- crystal: optically clear, strong glass, gasketed to maintain weather-tight integrity is standard
- stem: 304 series stainless steel, welded at tip and case connector to prevent leakage, ¼" (6.35 mm) diameter is standard
- hermetic seal: hermetically sealed per ASME B40.3 external reset: slotted-hex adjustment head offers screwdriver or wrench use to field calibrate the thermometer
- bi-metal element: an extremely responsive temperature sensing helix which has been carefully sized and tested, heat treated and aged to relieve inherent stresses and insure continued accuracy.
- dampening: bi-metal helix is coated with a viscous silicone to minimize pointer oscillation and to improve temperature transmission.
- immersion: for accurate temperature readings, immerse stem a minimum of 2" (50 mm) in agitated liquids or 4" (100 mm) in moving air or gas
- over range: temporary over or under range of 50% of scale up to 260°C or **500°F** will not affect the instrument accuracy
- accuracy: guaranteed to be accurate to within 1% of full scale (Grade A per ASME B40.3) (The American Society of Mechanical Engineers issued a new standard for Bi-Metal Thermometers in 1990 referred to as ASME B40.3.)Standard Connection is ½" male NPT



Model 30
Back Connected 3" Thermometers

Stem Length	Range	Part #	Price/E
2½"	0-250°F/-20-120°C	***30025064***	**$52.00**
2½"	50-500°F/10-260°C	***30025104***	**52.00**
4"	0-250°F/-20-120°C	***30040064***	**52.00**
4"	50-500°F/10-260°C	***30040104***	**52.00**
6"	0-250°F/-20-120°C	***30060064***	**52.00**
6"	50-500°F/10-260°C	***30060104***	**52.00**
9"	0-250°F/-20-120°C	***30090064***	**52.00**
9"	50-500°F/10-260°C	***30090104***	**52.00**



Model 31
Bottom Connected 90° Angle 3" Thermometers

Stem Length	Range	Part #	Price/E
2½"	0-250°F/-20-120°C	***31025064***	**$103.40**
4"	50-500°F/10-260°C	***31040104***	**103.40**



Model 50
Back Connected 5" Thermometers

Stem Length	Range	Part #	Price/E
2½"	50-500°F/10-260°C	***50025104***	**$115.35**
4"	0-250°F/-20-120°C	***50040064***	**115.35**



Model 52
Adjustable Angle 5" Thermometers

Stem Length	Range	Part #	Price/E
2½"	0-250°F/-20-120°C	***52025064***	**$156.45**
4"	0-250°F/-20-120°C	***52040064***	**167.05**
4"	50-500°F/10-260°C	***52040104***	**167.05**

Bi-Metal Pocket Thermometers

- case: 304 stainless steel case, hermetically sealed
- crystal: extra heavy polycarbonate crystal
- stem: 304 series stainless steel
- external reset: hex nut on back of case
- bi-metal element: responsive actuation by bi-metal helix
- dampening: bi-metal helix is coated with a viscous silicone to minimize pointer oscillation
- scale length: approximately 2-1/8" (54mm)
- accuracy: 1%
- carrying case: polyethylene case with clip



range	Part #	Price/E
0-220°F	***PT220***	**$18.85**
50-550°F	***PT550***	**18.85**

Magnetic Surface Mount Thermometers

- case: steel, 2" x ½"
- dial: polished aluminum
- bi-metal element: responsive actuation by bi-metal helix
- accuracy: ± 2%




2" Face

range	Part #	Price/E
0-250°F	***MT250***	**$36.60**
0-500°F	***MT500***	**36.60**

316 Stainless Steel Threaded Thermowells

- ¾" male NPT process connection

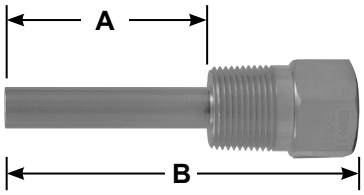

'A' dimension	'B' dimension	Part #	Price/E
1-5/8"	2-1/2"	***75TH2R015SS***	**$66.60**
2-1/2"	4"	***75TH2R025SS***	**57.95**
4-1/2"	6"	***75TH2R045SS***	**72.75**
7-1/2"	9"	***75TH2R075SS***	**122.60**

180º Steam Gauge Siphons

In steam service, the siphon will prevent hot steam from entering a pressure gauge, diaphragm seal or transmitter. Recommended for applications involving temperatures above 100°F (37°C). Also *use siphons whenever condensing hot vapors* (not just steam) *are present*.

SAFETY ALERT

- red brass pipe
- complies with ASTM B-43
- withstands pressure of **200 PSI** at **406°F**

IPS	*Red Brass* Part #	Price/E
1/4"	***401-01***	**$29.00**



401-01

2010 NEW

- ¼" NPT schedule 40 steel, welded
- suitable for **175 PSI** at **340°F**

NPT	*Steel* Part #	Price/E
1/4"	***401-01S***	**$13.00**

Dixon Gauges

All of the gauges supplied by Dixon are designed for long, reliable service under rugged conditions. Typical applications include those on pumps, hydraulic and pneumatic systems, compressors, machine tools and many other installations where it is necessary to have a gauge with a non-corrosive movement. The gauges available include standard dry and liquid-filled pressure gauges, compound pressure gauges, vacuum gauges and welding gauges. Materials available include brass, stainless steel and plastic.

Fig. Inter. - Figure Interval. Increments between PSI numbers on gauge face.

Grad. Inter. - Graduation Interval. Fractional increments between PSI numbers on gauge face.

Brass Standard Dry Gauges

- ASME B40.1 Grade B (± 3/2/3% accuracy)
- polished brass case
- polished brass ring
- copper alloy bourdon tube
- dual PSI / kPa scale dial
- ambient temperature range of **-40°F** to **140°F**



2½" face
¼" lower mount

PSI	Fig. Inter.	Grad. Inter.	Part #	Price/E
0-15	3	.2	***GBR15***	**$45.00**
0-30	5	.5	***GBR30***	**45.00**
0-60	10	1	***GBR60***	**45.00**
0-100	20	2	***GBR100***	**45.00**
0-160	20	2	***GBR160***	**45.00**
0-200	50	5	***GBR200***	**45.00**
0-300	50	5	***GBR300***	**45.00**
0-400	100	10	***GBR400***	**45.00**
0-600	100	10	***GBR600***	**45.00**
0-1000	200	20	***GBR1000***	**52.50**
0-1500	300	20	***GBR1500***	**52.50**
0-2000	500	50	***GBR2000***	**52.50**
0-3000	500	50	***GBR3000***	**52.50**
0-5000	1000	100	***GBR5000***	**56.70**

Process Gauges

2010 NEW

Specifically designed for process, chemical and petroleum industries, these process gauges are engineered to deliver years of accurate service while withstanding vibration, corrosive media and corrosive atmosphere.

- ambient process temperature: dry **-40°F** to **200°F** (-40°C to 93°C)
- case: black impact resistant thermoplastic, with safety blowout back, solid front, integral back flange (dry)
- ring: ethylene propylene
- wetted parts: 316L stainless steel
- window: polycarbonate
- dial: white aluminum
- pointer: black aluminum
- accuracy: ± 0.5% ANSI/ASME Grade 2A
- scale: single scale PSI only



4½" face
1/2" lower mount

PSI	Fig. Inter.	Grad. Inter.	*316L Stainless Steel* Part #	Price/E
0-30	5	.2	***PGS30***	**$170.00**
0-60	10	.5	***PGS60***	**170.00**
0-100	10	1	***PGS100***	**170.00**
0-160	20	1	***PGS160***	**170.00**
0-200	20	2	***PGS200***	**170.00**
0-300	50	2	***PGS300***	**170.00**
0-600	10	5	***PGS600***	**170.00**
0-1000	100	10	***PGS1000***	**170.00**

ABS Standard Dry Gauges

- ASME B40.1, Grade B (± 3-2-3% accuracy)
- ABS plastic case
- c-shaped bronze safety bourdon tube (600 PSI and lower)
- helical wound bronze safety bourdon tube (1000 PSI and higher)
- polycarbonate crystal
- black aluminum pointer
- PowerFlex™ movement with polyester segment, designed to resist the effects of shock, vibration and pulsation.
- ambient temperature range of **-40°F** to **150°F**

Center Back Mount

1½" face
1/8" center back mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-30	5	.5	***GC605***	**$15.90**
0-60	5	1	***GC610***	**15.90**
0-100	10	2	***GC615***	**15.90**
0-160	20	5	***GC620***	**15.90**
0-200	20	5	***GC625***	**15.90**

2" face
1/4" center back mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	1	.5	***GC200***	**$16.70**
0-30	5	.5	***GC215***	**16.70**
0-60	5	1	***GC220***	**16.70**
0-100	10	2	***GC225***	**16.70**
0-160	20	5	***GC230***	**16.70**
0-200	20	5	***GC235***	**16.70**
0-300	30	5	***GC240***	**16.70**



GC230

Lower Mount

2" face
1/4" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	1	.5	***GL100***	**$14.00**
0-30	5	.5	***GL115***	**14.00**
0-60	5	1	***GL120***	**14.00**
0-100	10	2	***GL125***	**14.00**
0-160	20	5	***GL130***	**14.00**
0-200	20	5	***GL135***	**14.00**
0-300	30	5	***GL140***	**14.00**

2½" face
1/4" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	1	.5	***GL300***	**$15.25**
0-30	5	.5	***GL320***	**15.25**
0-60	5	1	***GL325***	**15.25**
0-100	10	2	***GL330***	**15.25**
0-160	20	5	***GL335***	**15.25**
0-200	20	5	***GL340***	**15.25**
0-300	30	5	***GL345***	**15.25**
0-400	50	10	***GL347***	**15.25**
0-600	50	10	***GL350***	**15.25**
0-1000	200	20	***GL355***	**25.10**
0-1500	300	50	***GL360***	**25.10**
0-2000	400	50	***GL365***	**25.10**
0-3000	500	100	***GL370***	**25.10**
0-5000	1000	100	***GL375***	**25.10**



GL140

3½" face
1/4" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	1	.5	***GS15-4***	**$21.40**
0-30	5	.5	***GS30-4***	**21.40**
0-60	5	1	***GS60-4***	**21.40**
0-100	10	2	***GS100-4***	**21.40**
0-160	20	5	***GS160-4***	**21.40**
0-200	20	5	***GS200-4***	**21.40**
0-300	30	5	***GS300-4***	**21.40**
0-400	50	10	***GS400-4***	**21.40**
0-600	50	10	***GS600-4***	**21.40**
0-1000	200	20	***GS1000-4***	**35.00**

Contractor Pressure Gauges

- accuracy class: ± 1% of span
- material of wetted parts: copper alloy
- window: acrylic, snap in
- dial: aluminum, white
- pointer: aluminum, black, adjustable
- mounting flange/bracket: rear flange, stainless steel
- stainless steel case



4277768-0001

4½" face
¼" lower mount

PSI	Part #	Price/E
0-15	***4277750-0001***	**$61.30**
0-30	***4277768-0001***	**61.30**
0-60	***4277776-0003***	**61.30**

FlutterGuard™ Dry Gauges

FlutterGuard™ virtually eliminates pointer flutter, making the gauge easier to read and reducing excessive movement wear. Liquid-free casing results in lighter weight and eliminates the chance of gauge leakage.

- ASME B40.1, Grade B (± 3-2-3% accuracy)
- ABS plastic case
- c-shaped bronze safety bourdon tube (600 PSI and lower)
- helical wound bronze safety bourdon tube (1000 PSI and higher)
- polycarbonate crystal
- black aluminum pointer
- PowerFlex™ movement with polyester segment, designed to resist the effects of shock, vibration and pulsation.
- ambient temperature range of **-40°F** to **150°F**



GL345FG

2½" face
¼" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	1	.5	***GL300FG***	**$18.80**
0-30	5	.5	***GL320FG***	**18.80**
0-60	5	1	***GL325FG***	**18.80**
0-100	10	2	***GL330FG***	**18.80**
0-160	20	5	***GL335FG***	**18.80**
0-200	20	5	***GL340FG***	**18.80**
0-300	30	5	***GL345FG***	**18.80**
0-400	50	10	***GL347FG***	**18.80**
0-600	50	10	***GL350FG***	**18.80**
0-1000	200	20	***GL355FG***	**28.50**
0-1500	300	50	***GL360FG***	**28.50**
0-2000	400	50	***GL365FG***	**28.50**
0-3000	500	100	***GL370FG***	**28.50**
0-5000	1000	100	***GL375FG***	**28.50**

All Stainless Panel Builder Gauges

- suitable for corrosive environments
- used in gaseous and liquid media
- ASME B40.100 Grade A 2/1/2% full scale accuracy
- 316L stainless steel wetted parts materials
- ambient temperature range of **-4°F** to **140°F**
- media temperature **212°F** maximum
- dial - white aluminum with black lettering; stop pin
- pointer - black aluminum
- glycerin filled case
- laminated safety glass window lens
- fits industry standard 2.56" panel hole cutout



PBLSS200

2½" face
¼" lower back mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	3	.2	***PBLSS15***	**$133.00**
0-30	5	.5	***PBLSS30***	**133.00**
0-60	10	1	***PBLSS60***	**133.00**
0-100	20	2	***PBLSS100***	**133.00**
0-160	20	2	***PBLSS160***	**133.00**
0-200	50	5	***PBLSS200***	**133.00**
0-300	50	5	***PBLSS300***	**133.00**
0-400	100	10	***PBLSS400***	**133.00**
0-600	100	10	***PBLSS600***	**133.00**
0-800	200	20	***PBLSS800***	**133.00**
0-1000	200	20	***PBLSS1000***	**133.00**
0-1500	300	20	***PBLSS1500***	**161.00**
0-2000	500	50	***PBLSS2000***	**161.00**
0-3000	500	50	***PBLSS3000***	**161.00**
0-5000	1000	100	***PBLSS5000***	**161.00**

All Stainless Steel Dry Gauges

Stainless steel gauges provide the corrosion resistance and durability of a permanently sealed gauge. Designed for severe service applications.

2½" face

¼" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	3	.2	***GSS15***	**$91.20**
0-30	5	.5	***GSS30***	**91.20**
0-60	10	1	***GSS60***	**91.20**
0-100	20	2	***GSS100***	**91.20**
0-160	20	2	***GSS160***	**91.20**
0-200	50	5	***GSS200***	**91.20**
0-300	50	5	***GSS300***	**91.20**
0-400	100	10	***GSS400***	**91.20**
0-600	100	10	***GSS600***	**91.20**
0-1000	200	20	***GSS1000***	**91.20**
0-1500	300	20	***GSS1500***	**91.20**
0-2000	500	50	***GSS2000***	**91.20**
0-3000	500	50	***GSS3000***	**91.20**
0-5000	1000	100	***GSS5000***	**91.20**
0-10000	2000	200	***GSS10000***	**121.90**

- 2-1-2% accuracy
- 304 series stainless case with stainless crimp ring
- polycarbonate window
- ¼ lower mount stainless connector
- 316 stainless bourdon tube and socket
- ambient temperature range: **-40°F** to **140°F**



GSS100

3½" face

¼" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	3	.5	***GSS15-4***	**$164.00**
0-30	5	.5	***GSS30-4***	**164.00**
0-60	10	1	***GSS60-4***	**164.00**
0-100	20	2	***GSS100-4***	**164.00**
0-160	20	2	***GSS160-4***	**164.00**
0-200	40	5	***GSS200-4***	**164.00**
0-300	50	5	***GSS300-4***	**164.00**
0-400	50	10	***GSS400-4***	**164.00**
0-600	100	10	***GSS600-4***	**164.00**
0-1000	200	10	***GSS1000-4***	**164.00**
0-1500	200	20	***GSS1500-4***	**164.00**
0-2000	400	20	***GSS2000-4***	**164.00**
0-3000	500	50	***GSS3000-4***	**164.00**
0-5000	1000	100	***GSS5000-4***	**164.00**
0-10000	2000	200	***GSS10000-4***	**179.50**

- 3-2-3% accuracy
- 316 series stainless solid back case with polycarbonate window
- ¼" lower mount stainless connector
- 316 stainless bourdon tube and socket, polyester segment
- ambient temperature range of **-40°F** to **140°F**



GSS160-4

All Stainless Steel Liquid Filled Gauges

Stainless steel gauges provide the corrosion resistance and durability of a permanently sealed gauge. Designed for severe service applications.

- 2-1-2% accuracy
- 2½" 304 series stainless case with stainless crimp ring

2½" face

¼" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	3	.2	***GLSS15***	**$97.55**
0-30	5	.5	***GLSS30***	**97.55**
0-60	10	1	***GLSS60***	**97.55**
0-100	20	2	***GLSS100***	**97.55**
0-160	20	2	***GLSS160***	**97.55**
0-200	50	5	***GLSS200***	**97.55**
0-300	50	5	***GLSS300***	**97.55**
0-400	100	10	***GLSS400***	**97.55**
0-600	100	10	***GLSS600***	**97.55**
0-1000	200	20	***GLSS1000***	**97.55**
0-1500	300	20	***GLSS1500***	**97.55**
0-2000	500	50	***GLSS2000***	**97.55**
0-3000	500	50	***GLSS3000***	**97.55**
0-5000	1000	100	***GLSS5000***	**97.55**
0-10000	2000	200	***GLSS10000***	**132.50**

- polycarbonate window
- ¼" lower mount stainless connector
- 304 stainless case with stainless crimp ring
- glycerin filled
- ambient temperature range of **-4°F** to **140°F**



GLSS1500

All Stainless Steel Liquid Filled Gauges

Stainless steel gauges provide the corrosion resistance and durability of a permanently sealed gauge. Designed for severe service applications.

- 2-1-2% accuracy
- 2½" 304 series stainless case with stainless crimp ring
- polycarbonate window
- ¼" lower mount stainless connector
- 304 stainless case with stainless crimp ring
- glycerin filled
- ambient temperature range of **-4°F** to **140°F**



GLSSC160

2½" face
¼" center back mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-100	20	2	***GLSSC100***	**$132.50**
0-160	20	2	***GLSSC160***	**132.50**
0-200	50	5	***GLSSC200***	**132.50**

Brass Liquid Filled Gauges

- 2-1-2% accuracy on 2½"; 1% accuracy on 4"
- acrylic window with membrane assembly
- copper alloy bourdon tube
- brass movement with highly polished bearing surfaces
- glycerin filled
- ambient temperature range of **-4°F** to **140°F**
- 2½" face gauges have solid cast brass case with polished brass slip-fit ring
- 4" face gauges have cast brass, silver painted case with chrome plated brass ring



GLBR160

2½" face
¼" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	3	.2	***GLBR15***	**$100.70**
0-30	5	.5	***GLBR30***	**100.70**
0-60	10	1	***GLBR60***	**100.70**
0-100	20	2	***GLBR100***	**100.70**
0-160	20	2	***GLBR160***	**100.70**
0-200	50	5	***GLBR200***	**100.70**
0-300	50	5	***GLBR300***	**100.70**
0-400	100	10	***GLBR400***	**100.70**
0-600	100	10	***GLBR600***	**100.70**
0-1000	300	20	***GLBR1000***	**100.70**
0-1500	500	20	***GLBR1500***	**112.25**
0-2000	500	50	***GLBR2000***	**112.25**
0-3000	1000	50	***GLBR3000***	**112.25**
0-5000	1000	100	***GLBR5000***	**112.25**

2½" face
¼" center back mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	3	.2	***GLBRC15***	**$116.75**
0-30	5	.5	***GLBRC30***	**105.75**
0-60	10	1	***GLBRC60***	**105.75**
0-100	20	2	***GLBRC100***	**105.75**
0-160	20	2	***GLBRC160***	**105.75**
0-200	50	5	***GLBRC200***	**105.75**
0-300	50	5	***GLBRC300***	**105.75**
0-400	100	10	***GLBRC400***	**105.75**
0-600	100	10	***GLBRC600***	**105.75**
0-1000	300	20	***GLBRC1000***	**105.75**
0-1500	500	20	***GLBRC1500***	**116.75**
0-2000	500	50	***GLBRC2000***	**116.75**
0-3000	1000	50	***GLBRC3000***	**116.75**
0-5000	1000	100	***GLBRC5000***	**116.75**

4" face
½" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	3	.2	***GLBR15-4***	**$257.00**
0-30	5	.5	***GLBR30-4***	**257.00**
0-60	10	1	***GLBR60-4***	**257.00**
0-100	10	1	***GLBR100-4***	**257.00**
0-160	20	2	***GLBR160-4***	**257.00**
0-200	20	2	***GLBR200-4***	**257.00**
0-300	50	5	***GLBR300-4***	**257.00**
0-400	50	5	***GLBR400-4***	**257.00**
0-600	100	10	***GLBR600-4***	**257.00**
0-1000	100	10	***GLBR1000-4***	**257.00**
0-1500	300	20	***GLBR1500-4***	**280.25**
0-2000	200	20	***GLBR2000-4***	**280.25**
0-3000	500	50	***GLBR3000-4***	**280.25**
0-5000	500	50	***GLBR5000-4***	**280.25**
0-10000	1000	100	***GLBR100004***	**384.00**

Liquid Filled Stainless Case Gauges

- copper alloy bourdon tube
- white aluminum dial with black numbers and black aluminum pointer
- PowerFlex™ movement with polyester segment designed to resist the effects of shock, vibration and pulsation.
- ¼" NPT brass connection
- glycerin liquid fill
- polycarbonate window
- ambient temperature range **-4°F** to **140°F**
- ASME B40.100, Grade A (± 2-1-2% accuracy)

2½" face
¼" center back mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	1	.5	***GLSC400***	**$47.70**
0-30	5	.5	***GLSC405***	**47.70**
0-60	5	1	***GLSC410***	**47.70**
0-100	10	2	***GLSC415***	**47.70**
0-160	20	5	***GLSC417***	**47.70**
0-200	20	5	***GLSC420***	**47.70**
0-300	30	5	***GLSC425***	**47.70**
0-400	50	10	***GLSC427***	**47.70**
0-600	50	10	***GLSC430***	**47.70**
0-1000	200	20	***GLSC435***	**47.70**
0-1500	300	50	***GLSC440***	**54.10**
0-2000	400	50	***GLSC445***	**54.10**
0-3000	500	100	***GLSC450***	**54.10**
0-5000	1000	100	***GLSC455***	**54.10**



GLSC420

2½" face
¼" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	1	.5	***GLS400***	**$39.25**
0-30	5	.5	***GLS405***	**39.25**
0-60	5	1	***GLS410***	**39.25**
0-100	10	2	***GLS415***	**39.25**
0-160	20	5	***GLS417***	**39.25**
0-200	20	5	***GLS420***	**39.25**
0-300	30	5	***GLS425***	**39.25**
0-400	50	10	***GLS427***	**39.25**
0-600	50	10	***GLS430***	**39.25**
0-1000	200	20	***GLS435***	**43.50**
0-1500	300	50	***GLS440***	**43.50**
0-2000	400	50	***GLS445***	**43.50**
0-3000	500	100	***GLS450***	**43.50**
0-5000	1000	100	***GLS455***	**43.50**



GLS430

Liquid Filled ABS Case Gauges

- ASME B40.100, Grade B (± 3-2-3% accuracy)

2½" face
¼" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-15	1	.5	***GLP500***	**$30.75**
0-30	5	.5	***GLP505***	**30.75**
0-60	5	1	***GLP510***	**30.75**
0-100	10	2	***GLP515***	**30.75**
0-160	20	5	***GLP517***	**30.75**
0-200	20	5	***GLP520***	**30.75**
0-300	30	5	***GLP525***	**30.75**
0-400	50	10	***GLP527***	**30.75**
0-600	50	10	***GLP530***	**30.75**
0-1000	200	20	***GLP535***	**35.00**
0-1500	300	50	***GLP540***	**35.00**
0-2000	400	50	***GLP545***	**35.00**
0-3000	500	100	***GLP550***	**35.00**
0-5000	1000	100	***GLP555***	**35.00**



GLP550

Compound Gauges

- ASME B40.1, Grade B accuracy (± 3-2-3 % accuracy)
- ABS plastic case
- bronze bourdon tube / brass socket
- polycarbonate crystal
- black aluminum pointer
- brass movement with polyester segment, designed for extended wear
- ambient temperature range of **-40°F** to **150°F**



GL310

2½" face
¼" center back mount

Mercury (Hg)	PSI	Fig. Inter. Hg / PSI	Min.Grad. Hg / PSI	Part #	Price/E
30"	0-160	30 / 20	5 / 5	***GC210***	**$18.50**

2½" face
¼" lower mount

Mercury (Hg)	PSI	Fig. Inter. Hg / PSI	Min.Grad. Hg / PSI	Part #	Price/E
30"	0-100	15 / 10	5 / 2	***GL310***	**$15.25**
30"	0-160	30 / 20	10 / 10	***GL110***	**15.25**
30"	0-200	30 / 20	10 / 10	***GL315***	**15.25**

Vacuum Gauges

- ASME B40.1, Grade B accuracy (± 3-2-3 % accuracy)
- ABS plastic case
- bronze bourdon tube
- polycarbonate crystal
- black aluminum pointer
- brass movement with polyester segment, designed for extended wear
- ambient temperature range of **-40°F** to **150°F**



GL105

2" face - ¼" lower mount

Mercury (Hg)	Fig. Inter.	Min. Grad.	Part #	Price/E
30"	5"	.5"	***GL105***	**$14.00**

2" face - ¼" center back mount

Mercury (Hg)	Fig. Inter.	Min. Grad.	Part #	Price/E
30"	5"	.5"	***GC205***	**$16.70**

2½" face - ¼" lower mount

Mercury (Hg)	Fig. Inter.	Min. Grad.	Part #	Price/E
30"	5"	.5"	***GL305***	**$15.25**

Brass Welding Gauges

- 3-2-3% accuracy according to ASME B40.100 Grade B
- polished drawn brass case
- twist-lock polycarbonate window
- copper alloy bourdon tube
- "Use no oil" in red on face
- temperature range: **-40°F** to **140°F**



GBRW400

2½" face
¼" lower mount

PSI	Fig. Inter.	Minor Grad.	Part #	Price/E
0-30	5	.5	***GBRW30***	**$51.80**
0-30	5	.5	***GBRW30R*** *	**51.80**
0-60	10	1	***GBRW60***	**51.80**
0-100	20	2	***GBRW100***	**51.80**
0-200	50	5	***GBRW200***	**51.80**
0-400	100	10	***GBRW400***	**51.80**
0-600	100	50	***GBRW600***	**51.80**
0-4000	1000	100	***GBRW4000***	**55.45**

* Red band between 15 to 30 PSI on GBRW30R

King Combination Nipples

- Combination nipples are recommended for low-pressure discharge and suction service for compatible liquids. **They are not for compressible products such as air or nitrogen on sizes 1¼" and above.** SAFETY ALERT
- **King Combination Nipples are not recommended for steam**.
- *The working pressure may vary with the construction of the hose, the type of clamping system used and the application. Consult the factory for recommendations.* SAFETY ALERT
- In accordance with the R.M.A. bulletin for oil suction and discharge hose, a coupled length of hose in any size, should be tested to 1½ times the working pressure and held for fifteen minutes without leaking or coupling movement. For additional information and detailed instruction on testing procedures, see the Rubber Manufacturers Association (R.M.A.) handbook.

NPT threaded end with knurled wrench grip

Size	*Unplated Steel*		Opt Qty	*Plated Steel*		Opt Qty	*Brass*		*Aluminum*		Opt Qty
	Part #	Price/E		Part #	Price/E		Part #	Price/E	Part #	Price/E	
½"	***ST1***	**$4.20**	50	***STC1***	**$4.50**	50	***BST1***	**$15.65**	***AST1***	**$15.65**	50
¾"	***ST5***	**4.80**	50	***STC5***	**4.85**	50	***BST5***	**22.45**	***AST5***	**13.05**	50
1"	***ST10***	**5.85**	50	***STC10***	**6.30**	50	***BST10***	**25.05**	***AST10***	**13.45**	--
1¼"	***ST15***	**8.70**	50	***STC15***	**9.30**	50	**---**	**--**	**---**	**--**	--
1½"	***ST20***	**9.00**	50	***STC20***	**9.55**	50	**---**	**--**	**---**	**--**	--
2"	***ST25***	**10.95**	25	***STC25***	**11.70**	25	**---**	**--**	**---**	**--**	--


knurled wrench grip

NPT threaded end no knurl

Size	*Brass*		*Aluminum*		Opt Qty	*316 Stainless Steel*		Opt Qty	*Hastelloy*	
	Part #	Price/E	Part #	Price/E		Part #	Price/E		Part #	Price/E
½"	**---**	**--**	**---**	**--**	--	***RST1 ****	**$20.75**	50	**---**	**--**
¾"	**---**	**--**	**---**	**--**	--	***RST5 ****	**20.75**	50	**---**	**--**
1"	**---**	**--**	**---**	**--**	50	***RST10***	**20.85**	50	**---**	**--**
1¼"	***BST15***	**$30.45**	***AST15***	**$16.20**	50	***RST15***	**26.05**	50	**---**	**--**
1½"	***BST20***	**39.00**	***AST20***	**15.65**	50	***RST20***	**31.65**	50	**---**	**--**
2"	***BST25***	**61.35**	***AST25***	**18.40**	25	***RST25***	**43.70**	25	***HST25***	**$780.00**

* made from casting


no knurl

Size	*Unplated Steel*		Opt Qty	*Plated Steel*		Opt Qty	*Brass*	
	Part #	Price/E		Part #	Price/E		Part #	Price/E
2½"	***ST30***	**$17.85**	10	***STC30***	**$19.45**	10	***BST30***	**$92.40**
3"	***ST35***	**20.95**	10	***STC35***	**24.10**	10	***BST35***	**127.25**
4"	***ST40***	**33.35**	4	***STC40***	**37.10**	4	***BST40***	**256.80**
5"	***ST50***	**77.75**	4	***STC50***	**82.55**	4	**---**	**--**
6"	***ST60***	**85.70**	2	***STC60***	**94.90**	2	**---**	**--**
8"	***ST80***	**148.15**	2	***STC80***	**191.40**	2	**---**	**--**
10"	***ST100***	**251.20**	1	***STC100***	**311.00**	1	**---**	**--**
12"	***ST120***	**345.00**	1	***STC120***	**448.50**	1	**---**	**--**



Size	*Aluminum*		Opt Qty	*316 Stainless Steel*		Opt Qty	*Hastelloy*	
	Part #	Price/E		Part #	Price/E		Part #	Price/E
2½"	***AST30***	**$57.70**	10	***RST30***	**$79.95**	10	**---**	**--**
3"	***AST35***	**45.20**	10	***RST35***	**114.00**	10	***HST35***	**$1600.00**
4"	***AST40***	**69.50**	4	***RST40***	**178.00**	4	**---**	**--**
5"	***AST50***	**157.00**	4	***RST50***	**393.00**	4	**---**	**--**
6"	***AST60***	**165.00**	2	***RST60***	**491.30**	2	**---**	**--**
8"	**---**	**--**	--	***RST80***	**955.00**	2	**---**	**--**

2010 NEW

King Combination Nipples



BSPT end

Size	Plated Steel Part #	Price/E	Opt Qty	316 Stainless Steel Part #	Price/E	Opt Qty
1"	***STC10A***	**$6.30**	50	***RST10A***	**$20.85**	50
1¼"	***STC15A***	**9.30**	50	***RST15A***	**26.05**	50
1½"	***STC20A***	**9.55**	50	***RST20A***	**31.65**	50
2"	***STC25A***	**11.70**	50	***RST25A***	**43.70**	25
2½"	***STC30A***	**19.45**	10	***RST30A***	**79.95**	10
3"	***STC35A***	**24.10**	10	***RST35A***	**114.00**	10
4"	***STC40A***	**37.10**	4	***RST40A***	**178.00**	4
6"	***STC60A***	**94.90**	2	***RST60A***	**491.30**	2

F
Shank



Beveled end

Size	Unplated Steel Part #	Price/E	Opt Qty	316 Stainless Steel Part #	Price/E	Opt Qty
½"	***STB1***	**$5.35**	50	**---**	**---**	--
¾"	***STB5***	**6.70**	50	***RSTB5***	**$25.15**	50
1"	***STB10***	**7.10**	50	***RSTB10***	**23.75**	50
1¼"	***STB15***	**10.50**	50	***RSTB15***	**35.85**	50
1½"	***STB20***	**9.90**	50	***RSTB20***	**32.25**	50
2"	***STB25***	**11.60**	25	***RSTB25***	**51.10**	25
2½"	***STB30***	**19.90**	10	***RSTB30***	**93.50**	10
3"	***STB35***	**24.30**	10	***RSTB35***	**108.85**	10
4"	***STB40***	**34.70**	5	***RSTB40***	**176.00**	5
5"	***STB50***	**83.75**	4	**---**	**---**	--
6"	***STB60***	**89.70**	2	***RSTB60***	**478.00**	--
8"	***STB80***	**162.60**	2	***RSTB80***	**960.00**	--
10"	***STB100***	**293.50**	1	**---**	**---**	--
12"	***STB120***	**418.60**	1	**---**	**---**	--

Grooved end

- Grooved and beveled ends (in *brass* and *aluminum*) available in select sizes. Consult Dixon for prices and availability.
- See pages 550-556 for our complete line of victaulic groove style fittings.



Size	Unplated Steel Part #	Price/E	Opt Qty	316 Stainless Steel Part #	Price/E	Opt Qty
1"	***STV10***	**$8.00**	50	**---**	**---**	--
1¼"	***STV15***	**9.65**	50	**---**	**---**	--
1½"	***STV20***	**11.85**	50	***RSTV20***	**$44.40**	50
2"	***STV25***	**11.65**	25	***RSTV25***	**49.05**	25
2½"	***STV30***	**21.55**	10	**---**	**---**	--
3"	***STV35***	**23.95**	10	***RSTV35***	**140.85**	10
4"	***STV40***	**33.05**	5	***RSTV40***	**188.55**	5
5"	***STV50***	**78.10**	4	**---**	**---**	--
6"	***STV60***	**95.70**	2	**---**	**---**	--
8"	***STV80***	**167.45**	2	**---**	**---**	--
10"	***STV100***	**299.00**	1	**---**	**---**	--
12"	***STV120***	**431.25**	1	**---**	**---**	--

NPT end with knurled wrench grip - for plastic pipe



Size	Plated Steel Part #	Price/E	Opt Qty
½"	***SAP1***	**$8.15**	50
¾"	***SAP6***	**13.65**	50
1"	***SAP11***	**10.85**	50
1¼"	***SAP16***	**14.40**	50
1½"	***SAP21***	**14.60**	50
2"	***SAP26***	**15.65**	25

External Swage Notched NOS Stems and Ferrules

- The largest advantage of the notched design is that the coupling can be removed from a damaged hose by cutting away the ferrule, without necessarily damaging the fitting. *After inspection of the fitting to determine its suitability for reuse,* it can be reinstalled into another hose by using a *new ferrule*. SAFETY ALERT
- The notched system allows you to better manage your inventories. You can stock one stem and two ferrules, and cover the same hose range with less inventory. *You must purchase a fitting and the matching ferrule to create an assembly*. SAFETY ALERT
- For hose outside diameters of 2-4/64" and below, *the couplings are crimp only*. SAFETY ALERT
- For hose outside diameters of 2-5/64" and above, the couplings can be crimped or swaged.
- See page 39 for cam and groove style notched NOS fittings.



STC200NOS

SAFETY ALERT **Only use the NOS shank with the NOS ferrules.**
Due to differences in dimensions and tolerances for safety reasons,
do not use other manufacturer's stems or ferrules with Dixon Holedall products. SAFETY ALERT

stems

Size	PSI	*Plated Carbon Steel*		*Stainless Steel*	
		Part #	Price/E	Part #	Price/E
1½"	**250**	***STC150NOS***	**$21.00**	***RST150NOS***	**$40.75**
2"	**250**	***STC200NOS***	**24.60**	***RST200NOS***	**48.25**
3"	**250**	***STC300NOS***	**44.00**	***RST300NOS***	**100.00**
4"	*	***STC400NOS***	**55.70**	***RST400NOS***	**160.00**

* Contact factory for pressure information



RST150NOS

ferrules

Size	Hose OD		*Carbon Steel*		*304 Stainless Steel*	
	From:	To:	Part #	Price/E	Part #	Price/E
1½"	1-60/64"	2-12/64"	***CAS2334NOS***	**$15.20**	***GAS2334NOS***	**$31.00**
1½"	2-4/64"	2-22/64"	***CAS2370NOS***	**15.20**	***GAS2370NOS***	**33.00**
2"	2-30/64"	2-44/64"	***CAS2709NOS***	**20.90**	***GAS2709NOS***	**30.00**
2"	2-42/64"	2-54/64"	***CAS2885NOS***	**20.90**	***GAS2885NOS***	**59.00**
3"	3-30/64"	3-46/64"	***CAS3760NOS***	**32.60**	***GAS3760NOS***	**45.00**
3"	3-47/64"	3-54/64"	***CAS3885NOS***	**32.60**	***GAS3885NOS***	**61.50**
4"	4-40/64"	4-47/64"	***CAS5010NOS***	**51.00**	***GAS5010NOS***	**235.00**



Jump Size King Combination Nipples

hose shank x NPT threaded end

Hose Shank	Male NPT	*Carbon Steel*		*316 Stainless Steel*	
		Part #	Price/E	Part #	Price/E
¾"	½"	**---**	**---**	***RST0501***	**$32.25**
¾"	1"	***STC0510***	**$10.65**	***RST0510***	**43.55**
1"	¾"	***STC1005***	**7.80**	***RST1005***	**31.15**
1"	1¼"	***STC1015***	**14.65**	***RST1015***	**56.05**
1¼"	1"	***STC1510***	**10.20**	***RST1510***	**69.90**
1¼"	1½"	***STC1520***	**12.90**	***RST1520***	**75.75**
1½"	1¼"	***STC2015***	**10.85**	***RST2015***	**80.80**
1½"	2"	***STC2025***	**16.05**	***RST2025***	**93.35**
1¾"	2"	***STC175200***	**23.25**	**---**	**---**
2"	1½"	***STC2520***	**21.30**	***RST2520***	**93.35**
2"	2½"	***STC2530***	**33.95**	**---**	**---**
2"	3"	***STC2535***	**51.50**	***RST2535***	**119.00**
2½"	2"	***STC3025***	**30.50**	**---**	**---**
2½"	3"	***STC3035***	**35.55**	**---**	**---**
3"	2"	***STC3525***	**55.05**	***RST3525***	**136.50**
3"	2½"	***STC3530***	**39.85**	**---**	**---**
3"	4"	***STC3540***	**74.50**	**---**	**---**
4"	3"	***STC4035***	**83.15**	**---**	**---**



reducer



increaser

PF Shank King Combination Nipples

- PF shank King Combination nipples have the same shank pattern as found on the PF style cam and groove fittings sold on page 41. This shank design was developed specifically for chemical transport hoses having Crosslinked Polyethylene (XLPE) or Ultra High Molecular Weight Polyethylene (UHMW) tubes, where shank retention can be a problem when using conventional band clamps.
- recommended for discharge and suction service
- ***Not intended for compressed air*** SAFETY ALERT
- working pressure is given at 70°F maximum
- *The working pressure may vary with the construction of the hose, the type of clamping system used and the application. Consult the factory for recommendations.*



NPT end

Size	Working PSI	*Plated Steel*		*316 Stainless Steel*	
		Part #	Price/E	Part #	Price/E
2"	**250**	***ST25PF***	**$34.60**	***RST25PF***	**$63.30**
3"	**125**	***ST35PF***	**41.15**	***RST35PF***	**163.00**
4"	**100**	***ST40PF***	**59.85**	***RST40PF***	**170.00**
6"	**75**	***ST60PF***	**130.00**	***RST60PF*** †	**425.00**

† Will be discontinued as inventory is depleted.
Note: Beveled ends for welding are also available. Contact the factory for further information.

Tuff-Lite King Combination Nipples



PPN



HB



THN

NPT end

Size	*Polypropylene*		Opt Qty
	Part #	Price/E	
½"	***PPN44*** *	**$0.68**	50
¾"	***PPN66*** *	**0.82**	50
1"	***PPN88*** *	**1.18**	25
1½"	***HB150***	**4.40**	25
2"	***HB200***	**5.60**	24
3"	***HB300***	**14.75**	10
4"	***HB400***	**33.15**	---

* sold in package quantities only

NPT end

Size	*Nylon*		Opt Qty
	Part #	Price/E	
1¼"	***THN15***	**$5.95**	25
1½"	***THN20***	**6.45**	25
2"	***THN25***	**9.85**	25
3"	***THN35***	**22.35**	10

Flanged King Combination Nipples

150# ASA flange x hose shank

Size	Steel		316 Stainless Steel	
	Part #	Price/E	Part #	Price/E
1½"	***FST20***	**$92.55**	***RFST20***	**$237.95**
2"	***FST25***	**87.85**	***RFST25***	**285.00**
3"	***FST35***	**127.25**	***RFST35***	**410.00**
4"	***FST40***	**160.40**	***RFST40***	**573.00**
6"	***FST60***	**292.00**	***RFST60***	**967.50**
8"	***FST80***	**530.00**	***RFST80***	**1660.00**
10"	***FST100***	**765.00**	***RFST100***	**3502.00**
12"	***FST120***	**1060.50**	***RFST120***	**4200.00**



Notched Turned Back Nipples

- When used with an appropriate notched ferrule, these fittings can be swaged or crimped onto hose, thereby providing improved shank retention.
- The stem can be removed from a damaged hose by cutting away the ferrule, without necessarily damaging the fitting. *After inspection to determine its suitability for reuse,* it can be reinstalled into another hose by *using a new ferrule*. SAFETY ALERT
- When used with double bolt or band clamps, notched turned back nipples will provide shank retention similar to that of the King turned back nipples.
- Notched turned back nipples let you use the same ferrules used with the notched (NO) cam and groove on page 38. This lets you *maximize your inventory usage and reduce costs*. *You must purchase a fitting and the matching ferrule to create an assembly*.
- Stems are for use with lap joint flanges on page 531.



stems

Size	Carbon Steel		316 Stainless Steel	
	Part #	Price/E	Part #	Price/E
1½"	***N150NO***	**$31.50**	***RN150NO***	**$80.60**
2"	***N200NO***	**35.55**	***RN200NO***	**92.70**
2½"	***N250NO*** NEW	**55.00**	***RN250NO*** NEW	**125.00**
3"	***N300NO***	**84.25**	***RN300NO***	**159.65**
4"	***N400NO***	**137.45**	***RN400NO***	**248.25**

ferrules

Size	Hose OD		304 Stainless Steel	
	From:	To:	Part #	Price/E
1½"	1-60/64"	2-12/64"	***GAS2334NO***	**$33.60**
1½"	2-4/64"	2-22/64"	***GAS2370NO***	**35.10**
2"	2-30/64"	2-44/64"	***GAS2709NO***	**30.10**
2"	2-42/64"	2-54/64"	***GAS2885NO***	**61.55**
2½"	2-54/64"	3"	***GAS3012NO*** NEW	**60.00**
2½"	3-1/64"	3-13/64"	***GAS3260NO***	**64.00**
3"	3-30/64"	3-46/64"	***GAS3760NO***	**43.90**
3"	3-47/64"	3-54/64"	***GAS3885NO***	**60.00**
4"	4-40/64"	4-47/64"	***GAS5010NO***	**250.00**



Note: Stems are for use with lap joint flanges on page 531.

* Special pushers required: 1½" stem - RN150NOPUSH
2" stem - RN200NOPUSH
2½" stem - RN250NOPUSH
3" stem - RN300NOPUSH
4" stem - RN400NOPUSH

Dixon stems and ferrules are specifically designed to be used together as a coupling system. Due to differences in dimensions and tolerances for safety reasons, do not use other manufacturer's stems or ferrules with Dixon Holedall products. SAFETY ALERT


King Short Shank Suction Couplings, NPSM Thread




Complete with NPSM thread



Female with NPSM thread



1" - 2½"



3" - 6"

Male with NPSM thread

Size	*Aluminum shanks with Brass nut*		Pkg Qty	*Aluminum shank with Brass nut*		*Aluminum*	
	Complete Part #	Price/E		Female Part #	Price/E	Male Part #	Price/E
1½"	***CAB150***	**$11.25**	60	***FAB150***	**$7.60**	***MA150***	**$3.95**
2"	***CAB200***	**16.75**	40	***FAB200***	**12.60**	***MA200***	**5.00**
2½"	***CAB250***	**30.25**	30	***FAB250***	**19.50**	***MA250***	**11.05**
3"	***CAB300***	**34.80**	18	***FAB300***	**21.90**	***MA300***	**13.15**
4"	***CAB400***	**68.75**	8	***FAB400***	**48.00**	***MA400***	**25.90**
6"	***CAB600***	**145.00**	6	***FAB600***	**100.00**	***MA600***	**49.50**

Size	*Brass shanks with Brass nut*		*Brass shank with Brass nut*		*Brass*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1¼"	***CBB125***	**$30.00**	***FBB125***	**$16.25**	***MB125***	**$15.90**
1½"	***CBB150***	**32.00**	***FBB150***	**19.95**	***MB150***	**15.10**
2"	***CBB200***	**45.15**	***FBB200***	**26.80**	***MB200***	**22.00**
2½"	***CBB250***	**73.60**	***FBB250***	**40.85**	***MB250***	**42.05**
3"	***CBB300***	**117.95**	***FBB300***	**70.50**	***MB300***	**57.00**
4"	***CBB400***	**187.50**	***FBB400***	**106.50**	***MB400***	**80.15**

Size	*Plated Iron shanks with Plated Iron nut*		*Plated Iron shank with Plated Iron nut*		*Plated Iron*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1"	***S33*** [1]	**$25.35**	***S12*** [1]	**$15.30**	***S10***	**$10.05**
1¼"	***S48***	**37.10**	***S17***	**22.00**	***S15***	**15.10**
1½"	***S63***	**35.60**	***S22***	**19.60**	***S20***	**16.00**
2"	***S78***	**43.60**	***S27***	**25.30**	***S25***	**18.30**
2½"	***S93***	**86.40**	***S32***	**53.60**	***S30***	**32.80**
3"	***S111***	**91.75**	***S38***	**46.75**	***S36***	**45.00**
4"	***S123***	**154.10**	***S42***	**86.20**	***S40***	**67.90**
5"	***S168***	**302.65**	***S57***	**187.65**	***S55***	**115.00**
6"	***S183***	**316.80**	***S62***	**183.75**	***S60***	**133.05**


Size	*Plated Iron shanks with Brass nut*		*Plated Iron shank with Brass nut*		*Plated Iron*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1"	***SB33*** [1]	**$29.45**	***SB12*** [1]	**$19.40**	***S10***	**$10.05**
1¼"	***SB48***	**31.15**	***SB17***	**16.05**	***S15***	**15.10**
1½"	***SB63***	**33.10**	***SB22***	**17.00**	***S20***	**16.00**
2"	***SB78***	**41.30**	***SB27***	**23.00**	***S25***	**18.30**
2½"	***SB93***	**76.80**	***SB32***	**44.00**	***S30***	**32.80**
3"	***SB111***	**89.40**	***SB38***	**44.40**	***S36***	**45.00**
4"	***SB123***	**143.80**	***SB42***	**75.90**	***S40***	**67.90**
5"	***SB168***	**316.80**	***SB57***	**201.80**	***S55***	**115.00**
6"	***SB183***	**291.05**	***SB62***	**158.00**	***S60***	**133.05**

- couplings supplied with rubber gaskets

[1] 1" fittings have a hex nut design

Replacement gaskets (KRW standard) are available, see page 270.

Steel King Short Shank Suction Couplings, NPSM Thread



Complete with NPSM thread



Female with NPSM thread




Male with NPSM thread


Size	*Steel shanks with Iron nut*		*Steel shank with Iron nut*		*Steel*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1¼"	***CSM125***	**$39.15**	***FCSM125***	**$22.15**	***MCS125***	**$17.00**
1½"	***CSM150***	**29.65**	***FCSM150***	**17.00**	***MCS150***	**12.65**
2"	***CSM200***	**39.80**	***FCSM200***	**20.65**	***MCS200***	**19.15**
2½"	***CSM250***	**55.55**	***FCSM250***	**28.30**	***MCS250***	**27.25**
3"	***CSM300***	**68.15**	***FCSM300***	**38.65**	***MCS300***	**29.50**
4"	***CSM400***	**108.15**	***FCSM400***	**65.00**	***MCS400***	**43.15**
6"	***CSM600***	**232.95**	***FCSM600***	**137.85**	***MCS600***	**95.10**

Size	*Steel shanks with Brass nut*		*Steel shank with Brass nut*		*Steel*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1¼"	***CSB125***	**$42.45**	***FCSB125***	**$25.45**	***MCS125***	**$17.00**
1½"	***CSB150***	**30.05**	***FCSB150***	**17.40**	***MCS150***	**12.65**
2"	***CSB200***	**39.10**	***FCSB200***	**19.95**	***MCS200***	**19.15**
2½"	***CSB250***	**53.35**	***FCSB250***	**26.10**	***MCS250***	**27.25**
3"	***CSB300***	**66.35**	***FCSB300***	**36.85**	***MCS300***	**29.50**
4"	***CSB400***	**106.85**	***FCSB400***	**63.70**	***MCS400***	**43.15**
6"	***CSB600***	**220.25**	***FCSB600***	**125.15**	***MCS600***	**95.10**


King Short Shank Suction Couplings, NST (NH) Thread



Complete with NST (NH) thread



Female with NST (NH) thread



Male with NST (NH) thread

Size	*Steel shanks with Iron nut*		*Steel shank with Iron nut*		*Steel*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1½"	***S63N***	**$49.80**	***S22N***	**$28.50**	***S201***	**$21.30**
2½"	***S93N***	**87.90**	***S32N***	**47.85**	***S301***	**40.05**

Size	*Plated Iron shanks with Brass nut*		*Plated Iron shank with Brass nut*		*Steel*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1½"	***SB63N***	**$49.25**	***SB22N***	**$27.95**	***S201***	**$21.30**
2½"	***SB93N***	**100.55**	***SB32N***	**60.50**	***S301***	**40.05**

Size	*Brass shanks with Brass nut*		*Brass shank with Brass nut*		*Brass*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1½"	***BS63N***	**$68.25**	***BS22N***	**$26.10**	***BS201***	**$42.15**
2½"	***BS93N***	**136.80**	***BS32N***	**54.00**	***BS301***	**82.80**

Size	*Aluminum shanks with Brass nut*		*Aluminum shank with Brass nut*		*Aluminum*	
	Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E
1½"	***CAB150N***	**$24.10**	***FAB150N***	**$15.75**	***MA150N***	**$8.55**
2½"	***CAB250N***	**46.50**	***FAB250N***	**30.00**	***MA250N***	**17.00**

NST (Common Fire Hose Thread) is also known as NH
Replacement gaskets are available, see page 270. Rubber (KRW) gaskets are standard

Pin Lug Spanner Wrenches



single end wrench

Size	*Plated Iron*	
	Part #	Price/E
1½"	***SW15***	**$9.50**
2"	***SW20***	**9.75**
2½"	***SW25***	**11.00**
3"	***SW30***	**12.75**
4"	***SW40***	**13.00**
6"	***SW60***	**84.85**



double end wrench

Size	*Plated Iron*	
	Part #	Price/E
1½", 2" x 2½", 3"	***SW153***	**$23.00**

Additional spanner wrenches are also available on pages 464-465.

Gaskets for Suction, Long and Short Shank Couplings



for NST thread

Size	*Rubber*		*Neoprene*		*Viton®*		*Leather*		*Rubber*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
½"	***KRW1***	**$0.45**	**---**	**---**	**---**	**---**	***KLW1***	**$2.40**	**---**	**---**
¾"	***KRW5***	**0.45**	***KNW5***	**$0.45**	**---**	**---**	***KLW5***	**1.40**	**---**	**---**
1"	***KRW10***	**0.45**	***KNW10***	**0.45**	***KVW10***	**$3.85**	***KLW10***	**1.55**	**---**	**---**
1¼"	***KRW15***	**0.45**	***KNW15***	**0.95**	**---**	**---**	***KLW15***	**1.55**	**---**	**---**
1½"	***KRW20***	**.0.55**	***KNW20***	**0.70**	***KVW20***	**7.25**	***KLW20***	**1.85**	***KRW2075***	**$1.85**
2"	***KRW25***	**0.70**	***KNW25***	**0.80**	***KVW25***	**10.10**	***KLW25***	**2.00**	**---**	**---**
2½"	***KRW30***	**0.90**	***KNW30***	**0.90**	**---**	**---**	***KLW30***	**2.25**	***KRW3075***	**1.90**
3"	***KRW35***	**0.90**	***KNW35***	**1.30**	***KVW35***	**21.85**	***KLW35***	**2.85**	**---**	**---**
4"	***KRW40***	**1.45**	***KNW40***	**2.10**	**---**	**---**	***KLW40***	**4.30**	**---**	**---**
5"	***KRW50***	**3.50**	***KNW50***	**4.20**	**---**	**---**	**---**	**---**	**---**	**---**
6"	***KRW60***	**4.45**	***KNW60***	**6.35**	**---**	**---**	**---**	**---**	**---**	**---**
8"	***KRW80***	**9.80**	***KNW80***	**12.10**	**---**	**---**	**---**	**---**	**---**	**---**

Quick Connect Fittings

- The primary applications for these fittings are irrigation and suction lines.
- The hot dipped, galvanized quick connect fittings has a double pin locking lever for smooth closing action.
- Type A (*Agri-Lock style*) locks on the female side. Type B (*Bauer style*) locks on the male side.
- Each coupler is equipped with a safety pin to prevent accidental openings.
- These fittings are not recommended for chemicals or any hazardous type materials where the possibility of leakage would result in health or environmental concerns. Consult the factory for recommendations.


SAFETY ALERT

(Agri-Lock style)



Type A male with 150 ASA flange

Size		*Galvanized Steel*	
inches	mm	Part #	Price/E
10"	250	***MC22210***	**$857.10**
12"	300	***MC22212***	**1142.75**



Type A female with 150 ASA flange (10" pictured)

Size		*Galvanized Steel*	
inches	mm	Part #	Price/E
10"	250	***FC22310***	**$904.15**
12"	300	***FC22312 ****	**1348.65**



Type A male with hose shank

Size		*Galvanized Steel*	
inches	mm	Part #	Price/E
10"	250	***MC21110***	**$322.45**
12"	300	***MC21112***	**504.25**



Type A female with hose shank (10" pictured)

Size		*Galvanized Steel*	
inches	mm	Part #	Price/E
10"	250	***FC21210***	**$377.80**
12"	300	***FC21212 ****	**663.35**



Type A male x female 90° elbow (12" pictured)

Size		*Galvanized Steel*	
inches	mm	Part #	Price/E
10"	250	***EL21510-90***	**$838.60**
12"	300	***EL21512-90 ****	**1137.50**

* includes ACB304 lever assist bar, page 272

Quick Connect Fittings

(Agri-Lock style)



Type A male plug with ring

Size		Galvanized Steel	
inches	mm	Part #	Price/E
10"	250	***MP21010***	**$311.25**
12"	300	***MP21012***	**554.40**



Type A female plug with gasket (10" pictured)

Size		Galvanized Steel	
inches	mm	Part #	Price/E
10"	250	***FP20910***	**$294.40**
12"	300	***FP20912 ****	**614.55**

* includes ACB304 lever assist bar



Type A gaskets

Size		Rubber		EPDM	
inches	mm	Part #	Price/E	Part #	Price/E
10"	250	***RG20510***	**$23.75**	***RG20610***	**$57.05**
12"	300	***RG20512***	**26.75**	***RG20612***	**64.75**






Type A accessories

Size		Description	Galvanized Steel	
inches	mm		Part #	Price/E
12"	300	lever assist bar for 12" fittings	***ACB304***	**$42.00**
12"	300	safety pin for 12" fittings	***SP390***	**14.30**

Quick Connect Fittings

(Bauer style)

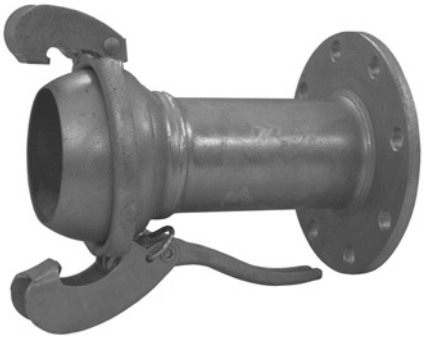

Type B male with 150 ASA flange

Size		Galvanized Steel	
inches	mm	Part #	Price/E
4"	108	***MC3134***	**$237.15**
6"	159	***MC3136***	**431.95**
8"	194	***MC3138***	**758.70**
10"	250	***MC31310***	**1325.30**
12"	300	***MC31312***	**1611.25**



Type B female with 150 ASA flange

Size		Galvanized Steel	
inches	mm	Part #	Price/E
4"	108	***FC3144***	**$169.15**
6"	159	***FC3146***	**297.40**
8"	194	***FC3148***	**507.00**
10"	250	***FC31410***	**858.60**
12"	300	***FC31412***	**1087.65**

Quick Connect Fittings

(Bauer style)



Type B male with hose shank

Size		Galvanized Steel	
inches	mm	Part #	Price/E
2"	50	***MC3092***	**$48.90**
3"	76	***MC3093***	**80.65**
4"	108	***MC3094***	**109.65**
6"	159	***MC3096***	**194.45**
8"	194	***MC3098***	**376.85**
10"	250	***MC30910***	**928.90**
12"	300	***MC30912***	**1137.25**



Type B female with hose shank

Size		Galvanized Steel	
inches	mm	Part #	Price/E
2"	50	***FC3102***	**$22.10**
3"	76	***FC3103***	**27.95**
4"	108	***FC3104***	**57.50**
6"	159	***FC3106***	**102.35**
8"	194	***FC3108***	**193.40**
10"	250	***FC31010***	**383.75**
12"	300	***FC31012***	**473.65**




Type B male with male NPT

Size		Galvanized Steel	
inches	mm	Part #	Price/E
2"	50	***MCM3112***	**$66.85**
3"	76	***MCM3113***	**100.10**
4"	108	***MCM3114***	**173.30**
6"	159	***MCM3116***	**316.80**
8"	194	***MCM3118***	**612.70**




Type B female with male NPT

Size		Galvanized Steel	
inches	mm	Part #	Price/E
2"	50	***FCM3122***	**$37.10**
3"	76	***FCM3123***	**47.15**
4"	108	***FCM3124***	**76.20**
6"	159	***FCM3126***	**141.05**
8"	194	***FCM3128***	**290.20**

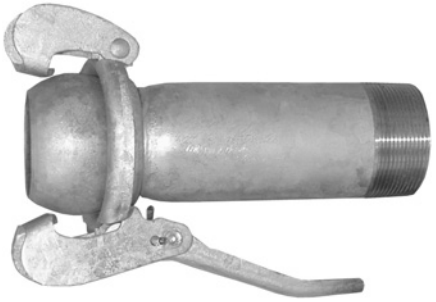

Type B male with male NPT - extra long

Size		Galvanized Steel	
inches	mm	Part #	Price/E
2"	50	***MCM3112XL***	**$60.90**
3"	76	***MCM3113XL***	**93.55**
4"	108	***MCM3114XL***	**162.05**
6"	159	***MCM3116XL***	**304.75**
8"	194	***MCM3118XL***	**587.20**



Standard Strainer Square Hole Type

NPT Size	Zinc Plated Steel	
	Part #	Price/E
2"	***SHS25***	**$26.75**
3"	***SHS35***	**43.00**
4"	***SHS40***	**60.00**
6"	***SHS60***	**155.00**
8"	***SHS80***	**385.00**

Quick Connect Fittings

(Bauer style)



Type B male x female 90° elbow

Size		Galvanized Steel	
inches	mm	Part #	Price/E
4"	108	***EL3154-90***	**$209.50**
6"	159	***EL3156-90***	**400.55**
8"	194	***EL3158-90***	**717.70**
10"	250	***EL31510-90***	**1325.20**
12"	300	***EL31512-90***	**1641.30**



Type B male x female 45° elbow

Size		Galvanized Steel	
inches	mm	Part #	Price/E
4"	108	***EL3154-45***	**$199.85**
6"	159	***EL3156-45***	**375.70**
8"	194	***EL3158-45***	**609.25**
10"	250	***EL31510-45***	**1157.40**
12"	300	***EL31512-45***	**1423.45**



Type B female x male reducer

Female Size		Male Size		Galvanized Steel	
inches	mm	inches	mm	Part #	Price/E
6"	159	4"	108	***FMR31864***	**$237.10**
8"	194	6"	159	***FMR31886***	**422.85**
10"	250	8"	194	***FMR318108***	**786.55**
12"	300	10"	250	***FMR3181210***	**1277.60**



Type B female x male increaser

Female Size		Male Size		Galvanized Steel	
inches	mm	inches	mm	Part #	Price/E
4"	108	6"	159	***FMI31946***	**$282.20**
6"	159	8"	194	***FMI31968***	**517.80**
8"	194	10"	250	***FMI319810***	**1330.70**
10"	250	12"	300	***FMI3191012***	**1330.70**



Type B male plug

Size		Galvanized Steel	
inches	mm	Part #	Price/E
2"	50	***MP3232***	**$35.60**
3"	76	***MP3233***	**53.60**
4"	108	***MP3234***	**107.60**
6"	159	***MP3236***	**208.05**
8"	194	***MP3238***	**362.90**
10"	250	***MP32310***	**776.10**
12"	300	***MP32312***	**931.35**



Type B female plug with gasket

Size		Galvanized Steel	
inches	mm	Part #	Price/E
2"	50	***FP3082***	**$15.25**
3"	76	***FP3083***	**17.45**
4"	108	***FP3084***	**35.10**
6"	159	***FP3086***	**85.15**
8"	194	***FP3088***	**131.90**
10"	250	***FP30810***	**336.55**
12"	300	***FP30812***	**454.55**

Quick Connect Fittings

(Bauer style)



Type B female with gasket

Size		*Unplated Steel*	
inches	mm	Part #	Price/E
2"	50	***3022***	**$5.95**
3"	76	***3023***	**7.10**
4"	108	***3024***	**18.75**
6"	159	***3026***	**39.50**
8"	194	***3028***	**75.15**
10"	250	***30210***	**161.40**
12"	300	***30212***	**210.90**



Type B male

Size		*Unplated Steel*	
inches	mm	Part #	Price/E
2"	50	***3032***	**$4.35**
3"	76	***3033***	**5.15**
4"	108	***3034***	**14.85**
6"	159	***3036***	**21.50**
8"	194	***3038***	**45.80**
10"	250	***30310***	**114.30**
12"	300	***30312***	**118.65**

- Female and male fittings are commonly used for butt-welding to pipe.



2" - 8"



10" - 12"

Type B safety pins

Size		*Galvanized Steel*	
inches	mm	Part #	Price/E
2"	50	***SP59***	**$5.70**
3"	76	***SP76***	**8.20**
4"	108	***SP89***	**8.90**
6"	159	***SP159***	**6.80**
8"	194	***SP159***	**6.80**
10"	250	***SP390***	**14.30**
12"	300	***SP390***	**14.30**



Type B lever ring

Size		*Galvanized Steel*	
inches	mm	Part #	Price/E
2"	50	***LR3042***	**$23.50**
3"	76	***LR3043***	**43.75**
4"	108	***LR3044***	**78.05**
6"	159	***LR3046***	**152.15**
8"	194	***LR3048***	**272.50**
10"	250	***LR30410***	**504.30**
12"	300	***LR30412***	**652.45**



Type B accessory

Size		Description	*Galvanized Steel*	
inches	mm		Part #	Price/E
10" 12"	250 300	lever assist bar for 10" and 12" Type B fittings	***ACB304***	**$42.00**



Type B gaskets


Size		*Rubber*		*EPDM*	
inches	mm	Part #	Price/E	Part #	Price/E
2"	50	***RG3052***	**$1.10**	***RG3062***	**$4.80**
3"	76	***RG3053***	**1.80**	***RG3063***	**6.10**
4"	108	***RG3054***	**4.65**	***RG3064***	**9.50**
6"	159	***RG3056***	**9.25**	***RG3066***	**19.75**
8"	194	***RG3058***	**20.80**	***RG3068***	**36.50**
10"	250	***RG30510***	**30.65**	***RG30610***	**46.10**
12"	300	***RG30512***	**46.50**	***RG30612***	**58.85**

2010 NEW

Heavy Duty Quick Connect Fittings

(Bauer style)

- features a Dixon STB style hose machined from Schedule 40 pipe
- recommended when using steel crimp sleeves

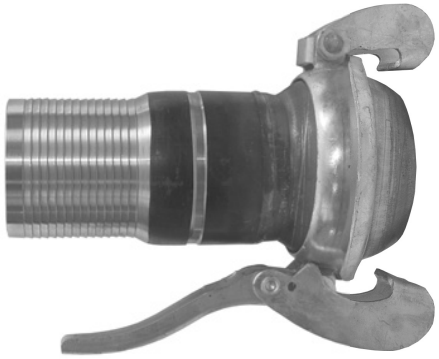



Type B male with machined steel hose shank


Size		*Machined Steel*	
inches	mm	Part #	Price/E
4"	108	***MC3094ST40***	**$171.85**
6"	159	***MC3096ST60***	**333.00**
8"	194	***MC3098ST80***	**589.40**

Type B female with machined steel hose shank

Size		*Machined Steel*	
inches	mm	Part #	Price/E
4"	108	***FC3104ST40***	**$124.75**
6"	159	***FC3106ST60***	**245.15**
8"	194	***FC3108ST80***	**388.50**


Dixon 316 Stainless Steel Menders

Size	Length	*Stainless Steel* Part #	Price/E
1/4"	2-1/32"	***RM2***	**$14.45**
3/8"	2-1/16"	***RM3***	**15.40**
1/2"	2-1/16"	***RM4***	**22.75**
3/4"	2-1/2"	***RM6***	**30.50**



Dixon Brass Hose Menders

Size	*Brass* Part #	Price/E
1/8"	***BM1***	**$1.58**
3/16"	***BM15***	**1.54**
1/4"	***BM2***	**1.70**
1/4" x 1/8"	***BM2-1*** NEW	**2.12**
5/16"	***BM25***	**1.83**
3/8"	***BM3***	**1.99**
3/8" x 1/4"	***BM3-2*** NEW	**2.45**
1/2"	***BM4***	**2.82**
1/2" x 3/8"	***BM4-3*** NEW	**3.32**
5/8"	***BM5***	**3.66**
5/8" x 3/8"	***BM5-3*** NEW	**3.53**
3/4"	***BM6***	**4.57**
3/4" x 1/2"	***BM6-4*** NEW	**4.78**
1"	***BM8***	**8.39**

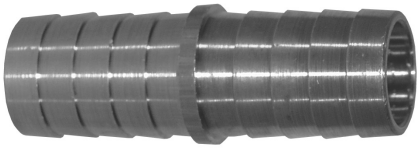

Tuff-Lite Nylon Menders

- maximum working temperature **150°F**

Size	*Nylon* Part #	Price/E	Pkg Qty
1/4"	***TM2 ****	**$0.63**	50
5/16"	***TM25 ****	**0.68**	50
3/8"	***TM3 ****	**0.72**	50
1/2"	***TM4 ****	**0.96**	50
5/8"	***TM5 ****	**1.48**	50
3/4"	***TM6 ****	**1.48**	50
1"	***TM8 ****	**1.82**	25
1-1/4"	***TM16***	**4.55**	50
1-1/2"	***TM21***	**7.45**	100
2"	***TM26***	**9.55**	50
3"	***TM36***	**32.00**	--
4"	***TM46***	**54.10**	--
6"	***TM66***	**81.65**	--



¼" - 2" menders



3" - 6" menders

* TM2 through TM8 sold in package quantity only.

Tuff-Lite Nylon Push-On Menders

- no clamps needed when used with push-on hose
- sold in package quantity only

Size	*Nylon* Part #	Price/E	Pkg Qty
1/4"	***TPM2***	**$0.65**	50
3/8"	***TPM3***	**0.71**	50
1/2"	***TPM4***	**0.87**	50



Steel Dixon Hose Menders

- **They are not for compressible products such as air, nitrogen or steam.** SAFETY ALERT
- *The working pressure may vary with the construction of the hose, the type of clamping system used and the application. Consult the factory for recommendations.*



- In accordance with the R.M.A. bulletin for oil suction and discharge hose, a coupled length of hose in any size, should be tested to 1½ times the working pressure and held for fifteen minutes without leaking or coupling movement. For additional information and detailed instruction on testing procedures, see the Rubber Manufacturers Association (R.M.A.) handbook.

Size	*Zinc Plated Steel* Part #	Price/E	Opt Qty
1/4"	***DMA***	**$7.10**	200
3/8"	***DMB***	**7.15**	100
1/2"	***DM1***	**7.25**	50
5/8"	***DM5***	**7.10**	50
3/4"	***DM6***	**6.25**	50
1"	***DM11***	**5.95**	50
1-1/4"	***DM16***	**7.90**	50
1-3/8"	***DM18***	**24.80**	50
1-1/2"	***DM21***	**8.00**	50
1-1/2"	***DMXL21 ****	**23.00**	25
2"	***DM26***	**10.40**	50
2"	***DMXL26 ****	**27.40**	25
2-1/2"	***DM31***	**17.10**	25
3"	***DM36***	**20.90**	20
4"	***DM46***	**37.00**	10
5"	***DM51***	**123.10**	5
6"	***DM66***	**93.00**	4
8"	***DM86***	**195.00**	1
10"	***DM100***	**309.50**	1
12"	***DM120***	**490.45**	1

Size	*Stainless Steel* Part #	Price/E	Opt Qty
1/4"	***RDMA***	**$26.70**	100
3/8"	***RDMB***	**31.05**	100
1/2"	***RDM1***	**26.80**	50
3/4"	***RDM6***	**54.65**	50
1"	***RDM11***	**58.00**	50
1-1/4"	***RDM16***	**60.95**	5
1-1/2"	***RDM21***	**70.30**	50
2"	***RDM26***	**78.00**	10
3"	***RDM36***	**175.25**	5
4"	***RDM46***	**207.90**	5

* XL series is extra long

Steel King Hose Menders

- **They are not for compressible products such as air, nitrogen or steam.** SAFETY ALERT
- *The working pressure may vary with the construction of the hose, the type of clamping system used and the application.* Consult the factory for recommendations.



for 1 clamp each end



for 2 clamps each end

- In accordance with the R.M.A. bulletin for oil suction and discharge hose, a coupled length of hose in any size, should be tested to 1½ times the working pressure and held for fifteen minutes without leaking or coupling movement. For additional information and detailed instruction on testing procedures, see the Rubber Manufacturers Association (R.M.A.) handbook.

Size	for 1 clamp each end *Steel* Part #	Price/E	for 2 clamps each end *Steel* Part #	Price/E
1/4"	***KM21***	**$5.20**	**---**	**---**
5/16"	***KM251***	**5.20**	**---**	**---**
1/2"	***KM41***	**8.15**	***KM42***	**$10.20**
5/8"	***KM51***	**9.45**	***KM52***	**11.15**
3/4"	***KM61***	**6.60**	***KM62***	**10.00**
1"	***KM81***	**7.25**	***KM82***	**11.00**
1-1/4"	***KM101***	**7.25**	***KM102***	**12.10**
1-1/2"	***KM121***	**10.50**	***KM122***	**18.65**
2"	**---**	**---**	***KM162***	**26.00**

Strainer with Spring Loaded Check Valves

- brass with NBR seat, stainless steel strainer
- soft seat for bubble tight shutoff, spring loaded for fast seating action
- flow profile designed to minimize head loss
- temperature range: **10°F** to **210°F** (-10°C to 100°C)



- cracking pressure: **0.50 PSI**
- pressure rating: 1½" - 2" **400 PSI** WOG, 3" - 4" **175 PSI** WOG

Size	Part #	Price/E
1½"	***BVFS20 ****	**$81.40**
2"	***BVFS25 ****	**123.75**
3"	***BVFS35***	**344.70**
4"	***BVFS40***	**520.00**


* NSF61 approved

Cast Iron Threaded Foot Valves

Must be installed in the *vertical position*








NPT Size	Complete Assembly Threaded		Strainer		Flapper Assembly		Valve		Seat Plate	
	Painted Cast Iron		*Painted Carbon Steel*		*Carbon Steel*		*Rubber*		*Ductile Iron*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1½"	***DFVS20***	**$22.00**	***FVS20***	**$6.90**	***FVFA20***	**$14.05**	***FVL20***	**$6.65**	***FVSP20***	**$6.35**
2"	***DFVS25***	**34.25**	***FVS25***	**10.60**	***FVFA25***	**17.80**	***FVL25***	**10.60**	***FVSP25***	**5.30**
2½"	***DFVS30***	**47.00**	***FVS30***	**20.95**	***FVFA30***	**22.30**	***FVL30***	**13.00**	***FVSP30***	**9.55**
3"	***DFVS35***	**58.50**	***FVS35***	**21.20**	***FVFA35***	**23.80**	***FVL35***	**19.65**	***FVSP35***	**14.35**
4"	***DFVS40***	**97.25**	***FVS40***	**28.80**	***FVFA40***	**35.00**	***FVL40***	**30.75**	***FVSP40***	**15.90**
6"	***DFVS60***	**240.00**	***FVS60***	**68.90**	***FVFA60***	**85.90**	***FVL60***	**65.75**	***FVSP60***	**29.05**
8"	***DFVS80***	**500.00**	***FVS80***	**189.35**	***FVFA80***	**187.80**	***FVL80***	**124.05**	***FVSP80***	**65.75**

Strainers and Skimmers









NPSH Size	Standard Strainer Round Hole Type		Standard Strainer Round Hole Type		Standard Strainer Square Hole Type		Long Thin Strainer Round Hole Type		Bottom Skimmer Round Hole Type		Top Skimmer Round Hole Type	
	Zinc Plated Steel		*304 Stainless Steel*		*Zinc Plated Steel*		*Zinc Plated Steel*		*Zinc Plated Steel*		*Zinc Plated Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1½"	***RHS20***	**$23.25**	***RRHS20***	**$260.00**	***SHS20***	**$23.25**	***RSS20***	**$21.25**	***DSB20***	**$77.00**	***DST20***	**$77.00**
2"	***RHS25***	**26.75**	***RRHS25***	**340.00**	***SHS25***	**26.75**	***RSS25***	**24.50**	***DSB25***	**85.00**	***DST25***	**85.00**
2½"	***RHS30***	**33.75**	**---**	**---**	***SHS30***	**33.75**	***RSS30***	**31.00**	**---**	**---**	**---**	**---**
3"	***RHS35***	**43.00**	***RRHS35***	**475.00**	***SHS35***	**43.00**	***RSS35***	**39.50**	***DSB35***	**190.00**	***DST35***	**190.00**
4"	***RHS40***	**60.00**	***RRHS40***	**590.00**	***SHS40***	**60.00**	***RSS40***	**55.00**	**---**	**---**	**---**	**---**
5"	***RHS50***	**130.00**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
6"	***RHS60***	**155.00**	***RRHS60***	**1175.00**	***SHS60***	**155.00**	**---**	**---**	**---**	**---**	**---**	**---**
8"	***RHS80***	**385.00**	**---**	**---**	***SHS80***	**385.00**	**---**	**---**	**---**	**---**	**---**	**---**
10"	***RHS100***	**650.00**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
12"	***RHS120***	**1160.00**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**


Polyethylene Strainers

NPT Size	*Black Polyethylene*	
	Part #	Price/E
1½"	***TSS20***	**$11.25**
2"	***TSS25***	**11.25**
3"	***TSS35***	**24.25**



King Steel Round Nipples





for one clamp

Hose Size	NPT Size	*Unplated Steel* Part #	Price/E	Opt Qty
5/8"	1/2"	***KRN541***	**$11.30**	100
3/4"	1/2"	***KRN641***	**8.95**	50
1"	3/4"	***KRN861***	**12.20**	50

for two clamps

Hose Size	NPT Size	*Unplated Steel* Part #	Price/E	Opt Qty
1/2"	1/4"	***KRN422***	**$15.20**	100
1/2"	3/8"	***KRN432***	**10.55**	100
5/8"	1/2"	***KRN542***	**14.50**	100
3/4"	1/2"	***KRN642***	**12.75**	50
3/4"	3/4"	***KRN662***	**14.45**	50
1"	3/4"	***KRN862***	**12.00**	50
1"	1"	***KRN882***	**13.50**	50
1-1/4"	1"	***KRN1082***	**11.40**	25
1-1/2"	1-1/4"	***KRN1210***	**15.05**	25
2"	1-1/2"	***KRN1612***	**44.05**	20

King Steel Hex Nipples





for one clamp

Hose Size	NPT Size	*Plated Steel* Part #	Price/E	Opt Qty
1/4"	1/4"	***KHN221***	**$9.35**	100
3/8"	1/4"	***KHN321***	**9.00**	100
3/8"	3/8"	***KHN331***	**8.40**	100
3/8"	1/2"	***KHN341***	**8.40**	100
1/2"	1/4"	***KHN421***	**10.90**	50
1/2"	3/8"	***KHN431***	**9.30**	50
1/2"	1/2"	***KHN441***	**8.25**	50
1/2"	3/4"	***KHN461***	**11.00**	50
3/4"	1/2"	***KHN641***	**12.35**	50
3/4"	3/4"	***KHN661***	**12.40**	50
1"	3/4"	***KHN861***	**15.00**	50
1"	1"	***KHN881***	**15.60**	25

for two clamps

Hose Size	NPT Size	*Plated Steel* Part #	Price/E	Opt Qty
1/4"	1/4"	***KHN222***	**$15.75**	100
3/8"	1/4"	***KHN322***	**13.50**	100
3/8"	3/8"	***KHN332***	**14.25**	100
3/8"	1/2"	***KHN342***	**16.65**	100
1/2"	1/4"	***KHN422***	**14.00**	100
1/2"	3/8"	***KHN432***	**12.40**	100
1/2"	1/2"	***KHN442***	**11.55**	50
1/2"	3/4"	***KHN462***	**16.00**	50
3/4"	1/2"	***KHN642***	**13.20**	50
3/4"	3/4"	***KHN662***	**12.60**	50
1"	3/4"	***KHN862***	**18.65**	50
1"	1"	***KHN882***	**18.80**	25

Steel 3500 Nipples



Male Nipple

(hose shank x male NPT)

Hose Size	NPT Size	*Zinc Plated Steel* Part #	Price/E	Opt Qty
1/4"	1/8"	***3501***	**$6.40**	100
1/4"	1/4"	***3502***	**5.15**	100
1/4"	3/8"	***3504***	**6.70**	100
3/8"	1/4"	***3505***	**6.15**	100
3/8"	3/8"	***3506***	**5.85**	100
3/8"	1/2"	***3508***	**8.50**	100
1/2"	1/4"	***3509***	**7.00**	100
1/2"	3/8"	***3510***	**6.80**	100
1/2"	1/2"	***3512***	**8.50**	100
1/2"	3/4"	***3511***	**11.30**	50
3/4"	1/2"	***3513***	**12.15**	50
3/4"	3/4"	***3514***	**11.00**	50
3/4"	1"	***3515***	**20.20**	25
1"	3/4"	***3516***	**19.00**	25
1"	1"	***3518***	**16.40**	25



Female Nipple

(hose shank x female NPT)


Hose Size	NPT Size	*Zinc Plated Steel* Part #	Price/E	Opt Qty
1/4"	1/4"	***3542***	**$9.00**	100
3/8"	1/4"	***3545***	**10.30**	50
3/8"	3/8"	***3546***	**10.70**	50
1/2"	3/8"	***3550***	**10.55**	100
1/2"	1/2"	***3552***	**12.50**	50
3/4"	3/4"	***3554***	**17.40**	50

F Shank

Steel 3500 Nipples with Ferrules

Exclusive interlocking ferrule can be crimped or swaged to achieve maximum coupling sealing and retention. The 3500 steel nipples with ferrules have a low profile, streamline appearance. For crimp dimensions see page 634.

- zinc plated steel 3500 nipple with carbon steel ferrule
- can be crimped or swaged-on
- rated to **600 PSI** working pressure at ambient temperature (70°F)
- *for air and water service only* SAFETY ALERT

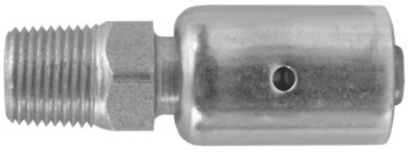

Size	Hose OD From:	Hose OD To:	*Steel* Part #	Price/E
1/2"	54/64"	58/64"	***3512WF***	**$19.35**
3/4"	1-10/64"	1-14/64"	***3514WF***	**19.90**
1"	1-30/64"	1-34/64"	***3518WF***	**20.70**

The Importance of Whip Hose

SAFETY ALERT

The constant vibration created by air tools, like air drills and pavement breakers, is destructive to air hose couplings, especially the quick-acting type. To provide protection against coupling breakage and related hazards, Dixon recommends the use of a whip hose. To construct a whip hose, connect one end of a short (3' to 10')air hose to the air tool using a 3500 type steel nipple. Connect the other end of the hose to the air supply using the standard quick-acting coupling. The heat-treated 3500 nipple will withstand vibration far better than the standard coupling and provide a safer connection. The whip hose should remain permanently connected to the tool.


Long Shank Couplings



Complete Coupling



Female



Male

Hose ID	NPSM Thread	*Plated Steel* Complete Part #	Price/E	*Plated Steel* Female Part #	Price/E	*Plated Steel* Male Part #	Price/E
1/2"	1/2"	***SLS404***	**$22.10**	***SLS444***	**$11.95**	***SLS414***	**$10.15**
3/4"	3/4"	***SLS606***	**24.65**	***SLS646***	**12.90**	***SLS616***	**11.75**
1"	1"	***SLS808***	**36.55**	***SLS848***	**20.40**	***SLS818***	**16.15**

F
Shank

Hose ID	GHT Thread	*Plated Steel* Complete Part #	Price/E	*Plated Steel* Female Part #	Price/E	*Plated Steel* Male Part #	Price/E
3/8"	3/4"	***SLS307***	**$29.40**	***SLS347***	**$16.05**	***SLS317***	**$13.35**
1/2"	3/4"	***SLS407***	**23.80**	***SLS447***	**14.25**	***SLS417***	**9.55**
5/8"	3/4"	***SLS507***	**21.35**	***SLS547***	**11.00**	***SLS517***	**10.35**
3/4"	3/4"	***SLS607***	**22.30**	***SLS647***	**11.55**	***SLS617***	**10.75**

Hose ID	NPSM Thread	*Plated Iron* Complete Part #	Price/E	*Plated Iron* Female Part #	Price/E	*Plated Iron* Male Part #	Price/E
1-1/4"	1-1/4"	***MLS48***	**$47.85**	***MLS33***	**$23.85**	***MLS15***	**$24.00**
1-1/2"	1-1/2"	***MLS63***	**49.65**	***MLS43***	**23.95**	***MLS20***	**25.70**
2"	2"	***MLS78***	**69.65**	***MLS53***	**40.95**	***MLS25***	**28.70**

Hose ID	NPSM Thread	*Brass* Complete Part #	Price/E	*Brass* Female Part #	Price/E	*Brass* Male Part #	Price/E
1/2"	1/2"	***BLS404***	**$21.20**	***BLS444***	**$11.00**	***BLS414***	**$10.20**
1/2"	3/4"	***BLS406***	**22.90**	***BLS446***	**9.95**	***BLS416***	**12.95**
5/8"	3/4"	***BLS506***	**18.35**	***BLS546***	**10.05**	***BLS516***	**8.30**
3/4"	3/4"	***BLS606***	**20.10**	***BLS646***	**10.35**	***BLS616***	**9.75**
1"	1"	***BLS808***	**33.40**	***BLS848***	**16.10**	***BLS818***	**17.30**
1-1/4"	1-1/4"	***BLS48***	**70.10**	***BLS33***	**39.70**	***BLS15***	**30.40**
1-1/2"	1-1/2"	***BLS63***	**87.00**	***BLS43***	**48.00**	***BLS20***	**39.00**
2"	2"	***BLS78***	**140.70**	***BLS53***	**77.85**	***BLS25***	**62.90**

sizes ½" to 1" machined; 1¼" to 2" cast

Hose ID	GHT Thread	*Brass* Complete Part #	Price/E	*Brass* Female Part #	Price/E	Pkg Qty	*Brass* Male Part #	Price/E	Pkg Qty
1/2"	3/4"	***BLS407***	**$15.12**	***BLS447***	**$7.73**	150	***BLS417***	**$7.39**	150
5/8"	3/4"	***BLS507***	**15.12**	***BLS547***	**7.89**	150	***BLS517***	**7.39**	150
3/4"	3/4"	***BLS607***	**15.04**	***BLS647***	**7.85**	150	***BLS617***	**7.19**	150

Hose ID	NST Thread	*Brass* Complete Part #	Price/E	*Brass* Female Part #	Price/E	*Brass* Male Part #	Price/E
1-1/2"	1-1/2"	***BLS63NST***	**$106.45**	***BLS150NST***	**$59.30**	***BLS20NST***	**$47.15**
2-1/2"	2-1/2"	***BLS93NST***	**205.75**	***BLS250NST***	**107.25**	***BLS30NST***	**98.50**

KRW rubber gaskets standard, located on page 270.

Super King Long Shank Couplings for Bulk Handling

NPSM Female Coupling



KLW leather gaskets standard | Teflon® gaskets standard

Size	Shank Length	*Plated Steel Shank with Brass Nut*		*Plated Steel Shank with Iron Nut*		*316 Stainless Shank with Iron Nut*		*316 Stainless Shank with Stain. Nut*	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1-1/4"	4-1/8"	***SD15***	**$43.00**	***SDMP15***	**$42.00**	**---**	**---**	**---**	**---**
1-1/2"	4-1/8"	***SD20***	**44.10**	***SDMP20***	**43.00**	**---**	**---**	***RSHR20 ****	**$120.00**
2"	5"	***SD25***	**55.55**	***SDMP25***	**54.45**	***RSDM25***	**$106.00**	***RSDR25***	**146.50**
2-1/2"	5"	***SD30***	**84.00**	***SDMP30***	**80.00**	**---**	**---**	**---**	**---**
3"	5"	***SD35***	**79.00**	***SDMP35***	**75.35**	***RSDM35***	**150.00**	***RSDR35***	**182.50**
4"	5"	***SD40***	**117.00**	***SDMP40***	**114.95**	**---**	**---**	**---**	**---**

* ***RSHR20*** has a hex nut


NPT Male Coupling



Size	Shank Length	*Plated Steel*		*316 Stainless*	
		Part #	Price/E	Part #	Price/E
1-1/4"	4-3/8"	***SK16***	**$18.00**	**---**	**---**
1-1/2"	4-5/32"	***SK21***	**20.65**	**---**	**---**
2"	5-5/16"	***SK26***	**25.70**	***RSK26***	**$78.45**
2-1/2"	5-5/16"	***SK31***	**44.50**	**---**	**---**
3"	5-1/2"	***SK36***	**48.00**	***RSK36***	**139.45**
4"	5-1/2"	***SK46***	**67.20**	**---**	**---**

All Super King long shank couplings will accept 3 band clamps.
Replacement Viton® (KVW) gaskets are available on page 270. Teflon® gaskets are available on page 565.

Spray Hose Couplings



Complete Coupling



Female



Male



Gasket

Hose ID	NPSM Thread	*Plated Steel*		*Plated Steel*		*Plated Steel*		*Leather*	
		Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E	Part #	Price/E
3/8"	3/4"	***SS306***	**$27.45**	***SS346***	**$13.25**	***SS316***	**$14.20**	***KLW5***	**$1.40**
1/2"	1/2"	***SS404***	**36.10**	***SS444***	**23.00**	***SS414***	**13.10**	***KLW1***	**2.40**
1/2"	3/4"	***SS406***	**27.35**	***SS446***	**11.95**	***SS416***	**15.40**	***KLW5***	**1.40**
3/4"	3/4"	***SS606***	**34.05**	***SS646***	**20.65**	***SS616***	**13.40**	***KLW5***	**1.40**
1"	1"	***SS808***	**68.35**	***SS848***	**47.55**	***SS818***	**20.80**	***KLW10***	**1.55**

Hose ID	GHT Thread	*Plated Steel*		*Plated Steel*		*Plated Steel*		*Leather*	
		Complete Part #	Price/E	Female Part #	Price/E	Male Part #	Price/E	Part #	Price/E
3/8"	3/4"	***SS307***	**$22.50**	***SS347***	**$12.50**	***SS317***	**$10.00**	***KLW5***	**$1.40**
1/2"	3/4"	***SS407***	**21.45**	***SS447***	**10.65**	***SS417***	**10.80**	***KLW5***	**1.40**
5/8"	3/4"	***SS507***	**24.75**	***SS547***	**12.65**	***SS517***	**12.10**	***KLW5***	**1.40**
3/4"	3/4"	***SS607***	**31.65**	***SS647***	**20.65**	***SS617***	**11.00**	***KLW5***	**1.40**

Note: Use with Boss clamps on page 98.

316 Stainless Steel Inserts




- brass inserts are available on page 309

Hose Size	NPT Size	Part #	Price/E	Hose Size	NPT Size	Part #	Price/E
1/8"	1/8"	***RN11***	**$14.00**	1/2"	1/4"	***RN42***	**$15.50**
3/16"	1/8"	***RN151***	**16.20**	1/2"	3/8"	***RN43***	**22.15**
3/16"	1/4"	***RN152***	**16.20**	1/2"	1/2"	***RN44***	**28.95**
1/4"	1/8"	***RN21***	**13.20**	1/2"	3/4"	***RN46***	**36.35**
1/4"	1/4"	***RN22***	**11.60**	5/8"	3/8"	***RN53***	**24.25**
1/4"	3/8"	***RN23***	**21.85**	5/8"	1/2"	***RN54***	**27.00**
5/16"	1/8"	***RN251***	**14.50**	5/8"	3/4"	***RN56***	**36.15**
5/16"	1/4"	***RN252***	**16.90**	3/4"	1/2"	***RN64***	**40.95**
5/16"	3/8"	***RN253***	**15.50**	3/4"	3/4"	***RN66***	**48.00**
3/8"	1/8"	***RN31***	**12.15**	1"	3/4"	***RN86***	**54.00**
3/8"	1/4"	***RN32***	**11.80**	1"	1"	***RKHN881 ****	**75.00**
3/8"	3/8"	***RN33***	**14.50**				
3/8"	1/2"	***RN34***	**29.55**				

* same shank style as KHN881 shown on page 280


F
Shank

Dixon 316 Stainless Steel Hose Menders



Size	Length	Part #	Price/E	Size	Length	Part #	Price/E
1/4"	2-1/32"	***RM2***	**$14.45**	1/2"	2-1/16"	***RM4***	**$22.75**
3/8"	2-1/16"	***RM3***	**15.40**	3/4"	2-1/2"	***RM6***	**30.50**

316 Stainless Short Shank Couplings



Complete Coupling



Female with Nut
NPSM Thread



Male
NPT Thread

Size	*316 Stainless Steel* Complete Part #	Price/E	*316 Stainless Steel* Female Part #	Price/E	*316 Stainless Steel* Male Part #	Price/E	Opt Qty
1/2"	***RES404***	**$92.70**	***RES444***	**$71.95**	***RST1 ****	**$20.75**	50
3/4"	***RES606***	**60.75**	***RES646***	**40.00**	***RST5 ****	**20.75**	50
1"	***RES808***	**61.70**	***RES848***	**40.85**	***RST10***	**20.85**	50
1-1/4"	***RES48***	**160.00**	***RES33***	**133.95**	***RST15***	**26.05**	50
1-1/2"	***RES63***	**127.75**	***RES43***	**96.10**	***RST20***	**31.65**	50
2"	***RES78***	**164.40**	***RES53***	**120.70**	***RST25***	**43.70**	25

Standard gasket is rubber (KRW); for Viton® gaskets (KVW) see page 270.
* made from casting

316 Stainless Steel Pipe Nipples

Close Nipples



schedule 40 welded pipe
male NPT x male NPT

NPT Size	Overall Length	Part #	Price/E	Opt Qty
1/8"	3/4"	***CN012SS***	**$4.05**	--
1/4"	7/8"	***CN025SS***	**4.55**	--
3/8"	1"	***CN037SS***	**5.60**	--
1/2"	1-1/8"	***CN050SS***	**7.50**	--
3/4"	1-3/8"	***CN075SS***	**9.70**	10
1"	1-1/2"	***CN100SS***	**13.45**	10
1-1/2"	1-3/4"	***CN150SS***	**22.75**	10
2"	2"	***CN200SS***	**35.30**	--
3"	2-5/8"	***CN300SS***	**95.00**	--
4"	2-7/8"	***CN400SS***	**128.30**	--

- reference page 304 for brass nipples
- reference pages 239 and 548 for carbon steel and galvanized nipples

SAFETY ALERT Do not use pipe nipples as hose inserts.

Threaded Both End Nipples



schedule 40 welded pipe
male NPT x male NPT

NPT Size	Overall Length	Part #	Price/E
1/4"	6"	***TN025X6SS***	**$15.25**
1/2"	6"	***TN050X6SS***	**30.00**
3/4"	6"	***TN075X6SS***	**33.80**
1"	6"	***TN100X6SS***	**45.65**
1-1/2"	6"	***TN150X6SS***	**69.00**
2"	6"	***TN200X6SS***	**90.50**
3"	6"	***TN300X6SS***	**183.80**
4"	6"	***TN400X6SS***	**245.90**

- reference page 304 for brass nipples
- reference page 549 for carbon steel and stainless nipples

Water-Steam Washdown Station

Fail-safe mixing station, bronze, wall mounted, safely blends steam and cold water for hot water on demand. Should cold water fail, the steam is instantly shut-off. **150 PSI** maximum, **200°F** maximum.

Unit is furnished with the following:

- control valves
- dial thermometer
- in-line check valves
- ¾" inlet and outlet
- stainless steel hose rack
- mounting plate and hardware

Part #	Price/E
SWDS	**$3145.60**

Pressure Requirements

Steam Pressure		*Water* Pressure	
Minimum	Maximum	Minimum	Maximum
80 PSI	**150 PSI**	**50 PSI**	**80 PSI**



station is not supplied with hose and nozzle

Hot and Cold Water Mixing Station

Style 1 hot and cold water mixing station, bronze, wall mounted. **150 PSI** maximum, **200°F** maximum.

Unit is furnished with the following:

- control valves (globe style)
- in-line check valves
- ¾" inlet and outlet
- stainless steel hose rack
- mounting plate and hardware

Part #	Price/E
WDS1	**$1140.15**



Rack for Mixing Station

Designed to hold 50' of ¾" heavy duty industrial grade hose.

- heavy duty stainless steel construction
- stainless steel lag screws
- heavy duty solid brass mounting crowns
- supplied with mounting hardware

Part #	Price/E
WDSR	**$198.00**



Hot Water Washdown Hose

- smooth extruded Chlorobutyl tube
- white, wrapped Neoprene cover (.075" thick), braided textile reinforcement
- furnished with internal stainless steel spring guards at both ends
- 3/4" male on one end and 1/2" male on the other
- working pressure: **250 PSI**
- temperature to: **200°F**

Size	Part #	Price/E
5/8" x 25'	***SWDSHOSE25***	**$679.00**
5/8" x 50'	***SWDSHOSE50***	**1146.70**



Hot Water Washdown Spray Nozzles

For low pressure cleaning and sanitation applications, such as food and dairy processing, tank and drum cleaning, pharmaceutical and chemical manufacturing and meat and poultry packing.

- efficient design for operator comfort
- variable spray pattern from solid stream to 50° hollow cone
- hose connects at base of gun for easy maneuvering




- ½" female NPT inlet
- rubber coated handle protects hands from water temperatures to **150°F**
- **12.5 GPM** flow capacity at **150 PSI**
- *Do not use with steam lines.* SAFETY ALERT

Cover color	*Brass*		*Aluminum*	
	Part #	Price/E	Part #	Price/E
black	***BWSG***	**$251.80**	***AWSG***	**$274.25**
white	***BWSG-W***	**276.60**	***AWSG-W***	**293.50**

Swivel Connectors for Washdown Spray Guns

- 300 series stainless steel swivel connector for stainless spray nozzles
- 360° ball type swivel adapter helps prevent hose kinking



Ball Type Swivel x Hose Shank

NPT	Hose ID	Part #	Price/E
½"	1/2"	***SSA44***	**$175.05**
½"	5/8"	***SSA54***	**175.05**
½"	3/4"	***SSA64***	**175.05**

- swivel body
- stainless steel hose shank
- EPDM gasket



Straight Swivel x Hose Shank

NPT	Hose ID	*Brass*		NEW *Stainless Steel*	
		Part #	Price/E	Part #	Price/E
½"	½"	***BNS44***	**$56.15**	***BNS44SS***	**$74.50**
½"	¾"	***BNS64***	**56.15**	***BNS64SS***	**102.00**



Straight Swivel x GHT Thread

NPT	Female GHT	Part #	Price/E
½"	¾"	***BMAS974***	**$56.15**

Thermal-Gard™ Elevated Temperature Spray Nozzle

The Thermal-Gard™ elevated temperature spray nozzle protects the operator from extreme hot water temperatures that exceed the comfort zone of standard hot water nozzles. 3/8" female NPT inlet. Black cover.

- Assembly includes required special rigid, stainless steel adapter, (3/8" male NPT x 1/2" female NPT).
- Thermal insulating sleeve reduces overall heat during elevated temperature conditions.



- Stainless steel lever handle is coated for additional thermal protection, and operator comfort.
- Lightweight aluminum alloy body reduces overall weight.
- Corrosion resistant body is anodized for additional corrosion protection.
- Recommended for water temperatures above **140°F** to a maximum temperature of **200°F**.
- **14 GPM** flow capacity
- working pressure: **150 PSI**

Aluminum	
Part #	Price/E
AWSG-TG	**$355.80**

Stainless Spray Nozzle

- ½" female NPT inlet
- specifically designed to prevent accidental spray
- durable dark blue cover design prevents front-mounted lever from being accidentally activated if nozzle is dropped
- design also reduces hand fatigue and offers smooth lever action
- trigger locking mechanism provides safe and secure method of keeping the nozzle open during any spray pattern
- variable spray patterns, from fan spray to solid stream
- drip-free automatic shut-off feature
- rate to **150 PSI** / **200°F**
- **5.5 GPM** flow capacity at **100 PSI**



Stainless

Part #	Price/E
D150SDB	**$330.30**

Temperature Indicating Spray Nozzle

When you uncoil your hose and walk away from the hot and cold water mixer, you can no longer read the dial thermometer on the mixer. With the temperature indicating spray nozzle, you take your thermometer with you. ½" female NPT inlet. Black cover.

- Easy to read dial thermometer is located at the rear of the nozzle for accurate and continual monitoring of water temperature.
- The dial thermometer is all stainless steel with a plastic sight window, and the entire gauge assembly is recessed into the rubber cover for complete protection.
- Alerts the operator to shut-down the steam valve upon cold water failure, preventing scalding and steam burn injuries (ensures operator safety).
- ensures a more accurate discharge water temperature reading
- recommended for water temperatures to **200°F**
- maximum operating pressure: **150 PSI**
- **14 GPM** flow capacity



Bronze

Part #	Price/E
BWSG-TI	**$388.00**

Stainless Steel Industrial Grade Spray Nozzle

The stainless steel industrial grade spray nozzle is recommended for use on corrosive applications where bronze and aluminum are not suitable.

- heavy duty 300 series stainless steel body and barrel
- variable spray pattern adjusts from a soft spray to a solid stream
- Replaceable rubber cover is specially formulated to resist a wide range of oils and chemicals. Rubber cover also protects surrounding equipment.
- maximum operating pressure: **150 PSI**
- **8 GPM** flow capacity at **100 PSI**
- ½" female NPT inlet



300 series Stainless Steel

Part #	Price/E
300SSSG	**$631.45**

Brass Industrial Grade Front Lever Spray Nozzle

The brass industrial grade spray nozzle provides effortless one hand operation: by actuating the operating lever the valve is opened/closed and the jet power is regulated from spray to concentrated jet.

- maximum operating pressure: **350 PSI**
- suitable for hot water up to **122°F**
- The adjusting screw on the back of the gun allows you to fix the desired form of jet. The fixing clamp for the operating lever allows permanent service.
- **6.6 GPM** flow capacity at **72 PSI**
- ½" female NPT inlet
- durable nozzle constructed of a high quality brass and steel combination



Brass

Part #	Price/E
DWG050	**$195.00**

Pressure Spray Guns



- 3/8" female inlet
- 1/4" female outlet
- **8 GPM**
- operating pressure: **4500 PSI**
- temperatures to **300°F**
- anti-fatigue pressure compensating design
- W = weeping, for the car wash industry, allows a small stream of water / leak

Part #	Price/E
HPSG	**$73.05**
HPSGW	**83.80**



- 3/8" female inlet
- 1/4" female outlet
- **6.6 GPM**
- operating pressure: **3625 PSI**
- temperatures to **140°F**

Part #	Price/E
HPSGC	**$56.20**



- 3/8" female inlet
- 1/4" female outlet
- **8 GPM**
- operating pressure: **5000 PSI**
- temperatures to **300°F**
- heavy duty anti-fatigue design
- stainless inner tube

Part #	Price/E
HPSGHD	**$94.90**



- 3/8" female inlet
- 22 mm x 14 mm female outlet
- **8 GPM**
- operating pressure: **3200 PSI**
- temperatures to **104°F**
- extension length: 14"

Part #	Price/E
AL9	**$68.90**



Kit includes:

- gun: 22 mm male inlet ,22 mm x 14 mm female outlet end, operating pressure **2500 PSI**
- lance: 18" with vari-spray nozzle 1.25 mm with 22 mm male inlet
- hose: 25', ¼" ID with 22 mm x 14 mm female ends
- nozzle: 4.0 variable nozzle 0° to 80°

Part #	Price/E
BIT-KIT	**$177.50**

Spray Lances and Extensions for Pressure Gun

- for use with ***AL9*** spray gun ***only***
- operating pressure: **4000 PSI** maximum
- temperatures to **300°F**



Spray Lance

Part #	Description	Length	Price/E
AL248	*zinc*, 22 mm x 14 mm male inlet x ¼" male outlet	24"	**$23.10**

Dual Spray Lances

- for use with ***HPSG***, ***HPSGC, HPSGHD*** and ***HPSGW***
- for soap and water
- temperatures to **300°F**
- **GPM: 10.5**
- requires 1 high pressure nozzle and 1 soap nozzle (pg. 266)
- Allows quick adjustment from high to low pressure with a twist of the handle; low pressure setting allows for use of soap.



AL344




AL333

Part #	Description	Length	Max. Operating PSI	Price/E
AL333	*zinc*, ¼" male inlet 2 each ¼" female outlets	40"	**3,650**	**$122.70**
AL344	*stainless steel*, ¼" male inlet, 2 each ¼" female outlets	40"	**4,000**	**175.10**

Molded Grip Extensions

- for use with ***HPSG***, ***HPSGC, HPSGHD*** and ***HPSGW***
- operating pressure: **5000 PSI** maximum
- temperatures to **300°F**
- maximum **GPM: 10.5**

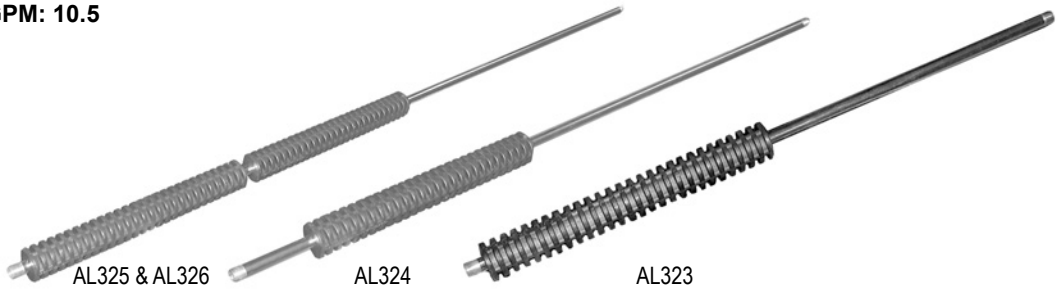

AL325 & AL326 AL324 AL323

Part #	Description	Length	Price/E
AL323XX	*zinc,* ¼" male inlet x ¼" male outlet	24"	**$21.55**
AL324XX	*zinc*, ¼" male inlet x ¼" male outlet, 4" space from the end	36"	**22.35**
AL325XX	*zinc*, ¼" male inlet x ¼" male outlet, 2 grips	48"	**37.10**
AL326XX	*zinc*, ¼" male inlet x ¼" male outlet, 2 grips	59"	**40.25**

Vented Grip Lances

- for use with ***HPSG***, ***HPSGC, HPSGHD*** and ***HPSGW***
- for hot water
- operating pressure: **5000 PSI** maximum
- temperatures to **300°F**
- maximum **GPM: 10.5**



AL361



AL362

Part #	Description	Length	Price/E
AL361	*zinc*, ¼" male inlet x ¼" female outlet, straight	36"	**$46.35**
AL362	*zinc*, ¼" male inlet x ¼" female outlet, bent	48"	**67.30**


Telescoping Lance and Belt for Pressure Gun

- 3/8" female (pipe thread) inlet
- 1/4" female (quick connect) outlet
- operating pressure: **4000 PSI** maximum
- 1/4" steel braided hose
- **GPM: 7**
- length is in three sections
- temperature up to **300°F**



Part #	Description	Length	Price/E
ARTEL18A	aluminum telescoping lance	6' - 18'	**$532.40**

Telescoping Lance Belt



- made of nylon
- adjusts from a minimum of 33" waist to a maximum of 58"

Part #	Description	Price/E
ARTEL-BELT	telescoping lance belt	**$52.35**

Quick Couplings and Plugs

Swiveling Couplings



1/4" female x 22 mm x 15 mm swivel

Part #	Description	Price/E
AL450	*swiveling* quick coupling	**$15.15**



1/4" male x 22 mm x 15 mm swivel

Part #	Description	Price/E
AL451	*swiveling* quick coupling	**$15.15**



3/8" female x 22 mm x 14 mm swivel

Part #	Description	Price/E
AL453	*swiveling* quick coupling	**$19.35**

for use with ***AL456*** *only*



3/8" female x female swivel

Part #	Description	Price/E
AL462	*swiveling* quick coupling	**$29.25**

for use with ***AL464*** *only*

Fixed Plugs



1/4" female x 22 mm x 15 mm male

Part #	Description	Price/E
AL454	*fixed* quick coupling plug	**$11.75**



1/4" male x 22 mm x 15 mm male

Part #	Description	Price/E
AL455F	*fixed* quick coupling plug	**$11.75**



3/8" female x 22 mm x 14 mm male

Part #	Description	Price/E
AL456	*fixed* quick coupling plug	**$15.10**

for use with ***AL453*** and ***AL9***



3/8" female x male plug

Part #	Description	Price/E
AL464	*fixed* quick coupling plug	**$16.45**

for use with ***AL462*** *only*

Injector Nozzles



AL477

For injection of cleaning solutions into high pressure discharge lines

- 3/8" male inlet and outlet
- operating pressure: **4000 PSI**

Part #	Description	Orifice	GPM	Price/E
AL472	adjustable, green	1.8 mm	2 - 3	**$52.85**
AL477	adjustable, red	2.1 mm	3 - 4	**53.25**
AL478	adjustable, blue	2.3 mm	4 - 5.5	**53.25**

Line Strainer



- operating pressure: **100 PSI**
- ½" female inlet, ½" male outlet
- .60 mesh cuffed filter
- 2 additional ¼" side ports
- maximum **GPM 8**

Part #	Description	Price/E
AR3000-A2	aluminum line strainer	**$36.00**

Nozzles

High Pressure Spray Soap Nozzles

Part #	Description	Price/E
NZ4040S	¼" male inlet, 40° spray angle, size #40	**$10.25**
NZ8040S	¼" male inlet, 80° spray angle, size #40	**10.25**



High Pressure Spray Nozzles

Part #	Description	Price/E
NZ1504	¼" male NPT inlet, 15° spray angle, size 4	**$15.30**
NZ2504	¼" male NPT inlet, 25° spray angle, size 4	**15.30**
NZ4004	¼" male NPT inlet, 40° spray angle, size 4	**15.30**



Quick Connect Soap Nozzle

Part #	Description	Price/E
NZ6540QCS	¼" straight through plug inlet, 65° spray angle, size #40	**$15.20**



To be used with ¼" couplers on page 346.

Quick Connect Spray Nozzles

Part #	Description	Price/E
MSP415	¼" straight through plug inlet, 15° spray angle, size #4, yellow	**$15.85**
MSP425	¼" straight through plug inlet, 25° spray angle, size #4, green	**15.85**
MSP440	¼" straight through plug inlet, 40° spray angle, size #4, white	**15.85**



To be used with ¼" couplers on page 346.

Multi-Pack Quick Connect Nozzles

Part #	Nozzle	Description	Price/E
MSP4PAK	NZ6540QCS MSP415 MSP425 MSP440	¼", 65° spray angle, size #40 ¼", 15° spray angle, size #4, yellow ¼", 25° spray angle, size #4, green ¼", 40° spray angle, size #4, white	**$62.60**



Multi-Pack High Pressure Spray Nozzles

- ¼" quick connect nozzle multi-packs include: 0° red, 15° yellow, 25° green, 40° white and 50° black soap nozzles

Part #	Price/E	Nozzle Size	GPM @ PSI								
			800	**1000**	**1500**	**2000**	**2500**	**3000**	**3500**	**4000**	**5000**
NZMQC5P-030	**$47.50**	3.0	1.34	1.50	1.84	2.12	2.37	2.60	2.81	3.00	3.35
NZMQC5P-035	**47.50**	3.5	1.57	1.75	2.14	2.47	2.77	3.03	3.27	3.50	3.91
NZMQC5P-040	**47.50**	4.0	1.79	2.00	2.45	2.83	3.16	3.46	3.74	4.00	4.47
NZMQC5P-045	**47.50**	4.5	2.01	2.25	2.76	3.18	3.56	3.90	4.21	4.50	5.03
NZMQC5P-050	**47.50**	5.0	2.24	2.50	3.06	3.54	3.95	4.33	4.68	5.00	5.59
NZMQC5P-055	**47.50**	5.5	2.46	2.75	3.37	3.89	4.35	4.76	5.14	5.50	6.15
NZMQC5P-065	**47.50**	6.5	2.91	3.25	3.98	4.60	5.14	5.63	6.08	6.50	7.27
NZMQC5P-080	**47.50**	8.0	3.58	4.00	4.90	5.66	6.32	6.93	7.48	8.00	8.94
NZMQC5P-120	**72.50**	12.0	5.37	8.00	7.35	8.49	9.49	10.39	11.22	12.00	13.42
NZMQC5P-150	**72.50**	15.0	6.71	7.50	9.19	10.61	11.86	12.99	14.03	15.00	16.77



- ¼" MEG nozzle multi-packs include: 0°, 15°, 25°, 40° and 65° soap nozzles

Part #	Price/E	Nozzle Size	GPM @ PSI								
			800	**1000**	**1500**	**2000**	**2500**	**3000**	**3500**	**4000**	**5000**
NZMMEG5P-035	**$49.50**	3.5	1.57	1.75	2.14	2.47	2.77	3.03	3.27	3.50	3.91
NZMMEG5P-040	**49.50**	4.0	1.79	2.00	2.45	2.83	3.16	3.46	3.74	4.0	4.47
NZMMEG5P-045	**49.50**	4.5	2.01	2.25	2.76	3.18	3.56	3.90	4.21	4.50	5.03
NZMMEG5P-050	**49.50**	5.0	2.24	2.50	3.06	3.54	3.95	4.33	4.68	5.00	5.59
NZMMEG5P-055	**49.50**	5.5	2.46	2.75	3.37	3.89	4.35	4.76	5.14	5.50	6.15

Turbo Nozzles



- 15° spray angle
- temperatures to **195°F**
- ceramic orifice

Part #	Description	Orifice	Nozzle Size	Max. Operating PSI	Price/E
AL-TPR25-30	¼" female inlet, yellow	1.30 mm	4.0	**3,625**	**$168.95**
AL-TPR25-50	¼" female inlet, green	1.50 mm	5.5 - 6.0	**3,625**	**168.95**
AL-TPR25-70	¼" female inlet, red	1.70 mm	7.0 - 7.5	**3,625**	**168.95**
AL-TPR30-30	¼" female inlet, yellow	1.30 mm	4.0	**5,000**	**254.10**
AL-TPR30-50	¼" female inlet, green	1.50 mm	5.5	**5,000**	**254.10**
AL-TPR30-70	¼" female inlet, red	1.70 mm	6.5	**5,000**	**254.10**

Nozzle Holders



AL414



AL416

- temperatures to **300°F**

Part #	Description	GPM	Operating PSI	Price/E
AL414	adjustable hi/low nozzle holder with nozzle protector, ¼" female inlet and outlet	**7.8**	**3,650**	**$47.25**
AL416	change over nozzle, ¼" female inlet, 2 each ¼" female outlet	**8**	**2,900**	**59.10**

Inlet Filter for Turbo Nozzles



- ¼" female inlet, ¼" male outlet
- temperatures to **212°F**
- 100 mesh filter

Part #	Description	GPM	Operating PSI	Price/E
AR3500	stainless steel, inlet water filter	**8**	**5,000**	**$36.00**

Braided Rubber Hose



Part #	Pressure PSI	Length	Inside Diameter	Male Swivel Inlet	Male Swivel Outlet	Price/E
AR503830SSP	**3,000**	50'	3/8"	3/8"	3/8"	**$242.65**

Hand Crank Hose Reel



- operating PSI: **3,000 PSI**
- temperature to: **160°F**
- 3/8" male outlet
- steel
- 3/8" female inlet
- holds 100' of 3/8" pressure hose

Part #	Price/E
AR-REEL100	**$382.50**

Unloader Valves

Pressure regulating unloader valves automatically relieves pressure from the pump at shut-off.

- temperatures to **190°F**
- inlet: 2 each, 3/8" female
- outlet: 3/8" female
- bypass: 2 each, 3/8" female
- gauge port: 1/4" female



Part #	Description	GPM	Operating PSI	Price/E
AL605	orange spring	8 gallons maximum	**2,900**	**$160.25**
AL606	silver spring	8 gallons maximum	**3,650**	**160.25**
AL607	gray spring	8 gallons maximum	**4,350**	**163.60**

- temperatures to **190°F**
- inlet: 3/8" female
- outlet: 3/8" male
- bypass: 3/8" female



Part #	Description	GPM	Operating PSI	Price/E
AR20831	VR-35 unloader valve	9	**5,100**	**$349.30**

Valves

Thermal Relief Valve

- operating PSI: **200 PSI**
- temperature to: **140°F**
- inlet: ¼" male



Part #	Price/E
TPP140	**$20.75**

Safety Release Valve

- operating PSI: **1,000** to **4,000 PSI**
- temperature to: **200°F**
- inlet: 3/8" male
- **6 GPM**



Part #	Price/E
AR5000-1	**$33.00**

Balance Release Valve

- operating PSI: **3,650 PSI**
- temperature to: **195°F**
- **6.3 GPM**
- inlet/outlet: 3/8" female
- bypass: 3/8" female



Part #	Description	Price/E
AL702	blue spring	**$107.80**

Water Broom

- operating PSI: **4,000 PSI**
- ¼" quick connect plug
- stainless steel



Part #	Description	Price/E
AR-BROOM16	16", 4 nozzle broom	**$130.05**

Garden Hoses

Flexogen® Hose



- heavy-duty, crush resistant, full-flow brass couplings with a built-in washer for tight sealing
- coils and handles easily in all weather
- patented 8-ply construction
- lightweight
- maximum kink resistance
- flow guard plus protective collar resists kinks at faucet
- polished surface resists abrasions, stains and mildew
- machined brass ends standard

Part #	Size	Price/E	Pkg Qty
FGH25	5/8" x 25'	**$48.55**	1
FGH50	5/8" x 50'	**82.10**	1

Rubber Vinyl Garden Hose


G Brass



- extra tough, five-ply construction
- exclusive, soft textured, abrasion-resistant green cover
- dual reinforced, heavy-duty, flexibility, kink resistance
- combines durability of rubber, easy handling of vinyl
- SEAL-TITE® leakproof coupling
- working pressure: **150 PSI**
- temperature range: **0°F** to **140°F**

Part #	Size	Price/E	Opt Qty
SGH25	5/8" x 25'	**$47.20**	5
SGH50	5/8" x 50'	**80.75**	5
SGH75	5/8" x 75'	**109.85**	3
SGH100	5/8" x 100'	**151.90**	3
SGH50-75	3/4" x 50'	**115.80**	5
SGH75-75	3/4" x 75'	**175.75**	3

Contractors Rubber Water Hose



- heavy duty, crush proof solid brass couplings with wrench grips
- EPDM tube
- spiral synthetic cord reinforcement
- black EPDM cover
- working pressure: **150 PSI**
- temperature range: **-20°F** to **180°F**

Part #	Size	Price/E	Opt Qty
CWH50	3/4" x 50'	**$155.00**	5

Garden Hoses

Premium Rubber Hose

- professional grade reinforcement provides maximum strength
- heavy-duty flexibility
- ultimate kink resistance
- SEAL-TITE® leakproof coupling
- EPDM tube
- black EPDM cover
- working pressure: **125 PSI**
- temperature range: **-20°F** to **160°F**



Part #	Size	Price/E	Opt Qty
PGH50	5/8" x 50'	**$108.05**	5
PGH75	5/8" x 75'	**152.05**	3

Hot Water Rubber Reinforced Hose

- industrial style reinforcing for flexibility, high burst strength
- extra heavy-duty, crush-proof, machined brass couplings
- maximum wear, abrasion-resistant red cover
- withstands extensive hot water **(200°F)** use
- working pressure: **130 PSI**



Part #	Size	Price/E	Opt Qty
HWH50	5/8" x 50'	**$123.50**	5
HWH50-75	3/4" x 50'	**184.90**	3

Marine, Camper, Patio & Pool Hose

- lightweight to handle, easy to store
- USFDA - approved tube materials for food contact use
- nickel plated couplings
- white cover
- working pressure: **80 PSI** at ambient temperature (70°F)



Part #	Size	Price/E	Opt Qty
MCH50	5/8" x 50'	**$69.15**	5

Country Club® RT Hose

- for golf courses, parks, nurseries
- premium PVC for high strength, flexibility
- lightweight, easy handling
- industrial knit reinforcing for kink resistance
- heavy duty 1" NPSH brass couplings
- green cover
- working pressure: **150 PSI** at ambient temperature (70°F)
- burst pressure: **450 PSI**



Part #	Size	Price/E	Opt Qty
CCH50	1" x 50'	**$290.95**	2

2010 NEW

Garden Hose Nozzles

Turbo Nozzle



- large handle controls spray
- adjustable spray pattern
- molded grip for cushioned comfort
- full size metal body
- rated to **100°F**

Inlet Thread	Part #	Price/E
GHT	***FD1***	**$101.00**

Brass / Rubber Power Flow Water Nozzle



- heavy duty construction won't break or leak
- adjustable spray (cone, sharp stream, full action)
- for hot or cold water use
- use with 5/8" or larger hose for best performance
- hot water up to **140°F**

Inlet Thread	Part #	Price/E
GHT	***PNB75GHT***	**$36.80**

Insulated Water Nozzles



- clip locks any spray pattern
- chrome plated all zinc body
- industrial strength nylon handle
- rubber handle guard
- GHT thread on head
- heavy duty brass valve and adjusting nut
- hot water up to **180°F**

Inlet Thread	Part #	Price/E
GHT	***SN75***	**$23.50**
NPT	***SN75NPT***	**23.50**

Pistol-Grip Water Nozzle



- clip locks any spray pattern
- easy squeeze on/off lever
- heavy duty all zinc metallized body
- brass valve and adjusting nut
- stainless steel spring with lifetime packing
- rubber handle guard

Part #	Price/E
CSN75	**$13.45**


Brass Twist Nozzles



- brass
- for use up to **150 PSI** (water only)
- ***500-AN4*** and ***500-AN7*** are imported

Thread Size	Length	Part #	Price/E
¾" GHT	4"	***BTN75***	**$17.50**
¾" GHT	4"	***500AN4***	**10.88**
¾" GHT	7"	***500-AN7***	**29.74**

Adjust-a-Power Nozzle

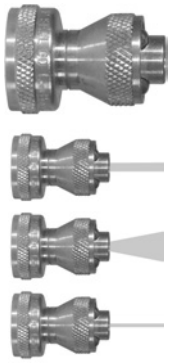

- ideal for patio, auto and boat, driveway and garden
- produces 50% more power than twist nozzles
- does not require a washer
- leave nozzle in the open position when not in use
- brass construction with stainless steel bearings
- for use up to **100 PSI** (water only) at ambient temperature (70°F)

Thread Size	Part #	Price/E
¾" GHT	***AAPN75GHT***	**$19.50**

Nozzles & Accessories

Green Constant Flow Nozzle Display



- shatterproof and UV resistant GE Lexan® is able to withstand tough environmental conditions
- easy twist spray pattern adjustment
- sold in case quantity only, with display
- 25 nozzles per case

Thread Size	45° Spray GPM @ **100 PSI**	Part #	Price/case
¾" GHT	25.1	***FNB75GHT-GD***	**$413.30**

Green Constant Flow Nozzle with Bumper



- green plastic
- steel stem
- can be used as a replacement for nozzles in the case listed above

Thread Size	45° Spray GPM @ **100 PSI**	Part #	Price/E
¾" GHT	25.1	***GNB75GHT***	**$15.50**

Fire Hose Nozzle with Bumper



- red polycarbonate with brass stem
- adjusts from Straight Stream to Fog
- for use up to **100 PSI** (water only) at ambient temperature (70°F)

Thread Size	Solid Stream @ **100 PSI**	45° Spray GPM @ **100 PSI**	120° Spray GPM @ **100 PSI**	Part #	Price/E
¾" GHT	20	25.1	30.9	***FNB75GHT***	**$40.80**

Brass Sweeper Nozzle



Thread Size	Discharge	Length	Part #	Price/E
¾" GHT	3/16"	2"	***PSN76***	**$7.50**

Brass Plain Hose Nozzle



- brass with satin finish
- for use up to **100 PSI** (water only) at ambient temperature (70°F)

Thread Size	Discharge	Length	Part #	Price/E
¾" GHT	¼	6"	***BN6***	**$30.15**

Hydrant Adapter



- cast brass

Female NST	Male GHT	Part #	Price/E
2½"	¾"	***HA2576***	**$29.35**

Washers and Gaskets




red vinyl



white rubber

GHT Washers

Material	Part #	Price/E	Opt Qty
red vinyl	***TVW7***	**$.10**	100
white rubber	***TRW7***	**.25**	100



Garden Hose Screen Gasket

Material	Mesh Size	Part #	Price/E
FDA approved black vinyl	6050 mesh, 304 SS	***TVS7-30***	**$.75**

Compression bibb faucets sold on page 494.

Garden Hose Accessories

Standard Flow Fittings

Flexible Water Nozzle

- bends for water flow, shuts off when released
- ¾" GHT



Part #	Price/E
8005	**$38.05**

Radiator Bibb

- vinyl spout
- ¼" female pipe thread connection



Part #	Price/E
8013	**$30.20**

Garden Hose Gooseneck


- powder-coated zinc gooseneck connector angles hose away from hose bib
- **125 PSI** at ambient temperature (70°F)



Part #	Price/E
GHGN	**$11.70**

Straight GHT Valve

- powder-coated zinc shut-off valve
- hot water up to **160°F**
- **150 PSI**



Part #	Price/E
GHV	**$10.20**

Straight GHT Valve with Handle

- powder-coated zinc shut-off valve with easy on/off handle
- hot water up to **160°F**
- **150 PSI**



Part #	Price/E
GHVEZK	**$14.10**

GHT Twin Valve

- powder-coated zinc with twin shut-off valves
- hot water up to **160°F**
- **150 PSI**



Part #	Price/E
GHYV	**$14.30**

GHT Y


- powder-coated zinc with twin outlet
- includes one end cap
- hot water up to **160°F**
- **150 PSI**



Part #	Price/E
GHY	**$8.10**

GHT 4-Valve Manifold

- brass
- stainless balls
- Teflon® seats
- swivel inlet



Part #	Price/E
500-GH4V	**$67.41**

Garden Hose Accessories

Full Flow Aluminum Shutoff Valves

- flows 45% more water than the standard series
- heavy-duty aluminum construction
- extra large handles for easy grip
- hot water up to **160°F**
- **150 PSI**

Straight GHT Valve with Handle

Part #	Price/E
AGHV-FF	**$17.65**




GHT Twin Valve

Part #	Price/E
AGHYV-FF	**$22.50**



GHT 4-Valve Manifold

Part #	Price/E
AY4-FF	**$40.35**

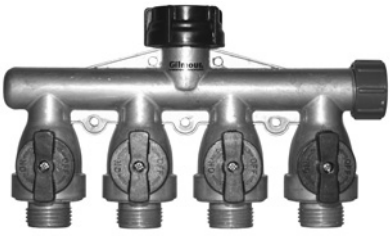

GHT Zinc Hose Fittings

- premimum brass and zinc construction for maximum strength and durability
- patented impact resistant clamp design
- non-corroding high grade 410 stainless steel screws will not strip when tightened
- leakproof, reusable
- for rubber or plastic hose



female



male



mender

Size	Opt Qty	Female Part #	Price/E	Male Part #	Price/E	Mender Part #	Price/E
5/8"	48	***M5834F***	**$12.30**	***M5834M***	**$11.00**	***M5834HM***	**$17.00**
3/4"	48	***M5834F***	**12.30**	***M5834M***	**11.00**	***M5834HM***	**17.00**

GHT Brass Clincher Repair Fittings



female with swivel nut



male




mender

Size	Opt Qty	Female Part #	Price/E	Male Part #	Price/E	Mender Part #	Price/E
1/2"	10	***C12F***	**$6.50**	***C12M***	**$5.90**	***C12HM***	**$6.50**
5/8"	10	***C58F***	**6.50**	***C58M***	**5.90**	***C58HM***	**6.50**
3/4"	10	***C34F***	**6.50**	***C34M***	**5.90**	***C34HM***	**6.50**

Brass Garden Hose Quick Connectors


Precision machined from solid brass with easy push-pull ring for long lasting and quick hose attachments.
Maximum operating pressure: **200 PSI** at ambient temperature (70°F).

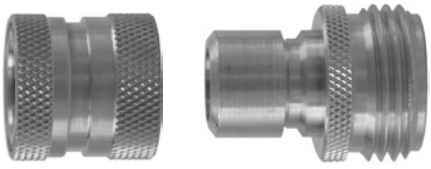

Description	Part #	Price/E	Opt Qty
complete assembly	***DGH7***	**$12.17**	25
male plug	***DGH7P***	**3.86**	25
female coupler	***DGH7C***	**8.31**	25
seal	***DGHW7***	**0.75**	25
valved coupler - water shutoff	***DGH7CV***	**12.96**	25
complete valved assembly	***DGH7V***	**16.82**	25

Short Shank Fittings - GHT Thread

uses washers on page 297

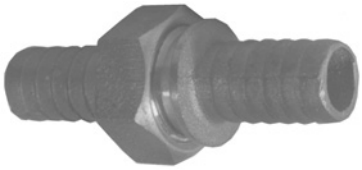

complete cast coupling

(sold in complete sets only)

Size	Brass Part #	Brass Price/E
1/2"	***CBC74***	**$10.00**
5/8"	***CBC75***	**10.00**
3/4"	***CBC76***	**10.00**
1"	***CBC88 ****	**17.00**

* 1" has NPSM threads




complete machined coupling

Size	Brass Part #	Brass Price/E	Stainless Part #	Stainless Price/E
3/8"	***BC73***	**$11.63**	**---**	**---**
1/2"	***BC74***	**11.46**	***SSC74***	**$153.15**
5/8"	***BC75***	**11.92**	***SSC75***	**153.15**
3/4"	***BC76***	**12.13**	***SSC76***	**153.15**
1"	***BC78*** NEW	**17.00**	**---**	**---**



machined female with swivel nut

Size	Brass Part #	Brass Price/E	Stainless Part #	Stainless Price/E	Pkg Qty
3/8"	***BCF73***	**$6.11**	**---**	**---**	50
1/2"	***BCF74***	**6.19**	***SSCF74***	**$95.19**	25
5/8"	***BCF75***	**6.11**	***SSCF75***	**95.19**	25
3/4"	***BCF76*** NEW	**6.31**	***SSCF76***	**95.19**	25
1"	***BCF78***	**10.22**	**---**	**---**	10




machined male

Size	Brass Part #	Brass Price/E	Stainless Part #	Stainless Price/E	Pkg Qty
3/8"	***BCM73***	**$5.52**	**---**	**---**	50
1/2"	***BCM74***	**5.28**	***SSCM74***	**$57.94**	50
5/8"	***BCM75***	**5.82**	***SSCM75***	**57.94**	25
3/4"	***BCM76***	**5.82**	***SSCM76***	**57.94**	25
1"	***BCM78*** NEW	**6.77**	**---**	**---**	10


Brass Short Shank Fittings - NPSM Thread

uses KRW washers on page 270

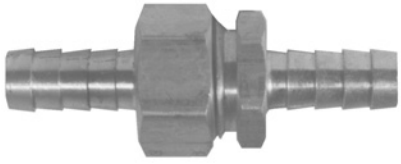

complete machined coupling

Hose ID	Thread	Part #	Price/E
1/2"	3/4"	***BS406***	**$16.30**
3/4"	3/4"	***BS606***	**17.40**
1"	1"	***BS808***	**26.10**



machined female with swivel nut

Hose ID	Thread	Part #	Price/E
1/2"	3/4"	***BS446***	**$7.75**
5/8"	3/4"	***BS546***	**8.20**
3/4"	3/4"	***BS646***	**9.05**
1"	1"	***BS848***	**14.80**



machined male

Hose ID	Thread	Part #	Price/E
1/2"	3/4"	***BS416***	**$8.55**
---	---	**---**	**---**
3/4"	3/4"	***BS616***	**8.35**
1"	1"	***BS818***	**11.30**

GHT Adapters



female GHT swivel

Female x Female	Brass		Opt Qty
	Part #	Price/E	
GHT x GHT	***BA977***	**$8.56**	100



female GHT swivel x female NPTF

Female x Female	Brass		Stainless NEW		Opt Qty
	Part #	Price/E	Part #	Price/E	
GHT x 1/2" NPTF	***BAS974***	**$7.56**	***RAS974***	**$70.61**	25
GHT x 3/4" NPTF	***BAS976***	**8.85**	***RAS976***	**76.21**	100



female GHT swivel x male NPTF

Female x Male	Brass		Stainless NEW		Opt Qty
	Part #	Price/E	Part #	Price/E	
GHT x 1/4" NPTF	***504-1204***	**$7.44**	**---**	**---**	25
GHT x 3/8" NPTF	***504-1206***	**7.23**	**---**	**---**	25
GHT x 1/2" NPTF	***504-1208***	**7.73**	***R504-1208***	**$79.54**	25
GHT x 3/4" NPTF	***504-1212***	**8.68**	***R504-1212***	**85.97**	25



female GHT x male NPTF

Female x Male	Brass		Stainless NEW		Opt Qty
	Part #	Price/E	Part #	Price/E	
GHT x 3/8" NPTF	***BMA973***	**$5.77**	**---**	**---**	25
GHT x 1/2" NPTF	***BMA974***	**6.60**	***RMA974***	**$47.14**	25
GHT x 3/4" NPTF	***BMA976***	**7.85**	***RMA976***	**47.14**	25



rigid female GHT x female NPTF

Female x Female	Brass		Stainless NEW		Opt Qty
	Part #	Price/E	Part #	Price/E	
GHT x 1/8" NPTF	***BA971***	**$5.69**	**---**	**---**	25
GHT x 1/4" NPTF	***BA972***	**6.56**	**---**	**---**	25
GHT x 3/8" NPTF	***BA973***	**6.65**	**---**	**---**	25
GHT x 1/2" NPTF	***BA974***	**8.35**	***RA974***	**$46.52**	25
GHT x 3/4" NPTF	***BA976***	**8.35**	***RA976***	**46.52**	25



threaded male

Male x Male	Brass		Stainless NEW		Opt Qty
	Part #	Price/E	Part #	Price/E	
GHT x GHT	***BA777***	**$4.61**	***RA777***	**$35.10**	100
1" NPSH x GHT	***509-1612***	**8.85**	**---**	**---**	100



male GHT x male NPTF

Male x Male	Brass		Stainless NEW		Opt Qty
	Part #	Price/E	Part #	Price/E	
GHT x 3/8" NPTF	***BA73***	**$4.57**	**---**	**---**	25
GHT x 1/2" NPTF	***BA74***	**4.65**	***RA74***	**$31.57**	25
GHT x 3/4" NPTF	***BA776 ****	**5.40**	***RA776***	**37.20**	25
GHT x 1" NPTF	***BA78*** NEW	**11.30**	**---**	**---**	10

* BA776 also has 1/2" female NPT on ID of 3/4" male NPT side



male GHT x female NPTF

Male x Female	Brass		Stainless NEW		Opt Qty
	Part #	Price/E	Part #	Price/E	
GHT x 1/4" NPTF	***507-1204***	**$3.36**	**---**	**---**	25
GHT x 3/8" NPTF	***507-1206***	**3.90**	**---**	**---**	25
GHT x 1/2" NPTF	***BA794***	**4.28**	***RA794***	**$25.75**	50
GHT x 3/4" NPTF	***BA796***	**6.11**	***RA796***	**46.10**	100



garden hose cap

Female	Brass		Opt Qty
	Part #	Price/E	
GHT	***GHC7***	**$3.66**	50

Brass Adapters

hex nipples

NPTF Thread	Part #	Price/E	Opt Qty
1/8" x 1/8"	***BCN12***	**$1.91**	100
1/4" x 1/4"	***BCN25***	**2.37**	100
3/8" x 3/8"	***BCN37***	**3.20**	50
1/2" x 1/2"	***BCN50***	**4.78**	25
3/4" x 3/4"	***BCN75***	**6.11**	100
1" x 1"	***BCN100***	**14.74**	50



female hex couplings

NPTF Thread	Part #	Price/E
1/8" x 1/8"	***BA1F1F***	**$2.37**
1/4" x 1/4"	***BA2F2F***	**3.99**
3/8" x 3/8"	***BA3F3F***	**4.61**
1/2" x 1/2"	***BA4F4F***	**6.77**
3/4" x 3/4"	***BA6F6F***	**11.71**



reducer hex bushings

Female NPTF	Male NPTF	Part #	Price/E	Opt Qty
1/8"	1/4"	***HB1F2M***	**$1.62**	100
1/8"	3/8"	***HB1F3M***	**1.95**	100
1/8"	1/2"	***HB1F4M***	**3.32**	25
1/8"	3/4"	***HB1F6M***	**5.57**	25
1/4"	3/8"	***HB2F3M***	**2.20**	100
1/4"	1/2"	***HB2F4M***	**3.45**	100
1/4"	3/4"	***HB2F6M***	**6.11**	25
1/4"	1"	***HB2F8M***	**11.46**	25
3/8"	1/2"	***HB3F4M***	**2.91**	50
3/8"	3/4"	***HB3F6M***	**5.40**	25
3/8"	1"	***HB3F8M***	**10.80**	25
1/2"	3/4"	***HB4F6M***	**5.94**	25
1/2"	1"	***HB4F8M***	**10.88**	25
3/4"	1"	***HB6F8M***	**9.01**	25



reducer adapters

Female NPTF	Male NPTF	Part #	Price/E	Opt Qty
1/8"	1/8"	***RA1F1M***	**$1.83**	100
1/4"	1/8"	***RA2F1M***	**3.20**	100
1/4"	1/4"	***RA2F2M***	**3.28**	50
3/8"	1/4"	***RA3F2M***	**3.74**	50
3/8"	3/8"	***RA3F3M***	**3.90**	50
1/2"	1/4"	***RA4F2M***	**5.69**	25
1/2"	3/8"	***RA4F3M***	**4.98**	25
1/2"	1/2"	***RA4F4M***	**6.27**	25
3/4"	1/2"	***RA6F4M***	**8.81**	10
3/4"	3/4"	***RA6F6M***	**8.80**	10

NEW



2010 NEW

adapters

Male NPSM	Female NPTF	Part #	Price/E
1/4"	1/4"	***174-0404***	**$3.20**
3/8"	3/8"	***174-0606***	**3.66**
1/2"	1/2"	***174-0808***	**4.74**



reducer hex nipples

NPTF Thread	Part #	Price/E	Opt Qty
1/4" x 1/8"	***HN2M1M***	**$2.24**	100
3/8" x 1/8"	***HN3M1M***	**3.41**	50
3/8" x 1/4"	***HN3M2M***	**3.07**	50
1/2" x 1/4"	***HN4M2M***	**4.40**	50
1/2" x 3/8"	***HN4M3M***	**4.57**	50
3/4" x 1/2"	***HN6M4M***	**7.14**	25

NEW



reducer couplings

NPTF Thread	Part #	Price/E
1/4" x 1/8"	***RC2F1F***	**$3.70**
3/8" x 1/4"	***RC3F2F***	**4.15**
1/2" x 1/4"	***RC4F2F***	**5.90**
1/2" x 3/8"	***RC4F3F***	**5.73**
3/4" x 1/2"	***RC6F4F***	**9.22**



hex head plugs

NPT Thread	Part #	Price/E
1/8"	***HHP1M***	**$1.04**
1/4"	***HHP2M***	**1.58**
3/8"	***HHP3M***	**2.08**
1/2"	***HHP4M***	**3.74**
3/4"	***HHP6M***	**5.44**
1"	***HHP8M***	**10.09**

NEW



Note: hex head plug is hollow

threaded unions

NPT Thread	Part #	Price/E
1/4"	***TUN2F***	**$24.05**
3/8"	***TUN3F***	**26.45**
1/2"	***TUN4F***	**29.90**



male unions

NPSM	NPSM	Part #	Price/E
1/8"	1/8"	***176-0202***	**$2.45**
1/4"	1/4"	***176-0404***	**2.70**
3/8"	3/8"	***176-0606***	**3.78**
1/2"	1/2"	***176-0808***	**4.82**



ball seat to male pipe

NPSM	NPTF	Part #	Price/E	Opt Qty
1/8"	1/8"	***BSM11***	**$2.04**	25
1/4"	1/8"	***BSM21***	**2.04**	25
1/4"	1/4"	***BSM22***	**2.20**	25
3/8"	1/4"	***BSM32***	**3.03**	25
3/8"	3/8"	***BSM33***	**3.16**	25
3/8"	1/2"	***BSM34***	**5.11**	25
1/2"	3/8"	***BSM43***	**3.57**	25
1/2"	1/2"	***BSM44***	**4.78**	25
3/4"	3/4"	***BSM66***	**6.11**	25



female NPSH x female NPSH swivel

Female NPSH	Male NPSH	Part #	Price/E
1"	1"	***BA1616***	**$17.25**



Brass Pipe Nipples

long pipe nipples

- carbon steel and stainless steel nipples are available on page 549



NPT Thread	Length	Part #	Price/E	Opt Qty
1/8"	1-1/2"	***166-0215***	**$1.79**	25
1/8"	2"	***166-0220***	**2.58**	25
1/8"	2-1/2"	***166-0225***	**3.49**	25
1/8"	3"	***166-0230***	**3.66**	25
1/8"	3-1/2"	***166-0235***	**3.95**	10
1/8"	4"	***166-0240***	**4.78**	10
1/4"	1-1/2"	***166-0415***	**3.03**	25
1/4"	2"	***166-0420***	**3.45**	25
1/4"	2-1/2"	***166-0425***	**5.73**	25
1/4"	3"	***166-0430***	**5.19**	25
1/4"	3-1/2"	***166-0435***	**5.57**	10
1/4"	4"	***166-0440***	**5.98**	10
1/4"	5"	***166-0450***	**7.31**	5
3/8"	1-1/2"	***166-0615***	**3.28**	25
3/8"	2"	***166-0620***	**4.36**	25
3/8"	2-1/2"	***166-0625***	**6.48**	10
3/8"	3"	***166-0630***	**6.48**	10
3/8"	3-1/2"	***166-0635***	**6.36**	10
3/8"	4"	***166-0640***	**8.52**	5
1/2"	1-1/2"	***166-0815***	**4.82**	10
1/2"	2"	***166-0820***	**5.36**	10
1/2"	2-1/2"	***166-0825***	**8.06**	10
1/2"	3"	***166-0830***	**8.52**	10
1/2"	3-1/2"	***166-0835***	**13.62**	10
1/2"	4"	***166-0840***	**10.18**	5
3/4"	2"	***166-1220***	**7.77**	25
3/4"	2-1/2"	***166-1225***	**9.55**	25
3/4"	3"	***166-1230***	**11.38**	25
3/4"	3-1/2"	***166-1235***	**11.80**	25
1"	2"	***TN100X2B***	**21.00**	---
1"	3"	***TN100X3B***	**31.50**	---
1"	4"	***TN100X4B***	**42.00**	---
1½"	2"	***TN150X2B***	**32.00**	---
1½"	3"	***TN150X3B***	**47.50**	---
2"	3"	***TN200X3B***	**63.00**	---
2"	4"	***TN200X4B***	**84.00**	---
2"	6"	***TN200X6B***	**115.00**	---

close pipe nipples

- carbon steel, galvanized steel and stainless steel nipples are available on page 548



NPT Thread	Part #	Price/E	Opt Qty
1/8"	***165-0202***	**$1.37**	50
1/4"	***165-0404***	**1.41**	50
3/8"	***165-0606***	**2.16**	25
1/2"	***165-0808***	**3.28**	25
3/4"	***165-1212***	**5.40**	10
1"	***165-1616***	**10.13**	10
1½"	***CN150B***	**25.50**	5
2"	***CN200B***	**43.50**	5
3"	***CN300B***	**105.00**	5

Brass Pipe Crosses



Female NPTF Size	Part #	Price/E	Opt Qty
1/8" - 27	***228-0202***	**$5.61**	20
1/4" - 18	***228-0404***	**8.35**	25
3/8" - 18	***228-0606***	**10.88**	25
1/2" - 14	***228-0808***	**23.38**	20
3/4" - 14	NEW ***228-1212***	**34.68**	10

Brass Tees

street tees

Female NPTF	Male NPTF	Part #	Price/E	Opt Qty
1/8"	1/8"	***326-0202***	**$4.28**	25
1/4"	1/4"	***326-0404***	**7.02**	30
3/8"	3/8"	***326-0606***	**9.51**	30
1/2"	1/2"	***326-0808***	**18.90**	15
3/4"	3/4"	***326-1212***	**26.58**	10



male branch tees

NPTF Thread	Part #	Price/E	Opt Qty
1/8"	***324-0202***	**$4.20**	100
1/4"	***324-0404***	**7.56**	25
3/8"	***324-0606***	**9.64**	25
1/2"	***324-0808***	**17.53**	25
3/4"	***324-1212***	**27.41**	10



female tees

NPTF Thread	Part #	Price/E	Opt Qty
1/8"	***322-0202***	**$4.15**	100
1/4"	***322-0404***	**7.31**	30
3/8"	***322-0606***	**9.68**	25
1/2"	***322-0808***	**18.81**	15
3/4"	***322-1212***	**25.17**	10



Brass Elbows

90° male pipe elbows

Male PTF	Part #	Price/E	Opt Qty
1/8"	***169-0202***	**$2.91**	25
1/4"	***169-0404***	**3.95**	25
3/8"	***169-0606***	**5.82**	25
1/2"	***169-0808***	**9.51**	25



90° female pipe elbows

Female NPTF	Part #	Price/E	Opt Qty
1/8"	***EL1F1F***	**$3.78**	25
1/4"	***EL2F2F***	**5.77**	50
3/8"	***EL3F3F***	**7.73**	30
1/2"	***EL4F4F***	**15.16**	25
3/4"	***EL6F6F***	**22.01**	25



90° street elbows

Female NPTF	Male NPTF	Part #	Price/E	Opt Qty
1/8"	1/8"	***SE1F1M***	**$3.74**	100
1/4"	1/4"	***SE2F2M***	**5.86**	50
3/8"	3/8"	***SE3F3M***	**8.18**	30
1/2"	1/2"	***SE4F4M***	**14.66**	25
3/4"	3/4"	***SE6F6M***	**20.97**	10



45° street elbows

Female NPTF	Male NPTF	Part #	Price/E	Opt Qty
1/8"	1/8"	***306-0202***	**$3.74**	25
1/4"	1/4"	***306-0404***	**4.32**	50
3/8"	3/8"	***306-0606***	**6.48**	25
1/2"	1/2"	***306-0808***	**10.97**	30
3/4"	3/4"	***306-1212***	**19.23**	10



Brass Push-On Fittings

Dixon push-on fittings are intended for use with Lok-On (push-on style) hose only. No hose clamps or ferrules are needed.

SAFETY ALERT Lok-On fittings will properly grip Lok-On hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.

NPTF Hose Barb Fittings



female NPTF x push-on hose barb
National Pipe Tapered - dryseal

Hose ID	NPTF Thread	Part #	Price/E	Opt Qty
1/4"	1/8"	***BPF21***	**$2.45**	100
1/4"	1/4"	***BPF22***	**2.70**	100
1/4"	3/8"	***BPF23***	**3.95**	50
5/16"	1/8"	***BPF251***	**2.66**	100
5/16"	1/4"	***BPF252***	**3.36**	50
3/8"	1/8"	***BPF31***	**2.87**	50
3/8"	1/4"	***BPF32***	**3.07**	50
3/8"	3/8"	***BPF33***	**3.49**	50
3/8"	1/2"	***BPF34***	**4.61**	50
3/8"	3/4"	***BPF36***	**8.89**	25
1/2"	1/4"	***BPF42***	**3.82**	50
1/2"	3/8"	***BPF43***	**3.90**	50
1/2"	1/2"	***BPF44***	**4.74**	25
1/2"	3/4"	***BPF46***	**10.51**	25
5/8"	1/2"	***BPF54***	**5.57**	25
5/8"	3/8"	***BPF53***	**4.78**	25
3/4"	1/2"	***BPF64***	**6.31**	25
3/4"	3/4"	***BPF66***	**9.93**	25
1"	3/4"	***BPF86***	**13.33**	10
1"	1"	***BPF88***	**16.90**	10



male NPTF x push-on hose barb
National Pipe Tapered - dryseal

Hose ID	NPTF Thread	*Brass* Part #	*Brass* Price/E	*Stainless* Part #	*Stainless* Price/E	Opt Qty
1/4"	1/8"	***BPN21***	**$1.91**	***RPN21***	**$28.45**	100
1/4"	1/4"	***BPN22***	**2.24**	***RPN22***	**22.05**	100
1/4"	3/8"	***BPN23***	**2.82**	**---**	**--**	50
5/16"	1/8"	***BPN251***	**2.08**	**---**	**--**	100
5/16"	1/4"	***BPN252***	**2.45**	**---**	**--**	50
3/8"	1/8"	***BPN31***	**2.49**	**---**	**--**	100
3/8"	1/4"	***BPN32***	**2.33**	***RPN32***	**32.65**	50
3/8"	3/8"	***BPN33***	**2.87**	***RPN33***	**34.06**	50
3/8"	1/2"	***BPN34***	**4.61**	**---**	**--**	25
3/8"	3/4"	***BPN36***	**8.10**	**---**	**--**	25
1/2"	1/4"	***BPN42***	**3.41**	**---**	**--**	25
1/2"	3/8"	***BPN43***	**3.20**	***RPN43***	**36.55**	25
1/2"	1/2"	***BPN44***	**4.36**	***RPN44***	**45.70**	50
1/2"	3/4"	***BPN46***	**6.52**	**---**	**--**	50
5/8"	3/8"	***BPN53***	**5.65**	**---**	**--**	25
5/8"	1/2"	***BPN54***	**6.11**	**---**	**--**	25
5/8"	3/4"	***BPN56***	**8.06**	**---**	**--**	25
3/4"	1/2"	***BPN64***	**6.77**	***RPN64***	**76.46**	25
3/4"	3/4"	***BPN66***	**7.27**	***RPN66***	**66.45**	25
1"	3/4"	***BPN86***	**15.95**	**---**	**--**	10
1"	1"	***BPN88***	**19.69**	**---**	**--**	10



male NPTF swivel x push-on hose barb
National Pipe Tapered - dryseal

Hose ID	NPTF Thread	Part #	Price/E	Opt Qty
1/4"	1/4"	***271-0404***	**$5.19**	50
3/8"	1/4"	***271-0604***	**5.52**	50
3/8"	3/8"	***271-0606***	**6.19**	25
1/2"	3/8"	***271-0806***	**6.77**	25
1/2"	1/2"	***271-0808***	**8.52**	25
3/4"	3/4"	***271-1212***	**12.58**	25

Note: swivel is for assembly convenience only.

NPSM Swivel Hose Barb Fittings



female NSPM swivel x push-on hose barb
gasket seat type

Hose ID	NPSM	Part #	Price/E	Opt Qty
1/4"	1/8"	***280-0402***	**$6.40**	100
1/4"	1/4"	***280-0404***	**4.36**	100
3/8"	1/4"	***280-0604***	**5.11**	50
3/8"	3/8"	***280-0606***	**6.77**	50
3/8"	1/2"	***280-0608***	**9.39**	50
1/2"	1/2"	***280-0808***	**8.56**	25
3/4"	3/4"	***280-1212***	**16.41**	25



female NSPM swivel x push-on hose barb
ball seat type

Hose ID	NPSM	Part #	Price/E	Opt Qty
1/4"	1/8"	***BPFS21***	**$5.15**	100
1/4"	1/4"	***BPFS22***	**4.28**	50
1/4"	3/8"	***BPFS23***	**5.77**	25
3/8"	1/4"	***BPFS32***	**4.94**	50
3/8"	3/8"	***BPFS33***	**6.11**	50
1/2"	1/2"	***BPFS44***	**7.27**	50
1/2"	3/4"	***BPFS46***	**10.18**	25
3/4"	3/4"	***BPFS66***	**13.83**	25

Push-On Fittings

Dixon push-on fittings are intended for use with Lok-On (push-on style) hose only. No hose clamps or ferrules are needed.

SAFETY ALERT Lok-On fittings will properly grip Lok-On hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.

45° SAE Hose Barb Fittings



male 45° SAE x push-on hose barb

Hose ID	UNF Thread	*Brass* Part #	Price/E	Opt Qty
1/4"	7/16"-20	***282-0407***	**$3.36**	100
1/4"	1/2"-20	***282-0408***	**2.74**	100
3/8"	5/8"-18 *	***282-0610***	**4.07**	100
1/2"	3/4"-16	***282-0812***	**5.65**	50
5/8"	7/8-14	***282-1014***	**7.14**	25
3/4"	1-1/16"-14 *	***282-1217***	**13.08**	25

NEW



female 45° SAE swivel x push-on hose barb

Hose ID	UNF Thread	*Brass* Part #	Price/E	Opt Qty
1/4"	5/8"-18 *	***284-0410***	**$4.40**	50
5/16"	5/8"-18 *	***284-0510***	**4.44**	50
3/8"	5/8"-18 *	***284-0610***	**4.24**	100
3/4"	1-1/16"-14 *	***284-1217***	**10.67**	25

* notch in hex for SAE identification

SAE Inverted Flare Fittings



male SAE swivel x push-on hose barb


Hose ID	UN Thread	*Brass* Part #	Price/E	Opt Qty
1/4"	3/8"-24	***290-0406***	**$4.78**	100
1/4"	7/16"-24	***290-0407***	**4.07**	100
1/4"	1/2"-20	***290-0408***	**4.49**	100
5/16"	1/2"-20	***290-0508***	**4.94**	50
5/16"	5/8"-18	***290-0510***	**6.90**	50
3/8"	1/2"-20	***290-0608***	**4.86**	50
3/8"	5/8"-18	***290-0610***	**5.28**	100
1/2"	3/4"-18	***290-0812***	**8.14**	50
5/8"	7/8"-18	***290-1014***	**10.18**	25



rigid female SAE x push-on hose barb

Hose ID	UN Thread	*Brass* Part #	Price/E	Opt Qty
1/4"	3/8"-24	***292-0406***	**$3.45**	100
1/4"	7/16"-24	***292-0407***	**3.41**	100
1/4"	1/2"-20	***292-0408***	**3.32**	100
3/8"	1/2"-20	***292-0608***	**5.15**	50
3/8"	5/8"-18	***292-0610***	**4.65**	50
1/2"	3/4"-18	***292-0812***	**7.19**	25

37° JIC Hose Barb Fittings



male 37° JIC x push-on hose barb

Hose ID	UNF Thread	*Brass* Part #	Price/E	Opt Qty
1/4"	7/16"-20	***286-0407***	**$3.20**	100
1/4"	9/16"-18	***286-0409***	**4.82**	100
3/8"	9/16"-18	***286-0609***	**4.78**	50
1/2"	3/4"-16	***286-0812***	**6.31**	50
5/8"	7/8"-14	***286-1014***	**7.10**	25
3/4"	1-1/16"-12	***286-1217***	**12.05**	25

NEW



female 37° JIC swivel x push-on hose barb

Hose ID	UNF Thread	*Brass* Part #	Price/E	Opt Qty
1/4"	9/16"-18	***288-0409***	**$3.90**	50
5/16"	9/16"-18	***288-0509***	**4.98**	50
3/8"	9/16"-18	***288-0609***	**4.20**	50
3/4"	1-1/16"-12	***288-1217***	**11.17**	25
1"	1-5/16"-12	***288-1621***	**26.66**	10

NEW NEW



female 45°SAE / 37°JIC swivel x push-on hose barb
(dual angle seat)

Hose ID	UNF Thread	*Brass* Part #	Price/E	Opt Qty
1/4"	7/16"-20	***287-0407***	**$3.36**	100
1/4"	1/2"-20	***287-0408***	**3.66**	100
3/8"	3/4"-16	***287-0612***	**5.19**	25
1/2"	3/4"-16	***287-0812***	**5.28**	25
1/2"	7/8"-14	***287-0814***	**7.56**	25
5/8"	7/8"-14	***287-1014***	**7.93**	100



2010 NEW

female 37° JIC/45° SAE swivel x push-on 90° elbow

Hose ID	UNF Thread	*Plated Steel* Part #	Price/E	Opt Qty
1/4"	7/16"-20	***289-0407***	**$23.38**	25
1/4"	7/16"-20	***289-0407SAE****	**23.38**	25
3/8"	9/16"-18	***289-0609***	**21.56**	25
3/8"	5/8"-18	***289-0610SAE****	**31.15**	25
1/2"	3/4"-16	***289-0812***	**26.90**	10
1/2"	3/4"-16	***289-0812SAE****	**26.96**	10
3/4"	1-1/16"-12	***289-1217***	**72.45**	5

* notch in nut for SAE identification

Push-On Fittings

Dixon push-on fittings are intended for use with Lok-On (push-on style) hose only. No hose clamps or ferrules are needed.

SAFETY ALERT Lok-On fittings will properly grip Lok-On hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.

Rigid Tube x Push-On Hose Barb



Hose ID	Tube OD	Brass Part #	Brass Price/E	Opt Qty
1/4"	3/16"	***294-0403***	**$2.82**	100
1/4"	1/4"	***294-0404***	**2.12**	100
1/4"	5/16"	***294-0405***	**2.53**	100
3/8"	3/8"	***294-0606***	**2.87**	50
1/2"	1/2"	***294-0808***	**4.24**	50
5/8"	5/8"	***294-1010***	**6.40**	25
3/4"	3/4"	***294-1212***	**8.72**	25

Push-On Hose Menders




Hose ID	Brass Part #	Brass Price/E	NEW Stainless Part #	Stainless Price/E	Opt Qty
1/4"	***BPM2***	**$2.41**	***SSPM2***	**$32.65**	100
5/16"	***BPM25***	**2.58**	**---**	**---**	100
3/8"	***BPM3***	**2.87**	***SSPM3***	**37.50**	50
1/2"	***BPM4***	**4.49**	***SSPM4***	**39.41**	50
5/8"	***BPM5***	**6.40**	**---**	**---**	25
3/4"	***BPM6***	**7.73**	**---**	**---**	25
NEW 1"	***BPM8***	**12.88**	**---**	**---**	10

90° Push-On Hose Barb x Male NPTF Elbows



Hose ID	NPTF Thread	Brass Part #	Brass Price/E	Opt Qty
1/4"	1/8"-27	***273-0402***	**$3.70**	100
1/4"	1/4"-18	***273-0404***	**4.49**	50
NEW 3/8"	1/8"-27	***273-0602***	**5.40**	50
3/8"	1/4"-18	***273-0604***	**5.11**	50
3/8"	3/8"-18	***273-0606***	**6.23**	25
1/2"	3/8"-18	***273-0806***	**7.93**	25
1/2"	1/2"-14	***273-0808***	**9.80**	25
NEW 3/4"	1/2"-14	***273-1208***	**20.19**	10
3/4"	3/4"-14	***273-1212***	**18.98**	10

Tool for Push-On Fittings

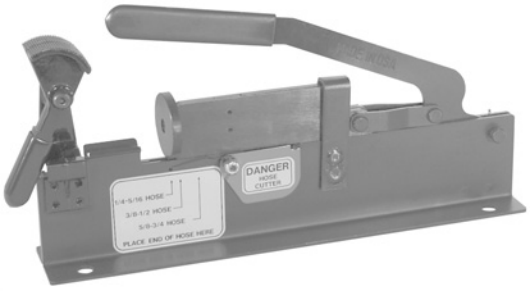

- cuts push-on style hose and inserts the fitting
- Built-in cutter slices through ¼" - ¾" ID reinforced push-on hose without fraying.
- Clamp hose into tool's vice and apply light pressure on handle to drive in the fitting.
- tool has four 7/16" diameter mounting holes for bench mounting
- overall size is 13-1/2" long x 2-3/8" wide x 7" height

Size	Part #	Price/E
all	***270AT***	**$980.18**

Assembly Instructions:

1. Trim hose end with smooth square cut
2. Lubricate either push-on fitting, hose or both.
3. Insert push-on fitting into hose until first barb is in hose.
4. Place end of fitting against a flat object (bench, wall, etc.) and grip the hose one inch from end. Push with a steady force until end of hose is covered by yellow plastic cap.

Disassembly Instructions:

1. Leaving push-on fitting in place, make a 1" cut in the hose along the barbed end of the fitting. Note: Be careful not to nick barbs when cutting the hose.
2. With firm grip on hose, give a sharp downward pull to release the fitting from the hose.

SAFETY ALERT *Caution:* Push-on fittings will properly grip push-on hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.

Brass Barbed Hose Fittings

male inserts

Hose ID	NPTF Thread	Part #	Price/E	Opt Qty	Hose ID	NPTF Thread	Part #	Price/E	Opt Qty
1/8"	1/8"	***BN11***	**$1.54**	100	1/2"	1/4"	***BN42***	**$2.58**	50
1/8"	1/4"	***BN122***	**1.99**	100	1/2"	3/8"	***BN43***	**2.74**	50
3/16"	1/8"	***BN151***	**1.66**	100	1/2"	1/2"	***BN44***	**3.99**	50
3/16"	1/4"	***BN152***	**2.04**	100	1/2"	3/4"	***BN46***	**6.02**	25
1/4"	1/8"	***BN21***	**1.62**	100	5/8"	3/8"	***BN53***	**2.99**	50
1/4"	1/4"	***BN22***	**1.70**	100	5/8"	1/2"	***BN54***	**4.32**	25
1/4"	3/8"	***BN23***	**2.66**	100	5/8"	3/4"	***BN56***	**5.94**	50
1/4"	1/2"	***BN24***	**5.15**	50	3/4"	1/2"	***BN64***	**4.82**	50
5/16"	1/8"	***BN251***	**1.74**	100	3/4"	3/4"	***BN66***	**5.44**	25
5/16"	1/4"	***BN252***	**2.08**	50	1"	3/4"	***BN86***	**7.02**	25
5/16"	3/8"	***BN253***	**2.66**	50	1"	1"	***BN88***	**11.92**	10
3/8"	1/8"	***BN31***	**1.99**	100	1-1/4"	3/4"	***BN106***	**13.25**	10
3/8"	1/4"	***BN32***	**1.66**	100	1-1/4"	1"	***BN108***	**14.16**	10
3/8"	3/8"	***BN33***	**2.66**	50					
3/8"	1/2"	***BN34***	**4.57**	25					
3/8"	3/4"	***BN36***	**6.19**	25					



solid female inserts

Hose ID	NPTF Thread	Part #	Price/E	Opt Qty	Hose ID	NPTF Thread	Part #	Price/E	Opt Qty
1/8"	1/8"	***BF11***	**$1.79**	100	1/2"	1/4"	***BF42***	**$2.78**	50
1/8"	1/4"	***BF12***	**3.07**	100	1/2"	3/8"	***BF43***	**3.57**	50
3/16"	1/8"	***BF151***	**2.08**	100	1/2"	1/2"	***BF44***	**4.69**	50
3/16"	1/4"	***BF152***	**2.78**	100	1/2"	3/4"	***BF46***	**8.14**	25
1/4"	1/8"	***BF21***	**1.87**	100	5/8"	3/8"	***BF53*** NEW	**3.12**	50
1/4"	1/4"	***BF22***	**2.37**	50	5/8"	1/2"	***BF54***	**4.53**	25
1/4"	3/8"	***BF23*** NEW	**2.96**	50	5/8"	3/4"	***BF56***	**8.14**	25
1/4"	1/2"	***BF24***	**4.53**	50	3/4"	1/2"	***BF64***	**4.98**	25
5/16"	1/8"	***BF251***	**2.49**	100	3/4"	3/4"	***BF66***	**8.27**	25
5/16"	1/4"	***BF252***	**2.82**	100	1"	3/4"	***BF86***	**9.05**	25
5/16"	3/8"	***BF253***	**3.49**	100	1"	1"	***BF88*** NEW	**14.66**	10
3/8"	1/8"	***BF31***	**2.28**	50	1-1/4"	1"	***BF108***	**14.79**	10
3/8"	1/4"	***BF32***	**2.37**	50					
3/8"	3/8"	***BF33***	**3.20**	50					
3/8"	1/2"	***BF34*** NEW	**4.74**	25					
3/8"	3/4"	***BF36***	**8.39**	25					



Brass Hose Menders

Hose Size	Part #	Price/E	Opt Qty
1/8"	***BM1***	**$1.58**	100
3/16"	***BM15***	**1.54**	100
1/4"	***BM2***	**1.70**	100
1/4" x 1/8"	***BM2-1*** NEW	**2.12**	100
5/16"	***BM25***	**1.83**	100
3/8"	***BM3***	**1.99**	100
3/8" x 1/4"	***BM3-2*** NEW	**2.45**	100
1/2"	***BM4***	**2.82**	50
1/2" x 3/8"	***BM4-3*** NEW	**3.32**	100
5/8"	***BM5***	**3.66**	50
5/8" x 3/8"	***BM5-3*** NEW	**3.53**	50
3/4"	***BM6***	**4.57**	50
3/4" x 1/2"	***BM6-4*** NEW	**4.78**	50
1"	***BM8***	**8.39**	10




Brass Barbed Hose Elbows

male insert 45° elbows



Hose ID	PTF Thread	Part #	Price/E	Pkg Qty
1/4"	1/8"	***139-0402***	**$6.02**	25
1/4"	1/4"	***139-0404***	**6.15**	25
3/8"	1/8"	***139-0602***	**4.78**	25
3/8"	1/4"	***139-0604***	**4.24**	25
3/8"	3/8"	***139-0606***	**6.44**	25
1/2"	1/4"	***139-0804***	**7.81**	25
1/2"	3/8"	***139-0806***	**6.60**	25
1/2"	1/2"	***139-0808***	**9.03**	25
3/4"	1/2"	NEW ***139-1208***	**14.20**	25


male insert 90° elbows



Hose ID	PTF Thread	Part #	Price/E	Pkg Qty	Hose ID	PTF Thread	Part #	Price/E	Pkg Qty
3/16"	1/8"	***EL15H1M***	**$3.28**	50	1/2"	1/4"	***EL4H2M***	**$4.65**	25
1/4"	1/8"	***EL2H1M***	**2.91**	50	1/2"	3/8"	***EL4H3M***	**5.82**	25
1/4"	1/4"	***EL2H2M***	**4.15**	50	1/2"	1/2"	***EL4H4M***	**7.48**	25
1/4"	3/8"	***EL2H3M***	**5.15**	50	5/8"	3/8"	***EL5H3M***	**9.68**	25
5/16"	1/8"	***EL25H1M***	**3.74**	25	5/8"	1/2"	***EL5H4M***	**10.51**	25
5/16"	1/4"	***EL25H2M***	**4.24**	25	3/4"	1/2"	***EL6H4M***	**13.21**	25
5/16"	3/8"	***EL25H3M***	**5.40**	25	3/4"	3/4"	***EL6H6M***	**18.07**	25
3/8"	1/8"	***EL3H1M***	**3.24**	50	1"	3/4"	***EL8H6M***	**22.76**	10
3/8"	1/4"	***EL3H2M***	**4.32**	50	1"	1"	***EL8H8M***	**28.57**	10
3/8"	3/8"	***EL3H3M***	**5.61**	50					
NEW 3/8"	1/2"	***EL3H4M***	**7.06**	25					

female insert 90° elbows

2010 NEW



Hose ID	NPTF Thread	Part #	Price/E	Pkg Qty
1/4"	1/8"	***134-0402***	**$4.49**	50
1/4"	1/4"	***134-0404***	**5.90**	50
3/8"	1/4"	***134-0604***	**5.90**	50
3/8"	3/8"	***134-0606***	**8.68**	50
1/2"	1/4"	***134-0804***	**5.86**	25
1/2"	3/8"	***134-0806***	**8.89**	25
1/2"	1/2"	***134-0808***	**17.98**	25
3/4"	3/4"	***134-1212***	**27.29**	25

Brass Barbed Hose Splicers

hose barb 90° elbow splicers

Hose ID	Part #	Price/E	Pkg Qty
1/8"	***177-0202*** NEW	**$4.07**	25
3/16"	***177-0303*** NEW	**3.32**	25
1/4" x 1/8"	***177-0402*** NEW	**4.78**	25
1/4"	***177-0404***	**3.20**	25
5/16"	***177-0505***	**5.23**	25
3/8" x 1/4"	***177-0604*** NEW	**4.94**	25
3/8"	***177-0606*** NEW	**4.82**	25
1/2" x 3/8"	***177-0806*** NEW	**5.98**	25
1/2"	***177-0808***	**5.94**	25
5/8"	***177-1010*** NEW	**10.38**	25
3/4" x 1/2"	***177-1208*** NEW	**12.42**	25
3/4"	***177-1212*** NEW	**14.66**	25



hose barb tee splicers

Hose ID	Part #	Price/E	Pkg Qty
1/8"	***179-0202*** NEW	**$4.98**	25
3/16"	***179-0303*** NEW	**4.15**	25
1/4" x 1/8"	***179-0402*** NEW	**4.28**	25
1/4"	***179-0404***	**3.90**	25
5/16"	***179-0505***	**5.11**	25
3/8" x 1/4"	***179-0604*** [1] NEW	**9.72**	25
3/8"	***179-0606***	**5.19**	25
1/2" x 3/8"	***179-0806*** NEW	**8.10**	25
1/2"	***179-0808***	**7.64**	25
5/8"	***179-1010***	**11.38**	25
3/4" x 1/2"	***179-1208*** NEW	**16.90**	25
3/4"	***179-1212***	**15.66**	25



[1] drop leg has 1/4-18 male NPTF thread

Brass Barbed Hose Fittings



male 45° SAE x hose barb


Hose ID	UNF Thread	Part #	Price/E	Opt Qty
3/16"	7/16"-20	***142-0307***	**$2.53**	100
1/4"	7/16"-20	***142-0407***	**1.99**	100
1/4"	5/8"-18	***142-0410***	**2.74**	100
5/16"	1/2"-20	***142-0508***	**2.12**	100
3/8"	5/8"-18	***142-0610***	**2.95**	50
3/8"	3/4"-16	***142-0612***	**3.95**	50
1/2"	3/4"-16	***142-0812***	**4.24**	25



male NPTF swivel x hose barb

Hose ID	NPTF Size	Part #	Opt Qty
1/4"	1/4"	***103-0404***	**$4.94**
3/8"	1/4"	***103-0604***	**5.15**
3/8"	3/8"	***103-0606***	**5.73**
1/2"	3/8"	***103-0806***	**6.65**
1/2"	1/2"	***103-0808***	**8.47**
3/4"	3/4"	***103-1212***	**11.22**

Note: swivel is for assembly convenience only.



female NPSM swivel x hose barb

ball seat type

Hose ID	NPSM Thread	Part #	Price/E	Opt Qty
1/8"	1/8"	***BFS11***	**$2.08**	100
3/16"	1/8"	***BFS151***	**2.16**	100
3/16"	1/4"	***BFS152***	**3.07**	100
1/4"	1/8"	***BFS21***	**2.33**	100
1/4"	1/4"	***BFS22***	**2.74**	100
1/4"	3/8"	***BFS23***	**3.90**	100
5/16"	1/4"	***BFS252***	**3.03**	100
5/16"	3/8"	***BFS253***	**3.74**	50
3/8"	1/4"	***BFS32***	**2.62**	100
3/8"	3/8"	***BFS33***	**3.61**	100
3/8"	1/2"	***BFS34***	**5.65**	100
1/2"	3/8"	***BFS43***	**4.15**	100
1/2"	1/2"	***BFS44***	**5.52**	100
3/4"	3/4"	***BFS66***	**7.81**	25



female NPSM swivel x hose barb

gasket seat type

Hose ID	NPSM Thread	Part #	Price/E	Opt Qty
1/8"	1/8"	***126-0202***	**$2.82**	100
3/16"	1/8"	***126-0302***	**2.58**	100
3/16"	1/4"	***126-0304***	**4.15**	100
1/4"	1/8"	***126-0402***	**4.15**	100
1/4"	1/4"	***126-0404***	**3.32**	100
1/4"	3/8"	***126-0406***	**4.49**	50
5/16"	1/4"	***126-0504***	**4.49**	100
3/8"	1/4"	***126-0604***	**3.57**	100
3/8"	3/8"	***126-0606***	**4.20**	50
3/8"	1/2"	***126-0608***	**6.15**	50
1/2"	3/8"	***126-0806***	**4.82**	50
1/2"	1/2"	***126-0808***	**5.98**	50
3/4"	3/4"	***126-1212***	**7.77**	25

2010 NEW



female NPTF swivel x hose barb

Hose ID	NPTF Thread	Part #	Price/E	Opt Qty
1/4"	1/4"-18	***105-0404***	**$6.23**	100
3/8"	1/4"-18	***105-0604***	**6.36**	50
3/8"	3/8"-18	***105-0606***	**6.40**	50
1/2"	3/8"-18	***105-0806***	**6.56**	50
1/2"	1/2"-14	***105-0808***	**7.89**	50

Note: swivel is for assembly convenience only.



female 37° JIC swivel x hose barb

Hose ID	UNF Thread	Part #	Price/E	Opt Qty
3/8"	9/16"-18	***145-0609***	**$2.91**	100
NEW 3/4"	1-1/16"-12	***145-1217***	**11.30**	25



female 45° SAE swivel x hose barb

Hose ID	UNF Thread	Part #	Price/E	Opt Qty
3/16"	3/8"-24	***144-0306***	**$2.62**	100
1/4"	5/8"-18	***144-0410***	**3.70**	100
5/16"	5/8"-18	***144-0510***	**3.82**	100
3/8"	5/8"-18	***144-0610***	**3.74**	100
1/2"	3/4"-16	***144-0812***	**4.94**	100
NEW 3/4"	1-1/16"-14	***144-1217***	**11.26**	25




female 45°SAE / 37°JIC swivel x hose barb

(dual angle seat)

Hose ID	UNF Thread	Part #	Price/E	Opt Qty
3/16"	7/16"-20	***143-0307***	**$2.45**	100
1/4"	7/16"-20	***143-0407***	**2.58**	100
1/4"	1/2"-20	***143-0408***	**3.28**	100
5/16"	1/2"-20	***143-0508***	**3.36**	100
3/8"	3/4"-16	***143-0612***	**4.53**	100
1/2"	3/4"-16	***143-0812***	**4.53**	100
1/2"	7/8"-14	***143-0814***	**6.40**	50

Brass Reusable Fittings

Reusable fittings are recommended for low pressure air hose applications. They offer a more durable hose connection and easily repaired. Maximum working pressure: **250 PSI** at ambient temperature (70°F). *Caution: Check hose OD and ID accurately before ordering.* SAFETY ALERT



reusable male fittings

Part #	Hose ID	NPTF Thread	Hose OD	Price/E	Opt Qty
BN21RU50	1/4"	1/8"	1/2"	**$7.39**	100
BN21RU56	1/4"	1/8"	9/16"	**7.39**	100
BN21RU62	1/4"	1/8"	5/8"	**7.56**	100
BN22RU50	1/4"	1/4"	1/2"	**5.40**	50
BN22RU56	1/4"	1/4"	9/16"	**5.73**	50
BN22RU62	1/4"	1/4"	5/8"	**5.90**	50
BN23RU50	1/4"	3/8"	1/2"	**7.89**	50
BN23RU56	1/4"	3/8"	9/16"	**8.22**	50
BN23RU62	1/4"	3/8"	5/8"	**8.39**	50
BN252RU56	5/16"	1/4"	9/16"	**7.73**	50
BN252RU62	5/16"	1/4"	5/8"	**6.27**	50
BN252RU68	5/16"	1/4"	11/16"	**8.18**	50
BN253RU56	5/16"	3/8"	9/16"	**10.13**	50
BN253RU62	5/16"	3/8"	5/8"	**8.68**	50
BN253RU68	5/16"	3/8"	11/16"	**10.59**	50

Part #	Hose ID	NPTF Thread	Hose OD	Price/E	Opt Qty
BN32RU62	3/8"	1/4"	5/8"	**$6.40**	50
BN32RU68	3/8"	1/4"	11/16"	**6.77**	50
BN32RU75	3/8"	1/4"	3/4"	**6.48**	50
BN33RU62	3/8"	3/8"	5/8"	**6.90**	50
BN33RU68	3/8"	3/8"	11/16"	**7.27**	50
BN33RU75	3/8"	3/8"	3/4"	**6.98**	50
BN34RU62	3/8"	1/2"	5/8"	**10.22**	50
BN34RU68	3/8"	1/2"	11/16"	**10.59**	50
BN34RU75	3/8"	1/2"	3/4"	**10.30**	50
BN42RU87	1/2"	1/4"	7/8"	**14.29**	25
BN42RU93	1/2"	1/4"	15/16"	**15.24**	25
BN42RU99	1/2"	1/4"	1"	**16.12**	25
BN43RU87	1/2"	3/8"	7/8"	**13.91**	25
BN43RU93	1/2"	3/8"	15/16"	**14.87**	25
BN43RU99	1/2"	3/8"	1"	**15.74**	25
BN44RU87	1/2"	1/2"	7/8"	**14.08**	25
BN44RU93	1/2"	1/2"	15/16"	**15.04**	25
BN44RU99	1/2"	1/2"	1"	**15.91**	25



reusable female swivels

Part #	Hose ID	NPSM Thread	Hose OD	Price/E	Opt Qty
185-4084	1/4"	1/4"	1/2"	**$7.44**	50
185-4094	1/4"	1/4"	9/16"	**7.77**	50
185-4104	1/4"	1/4"	5/8"	**7.93**	50
185-4086	1/4"	3/8"	1/2"	**9.30**	50
185-4096	1/4"	3/8"	9/16"	**9.64**	50
185-4106	1/4"	3/8"	5/8"	**9.80**	50
185-5094	5/16"	1/4"	9/16"	**10.01**	50
185-5104	5/16"	1/4"	5/8"	**8.56**	50
185-5114	5/16"	1/4"	11/16"	**10.47**	50
185-6104	3/8"	1/4"	5/8"	**9.22**	50
185-6114	3/8"	1/4"	11/16"	**9.59**	50
185-6124	3/8"	1/4"	3/4"	**9.30**	50
185-6106	3/8"	3/8"	5/8"	**10.34**	50
185-6116	3/8"	3/8"	11/16"	**10.72**	50
185-6126	3/8"	3/8"	3/4"	**10.43**	50
185-8148	1/2"	1/2"	7/8"	**16.45**	20
185-8158	1/2"	1/2"	15/16"	**17.40**	20
185-8168	1/2"	1/2"	1"	**18.28**	20



reusable hose splicers

Part #	Hose ID	Hose OD	Price/E	Opt Qty
187-0408	1/4"	1/2"	**$8.14**	50
187-0409	1/4"	9/16"	**8.76**	50
187-0410	1/4"	5/8"	**9.18**	50
187-0610	3/8"	5/8"	**9.80**	25
187-0611	3/8"	11/16"	**10.55**	25
187-0612	3/8"	3/4"	**9.72**	25

Grease Whip Hose Assemblies

- one piece brass crimp couplings
- 1/8"-27 male NPT thread, solid base
- US manufactured 3/16" I.D. hose - exceeds SAE 100R1-AT
- for use with hand grease guns only




Part #	Assembly Length	Retail Pack	Price/E
GWH-0800	8"	n/a	**$11.21**
GWH-1200	12"	Add "R" suffix to part number	**11.50**
GWH-1800	18"	Add "R" suffix to part number	**15.16**
GWH-2400	24"	n/a	**18.23**
GWH-3600	36"	n/a	**25.13**
GWH-4800	48"	n/a	**32.15**
GWH-6000	60"	n/a	**39.12**

Brass Grease Whip Hose Fittings

Male and female fittings are designed to be crimped on.

grease hose coupler




Part #	Description	Price/E	Pkg Qty
GWH-C	grease hose coupler	**$7.39**	25

male NPT thread - chamfered base



Part #	Description	Price/E	Pkg Qty
001-0055	1/8"-27 male NPT thread, drilled and chamfered base	**$2.33**	100

male NPT thread - solid base



Part #	Description	Price/E	Pkg Qty
001-0260	1/8"-27 male NPT thread, solid base	**$2.12**	100

female NPT thread



Part #	Description	Price/E	Pkg Qty
001-0860	1/8"-27 female NPT thread	**$3.16**	100

Brass Oxy-Acetylene Hose Couplings



acetylene couplings

left-hand thread for acetylene line x hose shank

Hose Size	Part #	Price/E	Left UNF Thread	Hex
3/16"	***OA69***	**$2.66**	3/8"-24	7/16"
3/16"	***OA70***	**2.91**	9/16"-18	11/16"
1/4"	***OA71***	**3.16**	9/16"-18	11/16"
5/16"	***OA72***	**3.16**	9/16"-18	11/16"
3/8"	***OA73***	**3.16**	9/16"-18	11/16"



oxygen couplings

right-hand thread for oxygen line x hose shank

Hose Size	Part #	Price/E	Right UNF Thread	Hex
3/16"	***OA59***	**$2.66**	3/8"-24	7/16"
3/16"	***OA60***	**2.91**	9/16"-18	11/16"
1/4"	***OA61***	**3.16**	9/16"-18	11/16"
5/16"	***OA62***	**3.16**	9/16"-18	11/16"
3/8"	***OA63***	**3.16**	9/16"-18	11/16"

Brass Oxy-Acetylene Connecting Spuds



left-hand thread x left-hand thread

For connecting two hoses together



right-hand thread x right-hand thread

Hose Size	Part #	Price/E	Left UNF Thread	Hex
3/16"	***OA52***	**$3.32**	9/16"-18	11/16"
1/4"	***OA52***	**3.32**	9/16"-18	11/16"
5/16"	***OA52***	**3.32**	9/16"-18	11/16"
3/8"	***OA52***	**3.32**	9/16"-18	11/16"

Hose Size	Part #	Price/E	Right UNF Thread	Hex
3/16"	***OA50***	**$3.32**	9/16"-18	11/16"
1/4"	***OA50***	**3.32**	9/16"-18	11/16"
5/16"	***OA50***	**3.32**	9/16"-18	11/16"
3/8"	***OA50***	**3.32**	9/16"-18	11/16"

Brass Oxy-Acetylene Adapters



left-hand thread x NPTF

Part #	Price/E	Left UNF Thread	NPTF Thread	Hex
158-0904	**$2.91**	9/16"-18	1/4"-18	5/8"
158-0906	**3.49**	9/16"-18	3/8"-18	11/16"



right-hand thread x NPTF

Part #	Price/E	Right UNF Thread	NPTF Thread	Hex
156-0904	**$2.91**	9/16"-18	1/4"-18	5/8"
156-0906	**3.49**	9/16"-18	3/8"-18	11/16"

Brass Oxy-Acetylene Ferrules

Part #	Price/E	Inside Dimensions	Overall Length	Metal Gauge	Std. Ind. Part #	Qty
BFO448	**$0.63**	.448" x 0.890"	15/32"	.019"	9116	25
BFO474	**0.52**	.474" x 0.943"	15/32"	.019"	9979	25
BFO535	**0.85**	.535" x 1.071"	3/4"	.024"	9940P	25
BFO593	**0.71**	.593" x 1.109"	3/4"	.024"	9593	25
BFO700	**2.55**	.700" x 1.325"	3/4"	.025"	8337	25



sold in package quantities only

Squeeze Lok™ Hose Assembly Tool

- installs 1/4", 5/16" and 3/8" hose fittings
- lightweight
- portable
- comfortable cushioned grip
- economical

Part #	Price/E
HHCI	**$185.00**



Brass Ferrules

ferrules for air

BFM
for medium weight hose



BFL
for light weight hose



Part #	Price/E	Pkg Qty	Ferrule ID	Ferrule Length	End Hole Size	Metal Gauge	*Stnd Ind Part #*	*Ribbed Die**	*Plain Die**
BFM478	**$0.38**	50	.478"	11/16"	21/64"	.024"	***4750***	***R41***	***P41/P42***
BFM500	**0.53**	50	.500"	1"	11/32"	.024"	***7322***	***R40***	***P40***
BFM525	**0.56**	50	.525"	1"	3/8"	.024"	***7323***	***R39***	***P39***
BFM531	**0.56**	50	.531"	1"	7/16"	.024"	***7324***	***R39***	***P39***
BFM562	**0.59**	50	.561"	1"	7/16"	.024"	***7325***	***R37***	***P38***
BFM593	**0.60**	50	.593"	1"	7/16"	.024"	***7326***	***R36***	***P37***
BFM625	**0.62**	50	.625"	1"	7/16"	.024"	***7327***	***R35***	***P36***
BFM656	**0.75**	50	.656"	1"	7/16"	.024"	***7328***	***R34***	***P35***
BFM687	**0.75**	50	.687"	1"	1/2"	.024"	***7329***	***R33***	***P34***
BFM718	**0.72**	50	.718"	1"	5/8"	.024"	***7330***	***R31***	***P32***
BFM718B	**0.72**	50	.718"	1"	1/2"	.024"	***7330B***	***R31***	***P32***
BFM750	**0.79**	50	.750"	1"	5/8"	.024"	***7331***	***R30***	***P31***
BFM750B	**0.76**	50	.750"	1"	1/2"	.024"	***7331B***	***R30***	***P31***
BFM781	**0.81**	50	.781"	1"	5/8"	.024"	***7332***	***R29***	***P30***
BFM781B	**0.81**	50	.781"	1"	1/2"	.024"	***7332B***	***R29***	***P30***
BFM812	**0.87**	50	.812"	1"	5/8"	.024"	***7333***	***R28***	***P29***
BFL380	**0.25**	50	.380"	1/2"	17/64"	.016"	***622***	***R44***	***P45***
BFL400	**0.27**	50	.400"	15/32"	17/64"	.020"	***619***	***R44***	***P44***
BFL410	**0.27**	50	.410"	1/2"	17/64"	.016"	***620***	***R43***	***P44***
BFL450	**0.27**	50	.450"	9/16"	11/32"	.016"	***769***	***R41***	***P42***
BFL500	**0.27**	50	.500"	1/2"	11/32"	.016"	***624***	***R40***	***P41***
BFL525	**0.27**	50	.525"	1/2"	11/32"	.016"	***625***	***R39***	***P40***
BFL548	**0.28**	50	.548"	31/64"	3/8"	.015"	***626***	***R38***	***P39***
BFL564	**0.39**	50	.564"	3/4"	3/8"	.019"	***3588***	***R37***	***P38***
BFL575	**0.33**	50	.575"	31/64"	15/32"	.019"	***KK***	***R37***	***P38***
BFL600	**0.34**	50	.600"	1/2"	1/2"	.019"	***JJ***	***R36***	***P37***
BFL625	**0.37**	50	.625"	1/2"	1/2"	.019"	***II***	***R35***	***P36***
BFL650	**0.38**	50	.650"	1/2"	1/2"	.019"	***HH***	***R34***	***P35***
BFL675	**0.41**	50	.675"	33/64"	1/2"	.019"	***GG***	***R34***	***P34***
BFL725	**0.40**	50	.725"	17/32"	1/2"	.019"	***EE***	***R31***	***P32***
BFL750	**0.41**	50	.750"	17/32"	1/2"	.019"	***DD***	***R30***	***P32***
BFL775	**0.42**	50	.775"	17/32"	1/2"	.016"	***CC***	***R31***	***P31***

* These dies for use with 5111A and 1765A ferrule machine. Other sizes are available.
Ribbed Dies per set: **$190.00**; Plain Dies per set: **$190.00**

ferrules for fluid

BFMW
for medium weight water hose



Part #	Price/E	Pkg Qty	Ferrule ID	Ferrule Length	End Hole Size	Metal Gauge	*Stnd Ind Part #*	*Ribbed Die**	*Plain Die**
BF800	**$0.78**	25	.800"	.844"	.688"	.024"	***---***	***R28***	***P29***
BF825	**0.64**	25	.825"	.844"	.688"	.024"	***---***	***R27***	***P28***
BF850	**0.45**	25	.850"	.568"	.688"	.019"	***Z***	***R26***	***P27***
BFW875	**0.70**	25	.875"	.844"	.688"	.024"	***7244A***	***R25***	***P26***
BFW900	**0.74**	25	.900"	.844"	.688"	.024"	***5029A***	***R24***	***P25***
BFW925	**0.88**	25	.925"	.840"	.690"	.025"	***7113***	***R23***	***P24***
BFW975	**0.95**	25	.975"	.844"	.688"	.024"	***5028A***	***R21***	***P22***
BFW1025	**0.96**	25	1.025"	.844"	.693"	.024"	***7114A***	***R19***	***P20***
BFW1175	**1.10**	25	1.175"	.844"	.875"	.024"	***7088A***	***R13***	***P14***
BFMW1050	**1.20**	25	1.050"	.625"	.750"	.025"	***3605***	***R18***	***P19***
BFMW1100	**1.25**	25	1.100"	.843"	.812"	.023"	***5027***	***R16***	***P17***
BFMW1150	**1.25**	25	1.150"	.844"	.880"	.024"	***7104A***	***R15***	***P15***
BFMW1225	**1.60**	25	1.225"	.875"	.875"	.025"	***875-K***	***R11***	***P12***
BFMW1275	**2.60**	25	1.275"	.875"	1.000"	.025"	***875-1***	***R9***	***P10***
BFMW1400	**2.60**	25	1.400"	.687"	1.120"	.020"	***D***	***R4***	***P5***
BFMW1500	**2.00**	25	1.500"	.875"	1.120"	.025"	***1500***	***---***	***P1***

* These dies for use with 5111A and 1765A ferrule machine. Other sizes are available.
Ribbed Dies per set: **$190.00**; Plain Dies per set: **$190.00**

sold in package quantities only

Manually - Operated Brass Ferrule Crimper


- crimps all brass ferrules shown on previous page
- Dies for ferrule machines are available in standard sets for all ferrules as tabulated (4 segments to a set).
- Dies are supplied with plain or ribbed crimping surface.
- does not include dies
- height: with handle upright 27"
- base: 8" x 3"
- body: 7-3/8"
- weight: 25 lbs.



Part #	Price/E
5111A	**$1700.00**

Air - Operated Brass Ferrule Crimper

- The mass production assembly of hose, ferrules and fittings is efficiently handled with this air-operated unit.
- The foot pedal permits the use of both hands, reduces fatigue and speeds production.
- complete with air cylinder, ferrule machine (less dies), fitted hose lengths and necessary control valves
- ready for work bench installation
- crimps all brass ferrules shown on page 316
- weight: 91 lbs.

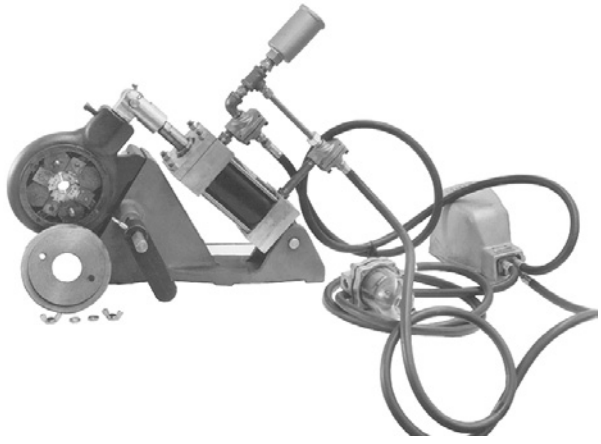

Part #	Price/E
1765A	**$7630.00**

Die sizes for ferrules and machine numbers 1765A and 5111A on page 316.

Hose Crimper

- 855 crimper with 5 dies for 31/64" (0.484") to 45/64" (0.703") OD hose
- 855A crimper with 5 dies for 28/64" (0.437") to 43/64" (0.671") OD hose
- optional dies up to 52/64" OD
- replacement dies: **$40.20**
- Hose crimper provides "big tool" crimping advantages at a fraction of the cost.
- rugged, portable and easy to use
- # 855 weight: 10 lbs.
- # 855A weight: 10 lbs.

Crimper Part #	Price/E
855	**$298.20**
855A	**309.20**



Replacement Dies


Die Bore	Hose OD From:	Hose OD To:	***Die Part #***	Crimper **# 855**	Crimper **# 855A**
.375"	.385"	.406"	***856-10***	optional	optional
.437"	.447"	.468"	***856-7***	optional	standard
.484"	.490"	.520"	***856-4***	standard	standard
.531"	.540"	.562"	***856-3***	standard	standard
.578"	.590"	.625"	***856-2***	standard	standard
.625"	.640"	.671"	***856-1***	standard	standard
.687"	.690"	.710"	***856-5***	standard	optional
.750"	.760"	.781"	***856-8***	optional	optional
.812"	.820"	.843"	***856-9***	optional	optional

Large Hose Crimper

(Sold without dies)

- for crimping 1/2" to 1" ID hoses with larger OD's, from 11/16" to 1-1/2"
- crimps standard brass or aluminum ferrules
- order separate dies for each hose diameter
- weight: 10 lbs.

Crimper Part #	Price/E
860	**$315.10**



Dies

Hose OD/ Finished Crimp Dimension	***Die Part #***	Price/E
11/16"	***861-22***	**$46.70**
23/32"	***861-23***	**46.70**
3/4"	***861-24***	**46.70**
25/32"	***861-25***	**46.70**
13/16"	***861-26***	**46.70**
27/32"	***861-27***	**46.70**
7/8"	***861-28***	**46.70**
29/32"	***861-29***	**46.70**
15/16"	***861-30***	**46.70**
31/32"	***861-31***	**46.70**
1"	***861-32***	**46.70**
1-1/32"	***861-33***	**46.70**
1-1/16"	***861-34***	**46.70**
1-1/8"	***861-36***	**46.70**
1-3/16"	***861-38***	**46.70**
1-1/4"	***861-40***	**46.70**
1-5/16"	***861-42***	**46.70**
1-3/8"	***861-44***	**46.70**
1-7/16"	***861-46***	**46.70**
1-1/2"	***861-48***	**46.70**

Polypropylene Non-Spill Chemical Transfer Couplings

The non-spill coupling virtually eliminates fluid loss upon disconnection. It is designed to help meet the demand for closed system transfer and dispensing of chemicals with minimal environmental contamination. The push-to-connect design allows ease of connection/disconnection and the flush valve enables ease of cleaning. They can be used with concentrated or diluted agricultural chemicals when transferring from bulk storage tanks, returnable containers, applicators, etc.

Materials:
- body - polypropylene
- springs - 316 stainless steel
- seals - chemical resistant fluorocarbon

Size	Pressure Ratings	*coupler*		*nipple*	
		Part #	Price/E	Part #	Price/E
½"	100 PSI at 68°F	***PFC50***	**$65.00**	***PFN50***	**$31.50**
1"	60 PSI at 68°F	***PFC100***	**79.00**	***PFN100***	**56.00**
2"	100 PSI at 68°F	***PFC200***	**205.00**	***PFN200***	**102.00**



Acetal Push-In Fittings

Construction:
- material - acetal copolymer
- O-Ring - nitrile rubber
- three piece construction, body, collet and O-Ring pre-assembled
- collets are produced with stainless steel locking teeth

Working Pressure and Temperature Range:
- temperature range: **-20°F** (-20°C) to **185°F** (85°C)
- maximum water pressure: ¼": **230 PSI**; 3/8" and ½": **170 PSI**

Advantages:
- FDA compliant and NSF 51 listed non toxic material
- Easy to install - no tools required. Easy to disconnect and reuse

Applications:
- Water conditioning, filtration, reverse osmosis, soft drink, beer and condiment dispensing equipment where no metal contamination can be present.
- Industrial applications include low pressure pneumatic, hydraulic and vacuum lines commonly used in packaging systems, robotics, machine tools, agricultural spraying, car and industrial wash systems and air logic systems.

Push-In Straight Unions

tube x tube

Tube OD	*Acetal*	
	Part #	Price/E
1/4"	***462-4***	**$3.05**
3/8"	***462-6***	**4.20**
3/8" x 1/4"	***462-64***	**4.20**
1/2"	***462-8***	**5.10**
1/2" x 3/8"	***462-86***	**5.05**



Push-In Union Tees

tube x tube x tube

Tube OD		*Acetal*	
Run	Branch	Part #	Price/E
1/4"	1/4"	***464-4***	**$4.20**
3/8"	3/8"	***464-6***	**5.25**
3/8"	1/4"	***464-664***	**5.20**
1/2"	1/2"	***464-8***	**6.20**
1/2"	3/8"	***464-886***	**5.90**



Push-In Hose Barb Connectors

tube x hose barb

Tube OD	*Acetal*	
	Part #	Price/E
1/4"	***489-4***	**$2.20**
3/8"	***489-6***	**2.75**
1/2"	***489-8***	**3.05**



Acetal Push-In Fittings


Push-In Female Adapters



tube x female NPT

Tube OD	Female NPT	*Acetal* Part #	Price/E
1/4"	1/4"	***466-4B***	**$3.70**
3/8"	1/4"	***466-6B***	**4.60**

Push-In Male Adapters



tube x male NPT

Tube OD	Male NPT	*Acetal* Part #	Price/E
1/4"	1/8"	***468-4A***	**$2.50**
1/4"	1/4"	***468-4B***	**2.70**
1/4"	3/8"	***468-4C***	**3.20**
3/8"	1/8"	***468-6A***	**3.45**
3/8"	1/4"	***468-6B***	**3.75**
3/8"	3/8"	***468-6C***	**4.05**
3/8"	1/2"	***468-6D***	**4.30**
1/2"	3/8"	***468-8C***	**4.65**
1/2"	1/2"	***468-8D***	**5.15**

Push-In Male Elbows



tube x 90° male NPT

Tube OD	Male NPT	*Acetal* Part #	Price/E
1/4"	1/8"	***469-4A***	**$3.15**
1/4"	1/4"	***469-4B***	**3.25**
1/4"	3/8"	***469-4C***	**3.45**
3/8"	1/4"	***469-6B***	**3.85**
3/8"	3/8"	***469-6C***	**4.15**
1/2"	3/8"	***469-8C***	**4.75**
1/2"	1/2"	***469-8D***	**5.25**

Push-In Union Elbows



tube x 90° tube

Tube OD	*Acetal* Part #	Price/E
1/4"	***465-4***	**$3.60**
3/8"	***465-6***	**4.65**
3/8" x 1/4"	***465-64***	**4.60**
1/2" x 3/8"	***465-86***	**5.30**
1/2"	***465-8***	**5.40**

Push-In 360° Swivel Elbows



tube x 360° swivel male NPT

Tube OD	Male NPT	*Acetal* Part #	Price/E
1/4"	1/8"	***469S-4A***	**$5.20**
1/4"	1/4"	***469S-4B***	**5.20**
3/8"	1/4"	***469S-6B***	**7.30**
3/8"	3/8"	***469S-6C***	**7.45**
1/2"	3/8"	***469S-8C***	**8.20**
1/2"	1/2"	***469S-8D***	**8.35**

Clear PVC Tubing

Clear PVC Tubing is designed to be used with standard shank fittings.
Tubing sold only in lengths shown below.

domestic

Size ID	Size OD	Working Pressure @ 72°F	Length	PVC Part #	PVC Price/length
3/16"	5/16"	55	100	***CL0305***	**$44.90**
1/4"	3/8"	55	100	***CL0406***	**50.60**
1/4"	1/2"	60	100	***CL0408***	**108.00**
5/16"	7/16"	50	100	***CL0507***	**58.60**
3/8"	1/2"	40	100	***CL0608***	**72.25**
3/8"	5/8"	55	100	***CL0610***	**140.00**
1/2"	5/8"	30	100	***CL0810***	**104.50**
1/2"	3/4"	45	100	***CL0812***	**174.00**
5/8"	7/8"	40	100	***CL1014***	**207.00**
3/4"	1"	35	100	***CL1216***	**235.00**
1"	1-1/4"	28	100	***CL1620***	**340.00**
1-1/4"	1-3/4"	45	50	***CL2028-50*** NEW	**378.50**
1-1/2"	2"	40	50	***CL2432-50***	**440.45**

imported

Size ID	Size OD	Working Pressure @ 72°F	Length	PVC Part #	PVC Price/length
1/4"	3/8"	50	100	***ICL0406***	**$20.20**
3/8"	1/2"	35	100	***ICL0608***	**27.25**
1/2"	5/8"	35	100	***ICL0810***	**47.70**
1/2"	3/4"	50	100	***ICL0812***	**100.50**
3/4"	1"	35	100	***ICL1216***	**103.90**
1"	1-1/4"	30	100	***ICL1620***	**135.20**
1-1/2"	2"	15	50	***ICL2432***	**221.55**

Domestic
- produced from FDA materials, but not FDA approved
- for non-critical hospital use such as suction and draining
- maximum temperature: **135°F**
- shipped in individually boxed bundles



Imported
- temperature range: **14°F** to **149°F**
- shipped in bundles wrapped with PVC film

H Plastic

Clear PVC Braided Tubing

Tubing sold only in lengths shown below.

domestic

Size ID	Size OD	Working Pressure @ 72°F	Length	PVC Part #	PVC Price/length
3/16"	3/8"	250	300	***BR0306***	**$299.50**
1/4"	7/16"	250	300	***BR0446***	**265.00**
3/8"	5/8"	225	300	***BR0609***	**536.00**
1/2"	3/4"	200	300	***BR0812***	**520.00**
5/8"	7/8"	200	300	***BR1014***	**820.00**
3/4"	1-1/16"	150	300	***BR1218***	**820.00**
1"	1-5/16"	125	200	***BR1621***	**1308.00**
1-1/4"	1-11/16"	100	100	***BR2027***	**825.00**
1-1/2"	1-15/16"	100	100	***BR2431***	**1350.00**

imported

Size ID	Size OD	Working Pressure @ 72°F	Length	PVC Part #	PVC Price/length
1/4"	1/2"	142	300	***IBR0446***	**$179.50**
3/8"	5/8"	114	300	***IBR0609***	**216.45**
1/2"	3/4"	100	300	***IBR0812***	**361.55**
3/4"	1-1/16"	71	300	***IBR1218***	**534.70**
1"	1-5/16"	71	200	***IBR1621***	**587.05**

Domestic
- high grade tensile strength polyester yarn reinforcement
- temperature range: **27°F** to **150°F**
- shipped in coils



Imported
- temperature range: **14°F** to **149°F**
- for various machine tools and transportation of chemicals
- shipped in bundles wrapped with PVC film

PVC Tubing and Hose Cutters



- rugged construction permits cutting up to ¾" tubing or hose
- corrosion resistant hardened steel blade ensures straight, crisp cuts for optimum fit

Part #	Price/E
TC97	**$17.00**
TC97RB *(replacement blade)*	**5.75**



- cuts low pressure fabric reinforced hose up to 1" OD
- reversible blade

Part #	Price/E
HC90	**$23.95**
HC90RB *(replacement blade)*	**11.15**



- cuts hose and tubing up to 2" OD; Polyethylene up to 1½" ID; PVC up to 1¼" ID
- stainless steel blade

Part #	Price/E
LHC95	**$43.50**
LHC95RB *(replacement blade)*	**18.10**

H
Plastic

Copper Tubing Cutters

Hi-Duty Tube Cutter



- for 1/8" through 1-1/8" OD tubing
- rugged aluminum alloy body is nickel chrome plated
- Foldaway hardened steel reamer with turned cutting edge removes burrs cleanly, filing surface removes outside burrs.
- includes 2 general purpose cutter wheels
- chromium steel cutting wheels
- replacement parts available, contact the factory for more information

Description	Part #	Price/E
length 5", weight 6.5 oz.	***TC-1000***	**$89.00**

Ratcheting Tube Cutter



- for 1/8" through 5/8" OD tubing
- use cutter with or without handle - snaps into place in seconds
- includes 1 general purpose cutter wheel
- Enclosed feed screw minimizes contamination ensuring continued smooth operation.
- corrosion resistant stainless steel rollers positioned at bottom of cutter allows for easier cutter engagement on tubing and smoother cutting action
- replacement parts available, contact the factory for more information

Description	Part #	Price/E
length with handle 4¾", weight 4 oz., 4" swing radius with handle	***TC-1050RH***	**$71.00**

Tube Cutter



- for 3/8" through 1-1/8" OD tubing
- includes 2 general purpose cutter wheels
- replacement parts available, contact the factory for more information

Description	Part #	Price/E
length 2-11/16", weight 5 oz., 1-15/16" swing radius	***174-F***	**$89.10**

Properties of Tuff-Lite Materials

Nylon fittings should not be used with acid-based fertilizers, bromine, chlorine, fluorine, hydrochloric acid, iodine, nitric acid, phosphoric acid, sulfuric acid or xylene. Made with material approved by FDA. Nylon should not be used with compressed gas. Parts are white.

SAFETY ALERT

Polypropylene fittings should not be used with aromatic hydrocarbons, carbon tetra-chloride, gasoline, hexane, kerosene, nitric acid, sodium hydrochlorite, toluene, trichloroethylene or xylene. Polypropylene should not be used with compressed gas. Parts are black.

SAFETY ALERT

Male Inserts

- Parts showing package quantities are sold in package quantities only.

hose shank x male NPT

Hose Shank	Male NPT	*Nylon* Part #	Price/E	Pkg Qty	*Polypropylene* Part #	Price/E	Pkg Qty
1/4"	1/8"	***TN21***	**$0.68**	50	***PPN21***	**$0.73**	50
	1/4"	***TN22***	**0.70**	50	***PPN22***	**0.54**	50
	3/8"	***TN23***	**0.76**	50	***PPN23***	**0.59**	50
	1/2"	***TN24***	**0.87**	50	***PPN24***	**0.62**	50
	3/4"	***TN26***	**0.91**	50	**---**	**---**	--
	1"	***TN28***	**1.38**	50	**---**	**---**	--
5/16"	1/4"	***TN252***	**0.70**	50	**---**	**---**	--
3/8"	1/8"	***TN31***	**0.80**	50	***PPN31***	**0.73**	50
	1/4"	***TN32***	**0.88**	50	***PPN32***	**0.56**	50
	3/8"	***TN33***	**0.92**	50	***PPN33***	**0.57**	50
	1/2"	***TN34***	**1.00**	50	***PPN34***	**0.68**	50
	3/4"	***TN36***	**1.08**	50	***PPN36***	**0.80**	50
1/2"	1/8"	***TN41***	**0.70**	50	**---**	**---**	--
	1/4"	***TN42***	**0.77**	50	***PPN42***	**0.58**	50
	3/8"	***TN43***	**0.79**	50	***PPN43***	**0.63**	50
	1/2"	***TN44***	**0.91**	50	***PPN44***	**0.68**	50
	3/4"	***TN46***	**1.03**	50	***PPN46***	**0.81**	50
5/8"	3/8"	***TN53***	**0.87**	50	**---**	**---**	--
	1/2"	***TN54***	**0.94**	50	***PPN54***	**0.82**	50
	3/4"	***TN56***	**1.10**	50	***PPN56***	**0.85**	50
3/4"	3/8"	***TN63***	**0.83**	50	**---**	**---**	--
	1/2"	***TN64***	**1.07**	50	***PPN64***	**0.88**	50
	3/4"	***TN66***	**1.17**	50	***PPN66***	**0.82**	50
	1"	***TN68***	**1.37**	25	***PPN68***	**1.08**	25
1"	3/4"	***TN86***	**1.29**	25	***PPN86***	**1.04**	25
	1"	***TN88***	**1.56**	25	***PPN88***	**1.18**	25
1-1/4"	1"	***TN158***	**2.35**	15	**---**	**---**	--
	1-1/4"	***TN150***	**3.51**	10	***PPN150***	**2.40**	10
	1-1/2"	***TN1520***	**3.69**	10	**---**	**---**	--
1-1/2"	1-1/4"	***TN2015***	**3.75**	10	**---**	**---**	--
	1-1/2"	***TN200***	**3.89**	10	***PPN200***	**2.80**	10
2"	2"	***TN250***	**5.29**	5	***PPN250***	**3.93**	5



nylon



polypropylene

Female Inserts

hose shank x female NPT

Hose Size	Female NPT	*Nylon* Part #	Price/E
1/4"	1/4"	***TFS22***	**$2.98**
1/4"	1/2"	***TFS42***	**3.14**
1/2"	1/2"	***TFS44***	**2.74**
3/4"	3/4"	***TFS66***	**3.47**



Tuff-Lite

Female Barbed Fittings



hose shank x female NPSM
ball seat type

Hose Size	Female NPSM	Nylon Part #	Nylon Price/E
1/4"	1/4"	***TF22***	**$0.92**
3/8"	3/8"	***TF33***	**1.07**

Short Shank Couplings

- Parts showing package quantities are sold in package quantities only.
- female shipped with a red vinyl washer, (***TVW7***)



nylon short shank couplings

Hose Shank	Thread Size	female Part #	female Price/E	male Part #	male Price/E	Pkg Qty
1/4"	3/4" NPSM	***TCF62***	**$1.50**	***TN26***	**$0.91**	50
3/8"	3/4" NPSM	***TCF63***	**1.50**	***TN36***	**1.08**	50
1/2"	3/4" NPSM	***TCF64***	**1.51**	***TN46***	**1.03**	50
5/8"	3/4" NPSM	***TCF65***	**1.56**	***TN56***	**1.10**	50
3/4"	3/4" NPSM	***TCF66***	**1.52**	***TN66***	**1.17**	50
1/4"	3/4" GHT	***TCF72***	**1.76**	***TCM72***	**0.92**	--
3/8"	3/4" GHT	***TCF73***	**1.77**	***TCM73***	**0.92**	--
1/2"	3/4" GHT	***TCF74***	**1.80**	***TCM74***	**0.99**	--
5/8"	3/4" GHT	***TCF75***	**1.82**	***TCM75***	**1.02**	--
3/4"	3/4" GHT	***TCF76***	**1.82**	***TCM76***	**0.99**	--

- female shipped with a red vinyl washer, (***TVW7***)



polypropylene short shank couplings

Hose Shank	Thread Size	female Part #	female Price/E	male Part #	male Price/E
1/4"	3/4" GHT	***PPCF72***	**$1.60**	**---**	**---**
3/8"	3/4" GHT	***PPCF73***	**1.50**	***PPCM73***	**$0.82**
1/2"	3/4" GHT	***PPCF74***	**1.50**	***PPCM74***	**0.84**
5/8"	3/4" GHT	***PPCF75***	**1.65**	***PPCM75***	**1.02**
3/4"	3/4" GHT	***PPCF76***	**1.65**	***PPCM76***	**0.91**

Reducing Bushings



male NPT x female NPT

Male NPT	Female NPT	Nylon Part #	Nylon Price/E
3/8"	1/4"	***THB32***	**$1.71**
1/2"	1/4"	***THB42***	**1.64**
1/2"	3/8"	***THB43***	**1.62**
3/4"	1/2"	***THB64***	**1.94**
1"	3/4"	***THB86***	**2.73**

Couplers

- Parts showing package quantities are sold in package quantities only.



female NPT x female NPT

Female NPT	Female NPT	Nylon Part #	Nylon Price/E	Pkg Qty
1/2"	1/2"	***TA994***	**$3.74**	25
3/4"	3/4"	***TA996***	**4.06**	25

Tuff-Lite

Male GHT x Female NPT Adapters

- Parts showing package quantities are sold in package quantities only.

male GHT x female NPT

Female NPT	*Nylon* Part #	Price/E	Pkg Qty	*Polypropylene* Part #	Price/E	Pkg Qty
1/4"	***TA792***	**$1.44**	50	***PPA792***	**$2.62**	50
3/8"	***TA793***	**1.49**	50	**---**	**---**	--
1/2"	***TA794***	**1.51**	50	***PPA794***	**2.55**	50
3/4"	***TA796***	**1.60**	50	***PPA796***	**2.67**	25


nylon


polypropylene

Female GHT x Male NPT Adapters

- Parts showing package quantities are sold in package quantities only.

female GHT x male NPT

Male NPT	*Nylon* Part #	Price/E	Pkg Qty
1/4"	***TA972***	**$1.46**	50
3/8"	***TA973***	**1.49**	50
1/2"	***TA974***	**1.53**	50
3/4"	***TA976***	**1.49**	50



H
Plastic

Male GHT x Male NPT Adapters

- Parts showing package quantities are sold in package quantities only.

male GHT x male NPT

Male NPT	*Nylon* Part #	Price/E	Pkg Qty	*Polypropylene* Part #	Price/E	Pkg Qty
1/4"	***TA772***	**$0.95**	50	**---**	**---**	--
3/8"	***TA773***	**1.03**	50	***PPA773***	**$1.02**	50
1/2"	***TA774***	**1.12**	50	***PPA774***	**0.85**	50
3/4"	***TA776***	**1.14**	50	***PPA776***	**0.85**	50
1"	***TA778***	**1.59**	25	**---**	**---**	--


nylon


polypropylene

Male NPT x Female Swivel Adapters

- female shipped with a red vinyl washer, (***TVW7***)

male NPT x female threaded swivel nut

Male NPT	Female Thread	*Nylon* Part #	Price/E
1/4"	3/4" GHT	***TSA72***	**$1.90**
3/8"	3/4" GHT	***TSA73***	**1.95**
1/4"	3/4" NPS	***TSA62***	**1.90**
3/8"	3/4" NPS	***TSA63***	**1.95**



Nuts

female threaded swivel nuts

Thread Size	*Nylon* Part #	Price/E
3/4" NPS	***TCF6***	**$0.63**
3/4" GHT	***TCF7***	**0.59**



Tuff-Lite

Female NPT x 90° Hose Barb Elbows



female NPT x 90° hose barb

Hose Size	Female NPT	*Nylon* Part #	Price/E
1/2"	1/2"	***TLFS44***	**$2.51**
1/2"	3/4"	***TLFS64***	**2.90**
3/4"	3/4"	***TLFS66***	**3.08**

Male NPT x 90° Hose Barb Elbows

- Parts showing package quantities are sold in package quantities only.



male NPT x 90° hose barb

Hose Size	Male NPT	*Nylon* Part #	Price/E	Pkg Qty
1/4"	1/8"	***TLS21***	**$0.82**	50
	1/4"	***TLS22***	**0.91**	50
	3/8"	***TLS23***	**1.17**	50
3/8"	1/8"	***TLS31***	**0.87**	50
	1/4"	***TLS32***	**0.91**	50
	3/8"	***TLS33***	**1.17**	50
	1/2"	***TLS34***	**1.36**	50
	3/4"	***TLS36***	**1.46**	50
1/2"	1/4"	***TLS42***	**1.17**	50
	3/8"	***TLS43***	**1.17**	50
	1/2"	***TLS44***	**1.36**	50
	3/4"	***TLS46***	**1.46**	25
	1"	***TLS48***	**2.17**	25
5/8"	3/8"	***TLS53***	**1.36**	25
	1/2"	***TLS54***	**1.46**	25
	3/4"	***TLS56***	**1.55**	25
	1"	***TLS58***	**1.64**	25
3/4"	3/8"	***TLS63***	**1.64**	25
	1/2"	***TLS64***	**1.55**	25
	3/4"	***TLS66***	**1.64**	25
	1"	***TLS68***	**1.72**	15
1"	3/4"	***TLS86***	**1.64**	15
	1"	***TLS88***	**2.61**	15

Street Elbows



female NPT x 90° male NPT

Female NPT	Male NPT	*Nylon* Part #	Price/E
1/4"	1/4"	***TSE22***	**$3.50**
1/2"	1/2"	***TSE44***	**3.35**
3/4"	3/4"	***TSE66***	**4.61**

GHT x Male NPT Elbows

- Parts showing package quantities are sold in package quantities only.



male NPT x GHT

Male NPT	*Nylon* Part #	Price/E	Pkg Qty
3/8"	***TLT73***	**$1.66**	25
1/2"	***TLT74***	**1.46**	25
3/4"	***TLT76***	**1.66**	25

Tuff-Lite

Hose x Hose Elbows

- Parts showing package quantities are sold in package quantities only.

hose barb x 90° hose barb

Hose Shank	*Nylon* Part #	Price/E	Pkg Qty	*Polypropylene* Part #	Price/E	Pkg Qty
1/4"	***TLSS22***	**$1.17**	50	***PPLSS22***	**$1.05**	50
3/8"	***TLSS33***	**1.21**	50	***PPLSS33***	**1.11**	50
1/2"	***TLSS44***	**1.35**	50	***PPLSS44***	**1.11**	50
3/4"	***TLSS66***	**1.42**	50	***PPLSS66***	**1.52**	50



nylon



polypropylene

Hose x Male NPT Tees

- Parts showing package quantities are sold in package quantities only.

hose run x male NPT branch

Hose Size	Male NPT	*Nylon* Part #	Price/E	Pkg Qty
1/4"	1/4"	***TSST222***	**$1.23**	50
3/8"	3/8"	***TSST333***	**1.35**	50
1/2"	1/2"	***TSST444***	**1.52**	50
3/4"	3/4"	***TSST666***	**1.68**	25



Hose x Hose Tees

- Parts showing package quantities are sold in package quantities only.

hose run x hose branch

Hose Size	*Nylon* Part #	Price/E	Pkg Qty
1/4"	***TSSS222***	**$1.17**	50
3/8"	***TSSS333***	**1.21**	50
1/2"	***TSSS444***	**1.35**	50
3/4"	***TSSS666***	**1.42**	25



Menders

- Parts showing package quantities are sold in package quantities only.

hose shank x hose shank

Hose Size	*Nylon* Part #	Price/E	Pkg Qty	*Polypropylene* Part #	Price/E	Pkg Qty
1/4"	***TM2***	**$0.63**	50	***PPM2***	**$0.52**	50
5/16"	***TM25***	**0.68**	50	**---**	**---**	--
3/8"	***TM3***	**0.72**	50	***PPM3***	**0.54**	50
1/2"	***TM4***	**0.96**	50	***PPM4***	**0.67**	50
5/8"	***TM5***	**1.48**	50	***PPM5***	**0.74**	50
3/4"	***TM6***	**1.48**	50	***PPM6***	**0.94**	50
1"	***TM8***	**1.82**	25	***PPM8***	**1.16**	50



nylon



polypropylene

Tuff-Lite

Washers for Garden Hose Fittings



red vinyl


white rubber

- Parts showing package quantities are sold in package quantities only.

Description	Part #	Price/E	Opt Qty
red vinyl	***TVW7***	**$0.10**	100
white rubber	***TRW7***	**0.25**	100

Close Nipples



- Parts showing package quantities are sold in package quantities only.

male NPT x male NPT

NPT Size	*Nylon* Part #	Price/E	Pkg Qty
1/4"	***TCN202***	**$0.72**	50
3/8"	***TCN303***	**0.81**	50
1/2"	***TCN404***	**0.93**	50
3/4"	***TCN606***	**1.10**	50

Threaded Caps



- Parts showing package quantities are sold in package quantities only.

female NPT

Thread Size	*Nylon* Part #	Price/E	Pkg Qty
1/4" NPT	***TTC2***	**$0.45**	50
3/8" NPT	***TTC3***	**0.57**	50
1/2" NPT	***TTC4***	**0.71**	50
3/4" NPT	***TTC6***	**0.80**	50
3/4" GHT	***TTC7***	**0.80**	50

Square Head Drain Plugs



- Parts showing package quantities are sold in package quantities only.

male NPT

Male NPT	*Nylon* Part #	Price/E	Pkg Qty
1/8"	***TPS1***	**$0.55**	50
1/4"	***TPS2***	**0.57**	50
3/8"	***TPS3***	**0.68**	50
1/2"	***TPS4***	**0.76**	50
3/4"	***TPS6***	**0.90**	50
1"	***TPS8***	**1.12**	50
1¼"	***TPS10***	**1.67**	25

Hex Head Drain Plugs



- Parts showing package quantities are sold in package quantities only.

male NPT

Male NPT	*Nylon* Part #	Price/E	Pkg Qty
1/8"	***TPX1***	**$0.64**	50
1/4"	***TPX2***	**0.68**	50
3/8"	***TPX3***	**0.71**	50
1/2"	***TPX4***	**0.82**	50
3/4"	***TPX6***	**0.96**	50
1"	***TPX8***	**1.17**	50
1¼"	***TPX10***	**1.55**	50

Tuff-Lite

Push-On Male Inserts

- Parts showing package quantities are sold in package quantities only.
- No clamps are needed when these fittings are used with push-on hose.

push-on hose shank x male NPT

Hose Size	Male NPT	*Nylon* Part #	Price/E	Pkg Qty
1/4"	1/8"	***TPN21***	**$0.70**	50
	1/4"	***TPN22***	**0.72**	50
	3/8"	***TPN23***	**0.78**	50
3/8"	1/4"	***TPN32***	**0.74**	50
	3/8"	***TPN33***	**0.79**	50
	1/2"	***TPN34***	**0.93**	50
1/2"	3/8"	***TPN43***	**1.10**	50
	1/2"	***TPN44***	**1.10**	50
	3/4"	***TPN46***	**1.10**	50



Push-On Female Inserts

- Parts showing package quantities are sold in package quantities only.
- No clamps are needed when these fittings are used with push-on hose.

push-on hose shank x female NPT

Hose Size	Female NPT	*Nylon* Part #	Price/E	Pkg Qty
1/4"	1/4"	***TPF22***	**$1.02**	50
3/8"	1/4"	***TPF32***	**1.26**	50
	3/8"	***TPF33***	**1.26**	50
1/2"	3/8"	***TPF43***	**1.13**	50
	1/2"	***TPF44***	**1.32**	50




Push-On Menders

- Parts showing package quantities are sold in package quantities only.
- No clamps are needed when these fittings are used with push-on hose.

push-on hose shank x push-on hose shank

Hose Size	*Nylon* Part #	Price/E	Pkg Qty
1/4"	***TPM2***	**$0.65**	50
3/8"	***TPM3***	**0.71**	50
1/2"	***TPM4***	**0.87**	50



Agricultural Straight Fittings

agricultural male straight thread x hose barb

UN Thread	Hose Size	*Nylon* Part #	Price/E
11/16-16	3/8"	***38D***	**$1.02**
11/16-16	1/2"	***3812D***	**1.02**



Tuff-Lite

Agricultural Elbows



agricultural male straight thread x 90° hose barb

UN Thread	Hose Size	*Nylon* Part #	Price/E
11/16-16	3/8"	***NTL38***	**$1.84**
11/16-16	1/2"	***NTL12***	**1.66**


Agricultural Tees



agricultural male straight thread branch x hose barb run

UN Thread	Hose Size	*Nylon* Part #	Price/E
11/16-16	3/8"	***NTT38***	**$1.66**
11/16-16	1/2"	***NTT12***	**1.66**

Agricultural Nozzle Nut



- fits all nozzle fittings with 11/16 straight thread

agricultural female threaded nozzle nut

UN Thread	*Nylon* Part #	Price/E
11/16-16	***B12NOZNUT***	**$0.38**

Agricultural Knurled Cap




- fits all nozzle fittings with 11/16 straight thread

agricultural knurled cap

UN Thread	*Nylon* Part #	Price/E
11/16-16	***3942***	**$0.48**

Agricultural Barbed Nozzles



- use with agricultural swivel nut

agricultural barbed nozzles

Hose Size	*Nylon* Part #	Price/E
3/8"	***K8438***	**$0.54**
1/2"	***K8412***	**0.81**

Agricultural Swivel Nut



- use with agricultural barbed nozzle

agricultural swivel nut

UN Thread	*Nylon* Part #	Price/E
11/16-16	***8027***	**$0.36**

Pinch-On Single Ear Clamps

- band width: 1/4"
- band thickness: .030"
- sold in bag quantities only

Nominal Size	Range closed	Range open	*Zinc Plated Steel* Part #	*Zinc Plated Steel* Price/E	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	Pkg Qty
3/8"	.350	.413	***105***	**$0.35**	***105R***	**$0.43**	100
7/16"	.382	.445	***113***	**0.37**	***113R***	**0.45**	100
15/32"	.409	.484	***123***	**0.37**	***123R***	**0.46**	100
1/2"	.449	.524	***133***	**0.37**	***133R***	**0.47**	100
35/64"	.469	.551	***140***	**0.37**	***140R***	**0.47**	100
9/16"	.496	.571	***145***	**0.38**	***145R***	**0.48**	100
5/8"	.543	.618	***157***	**0.38**	***157R***	**0.48**	100
11/16"	.595	.669	***170***	**0.38**	***170R***	**0.51**	100
23/32"	.618	.728	***185***	**0.38**	***185R***	**0.51**	100
3/4"	.669	.780	***198***	**0.39**	***198R***	**0.54**	100
13/16"	.717	.827	***210***	**0.40**	***210R***	**0.54**	100
7/8"	.780	.890	***226***	**0.40**	***226R***	**0.56**	100
15/16"	.839	.949	***241***	**0.41**	***241R***	**0.59**	100
1"	.898	1.008	***256***	**0.42**	***256R***	**0.60**	100
1-1/16"	.945	1.067	***271***	**0.43**	***271R***	**0.63**	100
1-1/8"	1.004	1.126	***286***	**0.44**	***286R***	**0.64**	100
1-3/16"	1.063	1.185	***301***	**0.45**	***301R***	**0.61**	100
1-5/16"	1.181	1.303	***331***	**0.47**	***331R***	**0.69**	100
1-3/8"	1.240	1.362	***346***	**0.48**	***346R***	**0.72**	100
1-15/32"	1.358	1.480	***376***	**0.52**	***376R***	**0.76**	100
1-9/16"	1.437	1.559	***396***	**0.54**	***396R***	**0.79**	100
1-5/8"	1.492	1.614	***410***	**0.54**	***410R***	**0.80**	100
1-11/16"	1.551	1.673	***425***	**0.56**	***425R***	**0.83**	100
1-23/32"	1.610	1.732	***440***	**0.57**	***440R***	**0.84**	100
1-3/4"	1.669	1.791	***455***	**0.59**	***455R***	**0.86**	100
1-13/16"	1.728	1.850	***470***	**0.60**	***470R***	**0.87**	100
1-7/8"	1.787	1.909	***485***	**0.62**	***485R***	**0.88**	100
1-15/16"	1.847	1.969	***500***	**0.63**	***500R***	**0.91**	100
2"	1.906	2.028	***515***	**0.65**	***515R***	**0.92**	100



Pinch-On Double Ear Clamps

- When ordering double ear clamps, select nominal clamp size nearest to, but always larger than, the OD of material to be clamped after insert has been fitted.

Nominal Size	Range closed	Range open	*Zinc Plated Steel* Part #	*Zinc Plated Steel* Price/E	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	Pkg Qty
3/16"	.134	.197	***0305***	**$0.74**	***0305R***	**$0.95**	100
1/4"	.197	.276	***0507***	**0.78**	***0507R***	**1.01**	100
5/16"	.276	.354	***0709***	**0.78**	***0709R***	**1.05**	100
3/8"	.319	.433	***0811***	**0.78**	***0811R***	**1.05**	100
1/2"	.425	.512	***1113***	**0.80**	***1113R***	**1.14**	100
9/16"	.492	.591	***1315***	**0.87**	***1315R***	**1.19**	100
19/32"	.551	.669	***1517***	**0.93**	***1517R***	**1.39**	100
5/8"	.591	.709	***1518***	**0.92**	***1518R***	**1.48**	100
3/4"	.638	.787	***1720***	**1.00**	***1720R***	**1.66**	100
13/16"	.709	.866	***1922***	**1.11**	***1922R***	**1.70**	100
7/8"	.748	.906	***2023***	**1.15**	***2023R***	**1.84**	100
15/16"	.827	.984	***2225***	**1.24**	***2225R***	**1.92**	100
1"	.886	1.063	***2327***	**1.37**	***2327R***	**2.05**	100
1-1/8"	1.035	1.221	***2731***	**1.49**	***2731R***	**2.32**	100
1-7/16"	1.260	1.457	***3437***	**1.67**	***3437R***	**2.70**	100
1-1/2"	1.378	1.575	***3740***	**1.71**	***3740R***	**2.83**	100



Stepless® Ear Clamps

Technical Information:

Stepless® ear clamps hold against pressure and vibration or material shrinkage due to temperature changes or aging. A built-in spring action permits the clamp to breathe without loosening. When installing Stepless® ear type clamps over an object, please note that each ear must be crimped closed to obtain a proper seal.

- once installed and clamped, any tampering is easily visible
- *Clamps are not reusable*; they should not be pried open, doing so renders the clamps nonfunctional. SAFETY ALERT
- When ordering Stepless® ear clamps, select the nominal size nearest to, but always larger than, the outside diameter of the material to be clamped. The outside diameter should be determined with connection fully assembled.
- sold in quantities of 100 per bag

Features:

- 304 stainless steel
- ensured clamping seal
- for low durometer and/or thin-walled hose/tubing
- for silicon, vinyl, polyurethane or other high-tech materials
- Smooth inner band prevents damage to the hose while the tongue-in-groove design provides a 360° seal.
- no steps or gaps inside the clamp
- Install clamps using 1098 or 1099 clamp tools below.



Nominal Size	Range (inches) closed	Range (inches) open	*304 Stainless Steel* Part #	Price/E
9/32"	.228	.275	***0983***	**$0.99**
3/8"	.307	.374	***0986***	**0.99**
7/16"	.378	.445	***0989***	**0.99**
1/2"	.425	.524	***0993***	**0.99**
35/64"	.453	.551	***0997***	**1.00**
9/16"	.472	.571	***0999***	**1.01**
5/8"	.520	.618	***1005***	**1.02**
11/16"	.571	.669	***1009***	**1.03**
3/4"	.654	.779	***1021***	**1.18**
13/16"	.701	.827	***1029***	**1.21**

Clamp Service Kit



Plastic kit box contains zinc plated 2-ear clamps:

- 15 of part #0709
- 15 of part #0811
- 15 of part #1113
- 15 of part #1315
- 15 of part #1518
- 12 of part #1720
- 12 of part #2023
- 12 of part #2225
- 12 of part #2327
- 1 pair of standard jaw pincers, part # 1098

Part #	Price/E
SK1098	**$184.70**

Clamp Construction Kit



Plastic construction clamp kit box contains the following:

- 50 of part #2225 (zinc plated, 2-ear clamps)
- 40 of part #2731 (zinc plated, 2-ear clamps)
- 6 hose menders (½", plastic)
- 1 pair of long handle pincers

Part #	Price/E
18500116	**$346.50**

Oetiker® Clamp Tools for Pinch-On Clamps



straight jaw

Part #	Price/E
9901	**$104.95**



standard jaw

Part #	Price/E
1098	**$61.10**



side jaw

Part #	Price/E
1099	**$74.55**

Dixon Worm Gear Clamps

- four-piece construction
- clamp meets SAEJ1508 which supercedes Mil Spec WW-C-440B
- screw design: 5/16" slotted hex head
- maximum recommended torque 50 in. lbs.
- *all clamps sold 10 per box*

Style HS material:
- band and housing: SAE 201/301 series stainless
- screw: SAE 1018 case-hardened steel, zinc plated and chromate dipped

Style HSS material:
- band and housing: SAE 201/301 series stainless
- screw: SAE 300 series stainless

Band Width	Hose OD from	Hose OD to	*style HS* Part #	*style HS* Price/E	Case Qty	*style HSS* Part #	*style HSS* Price/E	Case Qty
	28/64"	50/64"	***HS6***	**$1.25**	200	***HSS6***	**$1.60**	200
	32/64"	58/64"	***HS8***	**1.25**	200	***HSS8***	**1.60**	200
	36/64"	1-4/64"	***HS10***	**1.25**	500	***HSS10***	**1.60**	500
	44/64"	1-16/64"	***HS12***	**1.30**	500	***HSS12***	**1.65**	500
	52/64"	1-32/64"	***HS16***	**1.30**	500	***HSS16***	**1.65**	500
	52/64"	1-48/64"	***HS20***	**1.30**	500	***HSS20***	**1.70**	500
	1-4/64"	2"	***HS24***	**1.30**	500	***HSS24***	**1.70**	500
1/2"	1-20/64"	2-16/64"	***HS28***	**1.30**	500	***HSS28***	**1.70**	500
	1-36/64"	2-32/64"	***HS32***	**1.30**	500	***HSS32***	**1.70**	500
	1-52/64"	2-48/64"	***HS36***	**1.35**	500	***HSS36***	**1.80**	500
	2-4/64"	3"	***HS40***	**1.80**	200	***HSS40***	**2.00**	200
	2-20/64"	3-16/64"	***HS44***	**2.05**	200	***HSS44***	**2.30**	200
	2-36/64"	3-32/64"	***HS48***	**2.05**	200	***HSS48***	**2.30**	200
	2-52/64"	3-48/64"	***HS52***	**2.25**	200	***HSS52***	**2.45**	200
	3-4/64"	4"	***HS56***	**2.25**	200	***HSS56***	**2.45**	200
	3-20/64"	4-16/64"	***HS60***	**2.35**	200	***HSS60***	**2.55**	200
	3-36/64"	4-32/64"	***HS64***	**2.35**	200	***HSS64***	**2.55**	200
	1-56/64"	5"	***HS72***	**2.50**	100	***HSS72***	**2.80**	100
	2-32/64"	5-32/64"	***HS80***	**2.90**	100	***HSS80***	**2.90**	100
	3-8/64"	6"	***HS88***	**2.95**	100	***HSS88***	**3.25**	100
	3-40/64"	6-32/64"	***HS96***	**3.00**	100	***HSS96***	**3.35**	100
	4-8/64"	7"	***HS104***	**3.05**	100	***HSS104***	**3.15**	100
	5-40/64"	8-32/64"	***HS128***	**4.10**	100	***HSS128***	**5.00**	100
9/16"	7-8/64"	10"	***HS152***	**4.40**	100	***HSS152***	**5.50**	100
	9-24/64"	12-16/64"	***HS188***	**4.85**	100	***HSS188***	**6.00**	100
	10-8/64"	13"	***HS200***	**5.05**	100	***HSS200***	**6.10**	100
	10-56/64"	13-48/64"	***HS212***	**5.45**	100	***HSS212***	**6.40**	100
	11-40/64"	14-32/64"	***HS224***	**6.00**	100	***HSS224***	**6.85**	100
	12-24/64"	15-16/64"	***HS236***	**6.50**	100	***HSS236***	**7.55**	100
	13-8/64"	16"	***HS248***	**6.90**	100	***HSS248***	**8.40**	100
	17-8/64"	20"	***HS312***	**8.40**	100	***HSS312***	**9.65**	100



style HS



style HSS

Miniature Worm Gear Clamps

- screw design: 1/4" slotted hex head
- maximum recommended torque 15 in. lbs.
- *all clamps sold 10 per box*

Style MH material:
- band and housing: SAE 201/301 series stainless
- screw: SAE 1018 case-hardened steel, zinc plated and chromate dipped

Style MAH material:
- band and housing: SAE 300 series stainless
- screw: SAE 300 series stainless



style MH

Band Width	Hose OD from	Hose OD to	*style MH* Part #	*style MH* Price/E	Case Qty	*style MAH* Part #	*style MAH* Price/E	Case Qty
	14/64"	40/64"	***MH4***	**$1.00**	500	***MAH4***	**$1.20**	500
	28/64"	50/64"	***MH6***	**1.00**	500	***MAH6***	**1.20**	500
	32/64"	58/64"	***MH8***	**1.20**	200	***MAH8***	**1.45**	200
5/16"	36/64"	1-4/64"	***MH10***	**1.20**	200	***MAH10***	**1.45**	200
	44/64"	1-16/64"	***MH12***	**1.25**	200	***MAH12***	**1.55**	200
	60/64"	1-32/64"	***MH16***	**1.25**	200	***MAH16***	**1.55**	200
	1-12/64"	1-48/64"	***MH20***	**1.30**	200	***MAH20***	**1.60**	200



style MAH

Torque ratings given on this page correspond to the torque rating of the screw of the clamp and *are not an indication of the working pressure of any hose assembly installed with this clamp.*

SAFETY ALERT

Quick Release Clamps

- maximum recommended torque 30 in. lbs.



style LS



style LSS

Style LS material:
- band and housing: 301 series stainless
- screw: plated hardened carbon steel

Style LSS material:
- band and housing: 301 series stainless
- screw: SAE 410 series stainless

Band Width	Hose OD from	Hose OD to	*style LS* Part #	*style LS* Price/E	Pkg Qty	*style LSS* Part #	*style LSS* Price/E	Pkg Qty
1/2"	1-32/64"	3-32/64"	***LS48***	**$2.45**	10	***LSS48***	**$3.90**	10
	1"	4"	***LS56***	**2.60**	10	**---**	**---**	--
	2"	5"	***LS72***	**3.05**	10	***LSS72***	**4.10**	10
	2-4/64"	6"	***LS88***	**3.55**	10	***LSS88***	**4.75**	10
	3-32/64"	6-36/64"	***LS96***	**3.55**	--	**---**	**---**	--
	1-48/64"	7"	***LS104***	**4.40**	10	***LSS104***	**5.40**	10
	1-48/64"	8-36/64"	***LS128***	**4.40**	--	***LSS128***	**5.40**	--
	2"	10"	***LS152***	**6.45**	--	**---**	**--**	--
	2-4/64"	12-20/64"	***LS188***	**5.45**	--	***LSS188***	**6.20**	--
	10-12/64"	14"	**---**	**---**	--	***LSS216***	**6.75**	--
	10-48/64"	16"	**---**	**---**	--	***LSS248***	**7.65**	--

Euro-Seal® Embossed Worm Gear Clamps

- internally embossed perforations eliminate hose damage to soft cover hoses and extrusion through band slots
- rounded band edge protects hose surface
- smooth housing underside ensures greater concentricity
- can be used in place of liner clamps
- screw design: 7mm slotted hex head; can fasten with 9/32 socket
- maximum recommended torque 50 in. lbs.



style ES

Style ES material:
- band and housing: 300 series stainless
- screw: carbon steel

Style ESS material:
- band and housing: 300 series stainless
- screw: 316 stainless steel

Band Width	Hose OD from	Hose OD to	*style ES* Part #	*style ES* Price/E	*style ESS* Part #	*style ESS* Price/E	Pkg Qty
1/2"	28/64"	50/64"	***ES6***	**$1.70**	***ESS6***	**$2.15**	10
	32/64"	58/64"	***ES8***	**1.70**	***ESS8***	**2.15**	10
	36/64"	1-4/64"	***ES10***	**1.70**	***ESS10***	**2.15**	10
	44/64"	1-16/64"	***ES12***	**1.70**	***ESS12***	**2.15**	10
	52/64"	1-32/64"	***ES16***	**1.70**	***ESS16***	**2.15**	10
	52/64"	1-48/64"	***ES20***	**1.75**	***ESS20***	**2.30**	10
	1-4/64"	2"	***ES24***	**1.75**	***ESS24***	**2.30**	10
	1-20/64"	2-16/64"	***ES28***	**1.75**	***ESS28***	**2.30**	10
	1-36/64"	2-32/64"	***ES32***	**1.75**	***ESS32***	**2.30**	10
	1-52/64"	2-48/64"	***ES36***	**1.85**	***ESS36***	**2.40**	10
	2-4/64"	3"	***ES40***	**2.25**	***ESS40***	**2.85**	10
	2-20/64"	3-16/64"	***ES44***	**2.55**	***ESS44***	**3.15**	10
	2-36/64"	3-32/64"	***ES48***	**2.55**	***ESS48***	**3.15**	10

Thumb Screw Clamps

2010 NEW



- worm gear style clamp, no tools required
- screw cap removable to make clamp tamper resistant
- plated carbon steel screw with a yellow thermoplastic screw cap, removable and reusable
- band and housing are stainless steel

Band Width	Hose OD from	Hose OD to	*Stainless Steel* Part #	*Stainless Steel* Price/E	Pkg Qty
5/16"	1/4"	5/8"	***MH4Y***	**$5.90**	10
5/16"	5/16"	7/8"	***MH6Y***	**5.90**	10
1/2"	1/2"	1-1/4"	***HS12Y***	**6.85**	10
1/2"	3/4"	1-3/4"	***HS20Y***	**7.35**	10
1/2"	1-1/4"	2-1/4"	***HS28Y***	**7.80**	10

SAFETY ALERT

Torque ratings given on this page correspond to the torque rating of the screw of the clamp and *are not an indication of the working pressure of any hose assembly installed with this clamp.*

Aero-Seal® Clamps

- four-piece construction
- band slots designed for strength and smooth action
- saddle interlocks into embossed band to form a true concentric circle
- slotted hex head screw design
- heat treated screws have buttress thread type
- safety collar or thumb screw available
- maximum recommended torque 50 in. lbs.

Style 100 material:
- band and housing: 300 series stainless
- screw: plated carbon steel

Style 200 material:
- band and housing: 300 series stainless
- screw: 410 series stainless

Style 300 material:
- band and housing: 300 series stainless
- screw: high corrosion resistance stainless

Band Width	Hose OD from	Hose OD to	*style 100* Part #	*style 100* Price/E	*style 200* Part #	*style 200* Price/E	*style 300* Part #	*style 300* Price/E	Pkg Qty
	28/64"	50/64"	***10006***	**$1.75**	***20006***	**$2.20**	***30006***	**$2.50**	10
	32/64"	58/64"	***10008***	**1.75**	***20008***	**2.20**	***30008***	**2.50**	10
	36/64"	1-4/64"	***10010***	**1.75**	***20010***	**2.20**	***30010***	**2.50**	10
	44/64"	1-16/64"	***10012***	**1.80**	***20012***	**2.25**	***30012***	**2.60**	10
	52/64"	1-32/64"	***10016***	**1.80**	***20016***	**2.25**	***30016***	**2.60**	10
	52/64"	1-48/64"	***10020***	**1.85**	***20020***	**2.30**	***30020***	**2.60**	10
	1-4/64"	2"	***10024***	**1.85**	***20024***	**2.30**	***30024***	**2.60**	10
9/16"	1-20/64"	2-16/64"	***10028***	**1.90**	***20028***	**2.35**	***30028***	**2.70**	10
	1-36/64"	2- 32/64"	***10032***	**1.90**	***20032***	**2.35**	***30032***	**2.70**	10
	1-52/64"	2-48/64"	***10036***	**1.95**	***20036***	**2.40**	***30036***	**2.70**	10
	2-4/64"	3"	***10040***	**2.40**	***20040***	**2.95**	***30040***	**3.30**	10
	2-20/64"	3-16/64"	***10044***	**2.60**	***20044***	**3.20**	***30044***	**3.60**	10
	2-36/64"	3-32/64"	***10048***	**2.60**	***20048***	**3.20**	***30048***	**3.60**	10
	2-52/64"	3-48/64"	***10052***	**2.75**	***20052***	**3.40**	***30052***	**3.85**	10
	3-4/64"	4"	***10056***	**2.75**	***20056***	**3.40**	***30056***	**3.85**	10
	3-20/64"	4-16/64"	***10060***	**2.95**	***20060***	**3.70**	***30060***	**4.10**	10



style 100

HTM Hi Torque Clamps

- withstands more than three times the SAE torque requirements for worm-driven clamps
- slotted hex head screw design
- eight screw threads are engaged in the band simultaneously for incredible torquing drive (over 150 in. lbs.), sealing pressure and vibration resistance

Material:
- band and housing: 300 series half hard stainless
- screw: 410 stainless steel screw

Band Width	Hose OD from	Hose OD to	*Stainless Steel* Part #	*Stainless Steel* Price/E	Opt Qty
	1-16/64"	2-8/64"	***HTM200***	**$4.55**	10
	1-48/64"	2-40/64"	***HTM250***	**4.60**	10
	2-16/64"	3-8/64"	***HTM300***	**4.75**	10
	2-48/64"	3-40/64"	***HTM350***	**4.85**	10
	3-16/64"	4-8/64"	***HTM400***	**5.00**	10
	3-48/64"	4-40/64"	***HTM450***	**5.15**	10
	4-16/64"	5-8/64"	***HTM500***	**5.30**	10
5/8"	4-48/64"	5-40/64"	***HTM550***	**5.65**	10
	5-16/64"	6-8/64"	***HTM600***	**5.80**	10
	5-48/64"	6-40/64"	***HTM650***	**5.90**	10
	6-16/64"	7-8/64"	***HTM700***	**6.10**	10
	6-48/64"	7-40/64"	***HTM750***	**6.60**	10
	7-16/64"	8-8/64"	***HTM800***	**6.75**	10
	7-48/64"	8-40/64"	***HTM850***	**6.85**	10
	8-16/64"	9-8/64"	***HTM900***	**7.05**	10



style HTM


extended range clamps

Band Width	Hose OD from	Hose OD to	*Stainless Steel* Part #	*Stainless Steel* Price/E
	1-16/64"	2-40/64"	***HP2***	**$4.60**
5/8"	2-8/64"	4-8/64"	***HP3***	**5.00**
	4"	6-8/64"	***HP4***	**5.80**
	6-8/64"	9-8/64"	***HP5***	**7.00**

Torque ratings given on this page correspond to the torque rating of the screw of the clamp and *are not an indication of the working pressure of any hose assembly installed with this clamp.*

SAFETY ALERT

Make-A-Clamp Kits




This is a maintenance clamp system in a box. By simply cutting off a piece of banding from a continuous roll, you can make any size stainless steel worm-driven clamp from 2" diameter and up. It is a must for anyone likely to encounter requirements for varying sized large clamps.

- reusable
- band width: 1/2"
- band thickness: .023"
- screw design: 5/16" slotted hex head



Contents	*Stainless Steel*	
	Part #	Price/E
retail kit: 8½' band, 3 adjustable fasteners, 1 band splice	***4000***	**$24.25**
kit with 100' band, 25 adjustable fasteners, 10 band splices	***4001***	**190.00**
kit with 50' band, 10 adjustable fasteners, 5 band splices	***4002***	**100.00**
adjustable fastener priced per box, shipped 10 fasteners per box	***4004***	**40.00**
box with 100' band, 10 band splices	***4005***	**97.00**
box with 50' band, 5 band splices	***4006***	**52.00**
6" demonstrator kit with clamps	***4007***	**16.00**
priced per box, shipped 10 band splices per box	***4008***	**23.00**

Dixon Racks for Worm Gear Clamps




CRL

- front load metal rack made of stainless steel rods
- rack with clamps contains 14 clamp sizes with diameter ranges from 7/32" - 2-1/4"


Clamps included are:

- 60 of part# MH4
- 20 of part# MH6
- 40 of part# ES12
- 40 of part# ES16
- 30 of part# ES20
- 30 of part# ES24
- 10 of part# ES28
- 50 of part# HS8
- 50 of part# HS10
- 50 of part# HS12
- 50 of part# HS16
- 30 of part# HS20
- 30 of part# HS24
- 10 of part# HS28

Description	Part #	Price/E
with 500 clamps	***CRLWC***	**$870.00**
without clamps	***CRL***	**200.00**



CRWC



CR

- top load metal rack made of nickel plated steel rods with enameled steel sign
- sign identifies each clamp size and diameter range
- rack with clamps contain 9 clamp sizes with diameter ranges from 7/32" - 2-3/4"

Clamps included are:

- 30 of part# MH4
- 30 of part# MH6
- 20 of part# HS10
- 20 of part# HS12
- 20 of part# HS20
- 20 of part# HS24
- 20 of part# HS28
- 20 of part# HS32
- 20 of part# HS36

Description	Part #	Price/E
with 200 clamps	***CRWC***	**$330.00**
without clamps	***CR***	**85.00**

SAFETY ALERT

Torque ratings given on this page correspond to the torque rating of the screw of the clamp and *are not an indication of the working pressure of any hose assembly installed with this clamp.*

Band Clamps - F series

Center Punch Clamps

- for use with center punch tools F1, F38, F40 and F100 located on page 340 other manufacturer's punch style tools may be used
- on stainless clamps, bands are 300 series stainless steel, buckles are 302 series stainless steel

style F (pre-formed)

Band Width	ID	Band THK	*302 Stainless Steel* Part #	Price/E	Pkg Qty	Band THK	*Galvanized Steel* Part #	Price/E	Pkg Qty
3/8"	13/16"	.020	***FS3***	**$1.50**	100	.025	***F3***	**$0.85**	100
	1-3/8"	.020	***FS311***	**1.65**	100	.025	***F311***	**0.95**	100
5/8"	1"	.022	***FS4***	**2.05**	100	.025	***F4***	**0.95**	100
	1-1/4"	.022	***FS5***	**2.20**	100	.025	***F5***	**1.00**	100
5/8"	1-1/2"	.022	***FS6***	**2.30**	100	.031	***F6***	**1.10**	100
	1-3/4"	.022	***FS7***	**2.50**	100	.031	***F7***	**1.15**	100
	2"	.022	***FS8***	**2.70**	100	.031	***F8***	**1.20**	100
	2-1/4"	.022	***FS9***	**2.80**	100	.031	***F9***	**1.30**	100
	2-1/2"	.022	***FS10***	**3.05**	50	.031	***F10***	**1.50**	50
	2-3/4"	.022	***FS11***	**3.20**	50	.031	***F11***	**1.55**	50
	3"	.022	***FS12***	**3.40**	50	.031	***F12***	**1.65**	50
	3-1/2"	.022	***FS14***	**3.75**	50	.031	***F14***	**1.80**	50
	4"	.022	***FS16***	**4.20**	25	.031	***F16***	**2.00**	25
	4-1/2"	.022	***FS18***	**4.55**	25	.031	***F18***	**2.15**	25
	5"	.022	***FS20***	**4.90**	25	.031	***F20***	**2.25**	25
	6"	.022	***FS24***	**5.60**	25	.031	***F24***	**2.65**	25
	7"	.022	***FS28***	**6.30**	25	.031	***F28***	**3.10**	25
	8"	.022	***FS32***	**7.00**	25	.031	***F32***	**3.35**	25



style F

style FO (open end)

Band Width	ID	Band THK	*302 Stainless Steel* Part #	Price/E	Pkg Qty	Band THK	*Galvanized Steel* Part #	Price/E	Pkg Qty
3/8"	13/16"	.020	***FOS3***	**$3.45**	100	.025	***FO3***	**$3.05**	100
	1-3/8"	.020	***FOS311***	**3.65**	100	.025	***FO311***	**3.40**	100
	2"	.020	***FOS316***	**3.85**	100	.025	***FO316***	**3.45**	100
	3-1/8"	.020	***FOS325***	**4.15**	100	.025	***FO325***	**3.55**	100
5/8"	2"	.022	***FOS8***	**3.70**	100	.025	***FO8***	**2.20**	100
	2-1/2"	.022	***FOS10***	**4.10**	50	.025	***FO10***	**2.30**	50
5/8"	3"	.022	***FOS12***	**4.50**	50	.031	***FO12***	**2.40**	50
	3-1/2"	.022	***FOS14***	**4.90**	50	.031	***FO14***	**2.50**	50
	4"	.022	***FOS16***	**5.25**	50	.031	***FO16***	**2.55**	50
	4-1/2"	.022	***FOS18***	**5.60**	50	.031	***FO18***	**2.65**	50
	5"	.022	***FOS20***	**6.10**	25	.031	***FO20***	**2.85**	25
	6"	.022	***FOS24***	**6.75**	25	.031	***FO24***	**3.00**	25
	7"	.022	***FOS28***	**7.90**	25	.031	***FO28***	**3.20**	25
	8"	.022	***FOS32***	**8.80**	25	.031	***FO32***	**3.45**	25
	9"	.022	**---**	**---**	25	.031	***FO36***	**4.00**	25
	10"	.022	**---**	**---**	25	.031	***FO40***	**4.15**	25
	12"	.022	**---**	**---**	25	.031	***FO48***	**5.05**	25
	14"	.022	**---**	**---**	10	.031	***FO56***	**6.15**	10



style FO

Band and Buckle

- to be used with C2 or 51960 band clamp tools on page 341
- sold in box quantities only

strapping

Band Width	Band Thickness	Length	*stainless* Part #	Price/bx	*galvanized* Part #	Price/bx
3/8"	.025	100'	***SS375***	**$99.00**	***SG375***	**$50.15**
1/2"	.031	100'	***SS500***	**136.70**	***SG500***	**63.00**
5/8"	.031	100'	***SS625***	**185.40**	***SG625***	**76.00**
3/4"	.031	100'	***SS750***	**223.10**	***SG750***	**90.00**



strapping

buckles

Buckle Width	*stainless* Part #	Price/E	Pkg Qty	*galvanized* Part #	Price/E	Pkg Qty
3/8"	***CS375***	**$.70**	100	***CG375***	**$.32**	100
1/2"	***CS500***	**.95**	100	***CG500***	**.48**	100
5/8"	***CS625***	**1.30**	100	***CG625***	**.53**	100
3/4"	***CS750***	**1.65**	100	***CG750***	**.75**	50



buckles

Band Clamps - K series

The Universal Preformed Clamp

- can be center punched or rolled over, for use with the center punch or roll over tools located on page 340
- clamp bands: 300 series stainless steel
  buckles: 302 series stainless steel
- Fast-Lok™ tools: F1, F40, F100 (page 340)
- Super Strap Tools: 51960 screw action with 51970 adapter (page 341)
- Bandit®: S100 air tool with S180 Jr. head, C-001 hand tool with J001 Jr. adapter, S350 air tool with S260 Jr. head, T-240 for 3/8" only or T-250 for 3/8" and 5/8", S-38 for 3/8" and 5/8", J-102 Pok-It™ for 3/8" only.
- Punch-Lok® tools: P-1 for 3/8" and 5/8", P-3 for 3/8" only, P-38 for 3/8" and 5/8"
- sold in package quantities only



style K (pre-formed)

Band Width	ID	Band THK	*Stainless Steel* Part #	Price/E	Pkg Qty	Band THK	*Galvanized Steel* Part #	Price/E	Pkg Qty
3/8"	13/16"	.025	***KS3***	**$1.50**	100	.025	***K3***	**$0.95**	100
	1-3/8"	.025	***KS311***	**1.70**	100	.025	***K311***	**1.00**	100
5/8"	1"	.031	***KS4***	**2.60**	100	.030	***K4***	**1.35**	100
	1-1/4"	.031	***KS5***	**2.65**	100	.030	***K5***	**1.35**	100
	1-1/2"	.031	***KS6***	**2.85**	100	.030	***K6***	**1.40**	100
	1-3/4"	.031	***KS7***	**3.05**	100	.030	***K7***	**1.45**	100
	2"	.031	***KS8***	**3.30**	100	.030	***K8***	**1.50**	100
	2-1/4"	.031	***KS9***	**3.50**	100	.030	***K9***	**1.55**	100
	2-1/2"	.031	***KS10***	**3.15**	50	.030	***K10***	**1.65**	50
	2-3/4"	.031	***KS11***	**4.05**	50	.030	***K11***	**1.75**	50
	3"	.031	***KS12***	**4.30**	50	.030	***K12***	**1.80**	50
	3-1/2"	.031	***KS14***	**4.75**	50	.030	***K14***	**1.95**	50
	4"	.031	***KS16***	**5.25**	25	.030	***K16***	**2.20**	25
	4-1/2"	.031	***KS18***	**5.65**	25	.030	***K18***	**2.30**	25
	5"	.031	***KS20***	**6.10**	25	.030	***K20***	**2.45**	25
	6"	.031	***KS24***	**7.00**	25	.030	***K24***	**2.80**	25
	7"	.031	***KS28***	**7.90**	25	.030	***K28***	**3.25**	25
	8"	.031	***KS32***	**8.80**	25	.030	***K32***	**3.40**	25

- 3/4" width K Clamp must be applied with F175 hand tool located on page 340

¾" width style K (pre-formed)

Band Width	ID	Band THK	*Stainless Steel* Part #	Price/E	Pkg Qty
3/4"	2"	.030	***KS87501***	**$4.50**	100
	2-1/4"	.030	***KS97501***	**4.55**	100
	2-1/2"	.030	***KS107501***	**4.80**	50
	2-3/4"	.030	***KS117501***	**5.00**	50
	3"	.030	***KS127501***	**5.20**	50
	3-1/2"	.030	***KS147501***	**5.70**	50
	4"	.030	***KS167501***	**6.30**	25
	4-1/2"	.030	***KS187501***	**6.90**	25
	5"	.030	***KS207501***	**7.40**	25
	6"	.030	***KS247501***	**8.60**	25
	7"	.030	***KS287501***	**9.80**	25
	8"	.030	***KS327501***	**11.00**	25

Dixon Smooth ID Clamps

As industrial hose made of stiffer, thinner thermoplastics replaces soft, spongy thick-walled rubber, a new generation of hose clamps has been developed to prevent leak problems. The smooth ID clamp is manufactured in a wide variety of widths, sizes and materials that provide a uniform, gap-free inside diameter, and strong holding power. For use with roll over type clamp tools and most common band clamp air tools such as the 51960 and 51970 band tools on page 341.

Band Width	ID	THK	*201 Stainless Steel* Part #	Price/E	Pkg Qty	*Galvanized Steel* Part #	Price/E	Pkg Qty
3/8"	13/16"	.025	***JS201***	**$2.45**	100	***JS301***	**$1.20**	100
	1"	.025	***JS243***	**2.80**	100	***JS343***	**1.15**	100
	1-3/8"	.025	***JS202***	**2.70**	100	***JS302***	**1.25**	100
	2"	.025	***JS245***	**3.10**	100	**---**	**---**	--
1/2"	1"	.030	***JS203***	**3.40**	100	***JS303***	**1.45**	100
	1-1/4"	.030	***JS204***	**3.70**	100	***JS304***	**1.55**	100
	2-3/4"	.030	***JS230***	**5.60**	100	***JS330 ****	**2.30**	100
5/8"	1-1/2"	.030	***JS205***	**4.50**	100	***JS305***	**1.70**	100
	1-3/4"	.030	***JS206***	**4.95**	100	***JS306***	**1.90**	100
	2"	.030	***JS207***	**5.45**	100	***JS307***	**2.15**	100
	2-1/4"	.030	***JS208***	**5.75**	100	***JS308***	**2.20**	100
	2-1/2"	.030	***JS209***	**6.15**	100	***JS309***	**2.35**	100
3/4"	2-3/4"	.030	***JS210***	**7.30**	50	***JS310***	**2.85**	50
	3"	.030	***JS211***	**7.95**	50	***JS311***	**3.00**	50
	3-1/2"	.030	***JS212***	**8.45**	50	***JS312***	**3.20**	50
	4"	.030	***JS213***	**9.65**	25	***JS313***	**3.70**	25
	4-1/2"	.030	***JS214***	**10.40**	25	***JS314***	**3.90**	25
	5"	.030	***JS215***	**11.20**	25	***JS315***	**4.30**	25
	6"	.030	***JS216***	**12.90**	25	***JS316 ****	**4.95**	25
	7"	.030	***JS218***	**15.50**	25	**---**	**---**	--
	8"	.030	**---**	**---**	--	***JS319 ****	**6.70**	25



* stock quantities only

Dixon Smooth ID Center Punch Clamps

Center punch clamps are double wrapped and locked with the conical punch of the F100 tool (page 340). Recommended for use in applications where conditions are highly corrosive.

- unique dimple design offers excellent sealing strength while maintaining radial compression
- ideal for thin wall hose
- low profile clamp
- heavy buckle provides optimal holding power
- clamp can be applied with the F100 hand tool located on page 340.
- 5/8" band width
- .025" band thickness

Band Width	ID	THK	*201 Stainless Steel* Part #	Price/E	Pkg Qty
5/8"	1"	.025	***HBC4S***	**$2.20**	100
	1¼"	.025	***HBC5S***	**2.40**	100
	1½"	.025	***HBC6S***	**2.50**	100
	1¾"	.025	***HBC7S***	**2.70**	100
	2"	.025	***HBC8S***	**2.90**	100
	2¼"	.025	***HBC9S***	**3.05**	100
	2½"	.025	***HBC10S***	**3.30**	50
	2¾"	.025	***HBC11S***	**3.45**	50
	3"	.025	***HBC12S***	**3.60**	50
	3½"	.025	***HBC14S***	**4.00**	50
	4"	.025	***HBC16S***	**4.55**	25
	4½"	.025	***HBC18S***	**4.80**	25
	5"	.025	***HBC20S***	**5.15**	25
	6"	.025	***HBC24S***	**5.90**	25
	7"	.025	***HBC28S***	**6.65**	25
	8"	.025	***HBC32S***	**7.40**	25




Band Clamp Hand Tools



Description	Part #	Price/E
Locking tool. Portable hand tool used to apply punch type 3/8" and 5/8" band clamps. For use with F series only.	***F38***	**$81.50**



Description	Part #	Price/E
Hand tool. Intermediate hand tool for 3/8" and 5/8" band clamps.	***F40***	**$140.00**

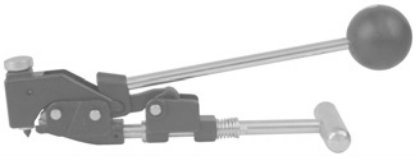

Description	Part #	Price/E
Hand held tool for application of 5/8" band clamps. Imported tool	***F1***	**$199.50**



Description	Part #	Price/E
Hand held tool for application of 3/8" and 5/8" band clamps	***F100***	**$346.50**



Description	Part #	Price/E
Hand held tool for application of 3/4" K clamps	***F175***	**$831.00**



Description	Part #	Price/E
3/8" clamp adapter for F100 tool only	***F229***	**$20.75**

Band Clamp Tool Accessories



Description	Part #	Price/E
Mallet for punching band clamps	***F225***	**$68.15**




Description	Part #	Price/E
Clamp cutter	***F550***	**$136.50**

Band Clamp Tools

Description	Part #	Price/E
Clamping tool for band and buckles	***C2***	**$429.00**



Description	Part #	Price/E
Clamping tool for band and buckles	***51960***	**$141.50**

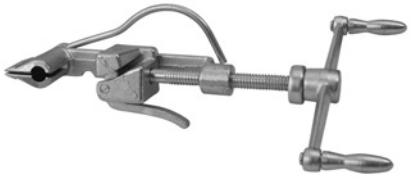


Description	Part #	Price/E
51960 adapter for installing preformed clamps	***51970***	**$114.00**




Strap-Grip Saddles and Male Stems

Strap-Grip saddles are designed to provide greater resistance to end pull than conventional band clamps alone. The male fittings shown below are designed for use with Strap-Grip saddles. Cam and Groove fittings are available on page 56. Saddles are designed for use with 3/4" or 5/8" wide bands. A band clamp should first be applied to OD to seal the hose in sizes 3" and over. Then Strap-Grip saddles should be banded on top of initial clamps to anchor the fitting in the hose.

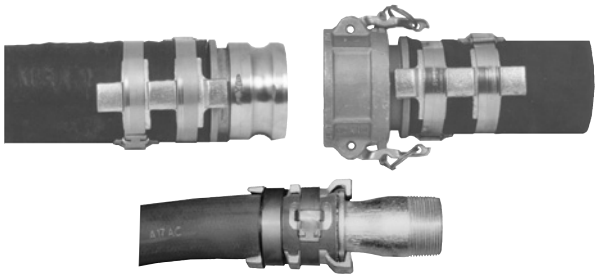

Size	Hose OD		*Plated Iron*	
	from	to	Part #	Price/pair
1½"	1-13/16"	2-1/8"	***SGS150***	**$12.50**
2"	2-5/8"	3"	***SGS200***	**14.50**
3"	3-1/2"	3-7/8"	***SGS300***	**18.95**
4"	4-9/16"	5-1/8"	***SGS400***	**21.90**
6"	6-1/2"	7-1/16"	***SGS600***	**39.50**
8"	8-5/8"	9-3/8"	***SGS800***	**44.00**



saddles

schedule 40

Size	*Plated Carbon Steel*		*Stainless Steel*	
	Part #	Price/E	Part #	Price/E
1½"	***LP21***	**$57.45**	**---**	**---**
2"	***LP26***	**49.40**	**---**	**---**
3"	***LP36***	**121.30**	***RLP36*** [1]	**$215.00**
4"	***LP46***	**154.00**	***RLP46*** [1]	**364.00**
6"	***LP66***	**329.45**	**---**	**---**

schedule 80 [2]

Size	*Plated Carbon Steel*	
	Part #	Price/E
1½"	***LP21-80***	**$65.45**
2"	***LP26-80***	**68.40**




male NPT x hose shank

[1] made from tubular steel
[2] schedule 80 stems meet NFPA 58

Double Bolt Clamps

A rugged, plated iron two-bolt clamp with machine bolts and hex nuts.

- inner surface has dual gripping ridges
- bolt lugs are reinforced to prevent bending out of alignment

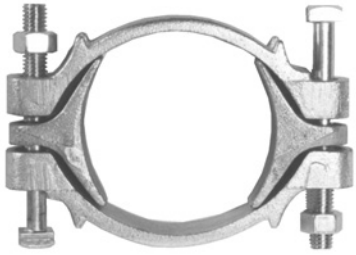


with saddles

Hose OD		*Plated Iron*		Opt	Torque
from	to	Part #	Price/E	Qty	in ft. lbs.
3-32/64"	3-52/64"	***400***	**$18.15**	25	40
3-50/64"	4-4/64"	***431***	**21.95**	20	40
4-2/64"	4-18/64"	***463***	**19.35**	20	40
4-16/64"	4-60/64"	***525***	**24.10**	10	60
4-32/64"	5-16/64"	***550***	**25.10**	10	60
5-8/64"	5-44/64"	***600***	**27.10**	10	60
5-44/64"	5-60/64"	***639***	**30.90**	10	60
5-60/64"	6-32/64"	***675***	**29.45**	10	60
6-32/64"	7-36/64"	***769***	**32.60**	10	60
7-44/64"	8-12/64"	***818***	**47.15**	5	125
8-16/64"	8-56/64"	***875***	**46.95**	5	125
8-60/64"	9-56/64"	***988***	**57.70**	5	125
9-60/64"	11-24/64"	***1125***	**90.55**	5	125
11-12/64"	13"	***1275***	**101.35**	3	125
12-12/64"	14"	***1360***	**162.65**	2	200
13-12/64"	15"	***1450***	**151.25**	2	200
15-4/64"	17-32/64"	***1700***	**189.00**	2	260

- measure hose OD accurately before ordering clamps
- Torque values for clamps are based on dry bolts. The use of lubricant on bolts will adversely effect clamp performance.

SAFETY ALERT

- Consult Dixon when using double bolt clamps on helical wire hose.



without saddles

Hose OD		*Plated Iron*		Opt	Torque
from	to	Part #	Price/E	Qty	in ft. lbs.
1-8/64"	1-12/64"	***J48***	**$6.45**	100	15
1-12/64"	1-24/64"	***J49***	**8.05**	50	21
1-28/64"	1-34/64"	***JX49***	**10.40**	25	21
1-40/64"	1-52/64"	***DL14***	**11.95**	25	40
1-48/64"	2-3/64"	***DL20***	**11.65**	25	27
2-7/64"	2-19/64"	***DL24***[1]	**11.65**	25	27
2-20/64"	2-40/64"	***DL32***[1]	**12.90**	25	40
2-32/64"	2-48/64"	***DL275***	**15.65**	25	40
2-48/64"	3-4/64"	***DL306***	**17.50**	20	60
3-4/64"	3-24/64"	***DL328***	**18.60**	20	60
3-16/64"	3-32/64"	***DL350***	**18.25**	20	60

[1] investment carbon steel

Single Bolt Clamps



- measure hose OD accurately before ordering clamps
- Torque values for clamps are based on dry bolts. The use of lubricant on bolts will adversely effect clamp performance.

SAFETY ALERT

Hose OD		*Plated Iron*		Torque
from	to	Part #	Price/E	in ft. lbs.
56/64"	1"	***2***	**$16.00**	6
62/64"	1-8/64"	***3***	**18.50**	6
1-4/64"	1-12/64"	***4***	**18.50**	6
1-10/64"	1-16/64"	***5***	**18.50**	6
1-16/64"	1-24/64"	***6***	**18.50**	6
1-22/64"	1-28/64"	***7***	**20.30**	6
1-28/64"	1-36/64"	***8***	**21.10**	6
1-34/64"	1-44/64"	***9***	**20.30**	6
1-42/64"	1-48/64"	***10***	**20.30**	6
1-48/64"	1-56/64"	***11***	**21.25**	6
1-56/64"	2-2/64"	***12***	**20.65**	6
2"	2-8/64"	***13***	**21.40**	12
2-8/64"	2-18/64"	***14***	**22.55**	12
2-16/64"	2-26/64"	***15***	**24.50**	12

Hose OD		*Plated Iron*		Torque
from	to	Part #	Price/E	in ft. lbs.
2-24/64"	2-32/64"	***16***	**$21.90**	12
2-32/64"	2-40/64"	***17***	**22.00**	12
2-40/64"	2-56/64"	***18***	**24.70**	12
2-56/64"	3-4/64"	***19***	**24.00**	12
3-4/64"	3-16/64"	***20***	**24.00**	12
3-16/64"	3-28/64"	***21***	**27.00**	12
3-28/64"	3-40/64"	***22***	**27.00**	21
3-40/64"	3-52/64"	***23***	**34.35**	21
3-52/64"	4-8/64"	***24***	**33.35**	21
4-8/64"	4-20/64"	***25***	**34.45**	21
4-16/64"	4-32/64"	***26***	**36.10**	21
4-28/64"	4-40/64"	***27***	**39.00**	21
4-40/64"	4-56/64"	***X27***	**38.10**	21
4-56/64"	5-16/64"	***28***	**38.10**	21

Spring Hose Clamps

- Single wire clamps have the most effective holding force and clamping strength. The single wire concentrates the clamping force in one specific area around the hose.
- *Safety glasses should be worn when installing parts.* SAFETY ALERT
- sold in box quantity only

Size	Hose OD from	Hose OD to	*Carbon Steel* Part #	Price/E	Pkg Qty
5/16"	.309"	.315"	***SHC0312***	**$0.17**	100
3/8"	.370"	.380"	***SHC0375***	**0.19**	100
1/2"	.490"	.510"	***SHC0500***	**0.21**	100
9/16"	.551"	.573"	***SHC0562***	**0.24**	100
5/8"	.610"	.640"	***SHC0625***	**0.25**	100
3/4"	.730"	.770"	***SHC0750***	**0.29**	100
13/16"	.792"	.832"	***SHC0812***	**0.31**	100
1"	.969"	1.031"	***SHC1000***	**0.36**	100
1-1/8"	1.100"	1.150"	***SHC1125***	**0.56**	50
1-1/4"	1.219"	1.280"	***SHC1250***	**0.53**	50
1-1/2"	1.469"	1.531"	***SHC1500***	**0.65**	50
1-5/8"	1.578"	1.672"	***SHC1625***	**0.78**	50



Spring Hose Clamp Pliers

Install single wire spring hose clamps quickly and easily using this simple hand tool.

- rugged construction
- ease of use, designed for efficiency

Part #	Price/E
SHCP	**$125.45**



Spiral Clamps

For use on convoluted cover hose. To determine which style clamp is needed for your hose look at the end of the hose; if the helix spirals in a clockwise direction away from you (along the hose), a clockwise clamp is needed. If the helix spirals in a counterclockwise direction away from you, a counterclockwise clamp is needed. Examples include, but are not limited to: Kuriyama convoluted hose uses counter clockwise clamps; Pacific Echo and Kana Flex use clockwise clamps; Goodyear uses both counter clockwise and clockwise. More than one clamp may be needed per size, contact the hose manufacturer for more information.

- due to fluctuations in the OD of hose each individual installation should be checked SAFETY ALERT

Hose ID	Hose OD from	Hose OD to	*Plated Steel, Right Hand* Part #	Price/E	*Plated Steel, Left Hand* Part #	Price/E
1½"	1-34/64"	1-52/64"	***SC150***	**$11.10**	***SCCW150***	**$11.10**
2"	2-18/64"	2-32/64"	***SC200***	**11.10**	***SCCW200***	**11.10**
2½"	2-46/64"	3-8/64"	***SC250***	**12.45**	***SCCW250***	**12.45**
3"	3"	3-32/64"	***SC300***	**13.45**	***SCCW300***	**13.45**
4"	4"	4-32/64"	***SC400***	**15.90**	***SCCW400***	**15.90**
5"	5-6/64"	5-32/64"	***SC500***	**20.40**	***SCCW500***	**20.40**
6"	6-16/64"	7"	***SC600***	**21.75**	***SCCW600***	**21.75**
8"	8-32/64"	9-16/64"	***SC800***	**26.20**	***SCCW800***	**26.20**
10"	10-40/64"	11-16/64"	***SC1000***	**32.50**	***SCCW1000***	**32.50**



clockwise wound
right hand spiral



counter clockwise wound
left hand spiral

2010 NEW

Constant Torque Clamps

A patented Belleville spring mechanism permits the Constant-Torque clamp to automatically increase or decrease its own diameter due to changes in operational or environmental temperatures.



- 5/8" wide, stainless steel band
- 3/8" hex, carbon steel screw

Hose OD from	Hose OD to	Part #	Price/E	Hose OD from	Hose OD to	Part #	Price/E
1"	1-3/4"	***CT175L***	**$17.30**	5¼"	6-1/8"	***CT600L***	**$19.45**
1¼"	2-1/8"	***CT200L***	**17.30**	5¾"	6-5/8"	***CT650L***	**19.55**
1¾"	2-5/8"	***CT250L***	**17.40**	6¼"	7-1/8"	***CT700L***	**19.90**
2¼"	3-1/8"	***CT300L***	**17.70**	6¾"	7-5/8"	***CT750L***	**20.70**
2¾"	3-5/8"	***CT350L***	**17.85**	7¼"	8-1/8"	***CT800L***	**20.95**
3¼"	4-1/8"	***CT400L***	**18.10**	7¾"	8-5/8"	***CT850L***	**21.20**
3¾"	4-5/8"	***CT450L***	**18.30**	8¼"	9-1/8"	***CT900L***	**21.50**
4¼"	5-1/8"	***CT500L***	**18.60**	8¾"	9-5/8"	***CT950L***	**21.80**
4¾"	5-5/8"	***CT550L***	**19.20**				

T-Bolt Clamps

- T-bolts can be applied with a standard 7/16" socket wrench
- 3/4" wide 300 series stainless steel band, .025" thick
- 300 series stainless steel bolt, torque rating 50 in/lbs

style STBC

Hose OD from	Hose OD to	Part #	Price/E	Opt Qty
1.250"	1.4063"	***STBC131***	**$12.10**	25
1.344"	1.562"	***STBC150***	**7.55**	25
1.594"	1.812"	***STBC175***	**7.55**	25
1.724"	1.942"	***STBC188***	**7.55**	25
1.844"	2.062"	***STBC200***	**7.55**	25
1.964"	2.182"	***STBC212***	**7.60**	25
2.094"	2.312"	***STBC225***	**7.55**	25
2.224"	2.442"	***STBC238***	**7.55**	25
2.344"	2.562"	***STBC250***	**7.65**	25
2.326"	2.622"	***STBC256***	**7.30**	25
2.396"	2.692"	***STBC263***	**7.30**	25
2.516"	2.812"	***STBC275***	**7.30**	25
2.646"	2.942"	***STBC288***	**7.35**	25
2.766"	3.062"	***STBC300***	**7.40**	25
2.886"	3.182"	***STBC312***	**7.40**	25
3.016"	3.312"	***STBC325***	**7.40**	25
3.266"	3.562"	***STBC350***	**7.65**	25
3.386"	3.682"	***STBC362***	**7.70**	25
3.516"	3.812"	***STBC375***	**7.70**	25
3.586"	3.882"	***STBC382***	**7.70**	25
3.766"	4.062"	***STBC400***	**7.70**	25
4.016"	4.312"	***STBC425***	**7.80**	25
4.266"	4.562"	***STBC450***	**7.80**	25
4.516"	4.812"	***STBC475***	**8.30**	25
4.766"	5.062"	***STBC500***	**8.40**	25
5.016"	5.312"	***STBC525***	**8.40**	25
5.266"	5.562"	***STBC550***	**8.85**	25
5.516"	5.812"	***STBC575***	**8.85**	25
5.766"	6.062"	***STBC600***	**9.00**	25
6.016"	6.312"	***STBC625***	**9.00**	25
6.266"	6.562"	***STBC650***	**9.00**	25
6.516"	6.812"	***STBC675***	**9.00**	25
6.766"	7.062"	***STBC700***	**9.25**	25
7.266"	7.562"	***STBC750***	**9.40**	25
7.766"	8.062"	***STBC800***	**9.55**	25
8.266"	8.562"	***STBC850***	**9.55**	25
8.646"	8.942"	***STBC888***	**10.75**	25
8.766"	9.062"	***STBC900***	**9.90**	25
9.266"	9.562"	***STBC950***	**10.10**	25
9.766"	10.062"	***STBC1000***	**10.20**	10
10.646"	10.942"	***STBC1088***	**11.00**	10
11.766"	12.062"	***STBC1200***	**10.95**	10
12.646"	12.942"	***STBC1288***	**11.00**	10



- T-bolts can be applied with a standard 7/16" socket wrench
- 3/4" wide 300 series stainless steel band, .025" thick
- alloy steel bolt, torque rating 70 in/lbs

style TBC

Hose OD from	Hose OD to	Part #	Price/E	Opt Qty
1.250"	1.406"	***TBC131***	**$8.95**	25
1.344"	1.562"	***TBC150***	**6.50**	25
1.594"	1.812"	***TBC175***	**6.50**	25
1.724"	1.942"	***TBC188***	**6.50**	25
1.844"	2.062"	***TBC200***	**6.50**	25
2.094"	2.312"	***TBC225***	**6.50**	25
2.224"	2.442"	***TBC238***	**6.50**	25
2.344"	2.562"	***TBC250***	**6.65**	25
2.326"	2.622"	***TBC256***	**6.40**	25
2.396"	2.692"	***TBC263***	**6.40**	25
2.516"	2.812"	***TBC275***	**6.40**	25
2.646"	2.942"	***TBC288***	**6.45**	25
2.766"	3.062"	***TBC300***	**6.45**	25
2.886"	3.182"	***TBC312***	**6.50**	25
3.016"	3.312"	***TBC325***	**6.50**	25
3.266"	3.562"	***TBC350***	**6.85**	25
3.516"	3.812"	***TBC375***	**6.85**	25
3.586"	3.882"	***TBC382***	**6.90**	25
3.766"	4.062"	***TBC400***	**6.90**	25
4.016"	4.312"	***TBC425***	**6.90**	25
4.266"	4.562"	***TBC450***	**6.90**	25
4.516"	4.812"	***TBC475***	**6.90**	25
4.766"	5.062"	***TBC500***	**6.95**	25
5.016"	5.312"	***TBC525***	**6.95**	25
5.266"	5.562"	***TBC550***	**7.40**	25
5.516"	5.812"	***TBC575***	**7.40**	25
5.766"	6.062"	***TBC600***	**7.45**	25
6.016"	6.312"	***TBC625***	**7.45**	25
6.266"	6.562"	***TBC650***	**7.55**	25
6.516"	6.812"	***TBC675***	**7.55**	25
6.766"	7.062"	***TBC700***	**7.65**	25
7.266"	7.562"	***TBC750***	**7.70**	25

Heavy Duty T-Bolt Clamps



- T-bolts can be applied with a standard 1/2" socket wrench.
- 7/8" wide 300 series stainless steel band, .040" thick
- carbon steel bolt, torque rating is 240 in/lbs

style HTBC

Hose OD from	Hose OD to	Part #	Price/E
2.125"	2.4375"	***HTBC238***	**$12.50**
2.250"	2.5625"	***HTBC250***	**12.55**
2.750"	3.0625"	***HTBC300***	**12.75**
3.250"	3.5625"	***HTBC350***	**12.95**
3.750"	4.0625"	***HTBC400***	**13.15**
4.250"	4.5625"	***HTBC450***	**13.40**
4.750"	5.0625"	***HTBC500***	**13.55**
5.250"	5.5625"	***HTBC550***	**13.80**
5.750"	6.0625"	***HTBC600***	**14.00**
6.250"	6.5625"	***HTBC650***	**14.25**
6.750"	7.0625"	***HTBC700***	**14.40**
7.250"	7.5625"	***HTBC750***	**14.60**
7.750"	8.0625"	***HTBC800***	**14.85**

- T-bolts can be applied with a standard 1/2" socket wrench.
- 7/8" wide 300 series stainless steel band, .040" thick
- 300 series stainless steel bolt, torque rating is 180 in/lbs

style HSTBC

Hose OD from	Hose OD to	Part #	Price/E
2.125"	2.4375"	***HSTBC238***	**$14.10**
2.250"	2.5625"	***HSTBC250***	**14.15**
2.750"	3.0625"	***HSTBC300***	**14.40**
3.250"	3.5625"	***HSTBC350***	**14.60**
3.750"	4.0625"	***HSTBC400***	**14.85**
4.250"	4.5625"	***HSTBC450***	**15.05**
4.750"	5.0625"	***HSTBC500***	**15.30**
5.250"	5.5625"	***HSTBC550***	**15.55**
5.750"	6.0625"	***HSTBC600***	**15.75**
6.250"	6.5625"	***HSTBC650***	**15.95**
6.750"	7.0625"	***HSTBC700***	**16.20**
7.250"	7.5625"	***HSTBC750***	**16.40**
7.750"	8.0625"	***HSTBC800***	**16.65**
8.266"	8.562"	***HSTBC850***	**20.95**
8.646"	8.942"	***HSTBC888***	**21.30**
8.766"	9.062"	***HSTBC900***	**21.55**
9.266"	9.562"	***HSTBC950***	**22.15**
9.766"	10.062"	***HSTBC1000***	**22.70**
10.646"	10.942"	***HSTBC1088***	**23.90**
11.766"	12.062"	***HSTBC1200***	**25.05**
12.646"	12.942"	***HSTBC1288***	**26.20**

Long Bolt T-Bolt Clamps

- T-bolts can be applied with a standard 7/16" socket wrench.
- 3/4" wide 300 series stainless steel band, .025" thick
- 300 series stainless steel bolt, torque rating is 50 in/lbs



style STBCL

Hose OD from	Hose OD to	Part #	Price/E	Opt Qty
2.80"	3.37"	***STBC325L***	**$10.30**	25
3.05"	3.62"	***STBC350L***	**10.30**	25
3.37"	3.94"	***STBC382L***	**10.35**	25
3.55"	4.12"	***STBC400L***	**10.40**	25
3.75"	4.32"	***STBC420L***	**10.40**	25
3.87"	4.44"	***STBC432L***	**10.40**	25
4.05"	4.62"	***STBC450L***	**10.40**	25
4.37"	4.94"	***STBC482L***	**10.65**	25
4.55"	5.12"	***STBC500L***	**10.75**	25
4.87"	5.44"	***STBC532L***	**10.65**	25
5.05"	5.62"	***STBC550L***	**10.70**	25
5.37"	5.94"	***STBC582L***	**10.70**	25
5.55"	6.12"	***STBC600L***	**10.80**	25
5.87"	6.44"	***STBC632L***	**10.80**	25
6.05"	6.62"	***STBC650L***	**10.85**	25
6.30"	6.87"	***STBC675L***	**10.85**	25
6.53"	7.10"	***STBC698L***	**11.60**	25
6.55"	7.12"	***STBC700L***	**11.10**	25

style STBCL

Hose OD from	Hose OD to	Part #	Price/E	Opt Qty
6.62"	7.19"	***STBC707L***	**$11.10**	25
8.05"	8.62	***STBC850L***	**10.15**	25
8.30"	8.87"	***STBC875L***	**11.85**	25
8.43"	9.00"	***STBC888L***	**12.25**	25
8.62"	9.19"	***STBC907L***	**12.30**	25
10.25"	10.82"	***STBC1070L***	**12.30**	25
10.43"	11.00"	***STBC1088L***	**12.30**	25
10.62"	11.19"	***STBC1107L***	**12.35**	25
10.72"	11.29"	***STBC1117L***	**12.50**	25
12.20"	12.77"	***STBC1265L***	**12.80**	25
12.43"	13.00"	***STBC1288L***	**12.80**	25
12.75"	13.32"	***STBC1320L***	**12.80**	25
14.20"	14.77"	***STBC1465L***	**12.90**	25
14.43"	15.00"	***STBC1488L***	**12.90**	25
14.75"	15.32"	***STBC1520L***	**13.15**	25
16.20"	16.77"	***STBC1665L***	**13.60**	25
16.43"	17.00"	***STBC1688L***	**13.60**	25

Straight Through Quick-Connect Fittings

These couplers and plugs have no internal valves, providing maximum flow with minimum pressure drop. Supplied with Buna-N gasket seal. Interchanges with Parker-Hannifin SST/BST, Foster FST and Hansen ST couplings.

- *Do Not Disconnect with pressure in line.* SAFETY ALERT

Female Couplers	Size	Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
	1/4"	1/4" - 18	**4500**	*brass*	***STFC2***	**$7.30**	12
	3/8"	3/8" - 18	**2700**	*brass*	***STFC3***	**9.00**	12
	1/2"	1/2" - 14	**2500**	*brass*	***STFC4***	**13.00**	12
	3/4"	3/4" - 14	**2000**	*brass*	***STFC6***	**25.00**	12
	1"	1" - 11½	**1000**	*brass*	***STFC8***	**36.00**	1
	1-1/4"	1-1/4" - 11½	**800**	*brass*	***STFC10***	**99.12**	1
	1-1/2"	1-1/2" - 11½	**600**	*brass*	***STFC12***	**135.85**	1
	2"	2" - 11½	**400**	*brass*	***STFC16***	**187.15**	1
	1/4"	1/4" - 18	**6700**	*303 stainless*	***STFC2SS***	**47.30**	5
	3/8"	3/8" - 18	**5500**	*303 stainless*	***STFC3SS***	**67.00**	5
	1/2"	1/2" - 14	**3000**	*303 stainless*	***STFC4SS***	**78.00**	5
	3/4"	3/4" - 14	**3000**	*303 stainless*	***STFC6SS***	**135.65**	5
	1"	1" - 11½	**1700**	*303 stainless*	***STFC8SS***	**185.00**	5

Male Couplers	Size	Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
	1/4"	1/4" - 18	**4500**	*brass*	***STMC2***	**$ 7.30**	12
	3/8"	3/8" - 18	**2700**	*brass*	***STMC3***	**9.00**	12
	1/2"	1/2" - 14	**2500**	*brass*	***STMC4***	**13.00**	12
	3/4"	3/4" - 14	**2000**	*brass*	***STMC6***	**25.00**	12
	1"	1" - 11½	**1000**	*brass*	***STMC8***	**36.00**	1
	1/4"	1/4" - 18	**6700**	*303 stainless*	***STMC2SS***	**49.00**	5
	3/8"	3/8" - 18	**5500**	*303 stainless*	***STMC3SS***	**61.45**	5
	1/2"	1/2" - 14	**3000**	*303 stainless*	***STMC4SS***	**84.65**	5
	3/4"	3/4" - 14	**3000**	*303 stainless*	***STMC6SS***	**155.50**	5
	1"	1" - 11½	**1700**	*303 stainless*	***STMC8SS***	**260.50**	5

Standard Hose Barbs	Size	Hose ID	PSI * at 70°F	Material	Part #	Price/E	Opt Qty
	1/4"	1/4"	**5200**	*brass*	***2ES2-B***	**$10.85**	100
	3/8"	3/8"	**2800**	*brass*	***3ES3-B***	**12.00**	50
	1/2"	1/2"	**2200**	*brass*	***4ES4-B***	**19.50**	25
	3/4"	3/4"	**1700**	*brass*	***6ES6-B***	**30.00**	20
	1"	1"	**1700**	*brass*	***8ES8-B***	**41.00**	10

SAFETY ALERT

** Operating pressures for the standard hose barbs utilizing hose barb end connections may be dramatically reduced to that of the hose rating and/or hose and end connection combination. Consult hose manufacturer's catalog for hose end connection ratings. If in doubt, test under controlled conditions for suitability to application. Dixon cannot assume liability for misapplication of products resulting in equipment down-time, lost production, property damage and/or personal injury including death.*

Straight Through Quick-Connect Fittings

These couplers and plugs have no internal valves, providing maximum flow with minimum pressure drop. Supplied with Buna-N gasket seal. Interchanges with Parker-Hannifin SST/BST, Foster FST and Hansen ST couplings.

- *Do Not Disconnect with pressure in line*. SAFETY ALERT


Female Plugs

Size	Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/4"	1/4" - 18	**5000**	*steel*	***STFP2***	**$2.35**	12
3/8"	3/8" - 18	**3500**	*steel*	***STFP3***	**3.70**	12
1/2"	1/2" - 14	**2700**	*steel*	***STFP4***	**5.20**	12
3/4"	3/4" - 14	**2700**	*steel*	***STFP6***	**12.00**	12
1"	1" - 11½	**2000**	*steel*	***STFP8***	**22.50**	1
1-1/4"	1-1/4" - 11½	**1700**	*steel*	***STFP10***	**53.50**	1
1-1/2"	1-1/2" - 11½	**1400**	*steel*	***STFP12***	**86.00**	1
2"	2" - 11½	**600**	*steel*	***STFP16***	**110.00**	1
1/4"	1/4" - 18	**4500**	*brass*	***STFP2B***	**4.45**	12
3/8"	3/8" - 18	**2700**	*brass*	***STFP3B***	**5.65**	12
1/2"	1/2" - 14	**2200**	*brass*	***STFP4B***	**8.35**	12
3/4"	3/4" - 14	**1700**	*brass*	***STFP6B***	**13.15**	12
1"	1" - 11½	**1000**	*brass*	***STFP8B***	**24.80**	1
1/4"	1/4" - 18	**6700**	*303 stainless*	***STFP2SS***	**14.70**	5
3/8"	3/8" - 18	**5500**	*303 stainless*	***STFP3SS***	**17.60**	5
1/2"	1/2" - 14	**3000**	*303 stainless*	***STFP4SS***	**39.00**	5
3/4"	3/4" - 14	**3000**	*303 stainless*	***STFP6SS***	**59.00**	5
1"	1" - 11½	**1700**	*303 stainless*	***STFP8SS***	**110.05**	5



Male Plugs

Size	Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/4"	1/4" - 18	**5000**	*steel*	***STMP2***	**$2.35**	12
3/8"	3/8" - 18	**3500**	*steel*	***STMP3***	**3.70**	12
1/2"	1/2" - 14	**2700**	*steel*	***STMP4***	**5.20**	12
3/4"	3/4" - 14	**2700**	*steel*	***STMP6***	**12.00**	12
1"	1" - 11½	**2000**	*steel*	***STMP8***	**22.50**	1
1-1/4"	1-1/4" - 11½	**1700**	*steel*	***STMP10***	**60.00**	1
1-1/2"	1-1/2" - 11½	**1400**	*steel*	***STMP12***	**86.00**	1
2"	2" - 11½	**600**	*steel*	***STMP16***	**115.00**	1
1/4"	1/4" - 18	**4500**	*brass*	***STMP2B***	**4.10**	12
3/8"	3/8" - 18	**2700**	*brass*	***STMP3B***	**5.10**	12
1/2"	1/2" - 14	**2200**	*brass*	***STMP4B***	**7.85**	12
3/4"	3/4" - 14	**1700**	*brass*	***STMP6B***	**11.55**	12
1"	1" - 11½	**1000**	*brass*	***STMP8B***	**22.75**	1
1/4"	1/4" - 18	**6700**	*303 stainless*	***STMP2SS***	**13.30**	5
3/8"	3/8" - 18	**5500**	*303 stainless*	***STMP3SS***	**15.25**	5
1/2"	1/2" - 14	**3000**	*303 stainless*	***STMP4SS***	**36.25**	5
3/4"	3/4" - 14	**3000**	*303 stainless*	***STMP6SS***	**55.60**	5
1"	1" - 11½	**1700**	*303 stainless*	***STMP8SS***	**116.00**	5



Standard Hose Barbs

Size	Hose ID	PSI * at 70°F	Material	Part #	Price/E	Opt Qty
1/4"	1/4"	**5200**	*brass*	***E2S2-B***	**$4.50**	100
3/8"	3/8"	**2800**	*brass*	***E3S3-B***	**5.50**	50
1/2"	1/2"	**2200**	*brass*	***E4S4-B***	**10.50**	25
3/4"	3/4"	**1700**	*brass*	***E6S6-B***	**13.75**	20
1"	1"	**1700**	*brass*	***E8S8-B***	**30.00**	10
1/4"	1/4"	**5500**	*steel*	***E2S2***	**5.20**	100
3/8"	3/8"	**4200**	*steel*	***E3S3***	**6.60**	50
1/2"	1/2"	**3500**	*steel*	***E4S4***	**12.40**	25
3/4"	3/4"	**2100**	*steel*	***E6S6***	**16.00**	20
1"	1"	**2000**	*steel*	***E8S8***	**32.00**	10



** Operating pressures for the standard hose barbs utilizing hose barb end connections may be dramatically reduced to that of the hose rating and/or hose and end connection combination. Consult hose manufacturer's catalog for hose end connection ratings. If in doubt, test under controlled conditions for suitability to application. Dixon cannot assume liability for misapplication of products resulting in equipment down-time, lost production, property damage and/or personal injury including death.* SAFETY ALERT

Flo-Mate Couplings

Flo-Mate couplings offer maximum flow with an unrestricted flow path, permitting maximum temperature control and minimum coupling size. Plugs are designed short so that they can be easily recessed below a molded surface to avoid damage (when mold is changed or stored). Non-valved design should be used where maximum flow is needed and automatic shut-off is not required. Suitable for use with hot oil, water glycol and high temperature water.

Sockets

(non-valved)

- socket seal is silicone
- service pressure is **200 PSI** at ambient temperature (70°F)
- sockets and sleeves are brass
- sleeve spring is 302 stainless steel
- locking balls are 404 stainless steel



90° hose shank

Size	Hose ID	Part #	Price/E	Opt Qty
1/4"	1/4"	***FMC214***	**$15.60**	10
1/4"	3/8"	***FMC216L*** *	**15.70**	10
3/8"	3/8"	***FMC316***	**15.65**	5
3/8"	3/8"	***FMC316L*** *	**17.85**	5
3/8"	1/2"	***FMC318***	**15.50**	5
3/8"	1/2"	***FMC318L*** *	**17.85**	5



45° hose shank

Size	Hose ID	Part #	Price/E	Opt Qty
1/4"	5/16"	***FMC225***	**$15.40**	10



straight hose shank

Size	Hose ID	Part #	Price/E	Opt Qty
1/4"	1/4"	***FMC204***	**$8.85**	10
1/4"	1/4"	***FMC204L*** *	**10.10**	10
1/4"	3/8"	***FMC206***	**9.40**	10
1/4"	3/8"	***FMC206L*** *	**9.40**	10
3/8"	3/8"	***FMC306***	**11.60**	5
3/8"	3/8"	***FMC306L*** *	**11.70**	5
3/8"	1/2"	***FMC308***	**11.55**	5
3/8"	1/2"	***FMC308L*** *	**11.90**	5
1/2"	1/2"	***FMC504***	**27.55**	5
1/2"	1/2"	***FMC504L*** *	**31.30**	5
1/2"	3/4"	***FMC506L*** *	**31.60**	5

* 'L' denotes push-on hose barb end (not pictured)

Plugs



female NPT

Size	Thread	*Steel* Part #	Price/E	Opt Qty
1/4"	1/8"	***FMP251F***	**$2.60**	25
1/4"	1/4"	***FMP252F***	**2.90**	25
3/8"	1/4"	***FMP352F***	**2.15**	25
3/8"	3/8"	***FMP353F***	**2.45**	25



male NPT

Size	Thread	*Brass* Part #	Price/E	Opt Qty
1/4"	1/8"	***FMP251***	**$1.85**	25
1/4"	1/4"	***FMP252***	**2.00**	25
1/4"	3/8"	***FMP253***	**2.60**	25
3/8"	1/4"	***FMP352***	**2.20**	25
3/8"	3/8"	***FMP353***	**2.40**	25
3/8"	1/2"	***FMP354***	**5.05**	25
1/2"	1/2"	***FMP554***	**4.85**	25
1/2"	3/4"	***FMP556***	**6.55**	25

SAFETY ALERT

Over-pressurization could result in a sudden failure of the coupling causing severe bodily injury or death. Be sure to select the proper coupling for your application and use it only within the specified service pressure ranges. Couplings do wear out. In order to avoid severe bodily injury or death, couplings must be routinely checked for condition and replaced if necessary.

Steel Flow Control Valves

Series F

Two-step needle provides fine adjustments at low flow with the first three turns of the adjusting knob. The next three turns give full-open needle position and conventional throttling control. When flow is reversed, the heavy-duty poppet/retainer permits full-flow return capacity. Exclusive color-coded reference scale on the adjusting knob greatly simplifies flow setting, resetting, adjusting and return to an original flow. A simple set screw locks the valve on any desired setting.

Thread Size	*Black Oxide Steel*	
	Part #	Price/E
1/8"	***SFC200***	**$55.00**
1/4"	***SFC400***	**62.00**
3/8"	***SFC600***	**76.65**
1/2"	***SFC800***	**103.25**
3/4"	***SFC1200***	**147.15**

- maximum operating pressure: **5000 PSI** at 70°F for 1/8" - 1/2", **3000 PSI** at 70°F for 3/4"
- also available in brass, see page 135



Series PF

Utilizes a ball type check that meters the flow of hydraulic oil in one direction and allows for free flow in the reverse direction. Recommended for use in non-shock applications.

Thread Size	*zinc plated steel with a dichromate seal*	
	Part #	Price/E
1/4"	***SPF400***	**$47.65**
3/8"	***SPF600***	**63.15**
1/2"	***SPF800***	**82.30**

- maximum operating pressure: **5000 PSI** at 70°F, **5 PSI** cracking pressure
- also available in brass, see page 135



Series N

Ideal for use as speed controls on hydraulic systems where a reverse flow check valve is not needed. Provides excellent control and reliable shutoff in a very small envelope. Color-coded reference scale on the adjusting knob simplifies setting, resetting, adjusting and quick return to a previous speed setting.

Thread Size	*Steel*	
	Part #	Price/E
1/8"	***SN200***	**$56.60**
1/4"	***SN400***	**64.40**
3/8"	***SN600***	**78.60**
1/2"	***SN800***	**99.45**
3/4"	***SN1200***	**132.35**

- maximum operating pressure: **5000 PSI** at 70°F
- also available in brass, see page 135



Series MV

With these high-precision metering and shutoff valves, you can readily make fine adjustments and reset with the exclusive color code 5000 that shows when you reach the desired setting.

Thread Size	*Steel*	
	Part #	Price/E
1/4"	***SMV400***	**$64.10**
3/8"	***SMV600***	**135.00**
1/2"	***SMV800***	**169.70**

- body components are precision-turned from solid barstock
- all models have 416 stainless steel needles
- maximum operating pressure: **5000 PSI** at 70°F



Series C Check Valves

Provides free flow in one direction and dependable shutoff in the opposite direction.

Thread Size	Free Flow GPM	*Steel*	
		Part #	Price/E
1/8"	3	***SCV200***	**$43.20**
1/4"	5	***SCV400***	**47.45**
3/8"	8	***SCV600***	**55.20**
1/2"	15	***SCV800***	**63.70**

- maximum operating pressure: **5000 PSI** at 70°F, **5 PSI** cracking pressure
- also available in brass, see page 134



High Pressure Full-Bore Ball Valves

- blow out proof stem
- rugged construction
- Viton® shaft seals
- female thread



Size	PSI at 70°F	*Carbon Steel* NPTF Part #	Price/E	SAE Part #	Price/E	PSI	*Stainless Steel* NPTF Part #	Price/E
1/4"	**7350**	***HPBV25***	**$63.90**	***HPBV25SAE***	**$71.65**	**7250**	***HPBV25SS***	**$427.50**
3/8"	**7350**	***HPBV38***	**67.80**	***HPBV38SAE***	**80.70**	**7250**	***HPBV38SS***	**497.50**
1/2"	**7350**	***HPBV12***	**73.70**	***HPBV12SAE***	**87.10**	**7250**	***HPBV12SS***	**595.00**
3/4"	**5880**	***HPBV34***	**145.05**	***HPBV34SAE***	**162.20**	**5800**	***HPBV34SS***	**950.00**
1"	**5145**	***HPBV10***	**173.10**	***HPBV10SAE***	**190.00**	**5075**	***HPBV10SS***	**1050.00**
1¼"	**5880**	***HPBV125***	**452.90**	***HPBV125SAE***	**490.20**	**---**	**---**	**---**
1½"	**5880**	***HPBV150***	**548.90**	***HPBV150SAE***	**583.00**	**---**	**---**	**---**
2"	**5880**	***HPBV200***	**831.00**	***HPBV200SAE***	**870.00**	**---**	**---**	**---**

Mini Needle Valves

Mini needle valves are available in a variety of materials, and handle options. All are equipped with both a Viton® O-ring seal and a Teflon® back-up ring below the threads to protect the mini valve from corrosion and galling. The stem threads are rolled for strength and ease of operation, and the metal-to-metal hard seat design is 100% helium leak tested to 1 x 10-4 ml/s at 200 PSI on each mini valve.

- orifice size:
  1/8" and 1/4" is 0.172"
  1/2" is 0.187"
- flow coefficient:
  1/8" and 1/4" 0.42
  1/2" is 0.44
- O-ring seal: Viton®
- back-up ring: Teflon®

Male to Female



NPT Size	Handle Style	PSI at 70°F	Material	Part #	Price/E
1/8" - 27	knurled knob	**6000**	*brass*	***MFB101***	**$45.90**
1/4" - 18	knurled knob	**6000**	*brass*	***MFB102***	**45.90**
1/8" - 27	T design	**10000**	*nickel plated steel*	***MFC101***	**39.50**
1/4" - 18	T design	**10000**	*nickel plated steel*	***MFC102***	**39.50**
1/2" - 14	T design	**10000**	*nickel plated steel*	***MFC404***	**55.45**
1/8" - 27	T design	**10000**	*316 stainless steel*	***MFS101***	**91.00**
1/4" - 18	T design	**10000**	*316 stainless steel*	***MFS102***	**91.00**
1/2" - 14	T design	**10000**	*316 stainless steel*	***MFS404***	**141.20**

Female to Female



NPT Size	Handle Style	PSI at 70°F	Material	Part #	Price/E
1/8" - 27	knurled knob	**6000**	*brass*	***FFB101***	**$45.90**
1/4" - 18	knurled knob	**6000**	*brass*	***FFB102***	**45.90**
1/8" - 27	T design	**10000**	*nickel plated steel*	***FFC101***	**39.50**
1/4" - 18	T design	**10000**	*nickel plated steel*	***FFC102***	**39.50**
1/2" - 14	T design	**10000**	*nickel plated steel*	***FFC404***	**52.90**
1/8" - 27	T design	**10000**	*316 stainless steel*	***FFS101***	**91.00**
1/4" - 18	T design	**10000**	*316 stainless steel*	***FFS102***	**91.00**
1/2" - 14	T design	**10000**	*316 stainless steel*	***FFS404***	**133.40**

Industrial Hydraulic Quick-Connect Fittings

- The Industrial Quick Connect series features poppet style shut-off valves in both the coupler and the plug.
- designed to prevent fluid loss when the coupler is disconnected
- interchangeable with Parker-Hannifin 60 series
- meets dimensional requirements of Series B in ISO 7241-1
- seal material is Buna-N
- Contact the factory if you intend to use the fittings on a compressed air system.
- see Hydraulic Profile Chart on page 630

Size	NPTF Thread	PSI * at 70°F	Material	Part #	Price/E	Opt Qty	**Poppet Valve Coupler**
1/4"	1/4" - 18	**5000**	*steel*	***16-263***	**$25.35**	5	
3/8"	3/8" - 18	**4000**	*steel*	***16-363***	**31.55**	5	
1/2"	1/2" - 14	**4000**	*steel*	***16-463***	**44.80**	5	
3/4"	3/4" - 14	**2500**	*steel*	***16-663***	**68.00**	5	
1"	1" - 11½	**2000**	*steel*	***16-863***	**90.15**	5	
1/4"	1/4" - 18	**1000**	*brass*	***B16-263***	**28.40**	5	
3/8"	3/8" - 18	**1000**	*brass*	***B16-363***	**38.15**	5	
1/2"	1/2" - 14	**1000**	*brass*	***B16-463***	**56.25**	5	
3/4"	3/4" - 14	**1000**	*brass*	***B16-663***	**85.05**	5	
1"	1" - 11½	**1000**	*brass*	***B16-863***	**116.40**	5	
1/4"	1/4" - 18	**2000**	*303 stainless*	***SS16-263***	**68.45**	5	
3/8"	3/8" - 18	**1500**	*303 stainless*	***SS16-363***	**97.35**	5	
1/2"	1/2" - 14	**1500**	*303 stainless*	***SS16-463***	**155.05**	5	
3/4"	3/4" - 14	**1500**	*303 stainless*	***SS16-663***	**228.95**	5	
1"	1" - 11½	**1000**	*303 stainless*	***SS16-863***	**367.00**	5	



Size	NPTF Thread	PSI * at 70°F	Material	Part #	Price/E	Opt Qty	**Poppet Valve Plug**
1/4"	1/4" - 18	**5000**	*steel*	***17-263***	**$10.60**	5	
3/8"	3/8" - 18	**4000**	*steel*	***17-363***	**15.40**	5	
1/2"	1/2" - 14	**4000**	*steel*	***17-463***	**18.45**	5	
3/4"	3/4" - 14	**2500**	*steel*	***17-663***	**27.55**	5	
1"	1" - 11½	**2000**	*steel*	***17-863***	**37.85**	5	
1/4"	1/4" - 18	**1000**	*brass*	***B17-263***	**13.25**	5	
3/8"	3/8" - 18	**1000**	*brass*	***B17-363***	**16.85**	5	
1/2"	1/2" - 14	**1000**	*brass*	***B17-463***	**22.35**	5	
3/4"	3/4" - 14	**1000**	*brass*	***B17-663***	**32.25**	5	
1"	1" - 11½	**1000**	*brass*	***B17-863***	**45.80**	5	
1/4"	1/4" - 18	**2000**	*303 stainless*	***SS17-263***	**29.75**	5	
3/8"	3/8" - 18	**1500**	*303 stainless*	***SS17-363***	**42.40**	5	
1/2"	1/2" - 14	**1500**	*303 stainless*	***SS17-463***	**57.70**	5	
3/4"	3/4" - 14	**1500**	*303 stainless*	***SS17-663***	**105.75**	5	
1"	1" - 11½	**1000**	*303 stainless*	***SS17-863***	**176.20**	5	



Industrial Hydraulic Quick-Connect Fittings

Dust Plugs	Size	Material	Part #	Price/E	Opt Qty
	1/4"	*rubber*	***16-002***	**$3.45**	5
	3/8"	*rubber*	***16-003***	**4.05**	5
	1/2"	*rubber*	***16-004***	**4.55**	5
	3/4"	*rubber*	***16-006***	**8.45**	5
	1"	*rubber*	***16-008***	**9.85**	5
	1/4"	*aluminum*	***16-002A***	**12.90**	5
	3/8"	*aluminum*	***16-003A***	**13.75**	5
	1/2"	*aluminum*	***16-004A***	**16.05**	5
	3/4"	*aluminum*	***16-006A***	**22.60**	5
	1"	*aluminum*	***16-008A***	**61.95**	5

Dust Caps	Size	Material	Part #	Price/E	Opt Qty
	1/4"	*rubber*	***17-002***	**$3.50**	5
	3/8"	*rubber*	***17-003***	**4.05**	5
	1/2"	*rubber*	***17-004***	**4.30**	5
	3/4"	*rubber*	***17-006***	**9.45**	5
	1"	*rubber*	***17-008***	**9.55**	5
	1/4"	*aluminum*	***17-002A***	**12.80**	5
	3/8"	*aluminum*	***17-003A***	**14.30**	5
	1/2"	*aluminum*	***17-004A***	**18.80**	5
	3/4"	*aluminum*	***17-006A***	**25.15**	5
	1"	*aluminum*	***17-008A***	**69.40**	5

3000 Series Hydraulic Quick-Connect Fittings

The 3000 series interchanges with Parker 3000, Bruning IP 370 and Enerpac C 604. Threaded union locking system and precision ball-type check valves are designed for extreme high pressure applications such as hydraulic rams and pumps where low flow and pressures up to 10,000 PSI are encountered. Seals are polyurethane. See Hydraulic Profile Chart on page 629.

Couplers	Size	NPT Thread	PSI at 70°F	Material	Part #	Price/E	Pkg Qty
	1/4"	1/4" - 18 M	**10,000**	*steel*	***30-200***	**$36.00**	5
	3/8"	3/8" - 18 M	**10,000**	*steel*	***30-300***	**36.50**	5

Coupler	Size	NPT Thread	PSI at 70°F	Material	Part #	Price/E	Pkg Qty
	3/8"	3/8" - 18 F	**10,000**	*steel*	***30-300F***	**$41.40**	5

Plugs	Size	NPT Thread	PSI at 70°F	Material	Part #	Price/E	Pkg Qty
	1/4"	1/4" - 18	**10,000**	*steel*	***31-200***	**$20.85**	5
	3/8"	3/8" - 18	**10,000**	*steel*	***31-300***	**20.50**	5

Screw Type Dust Plugs	Size	Material	Part #	Price/E	Pkg Qty
	1/4"	*steel*	***30-200DP***	**$9.10**	5
	3/8"	*steel*	***30-300DP***	**8.50**	5

Screw Type Dust Caps	Size	Material	Part #	Price/E	Pkg Qty
	1/4"	*steel*	***31-200DC***	**$10.90**	5
	3/8"	*steel*	***31-300DC***	**10.75**	5

Agricultural Hydraulic Quick-Connect Fittings

The Agricultural Quick-Connect features ball style shut-off valves in both the coupler and the plug. The International Standard Organization (ISO) has adopted specifications regarding dimensions and interchangeability. Agricultural series couplers are used on construction equipment, farm implements and most other mobile equipment. Interchangeable with Pioneer 4000 series, Safeway Agricultural series and ISO5675. See Hydraulic Profile Chart on page 630.

FTP Fittings

Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/4"	1/4" - 18	**2500**	*steel*	***18-200*** [1]	**$25.00**	5
3/8"	3/8" - 18	**2500**	*steel*	***18-300*** [1]	**33.00**	5
1/2"	1/2" - 14	**2500**	*steel*	***18-400***	**24.90**	5
1/2"	3/4" - 14	**2500**	*steel*	***18-600***	**35.00**	5
3/4"	3/4" - 14	**2500**	*steel*	***18-660***	**69.30**	5
1"	1" - 11½	**2500**	*steel*	***18-800*** [1]	**85.70**	5

FTP Ball Valve Couplers



Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/4"	1/4" - 18	**2500**	*steel*	***19-200*** [1]	**$12.25**	10
3/8"	3/8" - 18	**2500**	*steel*	***19-300*** [1]	**16.45**	10
1/2"	1/2" - 14	**2500**	*steel*	***19-400***	**11.55**	10
1/2"	3/4" - 14	**2500**	*steel*	***19-600***	**18.25**	10
3/4"	3/4" - 14	**2500**	*steel*	***19-660***	**24.50**	10
1"	1" - 11½	**2500**	*steel*	***19-800*** [1]	**43.25**	10

FTP Ball Valve Plugs



[1] have a poppet valve with soft seat design

ORB Fittings

Size	ORB Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/2"	3/4" - 16	**2500**	*steel*	***18-415***	**$28.10**	5

ORB Ball Valve Coupler



Size	ORB Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/2"	3/4" - 16	**2500**	*steel*	***19-415***	**$13.55**	5

ORB Ball Valve Plug



Dust Plugs and Caps

Size	Material	Part #	Price/E	Opt Qty
1/4"	*rubber*	***18-002***	**$4.30**	10
3/8"	*rubber*	***18-003***	**9.20**	10
1/2"	*rubber*	***18-004*** [2]	**8.20**	10
3/4"	*rubber*	***18-006***	**9.15**	10
1"	*rubber*	***18-008***	**10.50**	10

Dust Plugs



18-004

[2] has chain design

Size	Material	Part #	Price/E	Opt Qty
1/4"	*rubber*	***19-002***	**$4.45**	10
3/8"	*rubber*	***19-003***	**5.10**	10
1/2"	*rubber*	***19-004***	**5.70**	10
3/4"	*rubber*	***19-006***	**12.75**	10
1"	*rubber*	***19-008***	**14.55**	10

Dust Caps



7800 Series Hydraulic Thread-to-Connect Fittings

The 7800 series interchanges with Aeroquip 5100 series, Parker 6100 series and Snap-Tite 78 series. Designed for applications requiring a coupling that can be connected under pressure with minimum spillage and air inclusion. Widely used on dump trailer wet-line hydraulic systems and oil field equipment. Not recommended for continuous hydraulic impulse applications. See Hydraulic Profile Chart on page 629.

Couplers



Size	NPT Thread	PSI at 70°F	Material: Body	Material: Nut	Part #	Price/E	Opt Qty
3/4"	3/4" - 14	**3000**	*brass*	*iron*	***78-600***	**$75.00**	5
1"	1" - 11½	**3000**	*brass*	*iron*	***78-800***	**92.00**	5
1-1/4"	1-1/4" - 11½	**2750**	*brass*	*iron*	***78-1000***	**168.00**	5
1-1/2"	1-1/2" - 11½	**2750**	*brass*	*iron*	***78-1200***	**200.00**	1

Plugs



Size	NPT Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
3/4"	3/4" - 14	**3000**	*brass*	***79-600***	**$53.00**	5
1"	1" - 11½	**3000**	*brass*	***79-800***	**57.00**	5
1-1/4"	1-1/4" - 11½	**2750**	*brass*	***79-1000***	**118.00**	5
1-1/2"	1-1/2" - 11½	**2750**	*brass*	***79-1200***	**200.00**	1

Flanges



Size	Material	Part #	Price/E	Opt Qty
3/4"	*steel*	***77-600***	**$4.50**	2
1"	*steel*	***77-800***	**6.00**	2
1-1/4"	*steel*	***77-1000***	**8.00**	2
1-1/2"	*steel*	***77-1200***	**10.00**	2

Screw Type Dust Plugs



Size	Material	Part #	Price/E	Opt Qty
3/4"	*brass*	***78-006***	**$17.70**	1
1"	*brass*	***78-008***	**19.50**	1
1-1/4"	*brass*	***78-010***	**28.00**	1
1-1/2"	*brass*	***78-012***	**50.00**	1

Screw Type Dust Caps



Size	Material	Part #	Price/E	Opt Qty
3/4"	*brass*	***79-006***	**$15.60**	1
1"	*brass*	***79-008***	**17.00**	1
1-1/4"	*brass*	***79-010***	**26.40**	1
1-1/2"	*brass*	***79-012***	**46.00**	1

WS Series Fittings

The WS series interchanges with Snap-Tite 75 series. Extensively used in oil field and off shore oil rig applications.

High Pressure

Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty	Couplers
3/4"	3/4" - 14	**5,000**	*steel*	***6WSF6***	**$136.00**	5	
1"	1" - 11½	**5,000**	*steel*	***8WSF8***	**204.00**	5	
1-1/4"	1-1/4" - 11½	**5,000**	*steel*	***10WSF10***	**345.00**	1	
1-1/2"	1-1/2" - 11½	**5,000**	*steel*	***12WSF12***	**510.00**	1	
2"	2" - 11½	**5,000**	*steel*	***16WSF16***	**730.00**	1	

Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty	Couplers
3/4"	3/4" - 14	**5,000**	*steel*	***WS6F6***	**$125.00**	5	
1"	1" - 11½	**5,000**	*steel*	***WS8F8***	**150.00**	5	
1-1/4"	1-1/4" - 11½	**5,000**	*steel*	***WS10F10***	**275.00**	1	
1-1/2"	1-1/2" - 11½	**5,000**	*steel*	***WS12F12***	**430.00**	1	
2"	2" - 11½	**5,000**	*steel*	***WS16F16***	**700.00**	1	

Blowout Prevention Safety

- fire tested and Lloyd's certified to 700°C (**1300°F**) in accordance with API 16D (Certificate #NAO 0601041/1)
- designed for hazardous area service where couplings are required to operate under fire conditions in an emergency
- Sleeve is cast using a unique process that provides better surface finishes, tighter tolerance control, and excellent repeatability.
- Blowout Prevention Couplings are individually marked with the BOP series designation and manufacturing date code.

Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty	Couplers
3/4"	3/4" - 14	**5,000**	*steel*	***6WSF6-BOP***	**$200.00**	5	
1"	1" - 11½	**5,000**	*steel*	***8WSF8-BOP***	**280.00**	5	
1-1/4"	1-1/4" - 11½	**5,000**	*steel*	***10WSF10-BOP***	**450.00**	1	
1-1/2"	1-1/2" - 11½	**5,000**	*steel*	***12WSF12-BOP***	**640.00**	1	
2"	2" - 11½	**5,000**	*steel*	***16WSF16-BOP***	**900.00**	1	

Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty	Plugs
3/4"	3/4" - 14	**5,000**	*steel*	***WS6F6-BOP***	**$155.00**	5	
1"	1" - 11½	**5,000**	*steel*	***WS8F8-BOP***	**165.00**	5	
1-1/4"	1-1/4" - 11½	**5,000**	*steel*	***WS10F10-BOP***	**330.00**	1	
1-1/2"	1-1/2" - 11½	**5,000**	*steel*	***WS12F12-BOP***	**500.00**	1	
2"	2" - 11½	**5,000**	*steel*	***WS16F16-BOP***	**840.00**	1	

Dust Plugs and Caps


Size	Material	Part #	Price/E	Opt Qty	Dust Plugs
3/4"	*aluminum*	***6WSDP-A***	**$39.00**	25	
1"	*aluminum*	***8WSDP-A***	**50.00**	10	
1-1/4"	*aluminum*	***10WSDP-A***	**70.00**	10	
1-1/2"	*aluminum*	***12WSDP-A***	**75.00**	5	
2"	*aluminum*	***16WSDP-A***	**125.00**	5	

Size	Material	Part #	Price/E	Opt Qty	Dust Caps
3/4"	*aluminum*	***WS6DC-A***	**$39.00**	25	
1"	*aluminum*	***WS8DC-A***	**50.00**	10	
1-1/4"	*aluminum*	***WS10DC-A***	**70.00**	10	
1-1/2"	*aluminum*	***WS12DC-A***	**75.00**	5	
2"	*aluminum*	***WS16DC-A***	**125.00**	5	

5600 Series Hydraulic Quick-Connect Fittings

The 5600 series is interchangeable with the Aeroquip 5600, Parker 6600, and ISO A interchange. The two-way check valves in the plug and socket automatically balance in flow position and provide instant shut off when disconnected. To connect, simply retract sleeve, insert plug, and release sleeve. Permits fast connection and disconnection of gas or fluid lines with minimal loss of media from either end. Non-valved, slotted valve and straight through units available on request. See Hydraulic Profile Chart on page 630.

Couplers	Size	NPT Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
	1/4"	1/8" - 27	**5000**	*steel*	***56-100***	**$37.50**	5
	1/4"	1/4" - 18	**5000**	*steel*	***56-200***	**30.25**	5
	3/8"	3/8" - 18	**4000**	*steel*	***56-300***	**36.60**	5
	1/2"	1/2" - 14	**4000**	*steel*	***56-400***	**38.20**	5
	1/2"	3/4" - 14	**4000**	*steel*	***56-600***	**53.20**	5
	3/4"	3/4" - 14	**4000**	*steel*	***56-660***	**66.80**	5
	1"	1" - 11½	**4000**	*steel*	***56-800***	**85.30**	5

Plugs	Size	NPT Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
	1/4"	1/8" - 27	**5000**	*steel*	***57-100***	**$12.75**	5
	1/4"	1/4" - 18	**5000**	*steel*	***57-200***	**13.10**	5
	3/8"	3/8" - 18	**4000**	*steel*	***57-300***	**17.75**	5
	1/2"	1/2" - 14	**4000**	*steel*	***57-400***	**16.25**	5
	1/2"	3/4" - 14	**4000**	*steel*	***57-600***	**31.30**	5
	3/4"	3/4" - 14	**4000**	*steel*	***57-660***	**36.30**	5
	1"	1" - 11½	**4000**	*steel*	***57-800***	**40.50**	5

Dust Plugs	Size	Material	Part #	Price/E	Opt Qty
	1/4"	*rubber*	***56-002***	**$4.90**	5
	3/8"	*rubber*	***56-003***	**5.25**	5
	1/2"	*rubber*	***56-004***	**5.05**	5
	3/4"	*rubber*	***56-006***	**11.90**	5
	1"	*rubber*	***56-008***	**14.00**	5

Dust Caps	Size	Material	Part #	Price/E	Opt Qty
	1/4"	*rubber*	***57-002***	**$4.90**	5
	3/8"	*rubber*	***57-003***	**5.25**	5
	1/2"	*rubber*	***57-004***	**5.50**	5
	3/4"	*rubber*	***57-006***	**11.90**	5
	1"	*rubber*	***57-008***	**13.90**	5

Flush Face Hydraulic Quick-Connect Fittings

Flush Face interchanges with Aeroquip FD89, Parker FE, Snap-tite 74, Faster FF and Holmbury Series A. Flush face valve design minimizes fluid loss resulting in a cleaner, safer work environment. Automatic, push-to-connect couplings provide high flow with low pressure drop assuring maximum hydraulic tool performance. To reduce the possibility of accidental disconnect, a sleeve lock safety feature requires turning the collar to unlock the coupling. Conforms to ISO16028 interchange standard. See Hydraulic Profile Chart on page 629.

FTP Fittings

Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty	**Couplers**
1/4"	1/4" - 18	**4575**	*steel*	***2HTF2***	**$64.00**	5	
3/8"	3/8" - 18	**4375**	*steel*	***3HTF3***	**66.00**	5	
3/8"	1/2" - 14	**4375**	*steel*	***3HTF4***	**66.00**	5	
1/2"	1/2" - 14	**4250**	*steel*	***4HTF4***	**80.00**	5	
1/2"	3/4" - 14	**4250**	*steel*	***4HTF6***	**85.00**	5	
5/8"	3/4" - 14	**3650**	*steel*	***5HTF6***	**115.00**	5	
3/4"	3/4" - 14	**3650**	*steel*	***6HTF6***	**180.00**	5	
1"	1" - 11½	**3650**	*steel*	***8HTF8***	**250.00**	5	



Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty	**Plugs**
1/4"	1/4" - 18	**4575**	*steel*	***HT2F2***	**$26.00**	5	
3/8"	3/8" - 18	**4375**	*steel*	***HT3F3***	**28.00**	5	
3/8"	1/2" - 14	**4375**	*steel*	***HT3F4***	**28.00**	5	
1/2"	1/2" - 14	**4250**	*steel*	***HT4F4***	**45.00**	5	
1/2"	3/4" - 14	**4250**	*steel*	***HT4F6***	**50.00**	5	
5/8"	3/4" - 14	**3650**	*steel*	***HT5F6***	**64.00**	5	
3/4"	3/4" - 14	**3650**	*steel*	***HT6F6***	**82.00**	5	
1"	1" - 11½	**3650**	*steel*	***HT8F8***	**155.00**	5	



SAE/ORB Fittings

Size	ORB Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty	**SAE/ORB Coupler**
1/2"	7/8" - 14	**4250**	*steel*	***4HTOF5***	**$85.00**	5	
1/2"	1-1/16" - 12	**4250**	*steel*	***4HTOF6***	**85.00**	--	



Size	ORB Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty	**SAE/ORB Plug**
1/2"	7/8" - 14	**4250**	*steel*	***HT4OF5***	**$50.00**	5	
1/2"	1-1/16" - 12	**4250**	*steel*	***HT4OF6***	**50.00**	--	



Dust Plugs and Caps

Size	Material	Part #	Price/E	Opt Qty	**Dust Plugs**
3/8"	*rubber*	***3HTDP***	**$7.70**	10	
1/2"	*rubber*	***4HTDP***	**10.20**	10	
5/8"	*rubber*	***5HTDP***	**12.00**	10	
3/4"	*rubber*	***6HTDP***	**12.90**	10	
1"	*rubber*	***8HTDP***	**14.80**	10	




Size	Material	Part #	Price/E	Opt Qty	**Dust Caps**
3/8"	*rubber*	***HT3DC***	**$7.70**	10	
1/2"	*rubber*	***HT4DC***	**10.20**	10	
5/8"	*rubber*	***HT5DC***	**12.00**	10	
3/4"	*rubber*	***HT6DC***	**12.90**	10	
1"	*rubber*	***HT8DC***	**14.80**	10	



VH Series Hydraulic Quick-Connect Fittings


General purpose hydraulic quick-connect provides superior flow characteristics with built-in reliability. Standard seal is Buna-N. VH Series interchanges with Snap-tite H Series. See Hydraulic Profile Chart on page 629.

Couplers



Size	NPT Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/4"	1/4" - 18	**6500**	*zinc plated steel*	***VHC200***	**$20.65**	5
3/8"	3/8" - 18	**4500**	*zinc plated steel*	***VHC300***	**28.17**	5
1/2"	1/2" - 14	**4000**	*zinc plated steel*	***VHC400***	**34.25**	5
3/4"	3/4" - 14	**3500**	*zinc plated steel*	***VHC600***	**53.00**	5
1"	1" - 11½	**2000**	*zinc plated steel*	***VHC800***	**82.35**	5
1-1/4"	1-1/4" - 11½	**1750**	*zinc plated steel*	***VHC1000***	**195.13**	1
1-1/2"	1-1/2" - 11½	**1500**	*zinc plated steel*	***VHC1200***	**269.83**	1
2"	2" - 11½	**1500**	*zinc plated steel*	***VHC1600***	**513.12**	1
1/4"	1/4" - 18	**2250**	*brass*	***VHC200B***	**24.31**	5
3/8"	3/8" - 18	**2250**	*brass*	***VHC300B***	**31.61**	5
1/2"	1/2" - 14	**2000**	*brass*	***VHC400B***	**46.31**	5

Plugs



Size	NPT Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/4"	1/4" - 18	**6500**	*zinc plated steel*	***VHN200***	**$14.15**	5
3/8"	3/8" - 18	**4500**	*zinc plated steel*	***VHN300***	**17.65**	5
1/2"	1/2" - 14	**4000**	*zinc plated steel*	***VHN400***	**21.10**	5
3/4"	3/4" - 14	**3500**	*zinc plated steel*	***VHN600***	**31.63**	5
1"	1" - 11½	**2000**	*zinc plated steel*	***VHN800***	**50.56**	5
1-1/4"	1-1/4" - 11½	**1750**	*zinc plated steel*	***VHN1000***	**158.46**	1
1-1/2"	1-1/2" - 11½	**1500**	*zinc plated steel*	***VHN1200***	**194.60**	1
2"	2" - 11½	**1500**	*zinc plated steel*	***VHN1600***	**370.96**	1
1/4"	1/4" - 18	**2250**	*brass*	***VHN200B***	**17.33**	5
3/8"	3/8" - 18	**2250**	*brass*	***VHN300B***	**24.31**	5
1/2"	1/2" - 14	**2000**	*brass*	***VHN400B***	**32.33**	5

Dust Plugs



Size	Material	Part #	Price/E	Opt Qty
1/4"	*rubber*	***VHCN002***	**$5.45**	10
3/8"	*rubber*	***VHC003***	**5.45**	10
1/2"	*rubber*	***VHC004***	**5.95**	10
3/4"	*rubber*	***VHC006***	**5.95**	10
1"	*rubber*	***VHC008***	**11.10**	10
1-1/4"	*aluminum*	***VHC010***	**65.75**	10
1-1/2"	*aluminum*	***VHC012***	**134.40**	10
2"	*aluminum*	***VHC016***	**229.00**	10

Dust Caps



Size	Material	Part #	Price/E	Opt Qty
1/4"	*rubber*	***VHCN002***	**$5.45**	10
3/8"	*rubber*	***VHN003***	**5.45**	10
1/2"	*rubber*	***VHN004***	**5.95**	10
3/4"	*rubber*	***VHN006***	**5.95**	10
1"	*rubber*	***VHN008***	**10.60**	10
1-1/4"	*aluminum*	***VHN010***	**81.60**	10
1-1/2"	*aluminum*	***VHN012***	**156.75**	10
2"	*aluminum*	***VHN016***	**197.10**	10

Hydraulic Water-Blast Quick Couplers

- plug mounted sleeve guard protects against accidental disconnection
- smooth bore full-flow design ensures maximum flow with minimal pressure drop
- Heavy duty knurled sleeve with locking pin provides maximum protection against brinneling and accidental disconnection.
- Steel body components maximize service life by resisting the effects of brinneling and internal erosion.

Couplers

Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/2"	3/8" - 18	**10000**	*steel*	***4EAF3***	**$105.00**	25
1/2"	1/2" - 14	**10000**	*steel*	***4EAF4***	**105.00**	25



Plugs

Size	NPTF Thread	PSI at 70°F	Material	Part #	Price/E	Opt Qty
1/2"	3/8" - 18	**10000**	*steel*	***EA4F3***	**$22.70**	25
1/2"	1/2" - 14	**10000**	*steel*	***EA4F4***	**28.40**	25




Hydraulic Suction and Return Line Hose Fittings

- designed and machined for hydraulic suction line applications using SAE100R4 hydraulic hose
- barbs provide easy assembly and maximum gripping action

Stems


male stem

Hose ID	Male NPTF	*Plated Steel* Part #	Price/E
3/4"	3/4"-14	***188-12***	**$9.75**
1"	1"-11½	***188-16***	**26.75**
1-1/4"	1-1/4"-11½	***188-20***	**50.85**
1-1/2"	1-1/2"-11½	***188-24***	**62.10**
2"	2"-11½	***188-32***	**95.70**



female SAE (JIC) 37° swivel stem

Hose ID	Female SAE	*Plated Steel* Part #	Price/E
3/4"	1-1/16"-12	***688-12***	**$13.65**
1"	1-5/16"-12	***688-16***	**31.65**
1-1/4"	1-5/8"-12	***688-20***	**68.15**
1-1/2"	1-7/8"-12	***688-24***	**74.10**
2"	2-1/2"-12	***688-32***	**128.70**




Note: return line clamps must be used with these fittings.

Clamps

- measure hose OD accurately before ordering clamps
- Torque values for clamps are based on dry bolts.
  The use of lubricant on bolts will adversely effect clamp performance. SAFETY ALERT
- Consult Dixon when using double bolt clamps on helical wire hose.

without saddles

Hose ID	Hose OD from	Hose OD to	*Zinc Plated Iron* Part #	Price/E	Opt Qty	Torque in ft. lbs.
3/4"	1-8/64"	1-12/64"	***J48***	**$6.45**	100	15
1"	1-40/64"	1-52/64"	***DL14***	**11.95**	25	40
1-1/4"	1-48/64"	2-3/64"	***DL20***	**11.65**	25	27
1-1/2"	2-7/64"	2-19/64"	***DL24***[1]	**11.65**	25	27
2"	2-20/64"	2-40/64"	***DL32***[1]	**12.90**	25	40



[1] made from investment cast carbon steel

Hydraulic Hose Couplings

Stems



NPTF Size	*Plated Steel* Part #	Price/E
3/8"	***MSC***	**$5.65**
1/2"	***HY4***	**13.55**
3/4"	***MS6***	**9.15**
1"	***HY8***	**18.70**



NPTF Size	*Plated Iron* Part #	Price/E
1-1/4"	***HY10***	**$32.60**
1-1/2"	***HY12***	**37.00**
2"	***HY16***	**44.15**

Note: stems have a collar behind the hex to engage fingers

Clamps




- for use <u>only</u> on 1 wire hydraulic hoses

Size	Hose OD from	Hose OD to	*Plated Iron* Part #	Price/E	Torque in ft. lbs.
3/8"	48/64"	50/64"	***HD1-3***	**$14.90**	12
1/2"	56/64"	60/64"	***HD1-4***	**16.50**	18
3/4"	1-10/64"	1-14/64"	***HD1-6***	**20.20**	18
1"	1-29/64"	1-35/64"	***HD1-8***	**24.35**	36



- for use <u>only</u> on 2 wire hydraulic hoses

Size	Hose OD from	Hose OD to	*Plated Iron* Part #	Price/E	Torque in ft. lbs.
3/8"	52/64"	56/64"	***HD2-3***	**$12.10**	12
1/2"	60/64"	1"	***HD2-4***	**16.80**	18
3/4"	1-14/64"	1-18/64"	***HD2-6***	**17.35**	18
1"	1-33/64"	1-39/64"	***HD2-8***	**27.25**	36



- for use on hydraulic hose with 1, 2 or 4 wire braids or spiral plies

Size	Hose OD from	Hose OD to	*Plated Iron* Part #	Price/E	Torque in ft. lbs.
1-1/4"	1-48/64"	2"	***HD2-9***	**$38.10**	64
1-1/4"	2"	2-8/64"	***HD2-10***	**34.75**	64
1-1/2"	2-12/64"	2-18/64"	***HD2-11***	**34.75**	64
1-1/2"	2-16/64"	2-20/64"	***HD2-12***	**34.75**	64
2"	2-36/64"	2-48/64"	***HD2-15***	**50.40**	90
2"	2-48/64"	2-58/64"	***HD2-16***	**51.40**	90



SAFETY ALERT

- for use <u>only</u> on 1 or 2 wire hydraulic hoses
- This clamp *should not* be used on 4 or 6 wire hydraulic hose even when hose falls within recommended ranges.

Size	Hose OD from	Hose OD to	*Plated Iron* Part #	Price/E	Torque in ft. lbs.
3/8"	50/64"	52/64"	***HRC-037***	**$13.00**	18
1/2"	57/64"	1"	***HRC-050***	**19.20**	18
3/4"	1-16/64"	1-20/64"	***HRC-075***	**16.65**	36
1"	1-37/64"	1-41/64"	***HRC-100***	**19.15**	64
1-1/4"	1-54/64"	1-62/64"	***HRC-125***	**31.90**	90
1-1/2"	2-10/64"	2-18/64"	***HRC-150***	**34.50**	90
2"	2-43/64"	2-52/64"	***HRC-200***	**42.50**	90

Hydraulic Split Flange Adapters

Flange adapters for hydraulic systems make installation of components easier, especially in applications with limited space. Flanges are constructed with an O-ring seal to eliminate leakage. Flange adapters vary in size and are divided into Code 61 or Code 62. Code 61 flange adapters are generally used in applications up to **3,000 PSI** at 70°F while Code 62 flange adapters are used in applications up to **6,000 PSI** at 70°F.

Pressure Ratings of SAE Flanges

Code 61 SAE J518-1 / ISO 6162-1

Dash Size	Inch Size	Max Working Pressure		Fastener Torque Value	
		PSI	MPa	Grade 8 UNC (lb-ft)	Grade 10.9 Metric (N-m)
-8	½"	5000	35	24	32
-12	¾"	5000	35	44	70
-16	1"	4600	32	44	70
-20	1¼"	4000	28	68	70
-24	1½"	3000	21	111	130
-32	2"	3000	21	111	130
-40	2½"	2500	17.5	111	130
-48	3"	2300	16	218	295
-56	3½"	500	3.5	218	295
-64	4"	500	3.5	218	295
-80	5"	500	3.5	218	295

Code 62 SAE J518-2 / ISO 6162-2

Dash Size	Inch Size	Max Working Pressure		Fastener Torque Value	
		PSI	MPa	Grade 8 UNC (lb-ft)	Grade 10.9 Metric (N-m)
-8	½"	6000	40	24	32
-12	¾"	6000	40	44	70
-16	1"	6000	40	68	130
-20	1¼"	6000	40	111	130
-24	1½"	6000	40	218	295
-32	2"	6000	40	332	550

Hydraulic 4-Bolt Flanges

- code 61 - standard pressure
- code 62 - high pressure
- bolt kit with Buna O-ring included
- available in 316L stainless

NPTF port

Port Size	Pad Size	NPTF Thread	Code 61 *Carbon Steel*				Code 62 *Carbon Steel*			
			O-ring Part #	Price/E	Flat Face Part #	Price/E	O-ring Part #	Price/E	Flat Face Part #	Price/E
½"	½"	½"-14	***W43-8-8-U***	**$41.00**	***W104-8-8***	**$51.35**	***W44-8-8-U***	**$63.60**	***W45-8-8***	**$54.40**
¾"	¾"	¾"-14	***W43-12-12-U***	**33.50**	***W104-12-12***	**31.55**	***W44-12-12-U***	**68.35**	***W45-12-12***	**57.60**
1"	1"	1"-11½	***W43-16-16-U***	**37.20**	***W104-16-16***	**34.10**	***W44-16-16-U***	**79.05**	***W45-16-16***	**63.75**
1¼"	1¼"	1¼"-11½	***W43-20-20-U***	**42.00**	***W104-20-20***	**35.55**	***W44-20-20-U***	**99.80**	***W45-20-20***	**82.15**
1½"	1½"	1½"-11½	***W43-24-24-U***	**50.70**	***W104-24-24***	**40.00**	***W44-24-24-U***	**136.90**	***W45-24-24***	**109.70**
2"	2"	2"-11½	***W43-32-32-U***	**66.35**	***W104-32-32***	**55.45**	***W44-32-32-U***	**216.60**	***W45-32-32***	**165.95**
2½"	2½"	2½"-8	***W43-40-40-U***	**92.05**	***W104-40-40***	**87.45**	---	---	---	---
3"	3"	3"-8	***W43-48-48-U***	**136.10**	***W104-48-48***	**120.50**	---	---	---	---



SAE port

Port Size	Pad Size	UN / UNF-2B Thread	Code 61 *Carbon Steel*				Code 62 *Carbon Steel*			
			O-Ring Part #	Price/E	Flat Face Part #	Price/E	O-Ring Part #	Price/E	Flat Face Part #	Price/E
½"	½"	¾"-16	***W46-8-8-U***	**$56.00**	***W106-8-8***	**$51.35**	***W48-8-8-U***	**$63.60**	***W49-8-8***	**$54.40**
¾"	¾"	1-1/16"-12	***W46-12-12-U***	**34.80**	***W106-12-12***	**31.55**	***W48-12-12-U***	**68.35**	***W49-12-12***	**57.60**
1"	1"	1-5/16"-12	***W46-16-16-U***	**35.65**	***W106-16-16***	**34.10**	***W48-16-16-U***	**79.05**	***W49-16-16***	**63.75**
1¼"	1¼"	1-5/8"-12	***W46-20-20-U***	**44.45**	***W106-20-20***	**35.50**	***W48-20-20-U***	**99.80**	***W49-20-20***	**82.15**
1½"	1½"	1-7/8"-12	***W46-24-24-U***	**54.40**	***W106-24-24***	**49.05**	***W48-24-24-U***	**136.90**	***W49-24-24***	**109.70**
2"	2"	2-1/2"-12	***W46-32-32-U*** *	**173.50**	***W106-32-32*** *	**166.75**	***W48-32-32-U***	**216.60**	***W49-32-32***	**165.95**



* 500 PSI maximum for *W46-32-32* and *W106-32-32*

pipe socket weld

Pipe Size	Pad Size	Code 61 *Carbon Steel*				Code 62 *Carbon Steel*			
		O-Ring Part #	Price/E	Flat Face Part #	Price/E	O-Ring Part #	Price/E	Flat Face Part #	Price/E
½"	½"	***W4-8-8-U***	**$41.00**	***W61-8-8***	**$31.00**	***W59-8-8-U***	**$48.05**	***W60-8-8***	**$41.05**
¾"	¾"	***W4-12-12-U***	**37.95**	***W61-12-12***	**28.55**	***W59-12-12-U***	**53.20**	***W60-12-12***	**45.60**
1"	1"	***W4-16-16-U***	**39.35**	***W61-16-16***	**30.40**	***W59-16-16-U***	**67.80**	***W60-16-16***	**56.00**
1¼"	1¼"	***W4-20-20-U***	**46.50**	***W61-20-20***	**34.50**	***W59-20-20-U***	**83.70**	***W60-20-20***	**70.00**
1½"	1½"	***W4-24-24-U***	**59.15**	***W61-24-24***	**46.70**	***W59-24-24-U***	**110.90**	***W60-24-24***	**90.35**
2"	2"	***W4-32-32-U***	**87.80**	***W61-32-32***	**72.20**	***W59-32-32-U***	**168.50**	***W60-32-32***	**124.10**
2½"	2½"	***W4-40-40-U***	**120.90**	***W61-40-40***	**101.85**	***W59-40-40-U***	**394.50**	***W60-40-40***	**315.10**
3"	3"	***W4-48-48-U***	**141.50**	***W61-48-48***	**111.00**	***W59-48-48-U***	**657.85**	***W60-48-48***	**520.10**



Hydraulic Split Flange Kits

- for tube, hose end and split flange adapter connections
- kits include 2 split flange halves, 4 hex head screws and lockwashers, 1 Buna O-ring
- silver trivalent finish for high corrosion resistance
- available in forged 316L stainless



Flange Size	**Code 61** *Forged Carbon Steel*		**Code 62** *Forged Carbon Steel*	
	Part #	Price/E	Part #	Price/E
½"	***8SFO***	**$16.55**	***8SFXO***	**$26.55**
¾"	***12SFO***	**12.30**	***12SFXO***	**22.80**
1"	***16SFO***	**13.45**	***16SFXO***	**26.55**
1¼"	***20SFO***	**16.95**	***20SFXO***	**37.10**
1½"	***24SFO***	**22.50**	***24SFXO***	**54.20**
2"	***32SFO***	**24.25**	***32SFXO***	**91.70**
2½"	***40SFO***	**39.00**	**---**	**---**
3"	***48SFO***	**65.50**	**---**	**---**

SAE Hydraulic Adapters

SAE C61 or C62 x male JIC



Thread	Tube OD	Flange Size	**Code 61** *Carbon Steel*		**Code 62** *Carbon Steel*	
			Part #	Price/E	Part #	Price/E
3/4"-16	½"	½"	***300-8-8***	**$16.15**	**---**	**---**
3/4"-16	½"	¾"	***300-8-12***	**26.65**	**---**	**---**
1-1/16"-12	¾"	¾"	***300-12-12***	**19.30**	***600-12-12***	**$25.75**
1-5/16"-12	1"	¾"	***300-16-12***	**21.00**	***600-16-12***	**29.05**
1-1/16"-12	¾"	1"	***300-12-16***	**21.95**	***600-12-16***	**35.70**
1-5/16"-12	1"	1"	***300-16-16***	**23.15**	***600-16-16***	**30.25**
1-5/8"-12	1¼"	1"	***300-20-16***	**25.40**	***600-20-16***	**42.20**
1-5/16"-12	1"	1¼"	***300-16-20***	**26.25**	***600-16-20***	**37.10**
1-5/8"-12	1¼"	1¼"	***300-20-20***	**28.45**	***600-20-20***	**36.40**
1-7/8"-12	1½"	1¼"	***300-24-20***	**35.05**	***600-24-20***	**45.10**
1-5/8"-12	1¼"	1½"	***300-20-24***	**45.25**	***600-20-24***	**54.00**
1-7/8"-12	1½"	1½"	***300-24-24***	**33.25**	***600-24-24***	**46.50**
2-1/2"-12	2"	1½"	***300-32-24***	**66.25**	***600-32-24***	**62.30**
1-7/8"-12	1½"	2"	***300-24-32***	**55.55**	***600-24-32***	**74.30**
2-1/2"-12	2"	2"	***300-32-32***	**51.85**	***600-32-32***	**74.30**

90° SAE C61 or C62 x male JIC



Thread	Tube OD	Flange Size	**Code 61** *Carbon Steel*		**Code 62** *Carbon Steel*	
			Part #	Price/E	Part #	Price/E
3/4"-16	½"	¾"	***390-8-12***	**$28.75**	**---**	**--**
1-1/16"-12	¾"	¾"	***390-12-12***	**22.30**	***690-12-12***	**$34.15**
1-5/16"-12	1"	¾"	***390-16-12***	**30.80**	***690-16-12***	**40.85**
1-1/16"-12	¾"	1"	***390-12-16***	**31.30**	***690-12-16***	**45.95**
1-5/16"-12	1"	1"	***390-16-16***	**28.50**	***690-16-16***	**37.90**
1-5/8"-12	1¼"	1"	***390-20-16***	**35.35**	***690-20-16***	**43.65**
1-5/16"-12	1"	1¼"	***390-16-20***	**37.00**	***690-16-20***	**51.65**
1-5/8"-12	1¼"	1¼"	***390-20-20***	**38.50**	***690-20-20***	**46.95**
1-5/8"-12	1¼"	1½"	***390-20-24***	**52.25**	***690-20-24***	**68.45**
1-7/8"-12	1½"	1½"	***390-24-24***	**48.65**	***690-24-24***	**64.85**
2-1/2"-12	2"	1½"	***390-32-24***	**66.45**	***690-32-24***	**75.40**
1-7/8"-12	1½"	2"	***390-24-32***	**89.75**	***690-24-32***	**110.70**
2-1/2"-12	2"	2"	***390-32-32***	**88.00**	***690-32-32***	**110.85**

45° SAE C61 or C62 x male JIC



Thread	Tube OD	Flange Size	**Code 61** *Carbon Steel*		**Code 62** *Carbon Steel*	
			Part #	Price/E	Part #	Price/E
1-1/16"-12	¾"	¾"	***340-12-12***	**$23.10**	***640-12-12***	**$33.50**
1-5/16"-12	1"	1"	***340-16-16***	**27.00**	***640-16-16***	**40.35**
1-5/8"-12	1¼"	1¼"	***340-20-20***	**35.40**	***640-20-20***	**45.60**
1-7/8"-12	1½"	1½"	***340-24-24***	**50.50**	***640-24-24***	**58.60**
2-1/2"-12	2"	2"	***340-32-32***	**86.35**	***640-32-32***	**145.65**

SAE O-Ring Fittings

O-ring boss / male pipe adapters

Male SAE O-Ring Boss	Male NPTF Pipe Adapter	*Carbon Steel* Part #	Price/E
7/16"-20	1/4"-18	***6401-4-4***	**$1.85**
9/16"-18	1/4"-18	***6401-6-4***	**1.90**
9/16"-18	3/8"-18	***6401-6-6***	**2.30**
9/16"-18	1/2"-14	***6401-6-8***	**4.25**
3/4"-16	3/8"-18	***6401-8-6***	**2.85**
3/4"-16	1/2"-14	***6401-8-8***	**2.80**
7/8"-14	1/2"-14	***6401-10-8***	**3.25**
1-1/16"-12	3/4"-14	***6401-12-12***	**5.45**
1-5/16"-12	1"-11½	***6401-16-16***	**9.25**



adjustable O-ring unions

Male O-Ring Boss	Adjustable O-ring Boss	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***6403-4***	**$2.55**
9/16"-18	9/16"-18	***6403-6***	**3.55**
3/4"-16	3/4"-16	***6403-8***	**4.45**
7/8"-14	7/8"-14	***6403-10***	**5.25**
1-1/16"-12	1-1/16"-12	***6403-12***	**9.75**
1-5/16"-12	1-5/16"-12	***6403-16***	**10.80**



- reference SAE 090109
- uses Allen wrench


hollow hex O-ring plugs

Male SAE O-Ring Boss	*Carbon Steel* Part #	Price/E
7/16"-20	***6408HHP-4***	**$0.80**
9/16"-18	***6408HHP-6***	**1.05**
3/4"-16	***6408HHP-8***	**1.70**
7/8"-14	***6408HHP-10***	**1.85**
1-1/16"-12	***6408HHP-12***	**2.45**
1-5/16"-12	***6408HHP-16***	**3.70**
1-5/8"-12	***6408HHP-20***	**7.55**
1-7/8"-12	***6408HHP-24***	**10.85**
2-1/2"-12	***6408HHP-32***	**18.90**




Flat Face Fittings

2010 NEW




male connectors

Male Flat Face	Male NPTF	Carbon Steel Part #	Price/E
9/16"-18	1/4"-18	***FS2404-4-4***	**$1.90**
11/16"-16	3/8"-18	***FS2404-6-6***	**2.15**
13/16"-16	1/2"-14	***FS2404-8-8***	**2.95**
1 3/16"-12	3/4"-14	***FS2404-12-12***	**7.75**
1 7/16"-12	1"-11 1/2	***FS2404-16-16***	**8.35**



male unions

Male Flat Face	Carbon Steel Part #	Price/E
9/16"-18	***FS2403-4***	**$1.80**
11/16"-16	***FS2403-6***	**2.70**
13/16"-16	***FS2403-8***	**3.50**
1"-14	***FS2403-10***	**4.70**
1 3/16"-12	***FS2403-12***	**6.30**
1 7/16"-12	***FS2403-16***	**9.00**



male flat face x male SAE O-Ring Boss connectors

Male Flat Face	Male SAE O-Ring Boss	Carbon Steel Part #	Price/E
9/16"-18	7/16"-20	***FS6400-4-4***	**$1.85**
11/16"-16	9/16"-18	***FS6400-6-6***	**2.25**
13/16"-16	3/4"-16	***FS6400-8-8***	**2.80**
1"-14	7/8"-14	***FS6400-10-10***	**3.60**
1 3/16"-12	1 1/16"-12	***FS6400-12-12***	**5.10**
1 7/16"-12	1 5/16"-12	***FS6400-16-16***	**7.45**



flat face male elbows

Male Flat Face	Male NPTF	Carbon Steel Part #	Price/E
9/16"-18	1/4"-18	***FS2501-4-4***	**$3.15**
11/16"-16	3/8"-18	***FS2501-6-6***	**4.35**
13/16"-16	1/2"-14	***FS2501-8-8***	**5.90**
1 3/16"-12	3/4"-14	***FS2501-12-12***	**9.50**
1 7/16"-12	1"-11 1/2	***FS2501-16-16***	**15.85**



male flat face x female flat face swivel nut elbows

Male Flat Face	Female Flat Face	Carbon Steel Part #	Price/E
9/16"-18	9/16"-18	***FS6500-4-4***	**$7.00**
11/16"-16	11/16"-16	***FS6500-6-6***	**8.75**
13/16"-16	13/16"-16	***FS6500-8-8***	**10.85**
1"-14	1"-14	***FS6500-10-10***	**13.45**
1 3/16"-12	1 3/16"-12	***FS6500-12-12***	**14.50**
1 7/16"-12	1 7/16"-12	***FS6500-16-16***	**31.75**

Flat Face Fittings

2010 NEW

male flat face x male SAE O-Ring Boss Elbows



Male Flat Face	Male SAE O-Ring Boss	Carbon Steel Part #	Price/E
9/16"-18	7/16"-20	***FS6801-4-4***	**$4.10**
11/16"-16	9/16"-18	***FS6801-6-6***	**5.25**
13/16"-16	3/4"-16	***FS6801-8-8***	**6.00**
1"-14	7/8"-14	***FS6801-10-10***	**9.55**
1 3/16"-12	1 1/16"-12	***FS6801-12-12***	**12.75**
1 7/16"-12	1 5/16"-12	***FS6801-16-16***	**18.55**

male flat face x male flat face x male flat face union tees



Male Flat Face	Male Flat Face	Male Flat Face	Carbon Steel Part #	Price/E
9/16"-18	9/16"-18	9/16"-18	***FS2603-4***	**$5.50**
11/16"-16	11/16"-16	11/16"-16	***FS2603-6***	**7.40**
13/16"-16	13/16"-16	13/16"-16	***FS2603-8***	**7.55**
1"-14	1"-14	1"-14	***FS2603-10***	**12.45**
1 3/16"-12	1 3/16"-12	1 3/16"-12	***FS2603-12***	**16.00**
1 7/16"-12	1 7/16"-12	1 7/16"-12	***FS2603-16***	**25.05**

male flat face x female flat face swivel x male flat face run tees



Male Flat Face	Female Flat Face Swivel	Male Flat Face	Carbon Steel Part #	Price/E
9/16"-18	9/16"-18	9/16"-18	***FS6602-4***	**$7.40**
11/16"-16	11/16"-16	11/16"-16	***FS6602-6***	**9.75**
13/16"-16	13/16"-16	13/16"-16	***FS6602-8***	**10.55**
1"-14	1"-14	1"-14	***FS6602-10***	**17.00**
1 3/16"-12	1 3/16"-12	1 3/16"-12	***FS6602-12***	**22.00**
1 7/16"-12	1 7/16"-12	1 7/16"-12	***FS6602-16***	**32.55**

J Hydraulic

flat face caps



Female Flat Face	Carbon Steel Part #	Price/E
9/16"-18	***FS304C-4***	**$1.80**
11/16"-16	***FS304C-6***	**2.25**
13/16"-16	***FS304C-8***	**2.50**
1"-14	***FS304C-10***	**3.40**
1 3/16"-12	***FS304C-12***	**4.95**
1 7/16"-12	***FS304C-16***	**6.75**

flat face plugs



Male Flat Face	Carbon Steel Part #	Price/E
9/16"-18	***FS2408-4***	**$1.55**
11/16"-16	***FS2408-6***	**1.65**
13/16"-16	***FS2408-8***	**2.05**
1"-14	***FS2408-10***	**2.85**
1 3/16"-12	***FS2408-12***	**4.20**
1 7/16"-12	***FS2408-16***	**6.55**

SAE O-Ring Fittings

O-Ring to female pipe adapters



Male SAE O-Ring Boss	Female NPTF Pipe	Carbon Steel Part #	Price/E
7/16"-20	1/8"-27	***6405-4-2***	**$2.15**
7/16"-20	1/4"-18	***6405-4-4***	**2.80**
7/16"-20	3/8"-18	***6405-4-6***	**2.55**
9/16"-18	1/4"-18	***6405-6-4***	**2.20**
9/16"-18	3/8"-18	***6405-6-6***	**3.05**
9/16"-18	1/2"-14	***6405-6-8***	**5.90**
3/4"-16	3/8"-18	***6405-8-6***	**3.05**
3/4"-16	1/2"-14	***6405-8-8***	**3.95**
7/8"-14	3/4"-14	***6405-10-12***	**7.10**
7/8"-14	1/2"-14	***6405-10-8***	**3.90**
1-1/16"-12	3/4"-14	***6405-12-12***	**6.10**
1-1/16"-12	1"-11½	***6405-12-16***	**6.90**
1-1/16"-12	1/2"-14	***6405-12-8***	**5.90**
1-5/16"-12	3/4"-14	***6405-16-12***	**6.70**
1-5/16"-12	1"-11½	***6405-16-16***	**8.40**
1-5/16"-12	1-1/4"-11½	***6405-16-20***	**17.70**
1-5/8"-12	1"-11½	***6405-20-16***	**14.90**
1-5/8"-12	1-1/4"-11½	***6405-20-20***	**15.85**

O-Ring port reducers



Male SAE O-Ring Boss	Female O-Ring Port	Carbon Steel Part #	Price/E
9/16"-18	7/16"-20	***6410-6-4***	**$2.35**
9/16"-18	3/4"-16	***6410-6-8***	**3.90**
3/4"-16	7/8"-14	***6410-8-10***	**3.90**
3/4"-16	9/16"-18	***6410-8-6***	**2.70**
7/8"-14	1-1/16"-12	***6410-10-12***	**6.75**
7/8"-14	3/4"-16	***6410-10-8***	**3.80**
1-1/16"-12	1-5/16"-12	***6410-12-16***	**12.50**

J Hydraulic

Hydraulic Male Pipe Plugs

pipe thread



Thread Size	Part #	Price/E
1/8"-27	***1251-02H***	**$0.45**
1/4"-18	***1251-04H***	**0.80**
3/8"-18	***1251-06H***	**1.40**
1/2"-14	***1251-08H***	**2.30**
3/4"-14	***1251-12H***	**3.60**
1"-11½	***1251-16H***	**6.65**
1-1/4"-11½	***1251-20H***	**7.85**

JIC screw thread



Thread Size	Part #	Price/E
1/8"-27	***1254-02H***	**$1.45**
7/16"-20	***1254-04H***	**1.10**
9/16"-18	***1254-06H***	**1.15**
3/4"-16	***1254-08H***	**1.30**
7/8"-14	***1254-10H***	**2.60**
1-1/16"-12	***1254-12H***	**2.70**
1-5/16"-12	***1254-16H***	**3.75**
1-1/4"-11½	***1254-20H***	**6.40**

SAE O-ring boss thread



Thread Size	Part #	Price/E
7/16"-20	***1255-04H***	**$0.95**
9/16"-18	***1255-06H***	**1.05**
3/4"-16	***1255-08H***	**1.55**
7/8"-14	***1255-10H***	**1.95**
1-1/16"-12	***1255-12H***	**2.75**
1-5/16"-12	***1255-16H***	**3.90**
1-5/8"-12	***1255-20H***	**6.65**
1-7/8"-12	***1255-24H***	**11.50**
2-1/2"-12	***1255-32H***	**30.00**

Hydraulic Pipe Swivel Adapters

These common hose adapters feature female straight thread (NPSM) swivels which seal by means of a 30° seat. The male pipe must have a 30° chamfer in order to seal.

- Hydraulic pipe swivel adapters are designed to prevent hose stress due to twisting during assembly.
- compact design provides ease of assembly in confining areas
- female NPSM swivel seals on a 30° seat
- male NPTF must have a 30° chamfer to seal


male x female swivel nut

Male NPTF	Female NPSM	*Zinc Plated Steel*	
		Part #	Price/E
1/8"-27	1/8"-27	***1404-2-2***	**$2.40**
1/8"-27	1/4"-18	***1404-2-4***	**2.90**
1/4"-18	1/4"-18	***1404-4-4***	**2.75**
1/4"-18	3/8"-18	***1404-4-6***	**3.55**
3/8"-18	1/4"-18	***1404-6-4***	**3.60**
3/8"-18	3/8"-18	***1404-6-6***	**3.60**
3/8"-18	1/2"-14	***1404-6-8***	**4.65**
1/2"-14	3/8"-18	***1404-8-6***	**4.60**
1/2"-14	1/2"-14	***1404-8-8***	**4.50**
1/2"-14	3/4"-14	***1404-8-12***	**8.50**
3/4"-14	1/2"-14	***1404-12-8***	**8.00**
3/4"-14	3/4"-14	***1404-12-12***	**8.05**
1"-11½	1"-11½	***1404-16-16***	**10.90**
1-1/4"-11½	1-1/4"-11½	***1404-20-20***	**22.05**
1-1/2"-11½	1-1/2"-11½	***1404-24-24***	**36.10**
2"-11½	2"-11½	***1404-32-32***	**51.10**



female x female swivel nut

Female NPTF	Female NPSM	*Zinc Plated Steel*	
		Part #	Price/E
1/8"-27	1/8"-27	***1405-2-2***	**$3.25**
1/4"-18	1/4"-18	***1405-4-4***	**3.55**
3/8"-18	1/4"-18	***1405-6-4***	**4.60**
3/8"-18	3/8"-18	***1405-6-6***	**5.25**
3/8"-18	1/2"-14	***1405-6-8***	**5.50**
1/2"-14	1/2"-14	***1405-8-8***	**5.60**
3/4"-14	1/2"-14	***1405-12-8***	**7.15**
3/4"-14	3/4"-14	***1405-12-12***	**9.95**
1"-11½	1"-11½	***1405-16-16***	**15.45**
1-1/4"-11½	1-1/4"-11½	***1405-20-20***	**25.55**
1-1/2"-11½	1-1/2"-11½	***1405-24-24***	**25.95**
2"-11½	2"-11½	***1405-32-32***	**68.15**



45° male x female swivel nut

Male NPTF	Female NPSM	*Zinc Plated Steel*	
		Part #	Price/E
1/4"-18	1/4"-18	***1503-4-4***	**$4.25**
3/8"-18	3/8"-18	***1503-6-6***	**6.15**
1/2"-14	1/2"-14	***1503-8-8***	**8.15**
3/4"-14	3/4"-14	***1503-12-12***	**9.85**
1"-11½	1"-11½	***1503-16-16***	**15.90**



Hydraulic Pipe Swivel Adapters



90° male x female swivel nut

Male NPTF	Female NPSM	*Zinc Plated Steel* Part #	Price/E
1/8"-27	1/8"-27	***1501-2-2***	**$3.75**
1/4"-18	1/4"-18	***1501-4-4***	**4.20**
1/4"-18	3/8"-18	***1501-4-6***	**5.70**
3/8"-18	1/4"-18	***1501-6-4***	**6.10**
3/8"-18	3/8"-18	***1501-6-6***	**6.30**
3/8"-18	1/2"-14	***1501-6-8***	**6.90**
1/2"-14	3/8"-18	***1501-8-6***	**6.20**
1/2"-14	1/2"-14	***1501-8-8***	**7.80**
1/2"-14	3/4"-14	***1501-8-12***	**10.80**
3/4"-14	1/2"-14	***1501-12-8***	**10.85**
3/4"-14	3/4"-14	***1501-12-12***	**13.05**
3/4"-14	1"-11½	***1501-12-16***	**20.00**
1"-11½	3/4"-14	***1501-16-12***	**19.30**
1"-11½	1"-11½	***1501-16-16***	**17.15**
1"-11½	1-1/4"-11½	***1501-16-20***	**35.45**
1-1/4"-11½	1-1/4"-11½	***1501-20-20***	**32.20**



90° female x female swivel nut

Female NPTF	Female NPSM	*Zinc Plated Steel* Part #	Price/E
1/4"-18	1/4"-18	***1502-4-4***	**$5.85**
3/8"-18	3/8"-18	***1502-6-6***	**7.05**
1/2"-14	1/2"-14	***1502-8-8***	**9.75**
3/4"-14	3/4"-14	***1502-12-12***	**11.75**
1"-11½	1"-11½	***1502-16-16***	**20.35**



90° O-Ring swivel adapters

Male SAE O-Ring Boss	Female NPSM Swivel	*Carbon Steel* Part #	Price/E
7/16"-20	1/4"-18	***6901-4-4***	**$4.90**
7/16"-20	3/8"-18	***6901-4-6***	**7.35**
9/16"-18	1/4"-18	***6901-6-4***	**5.55**
9/16"-18	3/8"-18	***6901-6-6***	**5.95**
9/16"-18	1/2"-14	***6901-6-8***	**8.70**
3/4"-16	3/4"-14	***6901-8-12***	**13.25**
3/4"-16	3/8"-18	***6901-8-6***	**7.05**
3/4"-16	1/2"-14	***6901-8-8***	**7.80**
7/8"-14	3/4"-14	***6901-10-12***	**15.70**
7/8"-14	1/2"-14	***6901-10-8***	**9.05**
1-1/16"-12	3/4"-14	***6901-12-12***	**13.75**
1-1/16"-12	1"-11½	***6901-12-16***	**18.70**
1-1/16"-12	1/2"-14	***6901-12-8***	**12.60**
1-5/16"-12	3/4"-14	***6901-16-12***	**20.90**
1-5/16"-12	1"-11½	***6901-16-16***	**19.60**
1-5/16"-12	1-1/4"-11½	***6901-16-20***	**34.90**
1-5/8"-12	1-1/4"-11½	***6901-20-20***	**37.60**

Hydraulic Pipe Fittings

male x male

SAE Screw Thread	SAE Screw Thread	*Zinc Plated Steel* Part #	Price/E
7/16"-20	7/16"-20	***1204-04-04***	**$1.15**
9/16"-18	9/16"-18	***1204-06-06***	**1.50**
3/4"-16	7/16"-20	***1204-08-04***	**2.80**
3/4"-16	3/4"-16	***1204-08-08***	**2.20**
7/8"-14	3/4"-14	***1204-10-08***	**3.50**
7/8"-14	7/8"-14	***1204-10-10***	**3.80**
1-1/16"-12	3/4"-12	***1204-12-08***	**4.60**
1-1/16"-12	7/8"-12	***1204-12-10***	**4.40**
1-1/16"-12	1-1/16"-12	***1204-12-12***	**3.90**
1-5/16"-12	1-1/16"-12	***1204-16-12***	**8.35**
1-5/16"-12	1-5/16"-12	***1204-16-16***	**7.10**



male x male

SAE Screw Thread	SAE O-Ring Boss Thread	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***1231-04-04***	**$1.25**
7/16"-20	9/16"-18	***1231-04-06***	**1.45**
7/16"-20	3/4"-16	***1231-04-08***	**2.25**
9/16"-18	7/16"-20	***1231-06-04***	**1.50**
9/16"-18	9/16"-18	***1231-06-06***	**1.40**
9/16"-18	3/4"-16	***1231-06-08***	**1.95**
9/16"-18	7/8"-14	***1231-06-10***	**2.75**
3/4"-16	9/16"-18	***1231-08-06***	**2.35**
3/4"-16	3/4"-16	***1231-08-08***	**2.10**
3/4"-16	7/8"-14	***1231-08-10***	**2.70**
3/4"-16	1-1/16"-12	***1231-08-12***	**3.70**
7/8"-14	3/4"-16	***1231-10-08***	**3.05**
7/8"-14	7/8"-14	***1231-10-10***	**2.85**
7/8"-14	1-1/16"-12	***1231-10-12***	**3.85**
1-1/16"-12	7/8"-14	***1231-12-10***	**4.05**
1-1/16"-12	1-1/16"-12	***1231-12-12***	**4.25**
1-1/16"-12	1-5/16"-12	***1231-12-16***	**6.20**
1-5/16"-12	1-1/16"-12	***1231-16-12***	**5.15**
1-5/16"-12	1-5/16"-12	***1231-16-16***	**6.10**
1-5/16"-12	1-5/8"-12	***1231-16-20***	**10.70**
1-5/8"-12	1-5/16"-12	***1231-20-16***	**12.35**



45° male x male

SAE O-Ring Boss Thread	SAE Screw Thread	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***1240-04-04***	**$3.55**
9/16"-18	9/16"-18	***1240-06-06***	**3.95**
9/16"-18	3/4"-16	***1240-06-08***	**5.70**
3/4"-16	9/16"-18	***1240-08-06***	**6.50**
3/4"-16	3/4"-16	***1240-08-08***	**5.85**
3/4"-16	7/8"-14	***1240-08-10***	**8.20**
7/8"-14	3/4"-16	***1240-10-08***	**6.80**
7/8"-14	7/8"-14	***1240-10-10***	**7.30**
7/8"-14	1-1/16"-12	***1240-10-12***	**10.45**
1-1/16"-12	7/8"-14	***1240-12-10***	**9.60**
1-1/16"-12	1-1/16"-12	***1240-12-12***	**10.05**
1-5/16"-12	1-1/16"-12	***1240-12-16***	**15.00**
1-5/16"-12	1-5/16"-12	***1240-16-16***	**14.40**
1-5/16"-12	1-5/8"-12	***1240-20-16***	**32.15**
1-5/8"-12	1-5/8"-12	***1240-20-20***	**32.90**



Hydraulic Pipe Fittings

90° male x male



SAE Screw Thread	SAE Screw Thread	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***1234-04-04***	**$2.30**
9/16"-18	9/16"-18	***1234-06-06***	**3.10**
3/4"-16	3/4"-16	***1234-08-08***	**4.20**
7/8"-14	7/8"-14	***1234-10-10***	**5.85**
1-1/16"-12	1-1/16"-12	***1234-12-12***	**8.10**
1-5/16"-12	1-5/16"-12	***1234-16-16***	**12.30**
1-5/8"-12	1-5/8"-12	***1234-20-20***	**23.95**

90° male x male



SAE O-Ring Boss Thread	SAE Screw Thread	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***1238-04-04***	**$3.20**
7/16"-20	9/16"-18	***1238-04-06***	**3.75**
9/16"-18	7/16"-20	***1238-06-04***	**3.70**
9/16"-18	9/16"-18	***1238-06-06***	**3.25**
3/4"-16	9/16"-18	***1238-08-06***	**5.55**
3/4"-16	3/4"-16	***1238-08-08***	**4.80**
3/4"-16	7/8"-14	***1238-08-10***	**7.30**
7/8"-14	3/4"-16	***1238-10-08***	**7.05**
7/8"-14	7/8"-14	***1238-10-10***	**7.55**
7/8"-14	1-1/16"-12	***1238-10-12***	**8.95**
1-1/16"-12	7/8"-14	***1238-12-10***	**9.60**
1-1/16"-12	1-1/16"-12	***1238-12-12***	**9.55**
1-1/16"-12	1-5/16"-12	***1238-12-16***	**14.15**
1-5/16"-12	1-5/16"-12	***1238-16-16***	**14.50**
1-5/8"-12	1-5/16"-12	***1238-20-16***	**29.10**
1-5/8"-12	1-5/8"-12	***1238-20-20***	**25.50**
1-7/8"-12	1-7/8"-12	***1238-24-24***	**40.55**

J
Hydraulic

hex pipe couplings

- reference SAE 140138



Female NPTF Pipe	*Carbon Steel* Part #	Price/E
1/8"-27	***5000-2***	**$1.50**
1/4"-18	***5000-4***	**1.90**
3/8"-18	***5000-6***	**2.30**
3/8"-18 x 1/4"-18	***5000-6-4***	**2.40**
1/2"-14	***5000-8***	**3.20**
1/2"-14 x 3/8"-18	***5000-8-6***	**3.40**
3/4"-14	***5000-12***	**4.20**
1"-11½	***5000-16***	**8.25**
1"-11½ x 3/4"-14	***5000-16-12***	**8.55**
1-1/4"-11½	***5000-20***	**19.55**

hex pipe nipples

- reference SAE 140137



Male NPTF Pipe	Male NPTF Pipe	*Carbon Steel* Part #	Price/E
1/8"-27	1/8"-27	***5404-2***	**$1.05**
1/4"-18	1/4"-18	***5404-4***	**1.25**
3/8"-18	3/8"-18	***5404-6***	**1.90**
3/8"-18	1/4"-18	***5404-6-4***	**1.80**
1/2"-14	1/2"-14	***5404-8***	**2.45**
1/2"-14	3/8"-18	***5404-8-6***	**2.35**
3/4"-14	3/4"-14	***5404-12***	**3.80**
3/4"-14	1/2"-14	***5404-12-8***	**3.60**
1"-11½	1"-11½	***5404-16***	**6.00**
1"-11½	3/4"-14	***5404-16-12***	**5.45**
1-1/4"-11½	1-1/4"-11½	***5404-20***	**13.30**

Hydraulic Pipe Fittings


hex reducer bushings

Male NPTF Pipe	Female NPTF Pipe	Carbon Steel Part #	Carbon Steel Price/E
1/4"-18	1/8"-27	***5406-4-2***	**$1.35**
3/8"-18	1/8"-27	***5406-6-2***	**1.60**
3/8"-18	1/4"-18	***5406-6-4***	**1.60**
1/2"-14	1/8"-27	***5406-8-2***	**2.60**
1/2"-14	1/4"-18	***5406-8-4***	**2.55**
1/2"-14	3/8"-18	***5406-8-6***	**2.55**
3/4"-14	1/8"-27	***5406-12-2***	**3.95**
3/4"-14	1/4"-18	***5406-12-4***	**3.85**
3/4"-14	3/8"-18	***5406-12-6***	**3.85**
3/4"-14	1/2"-14	***5406-12-8***	**3.85**
1"-11½	1/4"-18	***5406-16-4***	**7.50**
1"-11½	3/8"-18	***5406-16-6***	**7.50**
1"-11½	1/2"-14	***5406-16-8***	**7.25**
1"-11½	3/4"-14	***5406-16-12***	**7.25**
1-1/4"-11½	3/8"-18	***5406-20-6***	**13.90**
1-1/4"-11½	1/2"-14	***5406-20-8***	**13.90**
1-1/4"-11½	3/4"-14	***5406-20-12***	**13.90**
1-1/4"-11½	1"-11½	***5406-20-16***	**13.90**
1-1/2"-11½	1/2"-14	***5406-24-8***	**19.85**
1-1/2"-11½	3/4"-14	***5406-24-12***	**15.30**
1-1/2"-11½	1"-11½	***5406-24-16***	**15.55**
1-1/2"-11½	1-1/4"-11½	***5406-24-20***	**18.10**
2-1/2"-8	1/2"-14	***5406-32-8***	**62.50**
2-1/2"-8	3/4"-14	***5406-32-12***	**34.70**
2-1/2"-8	1"-11½	***5406-32-16***	**34.70**
2-1/2"-8	1-1/4"-11½	***5406-32-20***	**31.25**
2-1/2"-8	1-1/2"-11½	***5406-32-24***	**34.70**



hex pipe caps

Female NPTF Pipe	Carbon Steel Part #	Carbon Steel Price/E
1/8"-27	***5406C-2***	**$1.35**
1/4"-18	***5406C-4***	**1.75**
3/8"-18	***5406C-6***	**2.50**
1/2"-14	***5406C-8***	**3.95**
3/4"-14	***5406C-12***	**6.00**
1"-11½	***5406C-16***	**9.10**
1-1/4"-11½	***5406C-20***	**46.35**
1-1/2"-11½	***5406C-24***	**62.85**



90° street elbows

- reference 140239


Male NPTF Pipe	Female NPTF Pipe	Carbon Steel Part #	Carbon Steel Price/E
1/4"-18	1/4"-18	***5502-4***	**$5.25**
3/8"-18	3/8"-18	***5502-6***	**6.10**
1/2"-14	1/2"-14	***5502-8***	**6.95**
3/4"-14	3/4"-14	***5502-12***	**9.75**
1"-11½	1"-11½	***5502-16***	**15.75**
1-1/4"-11½	1-1/4"-11½	***5502-20***	**22.35**



male x female run tees

- reference 140424

Male NPTF Pipe	Female NPTF Pipe	Carbon Steel Part #	Carbon Steel Price/E
1/8"-27	1/8"-27	***5602-2***	**$4.35**
1/4"-18	1/4"-18	***5602-4***	**5.40**
3/8"-18	3/8"-18	***5602-6***	**9.75**
1/2"-14	1/2"-14	***5602-8***	**12.75**
3/4"-14	3/4"-14	***5602-12***	**16.00**
1"-11½	1"-11½	***5602-16***	**28.55**
1-1/4"-11½	1-1/4"-11½	***5602-20***	**42.30**
1-1/2"-11½	1-1/2"-11½	***5602-24***	**264.10**



Hydraulic Pipe Fittings

- reference 140438



female pipe tees


Female NPTF Pipe	Female NPTF Pipe	Carbon Steel Part #	Price/E
1/4"-18	1/4"-18	***5605-4***	**$7.95**
3/8"-18	3/8"-18	***5605-6***	**9.75**
1/2"-14	1/2"-14	***5605-8***	**10.95**
3/4"-14	3/4"-14	***5605-12***	**16.30**
1"-11½	1"-11½	***5605-16***	**25.90**

Hydraulic 37° JIC Adapters




male x male

Male 37° Flare	Male NPTF	*Carbon Steel* Part #	Price/E
7/16"-20	1/8"-27	***2404-4-2***	**$1.15**
7/16"-20	1/4"-18	***2404-4-4***	**1.45**
7/16"-20	3/8"-18	***2404-4-6***	**1.95**
7/16"-20	1/2"-18	***2404-4-8***	**4.55**
9/16"-18	1/8"-27	***2404-6-2***	**1.65**
9/16"-18	1/4"-18	***2404-6-4***	**1.45**
9/16"-18	3/8"-18	***2404-6-6***	**2.00**
9/16"-18	1/2"-14	***2404-6-8***	**2.20**
3/4"-16	1/4"-18	***2404-8-4***	**2.00**
3/4"-16	3/8"-18	***2404-8-6***	**2.10**
3/4"-16	1/2"-14	***2404-8-8***	**2.40**
3/4"-16	3/4"-14	***2404-8-12***	**3.80**
7/8"-14	1/2"-14	***2404-10-8***	**2.60**
7/8"-14	3/4"-14	***2404-10-12***	**3.80**
1-1/16"-12	1/2"-14	***2404-12-8***	**5.05**
1-1/16"-12	3/4"-14	***2404-12-12***	**3.95**
1-1/16"-12	1"-11½	***2404-12-16***	**5.80**
1-5/16"-12	3/4"-14	***2404-16-12***	**8.30**
1-5/16"-12	1"-11½	***2404-16-16***	**5.90**



female x male

Male 37° Flare	Female NPTF	*Carbon Steel* Part #	Price/E
7/16"-20	1/8"-27	***2405-4-2***	**$2.25**
7/16"-20	1/4"-18	***2405-4-4***	**2.80**
9/16"-18	1/4"-18	***2405-6-4***	**2.90**
9/16"-18	3/8"-18	***2405-6-6***	**2.85**
9/16"-18	1/2"-14	***2405-6-8***	**4.25**
3/4"-16	3/8"-18	***2405-8-6***	**3.60**
3/4"-16	1/2"-14	***2405-8-8***	**3.95**
3/4"-16	3/4"-14	***2405-8-12***	**12.60**
7/8"-14	1/2"-14	***2405-10-8***	**5.45**
1-1/16"-12	3/4"-14	***2405-12-12***	**6.25**
1-1/16"-12	1"-11½	***2405-12-16***	**19.40**
1-5/16"-12	1"-11½	***2405-16-16***	**8.40**



45° male x male

Male 37° Flare	Male NPTF	*Carbon Steel* Part #	Price/E
7/16"-20	1/8"-27	***2503-4-2***	**$2.75**
7/16"-20	1/4"-18	***2503-4-4***	**2.95**
9/16"-18	1/4"-18	***2503-6-4***	**3.20**
9/16"-18	3/8"-18	***2503-6-6***	**3.70**
3/4"-16	1/4"-18	***2503-8-4***	**4.40**
3/4"-16	3/8"-18	***2503-8-6***	**4.45**
3/4"-16	1/2"-14	***2503-8-8***	**4.70**
7/8"-14	1/2"-14	***2503-10-8***	**5.95**
7/8"-14	3/4"-14	***2503-10-12***	**6.95**
1-1/16"-12	3/4"-14	***2503-12-12***	**7.55**
1-5/16"-12	1"-11½	***2503-16-16***	**11.75**

Hydraulic 37° JIC Adapters

90° male x male

Male 37° Flare	Male NPTF	Carbon Steel Part #	Price/E
7/16"-20	1/8"-27	***2501-4-2***	**$2.50**
7/16"-20	1/4"-18	***2501-4-4***	**2.90**
7/16"-20	3/8"-18	***2501-4-6***	**3.85**
9/16"-18	1/4"-18	***2501-6-4***	**2.65**
9/16"-18	1/8"-27	***2501-6-2***	**3.45**
9/16"-18	3/8"-18	***2501-6-6***	**3.70**
9/16"-18	1/2"-14	***2501-6-8***	**4.55**
3/4"-16	1/4"-18	***2501-8-4***	**5.25**
3/4"-16	3/8"-18	***2501-8-6***	**4.60**
3/4"-16	1/2"-14	***2501-8-8***	**4.95**
3/4"-16	3/4"-14	***2501-8-12***	**7.15**
7/8"-14	1/2"-14	***2501-10-8***	**5.80**
7/8"-14	3/4"-14	***2501-10-12***	**7.55**
1-1/16"-12	1/2"-14	***2501-12-8***	**7.65**
1-1/16"-12	3/4"-14	***2501-12-12***	**8.15**
1-5/16"-12	3/4"-14	***2501-16-12***	**11.40**
1-5/16"-12	1"-11½	***2501-16-16***	**11.30**



37° Flare Tube Fittings

- reference SAE 070112

JIC cap nuts

JIC Cap Nut	Tube OD	Carbon Steel Part #	Price/E
5/16"-24	1/8"	***0304C-2***	**$1.45**
7/16"-20	1/4"	***0304C-4***	**0.75**
9/16"-18	3/8"	***0304C-6***	**0.90**
3/4"-16	1/2"	***0304C-8***	**1.25**
7/8"-14	5/8"	***0304C-10***	**1.45**
1-1/16"-12	3/4"	***0304C-12***	**2.30**
1-5/16"-12	1"	***0304C-16***	**3.35**
1-5/8"-12	1-1/4"	***0304C-20***	**6.70**
1-7/8"-12	1-1/2"	***0304C-24***	**14.95**
2-1/2"-12	2"	***0304C-32***	**22.75**



- reference SAE 070118

bulkhead lock nuts

Bulkhead Lock Nut	Tube OD	Carbon Steel Part #	Price/E
7/16"-20	1/4"	***0306-4***	**$0.45**
9/16"-18	3/8"	***0306-6***	**0.60**
3/4"-16	1/2"	***0306-8***	**0.70**
7/8"-14	5/8"	***0306-10***	**0.90**
1-1/16"-12	3/4"	***0306-12***	**1.25**
1-5/16"-12	1"	***0306-16***	**1.95**



- reference SAE070425

male branch tees

Male 37° Flare	Male NPTF Pipe	Carbon Steel Part #	Price/E
7/16"-20	1/4"-18	***2601-4-4-4***	**$5.10**
9/16"-18	3/8"-18	***2601-6-6-6***	**6.70**
9/16"-18	1/4"-18	***2601-6-6-4***	**4.30**
3/4"-16	1/2"-14	***2601-8-8-8***	**8.05**
7/8"-14	1/2"-14	***2601-10-10-8***	**8.90**
1-1/16"-12	3/4"-14	***2601-12-12-12***	**12.65**
1-5/16"-12	1"-11½	***2601-16-16-16***	**20.25**



37° Flare Tube Fittings



- reference SAE 070401

Union Tees

Male 37° Flare	*Carbon Steel* Part #	Price/E
7/16"-20	***2603-4***	**$4.50**
9/16"-18	***2603-6***	**3.90**
3/4"-16	***2603-8***	**6.70**
7/8"-14	***2603-10***	**9.20**
1-1/16"-12	***2603-12***	**12.60**
1-5/16"-12	***2603-16***	**18.00**

37° Flare Bulkhead Fittings



- reference SAE 070601

Bulkhead Unions with Lock Nut

Male 37° Flare	Male 37° Flare	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***2700LN-4***	**$3.00**
9/16"-18	9/16"-18	***2700LN-6***	**3.30**
3/4"-16	3/4"-16	***2700LN-8***	**5.35**
7/8"-14	7/8"-14	***2700LN-10***	**6.75**
1-1/16"-12	1-1/16"-12	***2700LN-12***	**8.80**
1-5/16"-12	1-5/16"-12	***2700LN-16***	**12.65**



- reference SAE 070701

90° Bulkhead Elbows with Lock Nut

Male 37° Flare	Male 37° Flare	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***2701LN-4***	**$4.15**
9/16"-18	9/16"-18	***2701LN-6***	**4.90**
3/4"-16	3/4"-16	***2701LN-8***	**8.15**
7/8"-14	7/8"-14	***2701LN-10***	**11.40**
1-1/16"-12	1-1/16"-12	***2701LN-12***	**12.90**
1-5/16"-12	1-5/16"-12	***2701LN-16***	**17.90**

Female 37° Swivel Fittings



- reference SAE 070221

female 37° swivel elbows

Male 37° Flare	Female 37° Swivel	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***6500-4***	**$3.05**
9/16"-18	9/16"-18	***6500-6***	**3.45**
9/16"-18	7/16"-20	***6500-6-4***	**4.80**
3/4"-16	3/4"-16	***6500-6-8***	**5.55**
3/4"-16	3/4"-16	***6500-8***	**5.25**
3/4"-16	7/8"-14	***6500-8-10***	**8.15**
3/4"-16	9/16"-18	***6500-8-6***	**5.40**
7/8"-14	7/8"-14	***6500-10***	**6.90**
1-1/16"-12	1-1/16"-12	***6500-12***	**9.20**
1-1/16"-12	7/8"-14	***6500-12-10***	**10.65**
1-5/16"-12	1-5/16"-12	***6500-16***	**16.25**
1-5/8"-12	1-5/8"-12	***6500-20***	**33.55**



- reference SAE 070432

female 37° swivel run tees

Male 37° Flare	Female 37° Swivel	*Carbon Steel* Part #	Price/E
7/16"-20	7/16"-20	***6602-4***	**$5.60**
9/16"-18	9/16"-18	***6602-6***	**5.75**
3/4"-16	3/4"-16	***6602-8***	**8.25**
7/8"-14	7/8"-14	***6602-10***	**12.05**
1-1/16"-12	1-1/16"-12	***6602-12***	**14.40**
1-5/16"-12	1-5/16"-12	***6602-16***	**24.65**
1-5/8"-12	1-5/8"-12	***6602-20***	**51.55**

Holedall Coupling Machines

Rams securely attach Holedall couplings to hose. Five machines meet every hose service requirement.


Rams, are powerful finely engineered machines designed specifically to swage and internally expand Holedall couplings by hydraulic pressure. Since each ram generates all the hydraulic pressure required to attach the Holedall coupling, one person can easily operate the equipment.

15 Ton Ram




Specially designed ram for internally expanded couplings only. Bench mounted model (optional stand available), producing up to 10,000 PSI, for up to 15 tons of ram force. Capable of expanding 1" through 3" steel fittings and ¾" through 4" brass Holedall Petroleum fittings. The motor is ½ h.p., 115 volt 60 cycle, single phase with foot pedal.

25 Ton Ram

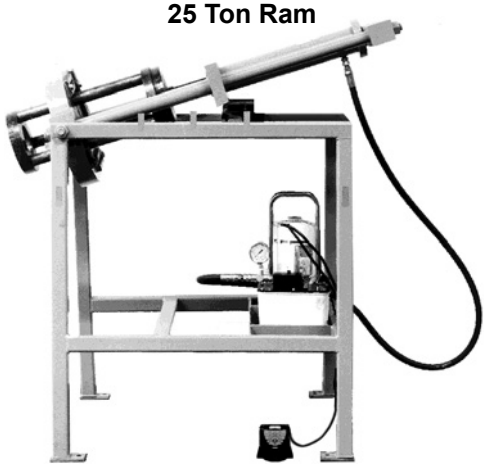


Free standing model producing up to 10,000 PSI of line pressure for up to 25 tons of ram force. Capable of external swaging ¼" through 4" ID hose and internal expanding 5/8" through 4" ID hose, with proper equipment. The motor is ½ h.p., 115 volt 60 cycle, single phase with foot pedal. High speed pump kit option is available.

50 Ton Ram

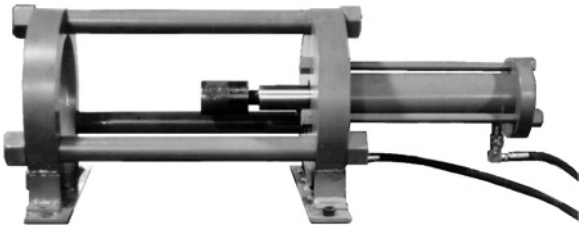


Bench mounted model (optional stand available), producing up to 10,000 PSI, for up to 50 tons of ram force. Capable of external swaging 1¼" through 6" ID hose and internal expanding 5/8" through 6" ID hose, with proper equipment. A 1-1/8 h.p., 115 volt, 60 cycle, single phase motor is standard with remote, (220/440 volt motors are available).

100 Ton Ram

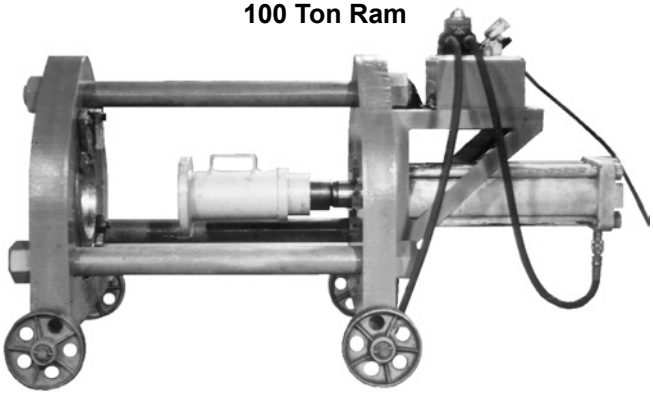

Used for swaging Holedall fittings to hose from 1¼" through 10" ID With optional accessories, this ram may be used for internally expanded couplings on hose from 1¼" through 6". This machine is capable of producing up to 100 tons of ram force. A 1-1/8 h.p., 115 volt, 60 cycle, single phase motor is standard with remote, (220/440 volt motors are available).

350 Ton Ram

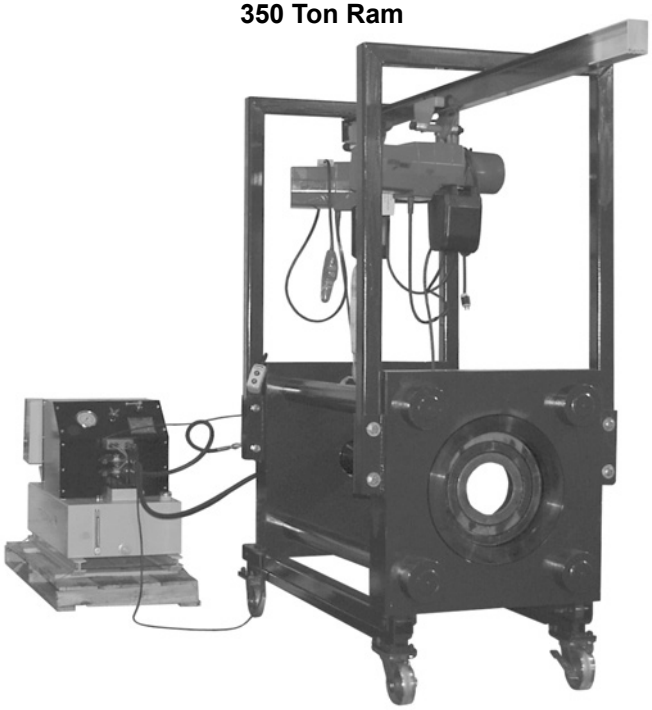

Used for swaging Holedall and Rotary fittings. This ram is capable of producing up to 354 tons of ram force for swaging. A 14" 150 lb. flange will fit through the bed plate. This ram has 36" of stroke. A 12.5 h.p., 230 volt, 60Hz, 3 phase motor is standard with remote.

All Rams require dies of the proper size to reduce the ferrule to the proper diameter for a good grip on the hose. Pushers of the proper size must be used on the end of the Ram to push the Holedall fitting through the die. Die and pusher selection depends on the sizes and types of hoses being coupled. Ferrule recommendations and a Die Chart binder are available upon request. Consult your Dixon representative for specific details.

Recommended Working Pressures

SAFETY ALERT

Holedall couplings, regardless of coupling style, are never to be used for steam service at any pressure. Holedall fittings listed below are not to be used with cable reinforced high-pressure hose, 4 or 6 braid wire hydraulic hose or any other service not listed in recommendations. In addition, Internally Expanded Holedall couplings are not to be used with plastic lined chemical hose. Consult Dixon for recommendations on usage.

Holedall couplings (Externally Swaged), to perform satisfactorily, must be applied properly in accordance with Dixon's assembly procedures, using correct die and ferrule for that particular hose end OD. Dixon's Die and Ferrule Recommendation Guide is to be used to select correct dies and ferrules. If you do not have the updated Die and Ferrule Recommendation Guide, consult the Dixon factory. Strict adherence to ferrule OD range (Internally Expanded) for each hose end to be assembled is essential for satisfactory performance.

Note: Hose service working pressure (including surges and spikes) is never to exceed the maximum recommended working pressure for the fitting (reference chart below)*. Media being transported through the hose should be compatible with the stem material. Compatibility of ferrule material with the environment in which it will be used is recommended. Consult Compatibility Chart on pages 600-605 or the Dixon factory for material compatibility. For applications other than the ones listed, please consult the Dixon factory.

	Externally Swaged						**Internally Expanded**	
Size	*Standard Fittings* [1]	*Long Style Fittings* [1]	*Light Duty Fittings*		*Holedall II Fittings* [1]	*Cam and Groove* [1]	*Internally Expanded* [1]	*Flow Chief / Crimp Sanitary Fittings* [1]
			NO Notched Fittings [1]	*NOS Notched Short Fittings* [1]				
	TM, TP, TG	TML, TPL, TGL	TM, TP, TG, RN•••NO	RST•••NOS, STC•••NOS, GAS••••NOS	FW		IXM, IXV, IXH	IXSE, IXFS, IXMS, CSSR
3/4"	---	---	---	---	---	---	---	---
1"	---	---	---	---	---	**250**	---	---
1-1/4"	**600**	**1,000**	**350**	---	---	---	**800**	---
1-3/8"	---	---	---	---	---	---	---	---
1-1/2"	**600**	**1,000**	**350**	**250**	**300**	**250**	**800**	**250**
2"	**600**	**1,000**	**350**	**250**	**300**	**250**	**800**	**250**
2-1/2"	**600**	**1,000**	**250**	---	**250**	**150**	**600**	**250**
3"	**600**	**1,000**	**250**	**250**	**200**	**125**	**600**	**250**
4"	**500**	**850**	**250**	***	**200**	**100**	**500**	**200**
5"	**450**	**750**	---	---	---	---	---	---
6"	**400**	**700**	---	---	---	---	**400**	---
8"	**350**	**600**	---	---	---	---	---	---
10"	**300**	**550**	---	---	---	---	---	---

[1] maximum recommended working pressures, in PSI, at **70°F** ambient temperature

* The assembly's (hose + coupling) maximum working pressure is the lesser of:
1) The hose rated working pressure, or
2) The coupling rated working pressure

** For hoses which use IXF48-3 to IXF48-5 and IXF64-2 to IXF64-5, consult the Dixon factory for working pressures. See notes below for specific recommendations.

Standard Fittings
Recommended for use on most one and two wire braid reinforced hoses, fiber reinforced (braided or spiraled) with or without helical wire such as: oil suction and discharge hose, barge and dock loading and unloading hose as well as L.P. gas hose, anhydrous ammonia hose, acid chemical hose and high pressure air and water hose.

Long Style Fittings
Recommended for use on hose as listed under standard fittings where additional retention is required due to higher working pressures or end pull. Consult maximum working pressure chart or call the Dixon factory.

Holedall II Fittings
Recommended for Royalflex 1193 and 1196 hose or hoses with similar construction, having helical wire for a given OD range.

Light Duty Fittings
Recommended for use in the same applications as standard fittings above where lower working pressures are encountered. Consult maximum working pressure chart or consult the Dixon factory.

Internally Expanded Fittings
Recommended for concrete placement, grout and plaster, food, dairy, pharmaceutical as well as other applications where increased flow capacity is important. Consult maximum working pressure chart or call the Dixon factory for additional application and working pressure information.

Holedall External Swage Coupling System

The Holedall coupling system provides outstanding strength, durability and safety.

The Holedall system is a method of attaching couplings to hose utilizing a progressive swage. The patented Holedall couplings include a Holedall stem and a specially engineered ferrule. The hydraulic swaging of the coupling to the hose is accomplished by pushing the ferrule through a die which reduces the ferrule OD. The ferrule penetrates the hose wall, providing a 360° uninterrupted compression band around the hose.

A hydraulic ram is the only piece of machinery necessary to accomplish the coupling. Available in five different sizes - 15, 25, 50, 100 and 350 ton - these rams will accommodate dies and pushers of various sizes so that hoses up to 10" in diameter may be coupled.

This multi-purpose, high pressure coupling system requires no bolts and results in a clean coupling with no protrusions. The swaging operation is fast and hose of various lengths and different styles can be coupled. Ease of operation, flexibility and economy make the Holedall method an unequalled assembly system.

The Holedall coupling - the most adaptable coupling available.

Holedall couplings provide long-lasting efficiency and safety.

Couplings are available in stainless steel and carbon steel.

Couplings are furnished with pipe thread, plain end, victaulic grooved or flanged ends.


Dixon Holedall stems and ferrules are specifically designed to be used together as a coupling system.

SAFETY ALERT

Due to differences in dimensions and tolerances, for safety reasons, do not use other manufacturer's stems or ferrules with Dixon Holedall products.

SAFETY ALERT

Streamlined, lightweight coupling consisting of ferrule and stem.
No protrusions to snag on equipment.

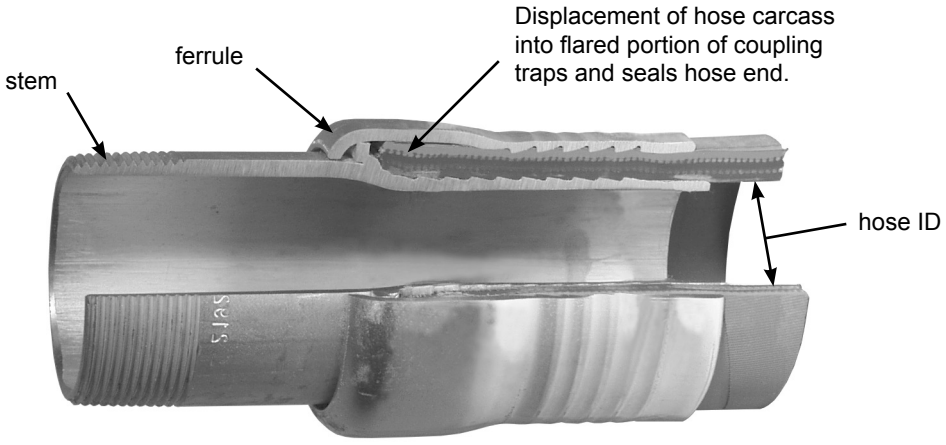

Cross-section of holedall externally swaged assembly

External Swage Stems

- designed and machined for hydraulic suction line applications using SAE100R4 hydraulic hose
- Barbs provide easy assembly and maximum gripping action.
- for higher working pressure applications use long style stems and ferrules

Male Pipe Threaded (NPT) End



tubular type

Hose ID	*Carbon Steel*		*Stainless Steel*		Long Style *Carbon Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1¼"	***TM20***	**$45.00**	***TMR20***	**$73.40**	***TML20***	**$56.25**
1½"	***TM24***	**53.05**	***TMR24***	**68.50**	***TML24***	**64.60**
2"	***TM32***	**37.65**	***TMR32***	**79.40**	***TML32***	**53.85**
2½"	***TM40***	**72.00**	***TMR40***	**194.00**	***TML40***	**81.35**
3"	***TM48***	**66.00**	***TMR48***	**175.00**	***TML48***	**91.55**
4"	***TM64***	**80.15**	***TMR64***	**288.20**	***TML64***	**140.00**
5"	***TM80***	**228.00**	**---**	**---**	***TML80***	**315.00**
6"	***TM96***	**207.00**	***TMR96***	**705.00**	***TML96***	**341.00**
8"	***TM128***	**245.00**	**---**	**---**	***TML128***	**350.00**
10"	***TM160***	**557.75**	**---**	**---**	***TML160***	**660.00**



investment cast design

Hose ID	*Stainless Steel* Part #	Price/E
1½"	***TMR24C***	**$45.00**
2"	***TMR32C***	**51.70**
3"	***TMR48C***	**107.00**

Beveled End for Welding



tubular type

Hose ID	*Carbon Steel*		*Stainless Steel*		Long Style *Carbon Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1¼"	***TP20***	**$45.00**	**---**	**---**	***TPL20***	**$56.25**
1½"	***TP24***	**53.05**	**---**	**---**	***TPL24***	**64.60**
2"	***TP32***	**37.65**	***TPR32***	**$110.00**	***TPL32***	**53.85**
2½"	***TP40***	**72.00**	**---**	**---**	***TPL40***	**81.35**
3"	***TP48***	**66.00**	***TPR48***	**205.00**	***TPL48***	**91.55**
4"	***TP64***	**80.15**	***TPR64***	**320.00**	***TPL64***	**140.00**
5"	***TP80***	**228.00**	**---**	**---**	***TPL80***	**315.00**
6"	***TP96***	**207.00**	**---**	**---**	***TPL96***	**341.00**
8"	***TP128***	**245.00**	**---**	**---**	***TPL128***	**350.00**
10"	***TP160***	**557.75**	**---**	**---**	***TPL160***	**660.00**

Grooved End (Victaulic)



tubular type

Hose ID	*Carbon Steel* NEW		*Stainless Steel*		Long Style *Carbon Steel*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1¼"	***TG20***	**$45.00**	**---**	**---**	***TGL20***	**POR**
1½"	***TG24***	**53.05**	***TGR24***	**$68.50**	***TGL24***	**POR**
2"	***TG32***	**52.00**	***TGR32***	**79.40**	***TGL32***	**POR**
2½"	***TG40***	**85.00**	***TGR40***	**194.00**	***TGL40***	**POR**
3"	***TG48***	**78.00**	***TGR48***	**175.00**	***TGL48***	**POR**
4"	***TG64***	**86.00**	***TGR64***	**288.20**	***TGL64***	**POR**
5"	***TG80***	**228.00**	**---**	**---**	***TGL80***	**POR**
6"	***TG96***	**207.00**	**---**	**---**	***TGL96***	**POR**
8"	***TG128***	**245.00**	**---**	**---**	***TGL128***	**POR**
10"	***TG160***	**557.75**	**---**	**---**	***TGL160***	**POR**

Female End



stem and ferrule - two piece design
1" sizes



stem and ferrule - one piece design
1¼" - 2" sizes

tubular type

Hose ID	Hose OD from	Hose OD to	*Carbon Steel* Part #	Price/E
1"	1-30/64"	1-34/64"	***TF16WF1-80***	**$43.15**
	1-34/64"	1-38/64"	***TF16WF2-80***	**43.15**
	1-35/64"	1-42/64"	***TF16WF3-80***	**43.15**
1¼"	1-44/64"	1-48/64"	***TF20WF1-80***[1]	**146.05**
	1-49/64"	1-56/64"	***TF20WF2-80***[1]	**146.05**
	1-57/64"	2"	***TF20WF3-80***[1]	**146.05**
2"	2-36/64"	2-40/64"	***TF32WF1-80***[1]	**158.40**
	2-41/64"	2-48/64"	***TF32WF2-80***[1]	**158.40**
	2-49/64"	2-56/64"	***TF32WF3-80***[1]	**158.40**

[1] Special pushers required for 1¼" and 2" sizes:
1¼" ***25PUSH125-MOD***
2" ***25PUSH200-MOD***

External Swage Ferrules

The selection of ferrules is very important to achieve the proper coupling-to-hose assembly.
- ferrules are plated carbon steel
- style F ferrules are used with all standard length male stems
- style FL ferrules are extra long and are used with all long style stems





Hose ID	Hose OD from	Hose OD to	*Plated Carbon Steel* Part #	*Plated Carbon Steel* Price/E	Long Style *Plated Carbon Stl.* Part #	Long Style *Plated Carbon Stl.* Price/E
1¼"	1-44/64"	1-48/64"	***F20-1***	**$41.20**	***FL20-1***	**$61.45**
	1-49/64"	1-56/64"	***F20-2***	**41.20**	***FL20-2***	**61.45**
	1-57/64"	2"	***F20-3***	**47.15**	***FL20-3***	**61.45**
	2-1/64"	2-8/64"	***F20-4***	**47.15**	***FL20-4***	**61.45**
1½"	1-58/64"	2"	***F24-1***	**36.25**	***FL24-1***	**56.85**
	2-1/64"	2-8/64"	***F24-2***	**36.25**	***FL24-2***	**56.85**
	2-9/64"	2-16/64"	***F24-3***	**39.20**	***FL24-3***	**56.85**
	2-17/64"	2-24/64"	***F24-4***	**41.60**	***FL24-4***	**56.85**
	2-25/64"	2-32/64"	***F24-5***	**41.60**	***FL24-5***	**56.85**
2"	2-28/64"	2-40/64"	***F32-1***	**36.50**	***FL32-1***	**55.35**
	2-41/64"	2-48/64"	***F32-2***	**36.50**	***FL32-2***	**55.35**
	2-49/64"	2-56/64"	***F32-3***	**43.00**	***FL32-3***	**55.35**
	2-57/64"	3-2/64"	***F32-4***	**43.00**	***FL32-4***	**55.35**
2½"	2-62/64"	3-8/64"	***F40-1***	**56.55**	***FL40-1***	**77.65**
	3-9/64"	3-16/64"	***F40-2***	**56.55**	***FL40-2***	**77.65**
	3-17/64"	3-24/64"	***F40-3***	**56.55**	***FL40-3***	**77.65**
	3-25/64"	3-32/64	***F40-4***	**70.00**	***FL40-4***	**77.65**
	3-33/64"	3-40/64"	***F40-5***	**70.00**	***FL40-5***	**77.65**
3"	3-30/64"	3-40/64"	***F48-1***	**47.25**	***FL48-1***	**89.70**
	3-41/64"	3-48/64"	***F48-2***	**51.50**	***FL48-2***	**89.70**
	3-49/64"	3-56/64"	***F48-3***	**54.30**	***FL48-3***	**89.70**
	3-57/64"	4"	***F48-4***	**71.00**	***FL48-4***	**89.70**
	4-1/64"	4-8/64"	***F48-5***	**68.00**	***FL48-5***	**89.70**
4"	4-30/64"	4-39/64"	***F64-Z*** [1]	**90.00**	***FL64-Z*** [2]	**114.70**
	4-40/64"	4-44/64"	***F64-1***	**90.00**	***FL64-1***	**114.70**
	4-45/64"	4-52/64"	***F64-2***	**90.00**	***FL64-2***	**114.70**
	4-53/64"	4-60/64"	***F64-3***	**90.00**	***FL64-3***	**114.70**
	4-61/64"	5-4/64"	***F64-4***	**90.00**	***FL64-4***	**114.70**
	5-5/64"	5-12/64"	***F64-5***	**101.20**	***FL64-5***	**114.70**
	5-13/64"	5-20/64"	***F64-6***	**101.20**	***FL64-6***	**114.70**
	5-21/64	5-28/64"	***F64-7***	**101.20**	***FL64-7***	**114.70**
	5-29/64"	5-36/64"	***F64-8***	**101.20**	***FL64-8***	**114.70**
5"	5-56/64"	5-60/64"	***F80-1***	**233.75**	***FL80-1***	**POR**
	5-61/64"	6-4/64"	***F80-2***	**233.75**	***FL80-2***	**POR**
	6-5/64"	6-12/64"	***F80-3***	**250.00**	***FL80-3***	**POR**
	6-13/64"	6-20/64"	***F80-4***	**POR**	***FL80-4***	**POR**
	6-21/64"	6-28/64"	***F80-5***	**POR**	***FL80-5***	**POR**
	6-29/64"	6-38/64"	***F80-6***	**POR**	***FL80-6***	**POR**
	6-37/64"	6-44/64"	***F80-7***	**POR**	***FL80-7***	**POR**

Hose ID	Hose OD from	Hose OD to	*Plated Carbon Steel* Part #	*Plated Carbon Steel* Price/E	Long Style *Plated Carbon Stl.* Part #	Long Style *Plated Carbon Stl.* Price/E
6"	6-44/64"	6-63/64"	***F96-Z***	**$221.25**	***FL96-Z***	**$304.75**
	7"	7-4/64"	***F96-1***	**228.85**	***FL96-1***	**304.75**
	7-5/64"	7-12/64"	***F96-2***	**228.85**	***FL96-2***	**304.75**
	7-13/64"	7-20/64"	***F96-3***	**228.85**	***FL96-3***	**304.75**
	7-21/64"	7-28/64"	***F96-4***	**241.50**	***FL96-4***	**304.75**
	7-29/64"	7-36/64"	***F96-5***	**241.50**	***FL96-5***	**304.75**
	7-37/64"	7-44/64"	***F96-6***	**255.30**	***FL96-6***	**304.75**
	7-45/64"	7-52/64"	***F96-7***	**255.30**	***FL96-7***	**304.75**
	7-53/64"	7-60/64"	***F96-8***	**255.30**	***FL96-8***	**304.75**
	7-61/64"	8"	***F96-9***	**255.30**	***FL96-9***	**304.75**
8"	9"	9-9/64"	***F128-Y***	**375.00**	***FL128-Y***	**POR**
	9-20/64"	9-24/64"	***F128-1***	**375.00**	***FL128-1***	**POR**
	9-25/64"	9-32/64"	***F128-2***	**375.00**	***FL128-2***	**POR**
	9-33/64"	9-40/64"	***F128-3***	**375.00**	***FL128-3***	**POR**
	9-41/64"	9-48/64"	***F128-4***	**418.00**	***FL128-4***	**POR**
	9-49/64"	9-56/64"	***F128-5***	**418.00**	***FL128-5***	**POR**
	9-57/64"	10"	***F128-6***	**418.00**	***FL128-6***	**POR**
	10-1/64"	10-4/64"	***F128-7***	**418.00**	***FL128-7***	**POR**
10"	11-32/64"	11-44/64"	***F160-1***	**701.50**	***FL160-1***	**POR**
	11-45/64"	11-60/64"	***F160-2***	**701.50**	***FL160-2***	**POR**
	11-61/64"	12-12/64"	***F160-3***	**POR**	***FL160-3***	**POR**
	12-13/64"	12-28/64"	***F160-4***	**POR**	***FL160-4***	**POR**
	12-29/64"	12-44/64"	***F160-5***	**POR**	***FL160-5***	**POR**
	12-45/64"	12-60/64"	***F160-6***	**POR**	***FL160-6***	**POR**

For applications with hose OD ranges not listed, call the factory.

[1] requires special stem: ***TM64-42*** **$97.75**
[2] requires special stem: ***TML64-42*** **$115.00**

Holedall II External Swage Ferrules

For use with Royal-Flex™ thin wall hose. These specially designed carbon steel ferrules have serrations on the outside and should be used with stem styles TM, TP and TG stems on page 378.



Hose ID	Hose OD from	Hose OD to	*Carbon Steel* Part #	Price/E
1½"	1-58/64"	2-2/64"	***FW24***	**$74.75**
2"	2-28/64"	2-34/64"	***FW32***	**80.50**
3"	3-30/64"	3-38/64"	***FW48***	**93.15**
4"	4-30/64"	4-42/64"	***FW64*** [1]	**98.90**

[1] 4" takes special stem; ***TM64-42***, **$97.75**

Stainless External Swage Ferrules

Light duty 304 stainless ferrules for use with standard length stems such as the TMR series. Consult Dixon for die recommendations. See page 10-13 for specific pressure recommendations.



Hose ID	Hose OD from	Hose OD to	*304 Stainless Steel* Part #	Price/E
1½"	1-60/64"	2-12/64"	***GAS2334TO***	**$41.50**
	2-4/64"	2-22/64"	***GAS2370TO***	**41.50**
2"	2-30-64"	2-44/64"	***GAS2709TO***	**32.90**
	2-42/64"	2-54/64"	***GAS2885TO***	**65.25**
3"	3-30/64"	3-46/64"	***GAS3760TO***	**52.00**
	3-47/64"	3-54/64"	***GAS3885TO***	**68.50**
4"	4-40/64"	4-47/64"	***GAS5010TO***	**268.15**

External Swage Notched NOS Stems and Ferrules

- The largest advantage of the notched design is that the coupling can be removed from a damaged hose by cutting away the ferrule, without necessarily damaging the fitting. *After inspection of the fitting to determine its suitability for reuse,* it can be reinstalled into another hose by using a *new ferrule*. SAFETY ALERT
- The notched system allows you to better manage your inventories. You can stock one stem and two ferrules, and cover the same hose range with less inventory. *You must purchase a fitting and the matching ferrule to create an assembly*. SAFETY ALERT
- For hose outside diameters of 2-4/64" and below, *the couplings are crimp only*. SAFETY ALERT
- For hose outside diameters of 2-5/64" and above, the couplings can be crimped or swaged.

- See page 39 for cam and groove style notched NOS fittings.



STC200NOS




RST150NOS

SAFETY ALERT **Only use the NOS shank with the NOS ferrules.**
Due to differences in dimensions and tolerances for safety reasons,
do not use other manufacturer's stems or ferrules with Dixon Holedall products. SAFETY ALERT

stems

Size	PSI at 70°F	*Plated Carbon Steel* Part #	Price/E	*Stainless Steel* Part #	Price/E
1½"	**250**	***STC150NOS***	**$21.00**	***RST150NOS***	**$40.75**
2"	**250**	***STC200NOS***	**24.60**	***RST200NOS***	**48.25**
3"	**250**	***STC300NOS***	**44.00**	***RST300NOS***	**100.00**
4"	*	***STC400NOS***	**55.70**	***RST400NOS***	**160.00**

* Contact factory for pressure information



ferrules


Size	Hose OD From:	Hose OD To:	*Carbon Steel* Part #	Price/E	*304 Stainless Steel* Part #	Price/E
1½"	1-60/64"	2-12/64"	***CAS2334NOS***	**$15.20**	***GAS2334NOS***	**$31.00**
1½"	2-4/64"	2-22/64"	***CAS2370NOS***	**15.20**	***GAS2370NOS***	**33.00**
2"	2-30/64"	2-44/64"	***CAS2709NOS***	**20.90**	***GAS2709NOS***	**30.00**
2"	2-42/64"	2-54/64"	***CAS2885NOS***	**20.90**	***GAS2885NOS***	**59.00**
3"	3-30/64"	3-46/64"	***CAS3760NOS***	**32.60**	***GAS3760NOS***	**45.00**
3"	3-47/64"	3-54/64"	***CAS3885NOS***	**32.60**	***GAS3885NOS***	**61.50**
4"	4-40/64"	4-47/64"	***CAS5010NOS***	**51.00**	***GAS5010NOS***	**235.00**

External Swage Flanged Assemblies

- 150# ASA flange drilling available with carbon steel stem, ferrule and flange, or 316 stainless steel stem, flange and carbon steel ferrule
- available in other sizes, consult the factory for pricing



fixed flange

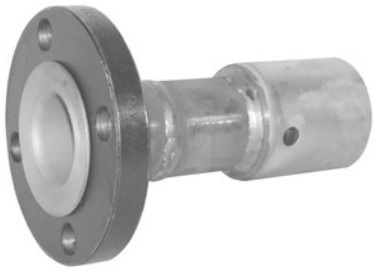

floating flange

Hose ID	Hose OD from	Hose OD to	Carbon Steel Part #	Carbon Steel Price/E	Stainless Steel Part #	Stainless Steel Price/E	Carbon Steel Part #	Carbon Steel Price/E	Stainless Steel Part #	Stainless Steel Price/E
2"	2-36/64"	2-40/64"	***32P1SO15***	**$203.55**	***R32P1SOR15***	**$425.00**	***32P1LJ15***	**$251.20**	***R32P1LJR15***	**$495.00**
	2-41/64"	2-48/64"	***32P2SO15***	**203.55**	***R32P2SOR15***	**425.00**	***32P2LJ15***	**251.20**	***R32P2LJR15***	**495.00**
	2-49/64"	2-56/64"	***32P3SO15***	**203.55**	***R32P3SOR15***	**425.00**	***32P3LJ15***	**251.20**	***R32P3LJR15***	**495.00**
3"	3-36/64"	3-40/64"	***48P1SO15***	**260.00**	***R48P1SOR15***	**580.00**	***48P1LJ15***	**280.00**	***R48P1LJR15***	**665.00**
	3-41/64"	3-48/64"	***48P2SO15***	**260.00**	***R48P2SOR15***	**580.00**	***48P2LJ15***	**280.00**	***R48P2LJR15***	**665.00**
	3-49/64"	3-56/64"	***48P3SO15***	**260.00**	***R48P3SOR15***	**580.00**	***48P3LJ15***	**280.00**	***R48P3LJR15***	**665.00**
4"	4-40/64"	4-44/64"	***64P1SO15***	**340.00**	***R64P1SOR15***	**845.00**	***64P1LJ15***	**435.00**	***R64P1LJR15***	**1197.00**
	4-45/64"	4-52/64"	***64P2SO15***	**340.00**	***R64P2SOR15***	**845.00**	***64P2LJ15***	**435.00**	***R64P2LJR15***	**1197.00**
	4-53/64"	4-60/64"	***64P3SO15***	**340.00**	***R64P3SOR15***	**845.00**	***64P3LJ15***	**435.00**	***R64P3LJR15***	**1197.00**
6"	7"	7-4/64"	***96P1SO15***	**652.00**	***R96P1SOR15***	**1542.00**	***96P1LJ15***	**820.00**	***R96P1LJR15***	**1800.00**
	7-5/64"	7-12/64"	***96P2SO15***	**652.00**	***R96P2SOR15***	**1542.00**	***96P2LJ15***	**820.00**	***R96P2LJR15***	**1800.00**
	7-13/64"	7-20/64"	***96P3SO15***	**652.00**	***R96P3SOR15***	**1542.00**	***96P3LJ15***	**820.00**	***R96P3LJR15***	**1800.00**
8"	9-20/64"	9-24/64"	***128P1SO15***	**950.00**	**---**	**---**	***128P1LJ15***	**1110.00**	**---**	**---**
	9-25/64"	9-32/64"	***128P2SO15***	**950.00**	**---**	**---**	***128P2LJ15***	**1110.00**	**---**	**---**
	9-33/64"	9-40/64"	***128P3SO15***	**950.00**	**---**	**---**	***128P3LJ15***	**1110.00**	**---**	**---**

External Swage Uni-Range Male Couplings

Designed for smaller hose systems, these couplings may be used for hose ID's of ¼" - 1" and come complete with factory assembled stem and ferrule combination.

- can be swaged or crimped
- other hose OD's available, consult the factory
- stainless steel stems are investment cast



- plated carbon steel stem and ferrule

Hose ID	Hose OD from	Hose OD to	Plated Carbon Steel Part #	Plated Carbon Steel Price/E
1/4"	34/64"	38/64"	***4P1***	**$15.00**
	38/64"	42/64"	***4P2***	**15.00**
	42/64"	46/64"	***4P3***	**15.00**
3/8"	46/64"	50/64"	***6P1***	**19.40**
	50/64"	54/64"	***6P2***	**19.40**
	54/64"	58/64"	***6P3***	**19.40**
1/2"	54/64"	58/64"	***8P1***	**20.00**
	58/64"	62/64"	***8P2***	**20.00**
	62/64"	1-2/64"	***8P3***	**20.00**
3/4"	1-10/64"	1-14/64"	***12P1***	**21.00**
	1-14/64"	1-18/64"	***12P2***	**21.00**
	1-18/64"	1-22/64"	***12P3***	**21.00**
1"	1-30/64"	1-34/64"	***16P1***	**27.00**
	1-34/64"	1-38/64"	***16P2***	**27.00**
	1-38/64"	1-42/64"	***16P3***	**27.00**
	1-42/64"	1-46/64"	***16P4***	**27.00**

- 316 stainless steel stem, plated carbon steel ferrule

Hose ID	Hose OD from	Hose OD to	Stainless/Carbon Steel Part #	Stainless/Carbon Steel Price/E
3/4"	1-10/64"	1-14/64"	***R12P1***	**$57.90**
	1-14/64"	1-18/64"	***R12P2***	**57.90**
	1-18/64"	1-22/64"	***R12P3***	**57.90**
1"	1-30/64"	1-34/64"	***R16P1***	**101.90**
	1-34/64"	1-38/64"	***R16P2***	**101.90**
	1-38/64"	1-42/64"	***R16P3***	**101.90**
	1-42/64"	1-46/64"	***R16P4***	**101.90**

- 316 stainless steel stem, 304 stainless steel ferrule

Hose ID	Hose OD from	Hose OD to	Stainless Steel Part #	Stainless Steel Price/E
1/2"	58/64"	62/64"	***R8P2SS***	**$110.00**
3/4"	1-6/64"	1-12/64"	***R12P1250***	**88.20**
	1-13/64"	1-22/64"	***R12P1370***	**88.20**
1"	1-30/64"	1-38/64"	***R16P1620***	**115.00**
	1-38/64"	1-46/64"	***R16P1770***	**115.00**

External Swage High Pressure Couplings

These couplings are for services requiring a fitting which will withstand extremely high pressures (up to **3,000 PSI** at 70°F) and severe operating conditions, such as on small and medium size drilling rigs, used for slim hole, core drill, workover, seismograph, water well, blast or shot holes, etc. These long, rugged fittings are machined from seamless pipe and tubing with specially designed serrations. The mating ferrules are machined from heavy wall material incorporating matching serrations. These couplings are shipped with matching ferrules. Please provide hose OD when ordering for properly sized ferrule. Make sure both ends of the hose are measured for OD. Must be swaged with 50 Ton or 100 Ton Ram.


- An accurate hose OD must be provided to complete the part # and to ensure proper retention.
- The LM fittings are sold as a complete coupling, including stem and ferrule.
- API and NPT sizes are interchangeable

Stem and Ferrule Complete Assemblies



NPT Male Threaded Couplings

Hose ID	NPT Size	*Zinc Plated Steel* Part #	Price/E
2"	2"	***LM32-****	**$322.00**
2½"	2½"	***LM40-****	**374.00**
3"	3"	***LM48-****	**422.00**



API Male Threaded Couplings

Hose ID	API Size	*Zinc Plated Steel* Part #	Price/E
2"	2½"	***LM3240- ****	**POR**
2½"	3"	***LM4048- ****	**POR**
3"	4"	***LM4864- ****	**POR**

Holedall Internal Expansion Couplings


K Holedall

The Dixon Internally Expanded Couplings are essential when maximum flow is important. Only one expansion tool is needed for each hose ID. Some recommended applications of these fittings are: concrete pump hose, plaster and grout hose, oil suction and discharge hose, multi-purpose heavy duty air hose, jetting hose, barge loading hose and bottom loading hose.

Benefits of Internal Expansion Fittings:
- maximum flow of media
- reduction of turbulence through hose
- excellent sealing and retention characteristics
- outperforms band clamps
- easy and consistent installation


End Configurations Available:
- male NPT
- raised California
- victaulic
- others available on request

Dixon Holedall stems and ferrules are specifically designed to be used together as a coupling system.
SAFETY ALERT
Due to differences in dimensions and tolerances, for safety reasons,
do not use other manufacturer's stems or ferrules with Dixon Holedall products.
SAFETY ALERT

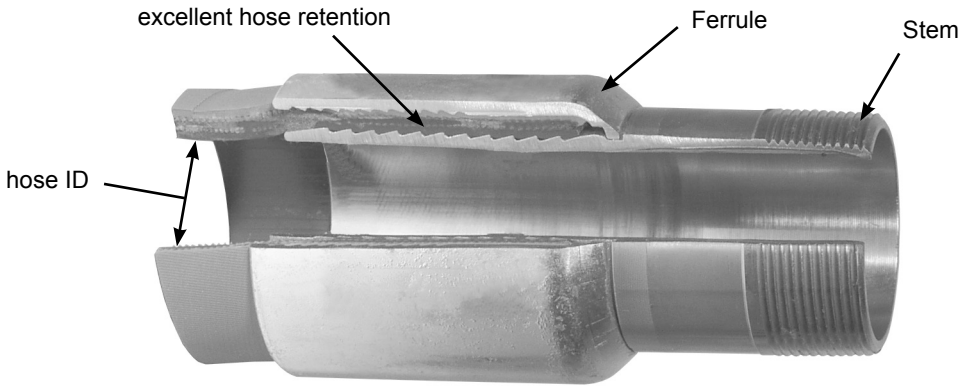

Cross-section of Holedall internally expanded assembly

Internal Expansion Stems



male pipe end

Size	Carbon Steel Part #	Carbon Steel Price/E
1"	***IXM16***	**$52.80**
1¼"	***IXM20***	**57.10**
1½"	***IXM24***	**47.50**
2"	***IXM32***	**54.00**
2½"	***IXM40***	**72.10**
3"	***IXM48***	**94.40**
4"	***IXM64***	**131.00**
6"	***IXM96***	**165.00**



heavy duty raised end

Size	Carbon Steel Part #	Carbon Steel Price/E
1½"	***IXH24***	**$90.00**
2"	***IXH32***	**92.00**
2½"	***IXH40***	**122.00**
3"	***IXH48***	**148.65**
4"	***IXH64***	**210.00**



grooved end

Size	Carbon Steel Part #	Carbon Steel Price/E
1¼"	***IXV20***	**$52.20**
1½"	***IXV24***	**51.50**
2"	***IXV32***	**54.00**
2½"	***IXV40***	**73.00**
3"	***IXV48***	**104.50**
4"	***IXV64***	**150.00**

Butt Weld x Heavy Duty Raised End (California Style)

Beveled design for welding to Schedule 40 pipe allows connection to a heavy duty raised end (California style) hose fitting or similar style end.

California style end

Size	Length	Carbon Steel Part #	Carbon Steel Price/E
1½"	1½"	***HDE24***	**$41.10**
2"	1½"	***HDE32***	**41.50**
2½"	1½"	***HDE40***	**51.70**
3"	1½"	***HDE48***	**54.90**
4"	1½"	***HDE64***	**66.25**
5"	1½"	***HDE80***	**82.00**



Clamps for IXH Raised End (California Style) Stems


Drop-forged steel clamps for fast assembly when connecting heavy-duty raised end fittings used for concrete. These clamps can be used to connect the ends of pipes or hoses which use the Raised End or California style fittings listed above. Shipped with double lipped gasket and safety pin. 1½" through 3" are galvanized; 4" and 5" are painted green. Clamp should only be used with safety pin in place.

Hose ID	Forged Steel Clamps Part #	Forged Steel Clamps Price/E	Buna-N Gaskets Part #	Buna-N Gaskets Price/E
1½"	***IXHC150***	**$127.70**	***IXHCG150***	**$14.35**
2"	***IXHC200***	**129.60**	***IXHCG200***	**14.35**
2½"	***IXHC250***	**142.50**	***IXHCG250***	**14.35**
3"	***IXHC300***	**159.00**	***IXHCG300***	**17.90**
4"	***IXHC400***	**204.25**	***IXHCG400***	**17.90**
5"	***IXHC500***	**221.00**	***IXHCG500***	**20.75**





Internal Expansion Ferrules



Hose ID	Hose OD from	Hose OD to	Ferrule Size	*Plated Carbon Steel* Part #	Price/E
1"	1-24/64"	1-28/64"	1-7/16"	***IXF16-1***	**$37.50**
	1-28/64"	1-32/64"	1-1/2"	***IXF16-2***	**37.50**
	1-32/64"	1-36/64"	1-9/16"	***IXF16-3***	**37.50**
1¼"	1-40/64"	1-44/64"	1-11/16"	***IXF20-Z***	**37.15**
	1-44/64"	1-48/64"	1-3/4"	***IXF20-1***	**37.15**
	1-48/64"	1-52/64"	1-13/16"	***IXF20-2***	**37.15**
	1-52/64"	1-56/64"	1-7/8"	***IXF20-3***	**37.15**
	1-56/64"	1-60/64"	1-15/16"	***IXF20-4***	**37.15**
	1-60/64"	2"	2"	***IXF20-5***	**37.15**
	2"	2-4/64"	2-1/16"	***IXF20-6***	**37.15**
1½"	1-56/64"	1-60/64"	1-15/16"	***IXF24-Z***	**35.85**
	1-60/64"	2"	2"	***IXF24-1***	**35.85**
	2"	2-4/64"	2-1/16"	***IXF24-2***	**35.85**
	2-4/64"	2-8/64"	2-1/8"	***IXF24-3***	**35.85**
	2-8/64"	2-12/64"	2-3/16"	***IXF24-4***	**35.85**
	2-12/64"	2-16/64"	2-1/4"	***IXF24-5***	**35.85**
	2-16/64"	2-20/64"	2-5/16"	***IXF24-6***	**35.85**
	2-20/64"	2-24/64"	2-3/8"	***IXF24-7***	**35.85**
2"	2-32/64"	2-36/64"	2-9/16"	***IXF32-Y***	**39.00**
	2-36/64"	2-40/64"	2-5/8"	***IXF32-Z***	**39.00**
	2-40/64"	2-44/64"	2-11/16"	***IXF32-1***	**39.00**
	2-44/64"	2-48/64"	2-3/4"	***IXF32-2***	**39.00**
	2-48/64"	2-52/64"	2-13/16"	***IXF32-3***	**39.00**
	2-52/64"	2-56/64"	2-7/8"	***IXF32-4***	**39.00**
	2-56/64"	2-60/64"	2-15/16"	***IXF32-5***	**39.00**
	2-60/64"	3"	3"	***IXF32-6***	**39.00**
	3"	3-4/64"	3-1/16"	***IXF32-7***	**39.00**
2½"	3"	3-4/64"	3-1/16"	***IXF40-1***	**57.80**
	3-4/64"	3-8/64"	3-1/8"	***IXF40-2***	**57.80**
	3-8/64"	3-12/64"	3-3/16"	***IXF40-3***	**57.80**
	3-12/64"	3-16/64"	3-1/4"	***IXF40-4***	**57.80**
	3-16/64"	3-20/64"	3-5/16"	***IXF40-5***	**57.80**
	3-20/64"	3-24/64"	3-3/8"	***IXF40-6***	**57.80**
	3-24/64"	3-28/64"	3-7/16"	***IXF40-7***	**57.80**
	3-28/64"	3-32/64"	3-1/2"	***IXF40-8***	**57.80**

Hose ID	Hose OD from	Hose OD to	Ferrule Size	*Plated Carbon Steel* Part #	Price/E
3"	3-32/64"	3-36/64"	3-9/16"	***IXF48-T***	**$73.10**
	3-36/64"	3-40/64"	3-5/8"	***IXF48-U***	**73.10**
	3-40/64"	3-44/64"	3-11/16"	***IXF48-V***	**73.10**
	3-44/64"	3-48/64"	3-3/4"	***IXF48-W***	**73.10**
	3-48/64"	3-52/64"	3-13/16"	***IXF48-X***	**73.10**
	3-52/64"	3-56/64"	3-7/8"	***IXF48-Y***	**73.10**
	3-56/64"	3-60/64"	3-15/16"	***IXF48-Z***	**73.10**
	3-60/64"	4"	4"	***IXF48-1***	**81.25**
	4"	4-4/64"	4-1/16"	***IXF48-2***	**81.25**
	4-4/64"	4-8/64"	4-1/8"	***IXF48-3*** [1]	**81.25**
	4-8/64"	4-12/64"	4-3/16"	***IXF48-4*** [1]	**81.25**
	4-12/64"	4-16/64"	4-1/4"	***IXF48-5*** [1]	**81.25**
4"	4-36/64"	4-40/64"	4 -5/8"	***IXF64-T***	**102.00**
	4-40/64"	4-44/64"	4-11/16"	***IXF64-U***	**102.00**
	4-44/64"	4-48/64"	4-3/4"	***IXF64-V***	**102.00**
	4-48/64"	4-52/64"	4-13/16"	***IXF64-W***	**102.00**
	4-52/64"	4-56/64"	4-7/8"	***IXF64-X***	**102.00**
	4-56/64"	4-60/64"	4-15/16"	***IXF64-Y***	**102.00**
	4-60/64"	5"	5"	***IXF64-Z***	**104.75**
	5"	5-4/64"	5-1/16"	***IXF64-1***	**104.75**
	5-4/64"	5-8/64"	5-1/8"	***IXF64-2*** [1]	**104.75**
	5-8/64"	5-12/64"	5-3/16"	***IXF64-3*** [1]	**104.75**
	5-12/64"	5-16/64"	5-1/4"	***IXF64-4*** [1]	**104.75**
	5-16/64"	5-20/64"	5-5/16"	***IXF64-5*** [1]	**104.75**
6"	6-40/64"	6-44/64"	6-11/16"	***IXF96-1***	**POR**
	6-44/64"	6-48/64"	6-3/4"	***IXF96-2***	**POR**
	6-46/64"	6-50/64"	6-25/32"	***IXF96-3***	**POR**
	6-48/64"	6-52/64"	6-13/16"	***IXF96-4***	**POR**
	6-52/64"	6-56/64"	6-7/8"	***IXF96-5***	**POR**
	6-56/64"	6-60/64"	6-15/16"	***IXF96-6***	**POR**
	6-60/64"	7"	7"	***IXF96-7***	**POR**
	7"	7-4/64"	7-1/16"	***IXF96-8***	**POR**
	7-4/64"	7-8/64"	7-1/8"	***IXF96-9***	**POR**
	7-8/64"	7-12/64"	7-3/16"	***IXF96-10***	**POR**
	7-12/64"	7-16/64"	7-1/4"	***IXF96-11***	**POR**
	7-16/64"	7-20/64"	7-5/16"	***IXF96-12***	**POR**
	7-18/64"	7-22/64"	7-11/32"	***IXF96-13***	**POR**
	7-20/64"	7-24/64"	7-3/8"	***IXF96-14***	**POR**

[1] For hoses using ferrule sizes IXF48-3 thru IXF48-5 and IXF64-2 thru IXF64-5, consult the factory for working pressures.


Internally Expanded Permanent Couplings - Scovill Style

SAFETY ALERT Do not interchange with other manufacturer's fittings. SAFETY ALERT

Brass internally expanded permanent coupling are recommended for discharge and suction service. Commonly used in the transfer of fuel in industry to homes, airplanes, ships, etc. The working pressure of the 520-H fitting varies with the size of the fitting, the size and construction of the hose and the media being conveyed. Consult the factory for recommendations. Dixon Holedall stems and ferrules are specifically designed to be used together as a coupling system.

Both the male and female have octagonal facets for tightening with a wrench. The female in 1½" and larger sizes has special lugs for tightening. The stem is expanded to nominal ID of hose for a rigid, uniform, full-flow area.


- Male and female stems are machined from bar stock or solid brass forgings; ferrules are available in brass and stainless steel.
- Couplings are compact, light and streamlined to eliminate catching on curbs and shrubs.
- The H520 fittings are designed for internal expansion only.
- Couplings are pre-lubricated for assembly.
- Hand and electrically operated installation equipment is available. Consult factory for pricing and availability.



male NPT



male NST



female NPSH

female NST

victaulic groove

Hose ID	*Brass* Part #	Price/E	*Brass* Part #	Price/E	*Brass* Part #	Price/E	*Brass* Part #	Price/E	*Brass* Part #	Price/E
3/4"	***H5192***	**$23.05**	**---**	**--**	***H5191-BU***	**$39.85**	**---**	**--**	**---**	**--**
1"	***H5212-A***	**24.20**	***H5212NST***	**$24.60**	***H5211-A-BU***	**42.50**	***H5211NST***	**$45.90**	***G5212***	**$30.10**
1-1/4"	***H5222-A***	**31.85**	**---**	**--**	***H5221-A-BU***	**46.05**	**---**	**--**	**---**	**--**
1-3/8"	***H5272*** [1]	**38.85**	**---**	**--**	***H5271-BU*** [1]	**73.60**	**---**	**--**	**---**	**--**
1-1/2"	***H5232-A***	**39.65**	***H5232NST*** [2]	**39.65**	***H5231-A-BU***	**72.65**	***H5231NST*** [2]	**80.75**	***G5232***	**57.50**
2"	***H5242***	**76.00**	**---**	**--**	***H5241-BU***	**128.15**	**---**	**--**	***G5242***	**80.50**
2-1/2"	***H5252***	**138.00**	**---**	**--**	***H5251*** [3]	**205.30**	**---**	**--**	**---**	**--**
3"	***H5262***	**181.65**	**---**	**--**	***H5261*** [3]	**268.80**	**---**	**--**	**---**	**--**

[1] 1-3/8" stem has 1½" thread

[2] 1½" NST requires special adapter, part # H5231NSTADT

[3] 2½" and 3" female parts have NPSM thread

Note: The fittings on this page are intended for fuel delivery service. See page 386 for information on API 1529 certification.

K Holedall

520-H Ferrules

A wide range of 520-H ferrules permits a perfect assembly of a coupling to a corresponding size of hose within commercial tolerances regardless of wall thickness. Eliminates need for large stock of coupling bodies. Consult Dixon for other hose OD's.



Hose ID	Hose OD from	to	*Brass* Part #	Price/E
	1-8/64"	1-11/64"	***R75AAS***	**$7.95**
¾"	1-12/64"	1-14/64"	***R75AS***	**7.95**
	1-15/64"	1-17/64"	***R75BS***	**7.95**
	1-18/64"	1-20/64"	***R75CS***	**7.95**
	1-24/64"	1-26/64"	***R1AAAS-A***	**9.00**
	1-27/64"	1-29/64"	***R1AAS-A***	**9.00**
	1-30/64"	1-32/64"	***R1AS-A***	**9.00**
1"	1-33/64"	1-35/64"	***R1BS-A***	**9.00**
	1-36/64"	1-38/64"	***R1CS-A***	**9.00**
	1-39/64"	1-41/64"	***R1DS-A***	**9.00**
	1-42/64"	1-44/64"	***R1ES-A***	**9.00**
	1-39/64"	1-42/64"	***R125AAS-A***	**12.95**
	1-43/64"	1-46/64"	***R125AS-A***	**12.95**
1¼"	1-47/64"	1-50/64"	***R125BS-A***	**12.95**
	1-51/64"	1-54/64"	***R125CS-A***	**12.95**
	1-55/64"	1-58/64"	***R125DS-A***	**12.95**
	1-59/64"	1-62/64"	***R125ES***	**12.95**


Hose ID	Hose OD from	to	*Brass* Part #	Price/E
	1-47/64"	1-50/64"	***R1375BS***	**$15.05**
1-3/8"	1-51/64"	1-54/64"	***R1375CS***	**15.05**
	1-55/64"	1-58/64"	***R1375DS***	**15.05**
	1-59/64"	1-62/64"	***R1375ES***	**15.05**
	1-54/64"	1-57/64"	***R15AAAS-A***	**15.90**
	1-58/64"	1-62/64"	***R15AAS-A***	**15.90**
	1-63/64"	2-2/64"	***R15AS-A***	**15.90**
	2-3/64"	2-6/64"	***R15BS-A***	**15.90**
1½"	2-7/64"	2-11/64"	***R15CS-A***	**15.90**
	2-12/64"	2-14/64"	***R15DS-A***	**15.90**
	2-15/64"	2-19/64"	***R15ES-A***	**15.90**
	2-20/64"	2-24/64"	***R15FS***	**15.90**
	2-25/64"	2-28/64"	***R15GS***	**15.90**

Hose ID	Hose OD from	to	*Brass* Part #	Price/E
	2-27/64"	2-30/64"	***R2AAS***	**$28.85**
	2-31/64"	2-34/64"	***R2AS***	**28.85**
	2-35/64"	2-38/64"	***R2BS***	**28.85**
2"	2-39/64"	2-42/64"	***R2CS***	**28.85**
	2-43/64"	2-46/64"	***R2DS***	**28.85**
	2-47/64"	2-50/64"	***R2ES***	**28.85**
	2-51/64"	2-54/64"	***R2FS***	**28.85**
	2-62/64"	3-1/64"	***R25AS***	**43.05**
	3-2/64"	3-6/64"	***R25BS***	**43.05**
2½"	3-7/64"	3-11/64"	***R25CS***	**43.05**
	3-12/64"	3-16/64"	***R25DS***	**43.05**
	3-17/64"	3-21/64"	***R25ES***	**43.05**
	3-22/64"	3-26/64"	***R25FS***	**43.05**
	3-30/64"	3-34/64"	***R3AAAS***	**57.55**
	3-35/64"	3-39/64"	***R3AAS***	**57.55**
3"	3-40/64"	3-45/64"	***R3AS***	**57.55**
	3-46/64"	3-50/64"	***R3BS***	**57.55**
	3-51/64"	3-54/64"	***R3CS***	**57.55**

[1] 1", 1¼" and 1½" ferrules will be replaced by API ferrules on page 386 as inventory is depleted.

API Certified Permanently Attached Petroleum Couplings

The following fittings have been tested and are compliant with API 1529 6th edition. Coupling procedures, ferrule recommendations and API test data are available upon request, please contact the factory.



520-H series male thread

Hose Size	Thread Type	*Brass* Part #	*Brass* Price/E	*Aluminum* Part #	*Aluminum* Price/E
1"	NPT	***H5212-A***	**$24.20**	**---**	**--**
1¼"	NPT	***H5222-A***	**31.85**	**---**	**--**
1½"	NPT	***H5232-A***	**39.65**	**---**	**--**
2"	NPT	***H5242L-A***	**76.00**	***A5242L-A*** [1]	**$63.00**
2½"	NPT	***H5252L-A***	**138.00**	***A5252L-A*** [1]	**110.00**
3"	NPT	***H5262L-A***	**181.65**	***A5262L-A*** [1]	**130.00**
4"	NPT	***H5282L-A***	**320.00**	**---**	**--**



520-H series female thread

Hose Size	Thread Type	*Brass* Part #	*Brass* Price/E
1"	NPSH	***H5211-A-BU***	**$42.50**
1¼"	NPSH	***H5221-A-BU***	**46.05**
1½"	NPSH	***H5231-A-BU***	**72.65**
2"	NPSH	***H5241L-A-BU***	**128.15**
2½"	NPSM	***H5251L-A-BU***	**205.30**
3"	NPSM	***H5261L-A-BU***	**268.80**
4"	NPSM	***H5281L-A-BU***	**395.00**

[1] requires a special thrust plate
2" ***25000HTL24***
2½" ***25000HTL25***
3" ***25000HTL26***

API 520-H Series Ferrules



Hose ID	Hose OD from	Hose OD to	*Brass* Part #	*Brass* Price/E
	1-24/64"	1-26/64"	***R1AAAS-A***	**$9.00**
	1-27/64"	1-29/64"	***R1AAS-A***	**9.00**
	1-30/64"	1-32/64"	***R1AS-A***	**9.00**
1"	1-33/64"	1-35/64"	***R1BS-A***	**9.00**
	1-36/64"	1-38/64"	***R1CS-A***	**9.00**
	1-39/64"	1-41/64"	***R1DS-A***	**9.00**
	1-42/64"	1-44/64"	***R1ES-A***	**9.00**
	1-39/64"	1-42/64"	***R125AAS-A***	**12.95**
	1-43/64"	1-46/64"	***R125AS-A***	**12.95**
1¼"	1-47/64"	1-50/64"	***R125BS-A***	**12.95**
	1-51/64"	1-54/64"	***R125CS-A***	**12.95**
	1-55/64"	1-58/64"	***R125DS-A***	**12.95**
	1-59/64"	1-62/64"	***R125ES-A***	**12.95**
	1-54/64"	1-57/64"	***R15AAAS-A***	**15.90**
	1-58/64"	1-62/64"	***R15AAS-A***	**15.90**
	1-63/64"	2-2/64"	***R15AS-A***	**15.90**
1½"	2-3/64"	2-6/64"	***R15BS-A***	**15.90**
	2-7/64"	2-11/64"	***R15CS-A***	**15.90**
	2-12/64"	2-14/64"	***R15DS-A***	**15.90**
	2-15/64"	2-19/64"	***R15ES-A***	**15.90**

Hose ID	Hose OD from	Hose OD to	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	*Aluminum* Part #	*Aluminum* Price/E
	2-31/64"	2-34/64"	***R2ASS-A***	**$26.00**	***R2AAL-A***	**$22.00**
	2-35/64"	2-38/64"	***R2BSS-A***	**26.00**	***R2BAL-A***	**22.00**
2"	2-39/64"	2-42/64"	***R2CSS-A***	**26.00**	***R2CAL-A***	**22.00**
	2-43/64"	2-46/64"	***R2DSS-A***	**26.00**	***R2DAL-A***	**22.00**
	2-47/64"	2-50/64"	***R2ESS-A***	**26.00**	***R2EAL-A***	**22.00**
	2-62/64"	3-1/64"	***R25ASS-A***	**40.20**	***R25AAL-A***	**33.00**
	3-2/64"	3-6/64"	***R25BSS-A***	**40.20**	***R25BAL-A***	**33.00**
2½"	3-7/64"	3-11/64"	***R25CSS-A***	**40.20**	***R25CAL-A***	**33.00**
	3-12/64"	3-16/64"	***R25DSS-A***	**40.20**	***R25DAL-A***	**33.00**
	3-17/64"	3-21/64"	***R25ESS-A***	**40.20**	***R25EAL-A***	**33.00**
	3-35/64"	3-39/64"	***R3AASS-A***	**51.25**	***R3AAAL-A***	**42.40**
	3-40/64"	3-45/64"	***R3ASS-A***	**51.25**	***R3AAL-A***	**42.40**
3"	3-46/64"	3-50/64"	***R3BSS-A***	**51.25**	***R3BAL-A***	**42.40**
	3-51/64"	3-54/64"	***R3CSS-A***	**51.25**	***R3CAL-A***	**42.40**
	3-55/64"	3-59/64"	***R3DSS-A***	**51.25**	***R3DAL-A***	**42.40**
	4-46/64"	4-48/64"	***R4ESS-A***	**144.50**	**---**	**–**
	4-49/64"	4-51/64"	***R4FSS-A***	**144.50**	**---**	**–**
	4-52/64"	4-54/64"	***R4GSS-A***	**144.50**	**---**	**–**
4"	4-55/64"	4-57/64"	***R4HSS-A***	**144.50**	**---**	**–**
	4-58/64"	4-59/64"	***R4KSS-A***	**144.50**	**---**	**–**
	4-60/64"	4-62/64"	***R4LSS-A***	**144.50**	**---**	**–**
	4-63/64"	5"	***R4MSS-A***	**144.50**	**---**	**–**

Replacement Washers

- replacement washers for 520-H female internally expanded permanent couplings on pages 385 and 386
- Dubl-Grip® female reattachables on page 388

Size	*Buna* Part #	Price/E
¾"	***H5071-BU***	**$1.15**
1"	***H5072-BU***	**1.15**
1¼"	***H5073-BU***	**1.15**
1½"	***H5074-BU***	**1.15**
2"	***H5075-BU***	**1.30**
2½"	***H5076-BU***	**1.30**
3"	***H5077-BU***	**1.30**
4"	***H5078-BU***	**1.75**




Permanent Couplings for Pump Hose

The most economical and trouble-free couplings for gas pump hose. Serrations on the stem become imbedded in the hose eliminating wicking and leakage. The shell extends beyond the stem to prevent cutting of interior walls. Tapered ends of stem and shell protect hose when flexed.

- Couplings provide tamper-proof static connection which cannot be broken without completely damaging coupling and hose.
- internal expansion of stem to nominal ID of hose provides full flow
- Broad, firm grip of coupling extends hose life by making it possible for hose to withstand more flexings.
- Hand and electrically operated installation equipment are available. Consult factory for pricing and availability.
- **Caution**: *Reattach static wire if required.* SAFETY ALERT

Hose ID	Male NPT	Hose OD	*Chrome Plated Brass* Part #	Price/E
5/8"	3/4"	1"	***H5741***	**$14.25**
5/8"	3/4"	1-1/32"	***H5742***	**14.25**
3/4"	3/4"	1-9/64"	***H5751***	**16.10**
3/4"	3/4"	1-11/64"	***H5752***	**16.10**
3/4"	3/4"	1-13/64"	***H5753***	**26.30**
3/4"	3/4"	1-7/32"	***H5754***	**26.30**
3/4"	3/4"	1-17/64"	***H5755*** [1]	**26.30**
1"	1"	1-25/64"	***H5771***	**29.75**
1"	1"	1-29/64"	***H5772***	**29.75**
1"	1"	1-1/2"	***H5773***	**29.75**
1"	1"	1-9/16"	***H5774***	**29.75**


[1] thrust plate required ***25000HTL15***

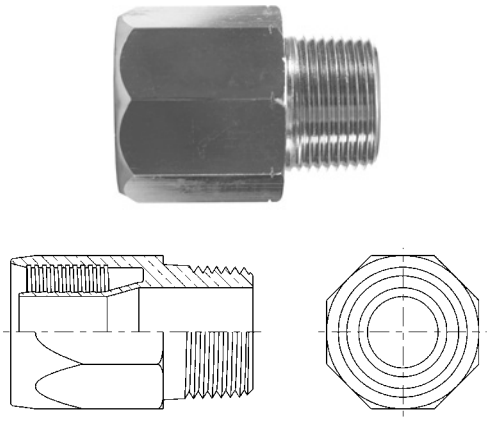

HB Coupling Expander Machine

- hand operated, pull-through type expander
- for use in a fixed location for small production runs or as a portable repair type expander
- attaches sizes ¾" through 2" of the 520-H Series couplings, and all sizes of 570-H and 580-H Series couplings
- expander tooling sold separately

Part #	Price/E
2500HB0000	**$2865.00**

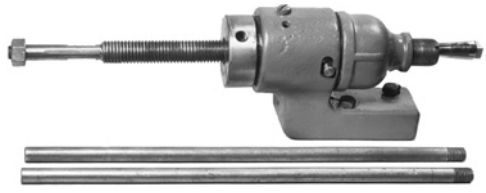


Dubl-Grip® Re-attachable Couplings for Curb Pump Hose

Two-piece re-attachable coupling made of chrome-plated brass for pump hose. Streamlined design prevents damage to hose and fits smartly on new pump equipment. Wide, flat surfaces of body threads protect inside of hose from breaking. Tapered surfaces of sleeve and body cradle hose, prevent one-point strain from flexing. Hose is gripped on its full circumference in two places, insuring a rigid leakproof connection.

- couplings have standard male NPT threads
- worn portion of hose can be removed and Dubl-Grip® can be reapplied
- easy assembly:
  Hose is held in position by sleeve as body is threaded home.
  Only a wrench is required to assemble the Dubl-Grip®.
- **Caution**: *Reattach static wire if required.* SAFETY ALERT


H-600 Series
Dubl-Grip® Swivel Reattachables

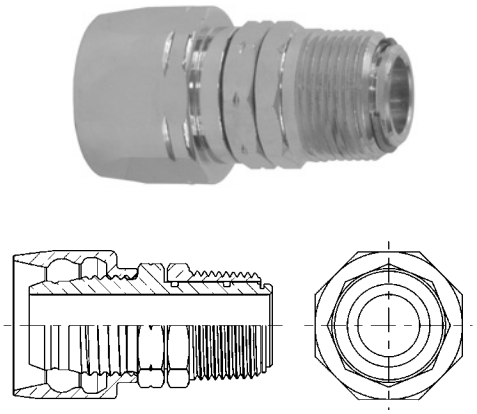

Hose ID	Male NPT	Hose OD	*Chrome Plated Brass* Part #	Price/E
5/8"	3/4"	1-1/16"	***H600*** [1]	**$22.00**
5/8"	3/4"	1"	***H601*** [1]	**22.00**
5/8"	3/4"	1-1/32"	***H602*** [1]	**22.00**
3/4"	3/4"	1-1/8"	***H603***	**36.60**
3/4"	3/4"	1-13/64"	***H604***	**36.60**
3/4"	3/4"	1-1/4"	***H605***	**36.60**
1"	1"	1-3/8"	***H609*** [2]	**56.25**
1"	1"	1-7/16"	***H610*** [2]	**56.25**
1"	1"	1-1/2"	***H611*** [2]	**56.25**

[1] items will be discontinued when stock is depleted
[2] octagonal shape

Dubl-Grip® Reattachables

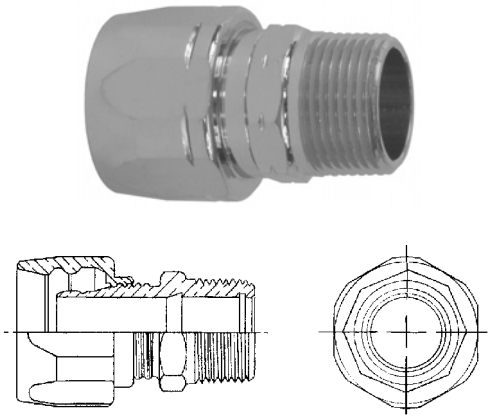

Hose ID	Male NPT	Hose OD	*Chrome Plated Brass* Part #	Price/E
5/8"	3/4"	1"	***850212***	**$19.90**
5/8"	3/4"	1-1/32"	***850213***	**19.90**
5/8"	3/4"	1-1/16"	***850214***	**19.90**
3/4"	3/4"	1-1/8"	***850451***	**26.00**
3/4"	3/4"	1-13/64"	***850455***	**26.00**
3/4"	3/4"	1-1/4"	***850453***	**26.00**
1"	1"	1-3/8"	***850841*** [1]	**39.60**
1"	1"	1-7/16"	***850801*** [1]	**39.60**
1"	1"	1-1/2"	***850811*** [1]	**39.60**


[1] octagonal shape

CIP Internal Expansion (IX) Sanitary Style Hose Couplings

- **Clean-In-Place** (CIP) compliant
- Flow Chief internal expansion (IX) fittings are only to be used with Flow Chief stainless steel ferrules.
- Flow Chief Sanitary fittings are used in the food, dairy and beverage industries.

Sanitary Clamp End Stems


- see pages 405-408 for sanitary style gaskets
- see pages 392-394 for sanitary style clamps
- special plug is required to expand CIP compliant fittings
- special adapter plate is required to expand 1½" CIP compliant fittings
- 3A compliant when assembled by 3A authorized hose shop



Size	*304 Stainless Steel*	
	Part #	Price/E
1½"	***IXSE24-3A***	**$155.00**
2"	***IXSE32-3A***	**195.00**
3"	***IXSE48-3A***	**350.00**

Tube Weld End Stem

- special plug is required to expand CIP compliant fittings



Size	*304 Stainless Steel*	
	Part #	Price/E
2"	***IXPE32-3A***	**$175.00**

Special Expansion Plug for CIP Compliant IX Fittings



Hose Size	Part #
1½"	***IXFDPLG137***
2"	***IXFDPLG187***
3"	***IXFDPLG287***

Flow Chief Ferrules

- the ferrule ID's are designed in increments of 1/16"




Hose ID	Hose OD		*304 stainless steel*	
	from	to	Part #	Price/E
1½" [1]	1-56/64"	1-59/64"	***24PFX1.937***	**$95.50**
	1-60/64"	1-63/64"	***24PFX2.000***	**95.50**
	2"	2-3/64"	***24PFX2.062***	**95.50**
	2-4/64"	2-7/64"	***24PFX2.125***	**95.50**
	2-8/64"	2-11/64"	***24PFX2.187***	**95.50**
	2-12/64"	2-15/64"	***24PFX2.250***	**95.50**
	2-16/64"	2-19/64"	***24PFX2.312*** [2]	**95.50**
2" [1]	2-28/64"	2-31/64"	***32PFX2.500***	**103.80**
	2-32/64"	2-35/64"	***32PFX2.562***	**103.80**
	2-36/64"	2-39/64"	***32PFX2.625***	**103.80**
	2-40/64"	2-43/64"	***32PFX2.687***	**103.80**
	2-44/64"	2-47/64"	***32PFX2.750***	**103.80**
	2-48/64"	2-51/64"	***32PFX2.812***	**103.80**
	2-52/64"	2-55/64"	***32PFX2.875***	**103.80**
	2-56/64"	2-59/64"	***32PFX2.937***	**103.80**
2½"	3"	3-3/64"	***40PFX3.062***	**151.00**
	3-4/64"	3-7/64"	***40PFX3.125***	**151.00**
	3-8/64"	3-11/64"	***40PFX3.187***	**151.00**
	3-12/64"	3-15/64"	***40PFX3.250***	**151.00**
	3-16/64"	3-19/64"	***40PFX3.312***	**151.00**
	3-20/64"	3-23/64"	***40PFX3.375***	**151.00**
	3-28/64"	3-31/64"	***40PFX3.500***	**151.00**

Hose ID	Hose OD		*304 stainless steel*	
	from	to	Part #	Price/E
3"	3-32/64"	3-35/64"	***48PFX3.562***	**$172.50**
	3-36/64"	3-39/64"	***48PFX3.625***	**172.50**
	3-40/64"	3-43/64"	***48PFX3.687***	**172.50**
	3-44/64"	3-47/64"	***48PFX3.750***	**172.50**
	3-48/64"	3-51/64"	***48PFX3.812***	**172.50**
	3-52/64"	3-55/64"	***48PFX3.875***	**172.50**
	3-56/64"	3-59/64"	***48PFX3.937***	**172.50**
	3-60/64"	3-63/64"	***48PFX4.000***	**172.50**
	4"	4-3/64"	***48PFX4.062***	**172.50**
	4-4/64"	4-7/64"	***48PFX4.125***	**172.50**
4"	4-36/64"	4-39/64"	***64PFX4.625***	**215.00**
	4-40/64"	4-43/64"	***64PFX4.687***	**215.00**
	4-44/64"	4-47/64"	***64PFX4.750***	**215.00**
	4-48/64"	4-51/64"	***64PFX4.812***	**215.00**
	4-52/64"	4-55/64"	***64PFX4.875***	**215.00**
	4-56/64"	4-59/64"	***64PFX4.937***	**215.00**

[1] 1½" and 2" ferrules are not serrated
[2] consult the factory for working pressure


Internal Expansion (IX) Sanitary Style Hose Couplings



- sanitary style end
- Flow Chief internal expansion (IX) fittings are only to be used with Flow Chief stainless steel ferrules.
- see pages 405-408 for sanitary style gaskets
- see pages 392-394 for sanitary style clamps

Size	*304 Stainless Steel*	
	Part #	Price/E
1½"	***IXSE24***	**$138.40**
2"	***IXSE32***	**169.60**
2½"	***IXSE40***	**265.00**
3"	***IXSE48***	**333.90**
4"	***IXSE64***	**425.00**

Internal Expansion (IX) Male NPT Stems

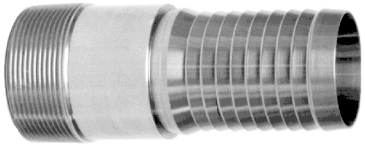

- Flow Chief internal expansion (IX) fittings are only to be used with Flow Chief stainless steel ferrules

Size	*304 Stainless Steel*	
	Part #	Price/E
1½"	***IXMS24***	**$178.00**
2"	***IXMS32***	**180.00**
2½"	***IXMS40***	**230.00**
3"	***IXMS48***	**340.00**
4"	***IXMS64***	**500.00**

K
Holedall

Internal Expansion (IX) Bevel Seat Hose Couplings

- Flow Chief internal expansion (IX) fittings are only to be used with Flow Chief stainless steel ferrules
- see page 418 for bevel seat gaskets

Female Shank



- only use with the IXAN nuts shown below

Size	*304 Stainless Steel*	
	Part #	Price/E
1½"	***IXFS24***	**$154.35**
2"	***IXFS32***	**206.00**
2½"	***IXFS40***	**230.00**
3"	***IXFS48***	**375.00**
4"	***IXFS64***	**395.00**

Threaded Hex Nuts



series 13H *(modified)*

Size	*304 Stainless Steel*	
	Part #	Price/E
1½"	***IXAN24***	**$34.30**
2"	***IXAN32***	**45.40**
2½"	***IXAN40***	**69.30**
3"	***IXAN48***	**88.20**
4"	***IXAN64***	**132.25**

Dixon Sanitary Style Crimp Stems

Sanitary End x Hose Shank

- sanitary style end
- Dixon sanitary crimp stems are only to be used with Dixon stainless steel crimp ferrules
- reference pages 640-641 for crimp recommendations



Size	*316 Stainless Steel* Part #	Price/E
1"	***CSSR100***	**$75.60**
1½"	***CSSR150***	**75.60**
2"	***CSSR200***	**132.50**
3"	***CSSR300***	**302.10**
4"	***CSSR400***	**562.85**

Female Bevel Seat End x Hose Shank



Size	*316 Stainless Steel* Part #	Price/E
1"	***CBSR100*** [1]	**$75.60**
1½"	***CBSR150*** [1]	**75.60**
2"	***CBSR200*** [1]	**132.50**
3"	***CBSR300*** [2]	**302.10**
4"	***CBSR400*** [1]	**562.85**

[1] only use with IXAN nut on page 390
[2] only use with IXAN300 nut

Female I-Line End x Hose Shank



Size	*316 Stainless Steel* Part #	Price/E
1½"	***CILR150***	**$75.60**
2"	***CILR200***	**132.50**
3"	***CILR300***	**302.10**
4"	***CILR400***	**562.85**

Tube Weld End x Hose Shank



Size	*316 Stainless Steel* Part #	Price/E
1½"	***CTER150***	**$75.60**
2"	***CTER200***	**132.50**
3"	***CTER300***	**302.10**
4"	***CTER400***	**562.85**

Dixon Sanitary Crimp Ferrules




- manufactured in AISI 304 stainless steel
- ferrules have a surface finish of 63 or better

Hose ID	Hose OD from	Hose OD to	*304 stainless steel* Part #	Price/E
1"	1-26/64"	1-28/64"	***F16G-1453***	**$51.50**
	1-29/64"	1-31/64"	***F16G-1500***	**51.50**
	1-32/64"	1-34/64"	***F16G-1547***	**51.50**
	1-35/64"	1-37/64"	***F16G-1594***	**51.50**
	1-38/64"	1-40/64"	***F16G-1641***	**51.50**
1½"	1-58/64"	1-61/64"	***F24G-1969***	**58.30**
	1-62/64"	2-1/64"	***F24G-2031***	**58.30**
	2-2/64"	2-5/64"	***F24G-2094***	**58.30**
	2-6/64"	2-9/64"	***F24G-2156***	**58.30**
2"	2-30/64"	2-33/64"	***F32G-2531***	**76.30**
	2-34/64"	2-37/64"	***F32G-2594***	**76.30**
	2-38/64"	2-41/64"	***F32G-2656***	**76.30**
	2-42/64"	2-45/64"	***F32G-2719***	**76.30**
3"	3-39/64"	3-42/64"	***F48G-3625***	**$204.10**
	3-40/64"	3-43/64"	***F48G-3688***	**204.10**
	3-44/64"	3-47/64"	***F48G-3750***	**204.10**
	3-48/64"	3-51/64"	***F48G-3813***	**204.10**
	3-52/64"	3-55/64"	***F48G-3875***	**204.10**
	3-56/64"	3-59/64"	***F48G-3938***	**204.10**
4"	4-40/64"	4-43/64"	***F64G-4688***	**409.15**
	4-44/64"	4-47/64"	***F64G-4750***	**409.15**
	4-48/64"	4-51/64"	***F64G-4813***	**409.15**
	4-52/64"	4-55/64"	***F64G-4875***	**409.15**
	4-56/64"	4-59/64"	***F64G-4938***	**409.15**

Clamps

Service pressure ratings are based on the following parameters: matching elastomer gaskets and weld ferrules properly aligned and assembled with the clamps tightened to the required torques. Tests are done hydrostatically with no water hammer or shock loads. Please note the pressure ratings of the described unions are above the recommended pipe line operating pressures.

Single Pin Squeeze Clamps - *13MHHM-Q*

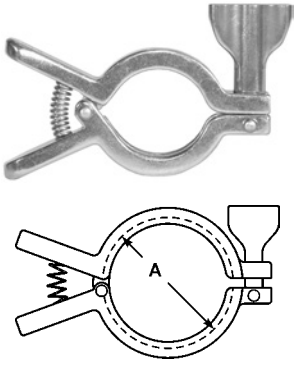


- patented design

Tube OD	Service Pressure Rating @ 70°F *	Service Pressure Rating @ 250°F *	Dimension A	*304 Stainless Steel* Part #	Price/E
½" - ¾"	**1500 PSI**	**1200 PSI**	1.062	***13MHHM-Q75***	**$32.10**
1" - 1½"	**500 PSI**	**300 PSI**	2.122	***13MHHM-Q100150***	**39.45**
2"	**450 PSI**	**250 PSI**	2.654	***13MHHM-Q200***	**46.25**
2½"	**400 PSI**	**200 PSI**	3.185	***13MHHM-Q250***	**59.65**
3"	**350 PSI**	**175 PSI**	3.717	***13MHHM-Q300***	**62.55**
4"	**300 PSI**	**150 PSI**	4.820	***13MHHM-Q400***	**72.65**

* wing nut tightened to 25 in. lbs. torque

Single Pin Heavy Duty Clamps - *13MHHM*

with cross hole wing nut

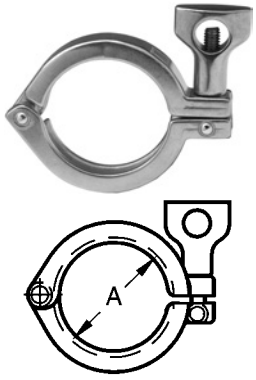


Tube OD	Service Pressure Rating @ 70°F *	Service Pressure Rating @ 250°F *	Dimension A	*304 Stainless Steel* Part #	Price/E
½" - ¾"	**1500 PSI**	**1200 PSI**	1.062	***13MHHM50-75***	**$8.30**
1" - 1½"	**500 PSI**	**300 PSI**	2.122	***13MHHM100-150***	**15.15**
2"	**450 PSI**	**250 PSI**	2.654	***13MHHM200***	**17.00**
2½"	**400 PSI**	**200 PSI**	3.185	***13MHHM250***	**19.65**
3"	**350 PSI**	**175 PSI**	3.717	***13MHHM300***	**20.90**
4"	**300 PSI**	**150 PSI**	4.820	***13MHHM400***	**26.90**
5"	**225 PSI**	**100 PSI**	5.820	***13MHHM500***	**84.10**
6"	**150 PSI**	**75 PSI**	6.695	***13MHHM600***	**61.00**
8"	**100 PSI**	**50 PSI**	8.695	***13MHHM800***	**84.50**

* wing nut tightened to 25 in. lbs. torque

Single Pin Heavy Duty Clamps - *13MHHM*


with serrated wing nut

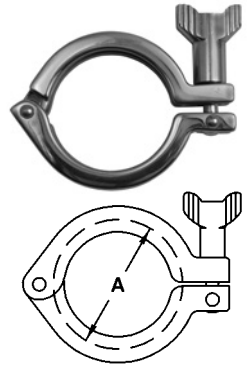

Tube OD	Service Pressure Rating @ 70°F *	Service Pressure Rating @ 250°F *	Dimension A	*304 Stainless Steel* Part #	Price/E
½" - ¾"	**1500 PSI**	**1200 PSI**	1.062	***13MHHM50-75SN***	**$8.30**
1" - 1½"	**500 PSI**	**300 PSI**	2.122	***13MHHM100-150SN***	**15.15**
2"	**450 PSI**	**250 PSI**	2.654	***13MHHM200SN***	**17.00**
2½"	**400 PSI**	**200 PSI**	3.185	***13MHHM250SN***	**19.65**
3"	**350 PSI**	**175 PSI**	3.717	***13MHHM300SN***	**20.90**
4"	**300 PSI**	**150 PSI**	4.820	***13MHHM400SN***	**26.90**
6"	**150 PSI**	**75 PSI**	6.695	***13MHHM600SN***	**61.00**
8"	**100 PSI**	**50 PSI**	8.695	***13MHHM800SN***	**84.50**

* wing nut tightened to 25 in. lbs. torque

Double Pin Heavy Duty Clamps - *13MHHM-DP*

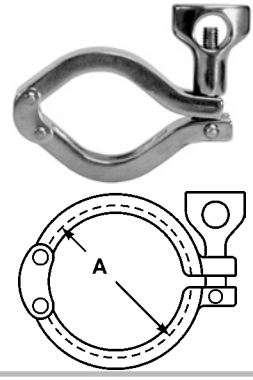


Tube OD	Service Pressure Rating @ 70°F *	Service Pressure Rating @ 250°F *	Dimension A	*304 Stainless Steel* Part #	Price/E
1" - 1½"	**500 PSI**	**300 PSI**	2.122	***13MHHM-DP100150***	**$19.75**
2"	**450 PSI**	**250 PSI**	2.654	***13MHHM-DP200***	**22.45**
2½"	**400 PSI**	**200 PSI**	3.185	***13MHHM-DP250***	**25.95**
3"	**350 PSI**	**175 PSI**	3.717	***13MHHM-DP300***	**29.20**
4"	**300 PSI**	**150 PSI**	4.820	***13MHHM-DP400***	**35.70**
10"	**100 PSI**	**50 PSI**	10.740	***13MHHM-DP1000***	**254.90**

* wing nut tightened to 25 in. lbs. torque

Clamps

3 Segment Clamps - *13MHHM-3P*






Tube OD	Service Pressure Rating @ 70°F *	Dimension A	304 Stainless Steel Part #	Price/E
1" - 1½"	**600 PSI**	2.122	***13MHHM-3P100150***	**$26.75**
2"	**550 PSI**	2.654	***13MHHM-3P200***	**30.70**
2½"	**450 PSI**	3.185	***13MHHM-3P250***	**36.85**
3"	**350 PSI**	3.717	***13MHHM-3P300***	**43.75**
4"	**300 PSI**	4.820	***13MHHM-3P400***	**52.25**
12"	**75 PSI**	12.740	***13MHHM-3P1200***	**623.30**

* wing nut tightened to 25 in. lbs. torque


Bolted Clamps - *13MHP*





½" - ¾"






1" - 12"

Tube OD	Service Pressure Rating @ 70°F *	Service Pressure Rating @ 250°F *	Dimension A	304 Stainless Steel Part #	Price/E
½" - ¾"	**1500 PSI**	**1200 PSI**	1.062	***13MHP75***	**$27.35**
1" - 1½"	**1500 PSI**	**1200 PSI**	2.046	***13MHP100-150***	**30.00**
2"	**1000 PSI**	**800 PSI**	2.578	***13MHP200***	**37.35**
2½"	**1000 PSI**	**800 PSI**	3.110	***13MHP250***	**40.85**
3"	**1000 PSI**	**800 PSI**	3.640	***13MHP300***	**49.70**
4"	**800 PSI**	**600 PSI**	4.744	***13MHP400***	**56.15**
6"	**300 PSI**	**200 PSI**	6.632	***13MHP600***	**92.15**
8"	**250 PSI**	**150 PSI**	8.638	***13MHP800***	**291.15**
10"	**200 PSI**	**125 PSI**	10.740	***13MHP1000***	**819.55**
12"	**150 PSI**	**100 PSI**	12.740	***13MHP1200***	**924.20**

* bronze nuts tightened to 20 ft. lbs. torque

Toggle Clamps - *13MHLA*






Tube OD	Service Pressure Rating @ 70°F *	Dimension A	304 Stainless Steel Part #	Price/E
1" - 1½"	**150 PSI**	2.122	***13MHLA100-150***	**$53.50**
2"	**150 PSI**	2.654	***13MHLA200***	**56.10**
2½"	**150 PSI**	3.185	***13MHLA250***	**60.25**
3"	**150 PSI**	3.717	***13MHLA300***	**95.80**
4"	**100 PSI**	4.820	***13MHLA400***	**101.80**

* screw tightened to maximum

Clamps

T-bolt Clamps - *13MO*






- 1" - 3" nuts tightened to 20 in. lb. of torque
  4" nuts tightened to 30 in. lb. of torque
  6" nuts tightened to 40 in. lb. of torque
  8" - 12" nuts tightened to 50 in. lb. of torque
- all nuts are brass

Tube OD	Service Pressure Rating @ 70°F	Dimension A	*304 Stainless Steel* Part #	Price/E
1" - 1½"	**500**	2.080	***13MO100-150***	**$35.20**
2"	**350**	2.610	***13MO200***	**38.70**
2½"	**300**	3.140	***13MO250***	**47.45**
3"	**200**	3.670	***13MO300***	**48.35**
4"	**100**	4.780	***13MO400***	**67.90**
6"	**75**	6.690	***13MO600***	**94.00**
8" *	**50**	8.690	***13MO800***	**140.15**
10" *	**40**	10.690	***13MO1000***	**177.15**
12" *	**30**	12.690	***13MO1200***	**235.75**

* 2 bolt configuration

Dairy Clamps - *13WGC*






Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1" - 1½"	2.080	***13WGC100-150***	**$12.45**
2"	2.610	***13WGC200***	**13.05**
2½"	3.140	***13WGC250***	**16.00**
3"	3.670	***13WGC300***	**17.25**
4"	4.780	***13WGC400***	**20.45**

L
Sanitary

Accessories


	Description	Part #	Price/E
 hex wing nut  cross hole wing nut  mini cross hole wing nut  serrated wing nut	hex wing nut cross hole wing nut mini cross hole wing nut serrated wing nut	NEW ***13WNH*** ***13WNX*** NEW ***13WNXM*** ***13WNS***	**$11.40** **11.40** **11.40** **11.40**
 rivet pin for single pin clamp	rivet pin for ½" - 5" single pin clamps rivet pin for 6", 8", 10" and 12" single pin clamps	***13RP*** ***13RP6***	**4.35** **5.30**
 threaded eye bolt	5/16"-18 x 2" threaded eye bolt for ½" - 5" clamps 5/16"-18 x 2½" threaded eye bolt for 6", 8", 10" and 12" clamps	***13IB*** ***13IB6***	**3.55** **3.55**

Clamp Caps

End Caps - *16AMP*


- Specify if you are using a piping system or a tubing system when ordering.

Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	*316L Stainless Steel* Part #	*316L Stainless Steel* Price/E
½" - ¾"	.187	.992	***16AMP-G50-75***	**$5.70**	***16AMP-R50-75***	**$7.80**
1" - 1½"	.250	1.984	***16AMP-G100-150***	**8.25**	***16AMP-R100-150***	**10.10**
2"	.250	2.516	***16AMP-G200***	**9.05**	***16AMP-R200***	**13.05**
2½"	.250	3.047	***16AMP-G250***	**13.60**	***16AMP-R250***	**18.90**
3"	.250	3.579	***16AMP-G300***	**18.65**	***16AMP-R300***	**25.60**
4"	.312	4.682	***16AMP-G400***	**34.70**	***16AMP-R400***	**49.20**
5"	.312	5.687	NEW ***16AMP-G500***	**315.65**	NEW ***16AMP-R500***	**378.80**
6"	.437	6.570	***16AMP-G600***	**136.40**	***16AMP-R600***	**165.00**
8"	.437	8.570	***16AMP-G800***	**302.65**	***16AMP-R800***	**370.15**
10"	.437	10.570	***16AMP-G1000***	**486.20**	---	---



Thermometer Caps - *B23BMP*

Tube OD	Dimensions A	Dimensions B	Dimensions C	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	*316L Stainless Steel* Part #	*316L Stainless Steel* Price/E
½"	.500	.993	1/8 NPT	---	---	***B23BMP-R5018***	**$198.35**
¾"	.500	.993	1/4 NPT	---	---	***B23BMP-R7514***	**220.40**
1"	.625	1.984	1/2 NPT	***B23BMP-G100***	**$37.00**	***B23BMP-R100***	**46.05**
1½"	.625	1.984	3/4 NPT	***B23BMP-G150***	**32.40**	***B23BMP-R150***	**46.05**
2"	.625	2.516	3/4 NPT	***B23BMP-G200***	**48.80**	***B23BMP-R200***	**61.15**
2½"	.625	3.047	3/4 NPT	***B23BMP-G250***	**63.85**	***B23BMP-R250***	**99.20**
3"	.625	3.579	3/4 NPT	***B23BMP-G300***	**84.00**	***B23BMP-R300***	**106.40**
4"	.625	4.682	3/4 NPT	***B23BMP-G400***	**126.70**	***B23BMP-R400***	**170.60**

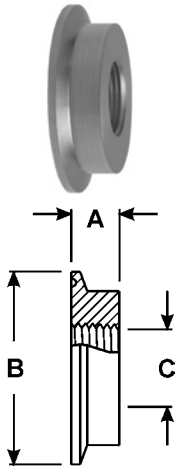


Clamp Ferrules

Roll-on Expanding Ferrules - *14RMP*

For use when modifying or repairing existing on-site farm milk handling systems.


Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	*316L Stainless Steel* Part #	*316L Stainless Steel* Price/E
1"	.750	1.005	***14RMP-G100***	**$9.35**	***14RMP-R100***	**$46.25**
1½"	1.125	1.505	***14RMP-G150***	**11.85**	***14RMP-R150***	**26.55**
2"	1.312	2.005	***14RMP-G200***	**15.60**	***14RMP-R200***	**40.20**
2½"	1.375	2.505	***14RMP-G250***	**19.65**	***14RMP-R250***	**128.25**
3"	1.437	3.005	***14RMP-G300***	**24.75**	***14RMP-R300***	**113.65**
4"	1.500	4.005	***14RMP-G400***	**36.15**	***14RMP-R400***	**221.90**

NEW

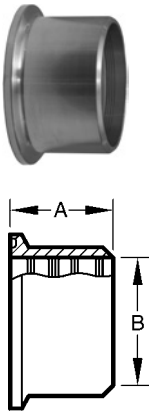


Clamp Ferrules

3A Short Weld Ferrules - *14WMP*

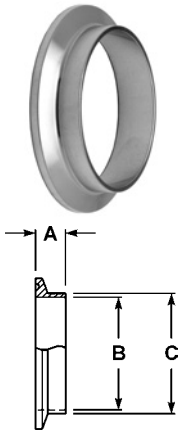


Tube OD	Dimensions			304 Stainless Steel		316L Stainless Steel	
	A	B	C	Part #	Price/E	Part #	Price/E
½"	.500	.370	.500	***14WMP-G50***	**$6.85**	***14WMP-R50***	**$9.10**
¾"	.500	.620	.750	***14WMP-G75***	**6.85**	***14WMP-R75***	**9.10**
1"	.500	.870	1.000	***14WMP-G100***	**7.20**	***14WMP-R100***	**10.10**
1½"	.500	1.370	1.500	***14WMP-G150***	**7.20**	***14WMP-R150***	**10.10**
2"	.500	1.870	2.000	***14WMP-G200***	**8.60**	***14WMP-R200***	**11.90**
2½"	.500	2.370	2.500	***14WMP-G250***	**12.40**	***14WMP-R250***	**18.90**
3"	.500	2.870	3.000	***14WMP-G300***	**16.35**	***14WMP-R300***	**22.70**
4"	.625	3.834	4.000	***14WMP-G400***	**25.95**	***14WMP-R400***	**33.75**
5"	.750	4.782	5.000	***14WMP-G500***	**332.70**	***14WMP-R500***	**408.15**
6"	.875	5.782	6.000	***14WMP-G600***	**114.45**	***14WMP-R600***	**145.00**
8"	.875	7.782	8.000	***14WMP-G800***	**150.80**	***14WMP-R800***	**208.25**
10"	.875	9.782	10.000	***14WMP-G1000***	**307.35**	***14WMP-R1000***	**427.95**
12"	.875	11.760	12.000	***14WMP-G1200***	**552.55**	***14WMP-R1200***	**755.70**

3A Long Weld Ferrules - *L14AM7*

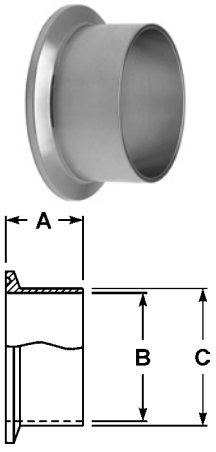

Tube OD	Dimensions			304 Stainless Steel		316L Stainless Steel	
	A	B	C	Part #	Price/E	Part #	Price/E
½"	1.125	.370	.500	***L14AM7-G50***	**$9.20**	***L14AM7-R50***	**$11.80**
¾"	1.125	.620	.750	***L14AM7-G75***	**9.20**	***L14AM7-R75***	**11.80**
1"	1.125	.870	1.000	***L14AM7-G100***	**10.80**	***L14AM7-R100***	**14.25**
1½"	1.125	1.370	1.500	***L14AM7-G150***	**10.80**	***L14AM7-R150***	**14.25**
2"	1.125	1.870	2.000	***L14AM7-G200***	**13.65**	***L14AM7-R200***	**17.70**
2½"	1.125	2.370	2.500	***L14AM7-G250***	**17.35**	***L14AM7-R250***	**26.70**
3"	1.125	2.870	3.000	***L14AM7-G300***	**22.75**	***L14AM7-R300***	**32.15**
4"	1.125	3.834	4.000	***L14AM7-G400***	**32.30**	***L14AM7-R400***	**43.20**
6"	1.500	5.782	6.000	***L14AM7-G600***	**211.25**	***L14AM7-R600***	**273.30**
8"	1.500	7.782	8.000	***L14AM7-G800***	**281.80**	***L14AM7-R800***	**399.15**
10"	1.750	9.782	10.000	***L14AM7-G1000***	**595.20**	***L14AM7-R1000***	**775.40**
12"	1.750	11.760	12.000	***L14AM7-G1200***	**909.70**	***L14AM7-R1200***	**1111.00**


3A Automatic Weld Ferrules - *TL14AM7*

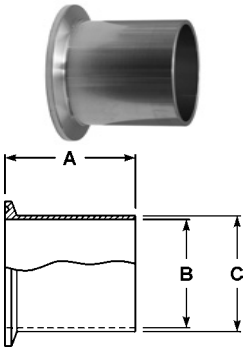

- meets ASME BPE-2007 specifications

Tube OD	Dimensions			316L Stainless Steel	
	A	B	C	Part #	Price/E
½"	1.750	.370	.500	***TL14AM7-R50***	**$37.60**
¾"	1.750	.620	.750	***TL14AM7-R75***	**37.60**
1"	1.750	.870	1.000	***TL14AM7-R100***	**43.20**
1½"	1.750	1.370	1.500	***TL14AM7-R150***	**43.20**
2"	2.250	1.870	2.000	***TL14AM7-R200***	**76.55**
3"	2.250	2.870	3.000	***TL14AM7-R300***	**146.25**

3A Tank Weld Ferrules (light duty) - *14WLMP*




Tube OD	Dimensions				304 Stainless Steel		316L Stainless Steel	
	A	B	C	D	Part #	Price/E	Part #	Price/E
1"	3.000	.870	1.000	1.984	***14WLMP-G100***	**$28.40**	***14WLMP-R100***	**$90.95**
1½"	3.000	1.370	1.500	1.984	***14WLMP-G150***	**28.40**	***14WLMP-R150***	**90.95**
2"	3.000	1.870	2.000	2.516	***14WLMP-G200***	**36.10**	***14WLMP-R200***	**122.20**
2½"	3.000	2.370	2.500	3.047	***14WLMP-G250***	**49.75**	***14WLMP-R250***	**173.60**
3"	4.000	2.870	3.000	3.579	***14WLMP-G300***	**62.25**	***14WLMP-R300***	**230.80**
4"	4.000	3.834	4.000	4.682	***14WLMP-G400***	**94.35**	***14WLMP-R400***	**346.45**
6"	6.000	5.782	6.000	6.562	***14WLMP-G600***	**508.70**	***14WLMP-R600***	**701.30**

Clamp Ferrules

Tank Weld Ferrules (heavy wall) - *14MPW*


- ½" - 4" certified to ASME SA479; 6" certified to ASME SA312

Tube OD	Dimensions A	B	C	D	*316L Stainless Steel* Part #	Price/E
½"	1.625	.321	.502	.984	***14MPW-R50***	**$70.10**
¾"	1.625	.574	.750	.984	***14MPW-R75***	**70.10**
1"	1.625	.870	1.160	1.984	***14MPW-R100***	**36.00**
1½"	1.625	1.370	1.676	1.984	***14MPW-R150***	**36.00**
2"	1.750	1.870	2.192	2.516	***14MPW-R200***	**45.65**
2½"	1.750	2.370	2.708	3.047	***14MPW-R250***	**63.35**
3"	1.813	2.870	3.224	3.579	***14MPW-R300***	**83.45**
4"	2.125	3.834	4.256	4.682	***14MPW-R400***	**147.95**
6"	2.500	5.758	6.192	6.562	***14MPW-R600***	**937.70**

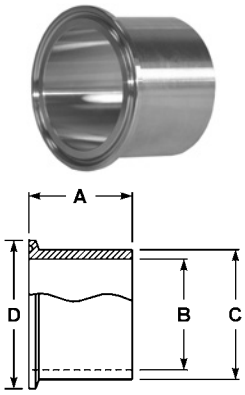

Reducing Ferrules - *B31WMP*

Tube OD	Dimensions A	B	C	*304 Stainless Steel* Part #	Price/E	*316L Stainless Steel* Part #	Price/E
2" x 1"	.500	.870	1.000	***B31WMP-G200100***	**$133.20**	***B31WMP-R200100***	**$180.95**
2½" x 1½"	.500	1.370	1.500	***B31WMP-G250150***	**261.30**	**---**	**---**
2½" x 2"	.500	1.870	2.000	***B31WMP-G250200***	**261.60**	**---**	**---**
3" x 2"	.500	1.870	2.000	***B31WMP-G300200***	**315.30**	**---**	**---**
4" x 2"	.625	1.870	2.000	***B31WMP-G400200***	**414.80**	**---**	**---**
4" x 3"	.625	2.870	3.000	***B31WMP-G400300***	**570.05**	**---**	**---**

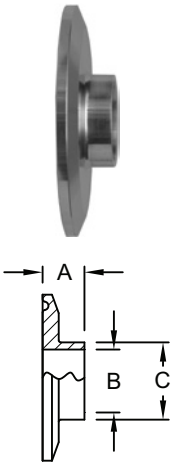


Clamp Adapters

Clamp x Plain Bevel Seat Adapters with Hex Nut - *17MP-14*


- hex nut is CF8 (304 stainless)

Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1"	3.000	***17MP-14-G100***	**$344.20**
1½"	3.000	***17MP-14-G150***	**319.45**
2"	3.000	***17MP-14-G200***	**409.90**
2½"	3.500	***17MP-14-G250***	**527.60**
3"	3.750	***17MP-14-G300***	**726.50**
4"	4.000	***17MP-14-G400***	**1118.50**

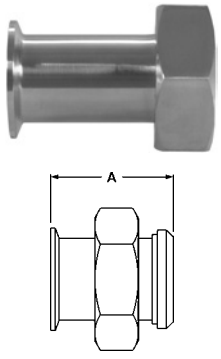


Clamp x Threaded Bevel Seat Adapters - *17MP-15*

Size	Dimension A	*304 Stainless Steel* Part #	Price/E
1"	1.843	***17MP-15-G100***	**$269.75**
1½"	1.843	***17MP-15-G150***	**232.05**
2"	1.875	***17MP-15-G200***	**263.35**
2½"	2.000	***17MP-15-G250***	**398.15**
3"	2.031	***17MP-15-G300***	**476.55**
4"	2.151	***17MP-15-G400***	**1060.60**



Clamp Adapters

Clamp x Male NPT Adapters - *21MP*

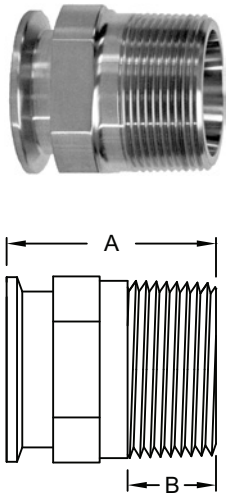


Tube OD	Thread Size	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	*316L Stainless Steel* Part #	*316L Stainless Steel* Price/E
1/2"	1/4"	2.000	.595	---	---	***21MP-R5025***	**$82.80**
1/2"	3/8"	2.000	.600	---	---	***21MP-R50375***	**82.80**
1/2"	1/2"	1.625	.782	---	---	***21MP-R50***	**75.45**
1/2"	3/4"	2.000	.794	---	---	***21MP-R5075***	**112.85**
3/4"	1/4"	2.000	.595	---	---	***21MP-R7525***	**91.95**
3/4"	3/8"	2.000	.600	---	---	***21MP-R75375***	**122.95**
3/4"	1/2"	2.000	.782	---	---	***21MP-R7550***	**91.95**
3/4"	3/4"	1.787	.794	---	---	***21MP-R75***	**64.00**
3/4"	1"	2.250	.985	---	---	***21MP-R75100***	**745.65**
1"	1/4"	2.161	.595	---	---	***21MP-R10025***	**223.35**
1"	3/8"	2.187	.600	---	---	***21MP-R100375***	**223.45**
1"	1/2"	2.187	.782	---	---	***21MP-R10050***	**140.45**
1"	3/4"	2.187	.794	***21MP-G10075***	**$92.00**	***21MP-R10075***	**140.45**
1"	1"	2.250	.985	***21MP-G100***	**88.70**	***21MP-R100***	**109.70**
1"	1-1/4"	2.438	1.009	***21MP-G100125***	**183.35**	***21MP-R100125***	**210.00**
1"	1-1/2"	2.438	1.025	***21MP-G100150***	**183.35**	***21MP-R100150***	**210.00**
1"	2"	2.625	1.058	***21MP-G100200***	**305.25**	***21MP-R100200***	**387.50**
1-1/2"	3/8"	2.187	.600	***21MP-G150375***	**179.75**	***21MP-R150375***	**224.65**
1-1/2"	1/2"	2.187	.782	***21MP-G15050***	**142.30**	***21MP-R15050***	**164.35**
1-1/2"	3/4"	2.187	.794	***21MP-G15075***	**148.45**	***21MP-R15075***	**170.50**
1-1/2"	1"	2.437	.985	***21MP-G150100***	**91.60**	***21MP-R150100***	**105.95**
1-1/2"	1-1/4"	2.438	1.009	***21MP-G150125***	**161.80**	***21MP-R150125***	**186.55**
1-1/2"	1-1/2"	2.250	1.025	***21MP-G150***	**87.80**	***21MP-R150***	**108.25**
1-1/2"	2"	2.625	1.058	***21MP-G150200***	**204.40**	***21MP-R150200***	**354.45**
1-1/2"	2-1/2"	3.281	1.571	***21MP-G150250***	**507.60**	***21MP-R150250***	**585.70**
2"	1/2"	2.187	.782	***21MP-G20050***	**341.40**	***21MP-R20050***	**410.35**
2"	3/4"	2.188	.794	***21MP-G20075***	**286.30**	***21MP-R20075***	**369.10**
2"	1"	2.469	.985	***21MP-G200100***	**222.90**	***21MP-R200100***	**343.10**
2"	1-1/4"	2.469	1.009	***21MP-G200125***	**342.65**	***21MP-R200125***	**498.30**
2"	1-1/2"	2.625	1.009	***21MP-G200150***	**105.40**	***21MP-R200150***	**151.90**
2"	2"	2.638	1.058	***21MP-G200***	**106.10**	***21MP-R200***	**159.35**
2"	2-1/2"	3.125	1.571	***21MP-G200250***	**408.50**	***21MP-R200250***	**473.20**
2"	4"	3.500	1.734	***21MP-G200400***	**895.35**	***21MP-R200400***	**1064.75**
2-1/2"	1/2"	2.781	.782	***21MP-G25050*** NEW	**478.65**	***21MP-R25050***	**676.80**
2-1/2"	1"	2.781	.782	***21MP-G250100***	**390.40**	***21MP-R250100***	**473.20**
2-1/2"	1-1/2"	2.781	1.025	***21MP-G250150***	**374.55**	***21MP-R250150***	**473.20**
2-1/2"	2"	2.781	1.058	***21MP-G250200***	**332.25**	***21MP-R250200***	**473.20**
2-1/2"	2-1/2"	2.875	1.571	***21MP-G250***	**321.45**	***21MP-R250***	**382.60**
2-1/2"	3"	3.690	1.634	***21MP-G250300***	**720.55**	***21MP-R250300*** NEW	**755.25**
3"	1"	3.000	.985	***21MP-G300100***	**843.45**	***21MP-R300100***	**806.35**
3"	1-1/2"	3.000	1.009	***21MP-G300150***	**571.25**	***21MP-R300150***	**806.35**
3"	2"	3.000	1.058	***21MP-G300200***	**571.25**	***21MP-R300200*** NEW	**806.35**
3"	2-1/2"	3.000	1.571	***21MP-G300250***	**571.25**	***21MP-R300250***	**806.35**
3"	3"	3.070	1.634	***21MP-G300***	**193.75**	***21MP-R300***	**279.50**
4"	3"	3.813	1.634	***21MP-G400300***	**800.90**	***21MP-R400300***	**1137.00**
4"	4"	3.155	1.734	***21MP-G400***	**275.20**	***21MP-R400***	**674.25**
6"	6"	4.500	1.946	***21MP-G600***	**1471.60**	***21MP-R600***	**1557.25**

Clamp Adapters


Clamp x Female NPT Adapters - *22MP*

Tube OD	Thread Size	Dimension A	304 Stainless Steel Part #	304 Stainless Steel Price/E	316L Stainless Steel Part #	316L Stainless Steel Price/E
1/2"	1/8"	1.250	---	---	22MP-R50-125	$183.90
1/2"	1/4"	1.500	---	---	22MP-R5025	64.15
1/2"	3/8"	1.500	---	---	22MP-R50375	183.90
1/2"	1/2"	1.500	---	---	22MP-R50	75.15
1/2"	3/4"	1.625	---	---	22MP-R5075	183.90
3/4"	1/4"	1.500	---	---	22MP-R7525	186.45
3/4"	1/2"	1.500	---	---	22MP-R7550	186.45
1"	1/4"	1.625	---	---	22MP-R10025	245.30
1"	1/2"	1.625	22MP-G10050	$219.20	22MP-R10050	214.40 NEW
1"	3/4"	1.625	22MP-G10075	219.20	22MP-R10075	245.30
1"	1"	1.625	22MP-G100	96.55	22MP-R100	117.80
1"	1-1/4"	1.625	22MP-G100125	286.30	22MP-R100125	352.60 NEW
1-1/2"	3/8"	1.625	22MP-G150375 NEW	211.35	22MP-R150375	254.45
1-1/2"	1/2"	1.625	22MP-G15050	211.35	22MP-R15050	106.40 NEW
1-1/2"	3/4"	1.625	22MP-G15075	158.50	22MP-R15075	254.45
1-1/2"	1"	1.625	22MP-G150100	84.60	22MP-R150100	101.05
1-1/2"	1-1/2"	2.250	22MP-G150	95.45	22MP-R150	124.25
1-1/2"	2"	2.250	22MP-G150200	299.25	22MP-R150200	343.30
2"	1/2"	1.687	22MP-G20050	316.20	22MP-R20050	399.75
2"	1"	1.687	22MP-G200100	306.25	22MP-R200100	390.95 NEW
2"	1-1/2"	1.656	22MP-G200150	104.95	22MP-R200150	390.95
2"	2"	2.344	22MP-G200	105.10	22MP-R200	165.00
2"	2-1/2"	2.406	22MP-G200250	439.45	22MP-R200250	633.15 NEW
2-1/2"	2"	1.719	22MP-G250200	548.10	22MP-R250200	1159.40
2-1/2"	2-1/2"	2.093	22MP-G250	322.25	22MP-R250	352.00
2-1/2"	3"	2.187	22MP-G250300	982.45	22MP-R250300	1282.55 NEW
3"	2"	2.187	22MP-G300200	659.35	22MP-R300200	1143.95
3"	2-1/2"	2.187	22MP-G300250 NEW	659.35	22MP-R300250	967.50
3"	3"	2.187	22MP-G300	190.20	22MP-R300	520.85
4"	4"	3.652	22MP-G400	524.90	22MP-R400	727.30 NEW

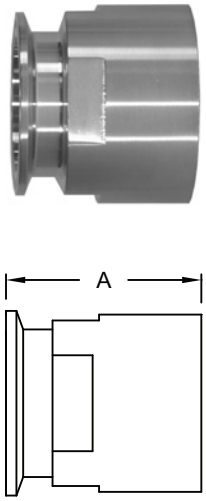

Rubber Hose Adapters - *14MPHR*


Tube OD	Hose Size	Dimensions A	Dimensions B	304 Stainless Steel Part #	304 Stainless Steel Price/E	316L Stainless Steel Part #	316L Stainless Steel Price/E
1/2"	1/8"	1.250	.125	---	---	14MPHR-R50125	$128.20
1/2"	1/4"	1.500	.250	---	---	14MPHR-R5025	128.20
1/2"	3/8"	1.500	.375	---	---	14MPHR-R50375	128.20
1/2"	1/2"	1.500	.500	---	---	14MPHR-R50	84.50
1/2"	3/4"	1.500	.750	---	---	14MPHR-R5075	128.20
3/4"	1/8"	1.500	.125	---	---	14MPHR-R75125	102.30
3/4"	1/4"	1.500	.250	---	---	14MPHR-R7525	102.30
3/4"	3/8"	1.500	.375	---	---	14MPHR-R75375	102.30
3/4"	1/2"	1.500	.500	---	---	14MPHR-R7550	102.30
3/4"	3/4"	1.500	.750	---	---	14MPHR-R75	88.35
1"	1"	1.688	1.000	14MPHR-G100	$39.95	14MPHR-R100	170.05
1"	3/8"	1.500	.375	---	---	14MPHR-R100375	192.00
1"	1/2"	1.500	.500	14MPHR-G10050	148.95	14MPHR-R10050	184.40
1"	3/4"	1.688	.750	14MPHR-G10075	148.95	14MPHR-R10075	192.00
1-1/2"	1/4"	1.500	.250	---	---	14MPHR-R15025	191.85
1-1/2"	1/2"	1.500	.500	14MPHR-G15050	115.00	14MPHR-R15050	191.85
1-1/2"	5/8"	1.500	.625	14MPHR-G150625	151.55	14MPHR-R150625	191.85
1-1/2"	3/4"	1.500	.750	14MPHR-G15075 NEW	115.00	14MPHR-R15075	191.85
1-1/2"	1"	1.687	1.000	14MPHR-G150100	108.15	14MPHR-R150100	161.50
1-1/2"	1-1/2"	1.689	1.500	14MPHR-G150	44.25	14MPHR-R150	143.80
2"	1-1/2"	2.312	1.500	14MPHR-G200150	209.80	14MPHR-R200150	295.10
2"	2"	2.313	2.000	14MPHR-G200	63.20	14MPHR-R200	139.90
2-1/2"	2-1/2"	2.344	2.500	14MPHR-G250	89.80	14MPHR-R250	245.20
3"	3"	3.094	3.000	14MPHR-G300	106.30	14MPHR-R300	312.70
4"	4"	3.406	4.000	14MPHR-G400	142.85	14MPHR-R400	694.95
6"	6"	3.406	6.000	14MPHR-G600	1337.45	14MPHR-R600 NEW	1727.20

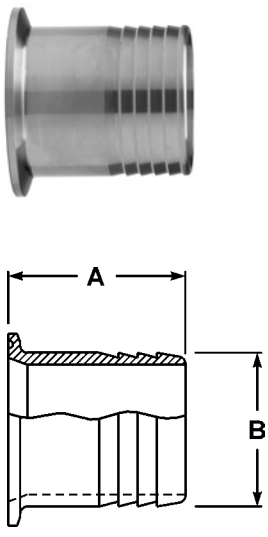

Clamp Adapters

304 Brewery Hose Barb Adapters - *14MPHRL*

- suitable for use with band clamps




Tube OD	Hose Size	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E
1"	1"	3.500	1.030	***14MPHRL100***	**$53.20**
1½"	1½"	5.000	1.030	***14MPHRL150***	**60.35**
2"	2"	5.000	2.030	***14MPHRL200***	**77.20**
2½"	2½"	5.500	2.030	***14MPHRL250***	**94.25**
3"	3"	5.500	3.030	***14MPHRL300***	**124.10**
4"	4"	5.500	4.030	***14MPHRL400***	**172.35**

SAFETY ALERT

Use of PVC tubing requires special techniques to prevent leakage. All assembly work must be done with heated tube. Cold durometer is 90 as opposed to rubber hose at 65 to 70 durometer. Banding buckles must be at 180° from one another.

Tygon Hose Adapters - *14MPHT*



Tube OD	Dimensions A	Dimensions B	Dimensions C	*316L Stainless Steel* Part #	*316L Stainless Steel* Price/E
¾"	4.000	.620	.750	***14MPHT-R75***	**$376.20**
1"	4.500	.870	1.000	***14MPHT-R100***	**67.40**
1½"	4.500	1.370	1.500	***14MPHT-R150***	**67.40**
2"	4.500	1.870	2.000	***14MPHT-R200***	**74.15**
2½"	4.500	2.370	2.500	***14MPHT-R250***	**98.90**
3"	4.500	2.870	3.000	***14MPHT-R300***	**123.40**
4"	4.625	3.834	4.000	***14MPHT-R400***	**197.95**

Transition Fittings

Cam and Groove Adapter x Clamp End

- does not have sanitary polish



Tube OD	*316 Stainless Steel Part #*	Price/E
1½"	***RE150SE***	**$151.75**
2"	***RE200SE***	**153.30**
3"	***RE300SE***	**360.00**

Cam and Groove Coupler x Clamp End

- does not have sanitary polish




Tube OD	*316 Stainless Steel Part #*	Price/E
1½"	***RC150SE***	**$270.00**
2"	***RC200SE***	**310.50**
3"	***RC300SE***	**490.00**

Dixon Butt Weld to Tube Cam and Groove

2010 NEW


- 316 stainless steel investment casting
- designed to be butt welded to standard sanitary tubing
- does not have sanitary polish

Adapter x Butt Weld to Tube End



Size	*316 Stainless Steel* Part #	*316 Stainless Steel* Price/E
1"	***RE100BT***	**$130.00**
1½"	***RE150BT***	**143.00**
2"	***RE200BT***	**148.00**
3"	***RE300BT***	**345.00**

Boss-Lock Coupler x Butt Weld to Tube End




Size	*316 Stainless Steel* Part #	*316 Stainless Steel* Price/E
1"	***RC100BT***	**$210.00**
1½"	***RC150BT***	**243.00**
2"	***RC200BT***	**280.00**
3"	***RC300BT***	**441.00**

Clamp Elbows

45° Clamp Elbows - *B2KMP*

Tube OD	Dimensions A	Dimensions R	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	*316L Stainless Steel* Part #	*316L Stainless Steel* Price/E
½"	.996	1.125	***---***	***---***	***B2KMP-R50***	**$136.75**
¾"	.966	1.125	***---***	***---***	***B2KMP-R75***	**132.40**
1"	1.125	1.500	***B2KMP-G100***	**$41.75**	***B2KMP-R100***	**55.45**
1½"	1.437	2.250	***B2KMP-G150***	**45.35**	***B2KMP-R150***	**61.00**
2"	1.750	3.000	***B2KMP-G200***	**63.50**	***B2KMP-R200***	**79.55**
2½"	2.062	3.750	***B2KMP-G250***	**86.25**	***B2KMP-R250***	**114.00**
3"	2.375	4.500	***B2KMP-G300***	**117.30**	***B2KMP-R300***	**149.00**
4"	3.125	6.000	***B2KMP-G400***	**190.60**	***B2KMP-R400***	**242.45**
6"	4.625	9.000	***B2KMP-G600***	**976.35**	***B2KMP-R600***	**1153.15**


NEW

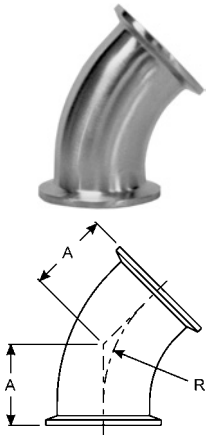

90° Clamp Elbows - *B2CMP*


Tube OD	Dimensions A	Dimensions R	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E	*316L Stainless Steel* Part #	*316L Stainless Steel* Price/E
½"	1.625	1.125	***---***	***---***	***B2CMP-R50***	**$100.70**
¾"	1.625	1.125	***---***	***---***	***B2CMP-R75***	**115.15**
1"	2.000	1.500	***B2CMP-G100***	**$47.35**	***B2CMP-R100***	**61.55**
1½"	2.750	2.250	***B2CMP-G150***	**49.25**	***B2CMP-R150***	**65.70**
2"	3.500	3.000	***B2CMP-G200***	**64.80**	***B2CMP-R200***	**86.95**
2½"	4.250	3.750	***B2CMP-G250***	**88.10**	***B2CMP-R250***	**124.70**
3"	5.000	4.500	***B2CMP-G300***	**125.45**	***B2CMP-R300***	**172.55**
4"	6.625	6.000	***B2CMP-G400***	**211.00**	***B2CMP-R400***	**262.10**
6"	9.875	9.000	***B2CMP-G600***	**1213.35**	***B2CMP-R600***	**1520.25**

NEW

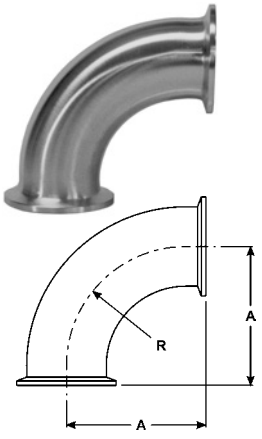

90° Clamp by Plain Bevel Seat with Hex Nut Elbows - *B2FMP-14*


Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E
2"	3.500	3.750	***B2FMP-14-G200***	**$270.60**
2½"	4.250	5.375	***B2FMP-14-G250***	**202.85**
3"	5.000	5.406	***B2FMP-14-G300***	**298.25**

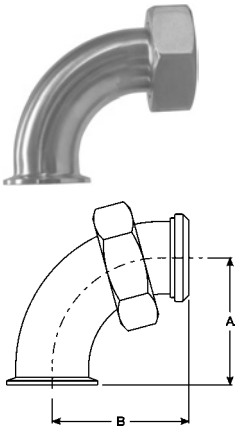

L Sanitary


Clamp Tees

Clamp Reducing Tees - *B7RMP*

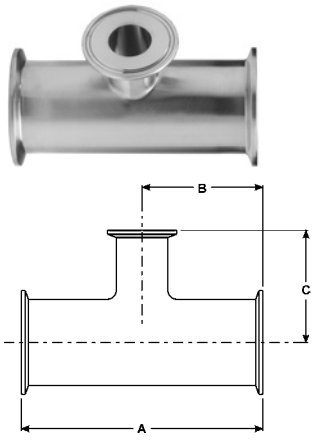


Tube OD	Dimensions			*304 Stainless Steel*		*316L Stainless Steel*	
	A	B	C	Part #	Price/E	Part #	Price/E
1½" x 1"	4.312	2.156	1.875	---	---	***B7RMP-R150100***	**$161.70**
2" x 1"	5.125	2.562	2.125	***B7RMP-G200100***	**$206.55**	***B7RMP-R200100***	**223.70**
2" x 1½"	5.688	2.844	2.406	***B7RMP-G200150***	**152.70**	***B7RMP-R200150***	**241.30**
2½" x 1½"	5.688	2.844	2.656	***B7RMP-G250150***	**233.65**	***B7RMP-R250150***	**323.45**
2½" x 2"	6.188	3.093	2.812	***B7RMP-G250200***	**200.10**	***B7RMP-R250200***	**204.70**
3" x 1½"	6.188	3.093	2.906	***B7RMP-G300150***	**282.95**	***B7RMP-R300150***	**444.00**
3" x 2"	6.188	3.093	3.063	***B7RMP-G300200***	**244.35**	***B7RMP-R300200***	**360.10**

Clamp Tees - *B7MP*

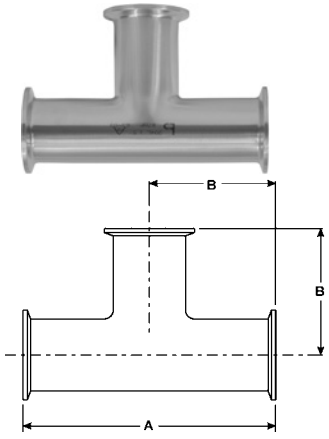

Tube OD	Dimensions		*304 Stainless Steel*		*316L Stainless Steel*	
	A	B	Part #	Price/E	Part #	Price/E
½"	4.750	2.375	---	---	***B7MP-R50***	**$546.10**
¾"	5.000	2.500	---	---	***B7MP-R75***	**482.95**
1"	4.750	2.375	***B7MP-G100***	**$76.95**	***B7MP-R100***	**104.00**
1½"	5.500	2.750	***B7MP-G150***	**86.55**	***B7MP-R150***	**120.00**
2"	7.000	3.500	***B7MP-G200***	**107.20**	***B7MP-R200***	**139.30**
2½"	7.000	3.500	***B7MP-G250***	**137.00**	***B7MP-R250***	**186.80**
3"	7.500	3.750	***B7MP-G300***	**185.90**	***B7MP-R300***	**260.65**
4"	9.000	4.500	***B7MP-G400***	**269.20**	***B7MP-R400***	**370.40**
6"	13.000	6.500	***B7MP-G600***	**1916.70**	---	---
8"	15.750	7.875	***B7MP-G800***	**2675.50**	---	---

Short Outlet Clamp Tee - *B7MPS*




Tube OD	Dimensions		*316L Stainless Steel*	
	A	B	Part #	Price/E
1½"	2.750	1.375	***B7MPS-R150***	**$265.45**
2"	3.500	1.625	***B7MPS-R200***	**307.15**
2½"	3.500	1.875	***B7MPS-R250***	**329.25**


Clamp Reducers

Clamp Concentric Reducers - *B3114MP*

Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E	*316L Stainless Steel* Part #	Price/E
1" x ½"	3.000	---	---	***B3114MP-R10050***	**$260.40**
1" x ¾"	2.000	---	---	***B3114MP-R10075***	**260.40**
1½" x ¾"	4.000	---	---	***B3114MP-R15075***	**392.90**
1½" x 1"	3.000	***B3114MP-G150100***	**$78.80**	***B3114MP-R150100***	**86.25**
2" x ¾"	6.000	---	---	***B3114MP-R20075***	**605.15**
2" x 1"	5.000	***B3114MP-G200100***	**108.00**	***B3114MP-R200100***	**130.10**
2" x 1½"	3.000	***B3114MP-G200150***	**82.80**	***B3114MP-R200150***	**91.75**
2½" x 1½"	5.000	***B3114MP-G250150***	**115.85**	***B3114MP-R250150***	**124.15**
2½" x 2"	3.000	***B3114MP-G250200***	**100.20**	***B3114MP-R250200***	**113.55**
3" x 1½"	7.000	***B3114MP-G300150***	**197.00**	***B3114MP-R300150***	**240.75**
3" x 2"	5.000	***B3114MP-G300200***	**135.20**	***B3114MP-R300200***	**156.30**
3" x 2½"	3.000	***B3114MP-G300250***	**123.60**	***B3114MP-R300250***	**137.35**
4" x 2"	9.125	***B3114MP-G400200***	**268.20**	***B3114MP-R400200***	**320.05**
4" x 2½"	7.125	***B3114MP-G400250***	**304.70**	***B3114MP-R400250***	**338.20**
4" x 3"	5.125	***B3114MP-G400300***	**181.85**	***B3114MP-R400300***	**204.85**
6" x 4"	7.000	***B3114MP-G600400***	**775.25**	---	---


NEW






Clamp Eccentric Reducers - *B3214MP*

Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
2" x 1"	5.000	***B3214MP-G200100***	**$209.85**
2" x 1½"	3.000	***B3214MP-G200150***	**101.25**
2½" x 1½"	5.000	***B3214MP-G250150***	**139.70**
2½" x 2"	3.000	***B3214MP-G250200***	**117.65**
3" x 1½"	7.000	***B3214MP-G300150***	**227.05**
3" x 2"	5.000	***B3214MP-G300200***	**164.00**
3" x 2½"	3.000	***B3214MP-G300250***	**198.80**
4" x 2"	9.125	***B3214MP-G400200***	**339.20**
4" x 2½"	7.125	***B3214MP-G400250***	**330.35**
4" x 3"	5.125	***B3214MP-G400300***	**241.25**
6" x 3"	6.875	***B3214MP-G600300***	**1041.65**
6" x 4"	7.000	***B3214MP-G600400***	**1134.65**






L
Sanitary

Clamp Crosses


Clamp Cross - *B9MP*


Tube OD	Dimensions A	Dimensions B	*316L Stainless Steel* Part #	Price/E
1"	4.750	2.375	***B9MP-R100***	**$284.85**
1½"	5.500	2.750	***B9MP-R150***	**303.15**
2"	7.000	3.500	***B9MP-R200***	**349.50**





Miscellaneous Configurations






Clamp Lateral - *B28AMP*

Tube OD	Dimensions			316L Stainless Steel	
	A	B	C	Part #	Price/E
1½"	8.375	1.688	6.688	***B28AMP-R150***	**$631.75**
2"	9.750	2.125	7.625	***B28AMP-R200***	**655.55**
3"	11.750	2.375	9.375	***B28AMP-R300***	**1016.25**
4"	14.062	2.640	11.312	***B28AMP-R400***	**1782.80**






Clamp True Y - *B28BMP*

Tube OD	Dimensions		316L Stainless Steel	
	A	B	Part #	Price/E
1½"	2.500	2.938	***B28BMP-R150***	**$631.75**
2"	3.125	3.750	***B28BMP-R200***	**655.55**
3"	4.500	5.375	***B28BMP-R300***	**1016.25**






Clamp 180° Return Bends - *B2WUMP*

Tube OD	Dimensions		316L Stainless Steel	
	A	B	Part #	Price/E
1"	3.000	2.500	***B2WUMP-R100***	**$293.20**
1½"	4.500	3.500	***B2WUMP-R150***	**320.45**
2"	6.000	4.500	***B2WUMP-R200***	**427.30**
3"	9.000	6.500	***B2WUMP-R300***	**747.70**

Bends are the standard 1.5 x tube diameter.

Clamp Gaskets


Gasket material approved by 3A (3A), USDA and complies with FDA's Code of Federal Register (CFR) title 21, Part 177 and meets 21CFR177.2600 and 1550. PSI Service Ratings for the sanitary clamps *DO NOT APPLY* to connections (1" and above) using any PTFE gaskets, due to the potential for cold flow under normal operating conditions. PTFE gaskets, when used with any clamp, are likely to leak at pressures far below the published service ratings. This restriction *does not apply* to the fractionally sized ½" and ¾" connections, due to their recessed, fully contained design.




Mini



Standard - type 1






Flanged - type 2

Buna-N Clamp Gaskets - *Black*

Size	Part #	Price/E
½"	***42MP-U50***	**$1.45**
¾"	***42MP-U75***	**1.45**
1"	***40MP-U100***	**0.75**
1½"	***40MP-U150***	**0.55**
2"	***40MP-U200***	**0.65**
2½"	***40MP-U250***	**0.80**
3"	***40MP-U300***	**0.90**
4"	***40MP-U400***	**1.70**
5"	***40MP-U500*** NEW	**8.50**
6"	***40MP-U600***	**21.60**
8"	***40MP-U800***	**27.35**



Type 1 - Standard
½" - ¾"



Type 1 - Standard
1" and larger


- color code: red dot
- meets 21CFR 177.2600

Buna-N Clamp Gaskets - *White*

Size	Part #	Price/E
½"	***42MP-UW50***	**$2.80**
¾"	***42MP-UW75***	**3.25**
1"	***40MP-UW100***	**1.30**
1½"	***40MP-UW150***	**1.20**
2"	***40MP-UW200***	**1.10**
2½"	***40MP-UW250***	**1.45**
3"	***40MP-UW300***	**1.55**
4"	***40MP-UW400***	**2.80**
6"	***40MP-UW600***	**28.25**



Type 1 - Standard
½" - ¾"



Type 1 - Standard
1" and larger


- color code: red dot
- meets 21CFR 177.2600

Silicone Clamp Gaskets - *White*

Size	Part #	Price/E
½"	***42MP-XW50***	**$2.85**
¾"	***42MP-XW75***	**3.20**
1"	***40MP-XW100***	**3.05**
1½"	***40MP-XW150***	**2.60**
2"	***40MP-XW200***	**3.05**
2½"	***40MP-XW250***	**4.20**
3"	***40MP-XW300***	**4.60**
4"	***40MP-XW400***	**5.50**
6"	***40MP-XW600***	**35.65**



Type 1 - Standard
½" - ¾"



Type 1 - Standard
1" and larger


- color code: pink dot
- peroxide cured
- meets 21CFR 177.2600
- passed USP Class VI Cytotoxicity testing

Silicone Clamp Gaskets - *Clear*

Size	Part #	Price/E
½"	***42MP-XC50***	**$2.85**
¾"	***42MP-XC75***	**3.20**
1"	***40MP-XC100***	**4.20**
1½"	***40MP-XC150***	**4.20**
2"	***40MP-XC200***	**4.35**
2½"	***40MP-XC250***	**5.25**
3"	***40MP-XC300***	**6.05**
4"	***40MP-XC400***	**8.35**



Type 1 - Standard
½" - ¾"



Type 1 - Standard
1" and larger


- color code: pink dot
- platinum cured
- meets 21CFR 177.2600
- passed USP Class VI Cytotoxicity testing

Clamp Gaskets

PTFE (Teflon®) Clamp Gaskets - *white*



Type 1 - Standard
½" - ¾"



Type 1 - Standard
1" and larger


- color code: no dot
- meets 21CFR 177.1550
- passed USP Class VI Cytotoxicity testing
- not recommended for use with bolted clamps

Size	Part #	Price/E
½"	***42MP-G50***	**$3.10**
¾"	***42MP-G75***	**2.90**
1"	***40MP-G100***	**2.60**
1½"	***40MP-G150***	**1.95**
2"	***40MP-G200***	**2.20**
2½"	***40MP-G250***	**2.95**
3"	***40MP-G300***	**3.20**
4"	***40MP-G400***	**4.50**
6"	***40MP-G600***	**42.05**
8"	***40MP-G800***	**96.45**
10"	***40MP-G1000***	**179.00**
12"	***40MP-G1200***	**306.85**

EPDM Clamp Gaskets - *Black*



Type 1 - Standard
½" - ¾"



Type 1 - Standard
1" and larger


- color code: three green dots
- meets 21CFR 177.2600
- peroxide cured
- passed USP Class VI Cytotoxicity testing

Size	Part #	Price/E
½"	***42MP-E50***	**$2.00**
¾"	***42MP-E75***	**2.10**
1"	***40MP-E100***	**1.70**
1½"	***40MP-E150***	**1.55**
2"	***40MP-E200***	**1.70**
2½"	***40MP-E250***	**2.30**
3"	***40MP-E300***	**2.65**
4"	***40MP-E400***	**2.90**
6"	***40MP-E600***	**15.40**

FKM (Viton®) Clamp Gaskets - *Black*



Type 1 - Standard
½" - ¾"




Type 1 - Standard
1" and larger

- color code: one white dot, one yellow dot
- meets 21CFR 177.2600
- passed USP Class VI Cytotoxicity testing

Size	Part #	Price/E
½"	***42MP-SFY50***	**$5.40**
¾"	***42MP-SFY75***	**5.95**
1"	***40MP-SFY100***	**6.00**
1½"	***40MP-SFY150***	**4.25**
2"	***40MP-SFY200***	**4.50**
2½"	***40MP-SFY250***	**8.20**
3"	***40MP-SFY300***	**10.55**
4"	***40MP-SFY400***	**15.70**
6"	***40MP-SFY600***	**52.85**

Buna-N Flanged Clamp Gaskets - *Black*



Type 2 - Flanged
1" and larger


- color code: red dot
- meets 21CFR 177.2600
- not recommended for use with bolted clamps

Size	Part #	Price/E
1"	***40MPF-U100***	**$1.80**
1½"	***40MPF-U150***	**1.55**
2"	***40MPF-U200***	**1.85**
2½"	***40MPF-U250***	**2.20**
3"	***40MPF-U300***	**3.10**
4"	***40MPF-U400***	**4.20**
6"	***40MPF-U600***	**25.80**
8"	***40MPF-U800***	**23.30**
10"	***40MPF-U1000***	**91.00**
12"	***40MPF-U1200***	**110.85**

Clamp Gaskets

Buna-N Flanged Clamp Gaskets - *White*

Size	Part #	Price/E
1"	***40MPF-UW100***	**$3.00**
1½"	***40MPF-UW150***	**2.15**
2"	***40MPF-UW200***	**2.55**
2½"	***40MPF-UW250***	**4.45**
3"	***40MPF-UW300***	**4.45**
4"	***40MPF-UW400***	**6.35**




Type 2 - Flanged
1" and larger

- color code: red dot
- meets 21CFR 177.2600
- passed USP Class VI Cytotoxicity testing
- not recommended for use with bolted clamps

Silicone Flanged Clamp Gaskets - *White*

Size	Part #	Price/E
1"	***40MPF-XW100***	**$4.55**
1½"	***40MPF-XW150***	**4.55**
2"	***40MPF-XW200***	**4.70**
2½"	***40MPF-XW250***	**5.70**
3"	***40MPF-XW300***	**6.60**
4"	***40MPF-XW400***	**9.00**
6"	***40MPF-XW600***	**57.20**
8"	***40MPF-XW800***	**71.15**
10"	***40MPF-XW1000***	**70.05**
12"	***40MPF-XW1200***	**78.75**




Type 2 - Flanged
1" and larger

- color code: no dot
- peroxide cured
- meets 21CFR 177.2600
- passed USP Class VI Cytotoxicity testing
- not recommended for use with bolted clamps

EPDM Flanged Clamp Gaskets

Size	Part #	Price/E
1"	***40MPF-E100***	**$3.20**
1½"	***40MPF-E150***	**3.20**
2"	***40MPF-E200***	**3.45**
2½"	***40MPF-E250***	**5.20**
3"	***40MPF-E300***	**6.05**
4"	***40MPF-E400***	**6.25**
6"	***40MPF-E600***	**41.30**
8"	***40MPF-E800***	**58.85**
10"	***40MPF-E1000***	**70.05**
12"	***40MPF-E1200***	**75.20**




Type 2 - Flanged
1" and larger

- color code: three green dots
- peroxide cured
- meets 21CFR 177.2600
- passed USP Class VI Cytotoxicity testing
- not recommended for use with bolted clamps

FKM (Viton®) Flanged Clamp Gaskets

Size	Part #	Price/E
1"	***40MPF-SFY100***	**$10.30**
1½"	***40MPF-SFY150***	**8.00**
2"	***40MPF-SFY200***	**9.55**
2½"	***40MPF-SFY250***	**16.80**
3"	***40MPF-SFY300***	**17.50**
4"	***40MPF-SFY400***	**20.45**
6"	***40MPF-SFY600***	**61.55**
8"	***40MPF-SFY800***	**102.30**
10"	***40MPF-SFY1000***	**133.65**
12"	***40MPF-SFY1200***	**153.45**




Type 2 - Flanged
1" and larger

- color code: one white dot, one yellow dot
- meets 21CFR 177.2600
- passed USP Class VI Cytotoxicity testing
- not recommended for use with bolted clamps

Clamp Gaskets


Buna Mesh Screen Clamp Gaskets, 316



- color code: red dot
- 10 mesh standard, other mesh available-call for details
- meets 21CFR 177.2600

Size	Part #	Price/E
1"	***40MPS-U100***	**$45.45**
1½"	***40MPS-U150***	**39.80**
2"	***40MPS-U200***	**42.65**
2½"	***40MPS-U250***	**56.85**
3"	***40MPS-U300***	**65.35**
4"	***40MPS-U400***	**102.30**


PTFE (Teflon®) Envelope Clamp Gaskets with EPDM



- color code: usually not marked
- peroxide cured
- meets 21CFR 177.1550
- passed USP Class VI Cytotoxicity testing

Size	Part #	Price/E
½"	***42MP-GRE50***	**$9.45**
1"	***40MP-GRE100***	**6.80**
2"	***40MP-GRE200***	**6.80**
3"	***40MP-GRE300***	**9.85**
4"	***40MP-GRE400***	**18.30**

PTFE (Teflon®) Envelope Clamp Gaskets with Viton®




- color code: Viton® usually not marked
- meets 21CFR 177.1550
- passed USP Class VI Cytotoxicity testing

Size	Part #	Price/E
1½"	***40MP-GR150***	**$6.25**
2"	***40MP-GR200***	**6.80**

Pipe Size Clamps

Single Pin Heavy Duty Clamps - *13MHHV*

Pipe Size	Dimension A	304 Stainless Steel Part #	Price/E
1"	2.122	***13MHHV100***	**$15.15**
1½"	2.654	***13MHHV150***	**17.15**
2"	3.185	***13MHHV200***	**19.65**
2½"	3.717	***13MHHV250***	**20.90**
3"	4.263	***13MHHV300***	**42.05**
4"	5.263	***13MHHV400***	**66.15**






Bolted Clamp - *13MHPV400*

NEW 2010

Pipe Size	Dimension A	304 Stainless Steel Part #	Price/E
4"	5.187	***13MHPV400***	**$78.65**






Pipe Size End Caps

Solid End Caps - *16AMV* 

Pipe Size	Dimensions A	Dimensions B	316L Stainless Steel Part #	Price/E
1"	.250	1.984	***16AMV-R100***	**$10.10**
1½"	.250	2.516	***16AMV-R150***	**13.05**
2"	.250	3.047	***16AMV-R200***	**18.90**
2½"	.250	3.579	***16AMV-R250***	**25.60**
3"	.312	4.125	***16AMV-R300***	**133.15**
4"	.312	5.125	***16AMV-R400***	**204.55**

- Specify if you are using a piping system or a tubing system when ordering.






Pipe Size Ferrules

Schedule 5 Short-weld Ferrules - *14WMV*


Pipe Size	Dimensions A	Dimensions B	Dimensions C	316L Stainless Steel Part #	Price/E
1"	.500	1.185	1.315	***14WMV-R100***	**$34.70**
1½"	.500	1.770	1.900	***14WMV-R150***	**47.15**
2"	.500	2.245	2.375	***14WMV-R200***	**69.55**
2½"	.500	2.709	2.875	***14WMV-R250***	**89.70**
3"	.500	3.334	3.500	***14WMV-R300***	**112.65**
4"	.625	4.334	4.500	***14WMV-R400***	**188.85**





Schedule 10 Short-weld Ferrules - *14WMX*

Pipe Size	Dimensions A	Dimensions B	Dimensions C	316L Stainless Steel Part #	Price/E
1"	.500	1.097	1.315	***14WMX-R100***	**$34.70**
1½"	.500	1.682	1.900	***14WMX-R150***	**47.15**
2"	.500	2.157	2.375	***14WMX-R200***	**69.55**
2½"	.500	2.635	2.875	***14WMX-R250***	**89.70**
3"	.500	3.260	3.500	***14WMX-R300***	**112.65**
4"	.625	4.260	4.500	***14WMX-R400***	**188.85**






Pipe Size Ferrules

Schedule 5 Long-weld Ferrules - *L14AM7V*






Pipe Size	Dimensions A	B	C	316L Stainless Steel Part #	Price/E
NEW 1"	1.125	1.185	1.135	***L14AM7V-R100***	**$67.55**
1½"	1.125	1.770	1.900	***L14AM7V-R150***	**85.65**
2"	1.125	2.245	2.375	***L14AM7V-R200***	**128.05**
2½"	1.125	2.709	2.875	***L14AM7V-R250***	**149.65**
3"	1.125	3.334	3.500	***L14AM7V-R300***	**210.80**
4"	1.125	4.334	4.500	***L14AM7V-R400***	**313.90**

Schedule 10 Long-weld Ferrules - *L14AM7X*






Pipe Size	Dimensions A	B	C	316L Stainless Steel Part #	Price/E
1"	1.125	1.097	1.315	***L14AM7X-R100***	**$67.55**
NEW 1½"	1.125	1.682	1.900	***L14AM7X-R150***	**85.65**
2"	1.125	2.157	2.375	***L14AM7X-R200***	**128.05**
3"	1.125	3.260	3.500	***L14AM7X-R300***	**210.80**
4"	1.125	4.260	4.500	***L14AM7X-R400***	**313.90**

2010 NEW Tube Buttweld x Schedule 5 Buttweld Adapters - *B19WV*






Pipe Size	Dim. A	Tube Wall Thickness	Pipe Wall Thickness	316L Stainless Steel Part #	Price/E
1"	2.000	.065	.065	***B19WV-R100***	**$283.00**
1½"	2.500	.065	.065	***B19WV-R150***	**343.35**
2"	2.500	.065	.065	***B19WV-R200***	**384.50**
2½"	2.500	.065	.084	***B19WV-R250***	**412.35**
3"	2.500	.065	.084	***B19WV-R300***	**429.65**
4"	3.000	.084	.084	***B19WV-R400***	**447.00**

2010 NEW Tube Buttweld x Schedule 10 Buttweld Adapters - *B19WX*






Pipe Size	Dim. A	Tube Wall Thickness	Pipe Wall Thickness	316L Stainless Steel A	Price/E
1"	2.000	.065	.109	***B19WX-R100***	**$96.00**
1½"	2.500	.065	.109	***B19WX-R150***	**106.95**
2"	2.500	.065	.109	***B19WX-R200***	**125.10**
2½"	2.500	.065	.120	***B19WX-R250***	**147.40**
3"	2.500	.065	.120	***B19WX-R300***	**169.25**
4"	3.000	.084	.120	***B19WX-R400***	**315.55**

Pipe Size Hangers


Hex Pipe Size Hangers with Grommets - *B24RV*

Pipe Size	Dimensions		*304 Stainless Steel*	
	A	B	Part #	Price/E
1"	3.625	2.125	***B24RV-G100***	**$22.45**
1½"	3.625	2.125	***B24RV-G150***	**24.45**
2"	4.312	2.625	***B24RV-G200***	**27.00**
2½"	4.875	3.125	***B24RV-G250***	**30.60**
3"	5.375	3.625	***B24RV-G300***	**36.00**
4"	6.562	4.750	***B24RV-G400***	**36.55**
6"	9.000	6.625	***B24RV-G600***	**103.55**

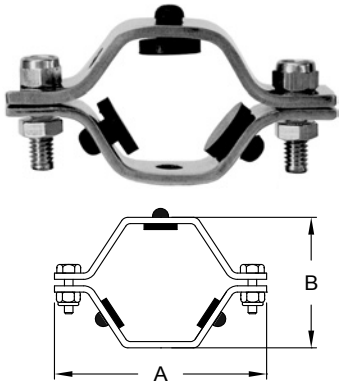

Hex Pipe Size Hangers with Polypropylene Sleeves - *B24PV*

Pipe Size	Dimensions		*304 Stainless Steel*	
	A	B	Part #	Price/E
1"	3.625	2.125	***B24PV-G100***	**$34.45**
1½"	4.312	2.625	***B24PV-G150***	**35.05**
2"	4.875	3.125	***B24PV-G200***	**38.70**
2½"	4.812	3.125	***B24PV-G250***	**47.85**
3"	6.000	4.250	***B24PV-G300***	**48.05**
4"	7.500	5.625	***B24PV-G400***	**54.80**
6"	9.750	7.375	***B24PV-G600***	**193.80**

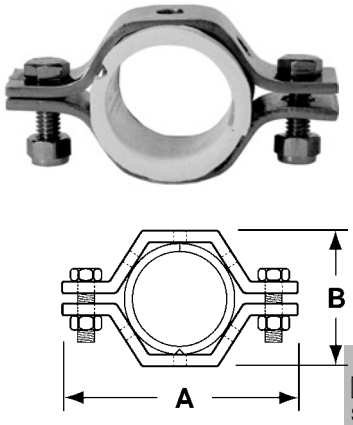


Polypropylene Pipe Size Sleeves - *13PV*

Size	Part #	Price/E
1"	***13PV-100***	**$18.75**
1½"	***13PV-150***	**18.75**
2"	***13PV-200***	**19.45**
2½"	***13PV-250***	**28.45**
3"	***13PV-300***	**19.85**
4"	***13PV-400***	**29.20**
6"	***13PV-600***	**126.00**



Schedule 5 and 10 Pipe Gaskets

Buna-N Pipe Gaskets- *40MPV-U*



- color code: red dot
- meets 21CFR 177.2600

Size	Part #	Price/E
1"	***40MPV-U100***	**$7.15**
1½"	***40MPV-U150***	**6.80**
2"	***40MPV-U200***	**7.15**
2½"	***40MPV-U250***	**7.60**
3"	***40MPV-U300***	**7.60**
4"	***40MPV-U400***	**6.85**

PTFE (Teflon®) Pipe Gaskets - *40MPV-G*




- color code: no dot
- meets 21CFR 177.1550
- passed USP Class VI Cytotoxicity testing
- not recommended for use with bolted clamps

Size	Part #	Price/E
1"	***40MPV-G100***	**$32.05**
1½"	***40MPV-G150***	**24.20**
2"	***40MPV-G200***	**30.25**
2½"	***40MPV-G250***	**49.95**
3"	***40MPV-G300***	**55.50**
4"	***40MPV-G400***	**64.45**

DIN 11851


Round Nut DIN 11857 - *13R*

Tube OD	Dimensions A	B	C	*304 Stainless Steel* Part #	Price/E
1"	.83	2.48	2.05	***13R-G100DIN***	**$38.40**
1½"	.83	3.07	2.56	***13R-G150DIN***	**47.85**
2"	.87	3.62	3.07	***13R-G200DIN***	**61.20**
2½"	.98	4.41	3.74	***13R-G250DIN***	**82.95**
3"	1.14	5.00	4.33	***13R-G300DIN***	**127.40**
4"	1.22	5.83	5.12	***13R-G400DIN***	**148.65**

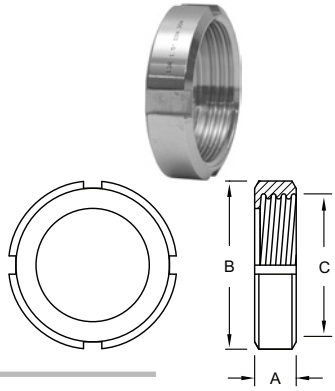


Blank Cap DIN - *16AMP*

Tube OD	Dimensions A	B	C	D	*316 Stainless Steel* Part #	Price/E
1"	.51	1.73	.39	1.38	***16AMP-R100DIN***	**$30.70**
1½"	.51	2.20	.39	1.89	***16AMP-R150DIN***	**49.65**
2"	.55	2.68	.43	2.40	***16AMP-R200DIN***	**70.80**
2½"	.63	3.39	.47	3.11	***16AMP-R250DIN***	**125.50**
3"	.63	3.66	.47	3.39	***16AMP-R300DIN***	**154.80**
4"	.79	4.76	.59	4.49	***16AMP-R400DIN***	**257.70**




Welding Male DIN - *15A*

Tube OD	Dimensions A	B	*316 Stainless Steel* Part #	Price/E
1"	1.14	2.04	***15A-R100DIN***	**$36.30**
1½"	1.30	2.55	***15A-R150DIN***	**50.75**
2"	1.38	3.07	***15A-R200DIN***	**62.30**
2½"	1.57	3.74	***15A-R250DIN***	**98.10**
3"	1.57	4.09	***15A-R300DIN***	**152.45**
4"	2.13	5.12	***15A-R400DIN***	**172.25**




Welding Liner DIN - *14A*

Tube OD	Dimensions A	B	*316 Stainless Steel* Part #	Price/E
1"	.87	1.73	***14A-R100DIN***	**$25.25**
1½"	1.02	2.20	***14A-R150DIN***	**35.50**
2"	1.10	2.68	***14A-R200DIN***	**45.35**
2½"	1.26	3.39	***14A-R250DIN***	**77.95**
3"	1.26	3.66	***14A-R300DIN***	**108.35**
4"	1.73	4.76	***14A-R400DIN***	**138.10**



Buna-N DIN Black Gaskets - *40MP*


Size	DN Number	ID	OD	Height	*Buna-N* Part #	Price/E
1"	25	1.18	1.57	.20	***40MP-U100DIN***	**$8.60**
1½"	40	1.65	2.05	.20	***40MP-U150DIN***	**13.65**
2"	50	2.13	2.52	.20	***40MP-U200DIN***	**14.25**
2½"	65	2.80	3.19	.20	***40MP-U250DIN***	**16.70**
3"	80	3.35	3.74	.20	***40MP-U300DIN***	**17.05**
4"	100	4.09	4.49	.24	***40MP-U400DIN***	**24.10**



Bevel Seat Ferrules

3A Long Threaded Bevel Seat Ferrules - *15A*






Tube OD	Dimensions A	Dimensions B	304 Stainless Steel Part #	304 Stainless Steel Price/E	316L Stainless Steel Part #	316L Stainless Steel Price/E
1½"	1.500	1.370	***15A-G150***	**$32.15**	***15A-R150***	**$78.50**
2"	1.500	1.870	***15A-G200***	**39.95**	***15A-R200***	**97.40**
2½"	1.750	2.370	***15A-G250***	**53.40**	***15A-R250***	**169.40** NEW
3"	1.750	2.870	***15A-G300***	**70.30**	***15A-R300***	**203.50**
4"	1.750	3.834	***15A-G400***	**104.10**	***15A-R400***	**293.00** NEW

3A Short Threaded Bevel Seat Ferrules - *15TRF*






Tube OD	Dimensions A	Dimensions B	304 Stainless Steel Part #	304 Stainless Steel Price/E
1"	.718	.870	***15TRF-G100***	**$13.45**
1½"	.718	1.370	***15TRF-G150***	**15.20**
2"	.750	1.870	***15TRF-G200***	**21.00**
2½"	.875	2.370	***15TRF-G250***	**28.30**
3"	.906	2.870	***15TRF-G300***	**36.50**
4"	1.031	3.834	***15TRF-G400***	**61.25**

3A* Recessless Threaded Bevel Seat Ferrules - *15R*

* For use when modifying or repairing existing on-site farm milk handling systems.
- For expanding only






Tube OD	Dimensions A	Dimensions B	304 Stainless Steel Part #	304 Stainless Steel Price/E
1½"	1.125	1.500	***15R-G150***	**$24.85**
2"	1.375	2.000	***15R-G200***	**31.05**
2½"	1.500	2.500	***15R-G250***	**42.35**
3"	1.675	3.000	***15R-G300***	**50.05**
4"	1.675	4.000	***15R-G400***	**79.45**

3A Long Plain Bevel Seat Ferrules - *14A*






Tube OD	Dimensions A	Dimensions B	304 Stainless Steel Part #	304 Stainless Steel Price/E	316L Stainless Steel Part #	316L Stainless Steel Price/E
1"	1.375	.870	***14A-G100***	**$17.20**	***14A-R100***	**$48.95**
1½"	1.500	1.370	***14A-G150***	**23.75**	***14A-R150***	**57.70**
2"	1.500	1.870	***14A-G200***	**36.10**	***14A-R200***	**67.05**
2½"	1.750	2.370	***14A-G250***	**44.70**	***14A-R250***	**93.25**
3"	1.750	2.870	***14A-G300***	**58.95**	***14A-R300***	**137.55**
4"	1.750	3.834	***14A-G400***	**87.05**	***14A-R400***	**292.25**

3A Short Plain Bevel Seat Ferrules - *14PRF*






Tube OD	Dimensions A	Dimensions B	304 Stainless Steel Part #	304 Stainless Steel Price/E
1"	.718	.870	***14PRF-G100***	**$11.25**
1½"	.718	1.370	***14PRF-G150***	**12.95**
2"	.750	1.870	***14PRF-G200***	**16.45**
2½"	.875	2.370	***14PRF-G250***	**24.95**
3"	.906	2.870	***14PRF-G300***	**32.25**
4"	1.031	3.834	***14PRF-G400***	**52.35**

3A* Recessless Plain Bevel Seat Ferrules - *14R*

* For use when modifying or repairing existing on-site farm milk handling systems.
- For expanding only






Tube OD	Dimensions A	Dimensions B	304 Stainless Steel Part #	304 Stainless Steel Price/E
1½"	1.125	1.500	***14R-G150***	**$17.05**
2"	1.312	2.000	***14R-G200***	**22.35**
2½"	1.375	2.500	***14R-G250***	**28.70**
3"	1.437	3.000	***14R-G300***	**36.45**

Bevel Seat Elbows

90° Bevel Seat Elbows - *B2F*

Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1½"	2.968	***B2F-G150***	**$270.60**
2"	3.750	***B2F-G200***	**270.60**
2½"	4.625	***B2F-G250***	**268.70**
3"	5.406	***B2F-G300***	**270.60**

hex nut is CF8 (304 stainless steel)






Plain Bevel Seat x Plain Bevel Seat with Hex Nut 90° Elbows - *B2E*

Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1½"	2.968	***B2E-G150***	**$236.10**
2"	3.750	***B2E-G200***	**269.60**
3"	5.406	***B2E-G300***	**433.60**

hex nut is CF8 (304 stainless steel)






Bevel Seat Adapters

Plain Bevel Seat x Male NPT Adapters - *14-19*

Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1½"	3.250	***14-19-G150***	**$380.40**
2"	3.312	***14-19-G200***	**379.00**
3"	4.250	***14-19-G300***	**557.80**


hex nut is CF8 (304 stainless steel)





Plain Bevel Seat Rubber Hose Adapters - *14AHR*

Tube OD	Dimensions A	B	C	*304 Stainless Steel* Part #	Price/E
1½"	1.687	1.370	1.500	***14AHR-G150***	**$103.05**
2"	2.312	1.870	2.000	***14AHR-G200***	**147.35**
3"	3.500	2.870	3.000	***14AHR-G300***	**313.35**






Bevel Seat Adapters

Plain Bevel Seat Tygon Hose Adapters - *14AHT*







Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E
1½"	4.719	1.500	***14AHT-G150***	**$106.70**
2"	4.719	2.000	***14AHT-G200***	**132.05**
3"	4.906	3.000	***14AHT-G300***	**250.70**

Bevel Seat Reducers

3A Plain Bevel Seat x Threaded Bevel Seat Concentric Reducers - *B3115F*






Tube OD	Dimension A	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E
2" x 1½"	3.468	***B3115F-G200150***	**$151.95**
2½" x 2"	3.625	***B3115F-G250200***	**173.85**
3" x 2½"	3.781	***B3115F-G300250***	**278.55**
4" x 3"	5.937	***B3115F-G400300***	**314.40**

Threaded Bevel Seat x Plain Bevel Seat with Hex Nut 3A Concentric Reducers - *B31TP*





Tube OD	Dimension A	*304 Stainless Steel* Part #	*304 Stainless Steel* Price/E
2" x 1½"	3.468	***B31TP-G200150***	**$204.05**
2½" x 2"	3.625	***B31TP-G250200***	**234.55**
3" x 2"	5.656	***B31TP-G300200***	**273.55**

Bevel Seat End Caps and Nuts

Plain Bevel Seat Solid End Caps - *16A*

Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1"	1.312	***16A-G100***	**$9.35**
1½"	1.843	***16A-G150***	**16.50**
2"	2.375	***16A-G200***	**24.75**
2½"	2.906	***16A-G250***	**33.10**
3"	3.437	***16A-G300***	**48.55**
4"	4.500	***16A-G400***	**87.50**







Hex Union Nuts - *13H*

- **400 PSI** maximum


Tube OD	Dimensions A	B	*304 Stainless Steel* Part #	Price/E
1"	.906	1.812	***13H-G100***	**$17.30**
1½"	.968	2.406	***13H-G150***	**24.35**
2"	1.062	3.000	***13H-G200***	**31.40**
2½"	1.187	3.594	***13H-G250***	**46.75**
3"	1.281	4.188	***13H-G300***	**62.15**
4"	1.500	5.438	***13H-G400***	**108.10**





Bevel Seat Hex Wrenches


Single Sided Aluminum Hex Wrenches - *25H*

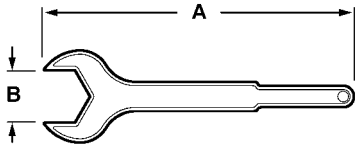



Tube OD	Dimensions A	B	Weight Lbs.	*Aluminum* Part #	Price/E
1"	10.500	1.812	.64	***25H-100***	**$47.95**
1½"	12.000	2.406	.86	***25H-150***	**49.60**
2"	14.000	3.000	1.76	***25H-200***	**60.85**
2½"	16.250	3.594	2.40	***25H-250***	**89.90**
3"	18.500	4.188	3.04	***25H-300***	**124.80**
4"	19.500	5.438	3.62	***25H-400***	**158.85**

Two Sided Aluminum Hex Wrenches - *25H*

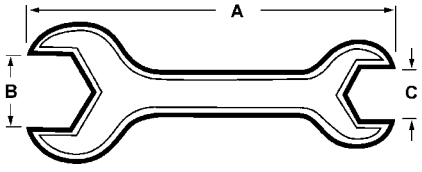




Tube OD	Dimensions A	B	C	Weight Lbs.	*Aluminum* Part #	Price/E
1½" x 1"	12.000	2.406	1.812	1.00	***25H-150100***	**$89.75**
2" x 1½"	14.000	3.000	2.406	1.75	***25H-200150***	**100.15**
2½" x 2"	16.500	3.594	3.000	2.80	***25H-250200***	**120.90**
3" x 2"	18.000	4.188	3.000	3.20	***25H-300200***	**139.75**
3" x 2½"	18.000	4.188	3.594	3.70	***25H-300250***	**161.05**

Bevel Seat Gaskets


Buna-N Bevel Seat Gaskets - *Black*



- color code: red dot
- meets 21CFR 177.2600

Size	Part #	Price/E
1"	***40BS-O100***	**$1.50**
1½"	***40BS-O150***	**1.25**
2"	***40BS-O200***	**1.40**
2½"	***40BS-O250***	**2.55**
3"	***40BS-O300***	**3.00**
4"	***40BS-O400***	**5.35**

PTFE (Teflon®) Bevel Seat Gaskets - *White*



- color code: no dot
- meets 21CFR 177.1550
- passed USP Class VI Cytotoxicity testing


Size	Part #	Price/E
1"	***40BS-S100***	**$2.00**
1½"	***40BS-S150***	**2.00**
2"	***40BS-S200***	**2.25**
2½"	***40BS-S250***	**3.10**
3"	***40BS-S300***	**4.20**
4"	***40BS-S400***	**6.15**

I-Line Clamps

Heavy Duty Clamps - *13ILH*

* wing nut tightened to 25 in. lbs. torque
• CF-8 material

Tube OD	Service Pressure Rating @ 70°F *	Service Pressure Rating @ 250°F *	Dimension A	*Stainless Steel* Part #	Price/E
1" - 1½"	**700 PSI**	**250 PSI**	2.122	***13ILH100-150***	**$29.00**
2"	**450 PSI**	**250 PSI**	2.654	***13ILH200***	**38.40**
2½"	**450 PSI**	**200 PSI**	3.185	***13ILH250***	**52.65**
3"	**350 PSI**	**150 PSI**	3.717	***13ILH300***	**63.90**
4"	**200 PSI**	**125 PSI**	4.820	***13ILH400***	**79.00**

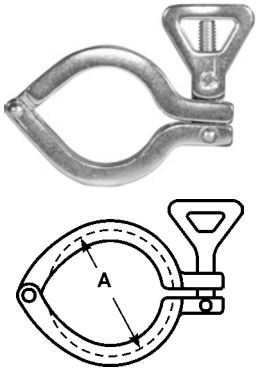

Bolted Clamps - *13ILB*

* nut must be tightened to 20 ft. lbs.
• CF-8 material


Tube OD	Service Pressure Rating @ 70°F *	Service Pressure Rating @ 250°F *	Dimension A	*304 Stainless Steel* Part #	Price/E
1" - 1½"	**1220 PSI**	**1100 PSI**	2.122	***13ILB100-150***	**$27.40**
2"	**900 PSI**	**830 PSI**	2.654	***13ILB200***	**47.75**
2½"	**720 PSI**	**660 PSI**	3.185	***13ILB250***	**66.60**
3"	**600 PSI**	**550 PSI**	3.717	***13ILB300***	**96.65**
4"	**570 PSI**	**525 PSI**	4.820	***13ILB400***	**116.75**



I-Line End Caps


Male I-line Solid End Caps - *16AI-14I*

Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	Price/E
1"	.500	1.985	***16AI-14I100***	**$15.20**
1½"	.500	1.985	***16AI-14I150***	**15.20**
2"	.562	2.640	***16AI-14I200***	**23.25**
2½"	.750	3.307	***16AI-14I250***	**38.95**
3"	.750	3.870	***16AI-14I300***	**50.65**
4"	.750	4.870	***16AI-14I400***	**86.60**



Female I-line Solid End Caps - *16AI-15I*


Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	Price/E
1"	.500	1.985	***16AI-15I100***	**$16.10**
1½"	.500	1.985	***16AI-15I150***	**16.10**
2"	.562	2.640	***16AI-15I200***	**23.25**
2½"	.750	3.307	***16AI-15I250***	**38.95**
3"	.750	3.870	***16AI-15I300***	**50.65**
4"	.750	4.870	***16AI-15I400***	**86.60**



I-Line Elbows

90° Male I-Line Elbows - *B2EI*






Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
2"	3.781	***B2EI-G200***	**$183.15**

I-Line Ferrules

Male I-Line Short Weld Ferrules - *14WI*






Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1½"	.765	***14WI-G150***	**$15.45**
2"	.790	***14WI-G200***	**23.70**
2½"	.848	***14WI-G250***	**35.25**
3"	.906	***14WI-G300***	**45.10**
4"	1.031	***14WI-G400***	**72.75**

Female I-line Short Weld Ferrules - *15WI*






Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1½"	.950	***15WI-G150***	**$14.40**
2"	1.040	***15WI-G200***	**22.30**
2½"	1.160	***15WI-G250***	**34.25**
3"	1.220	***15WI-G300***	**47.20**
4"	1.350	***15WI-G400***	**72.85**

Female I-line Long Weld Ferrules - *15WLI*






Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1"	1.750	***15WLI-G100***	**$43.45**
1½"	2.031	***15WLI-G150***	**43.35**
2"	2.312	***15WLI-G200***	**51.10**
3"	2.688	***15WLI-G300***	**98.75**
4"	3.000	***15WLI-G400***	**143.95**

Male I-line Long Weld Ferrules - *14WLI*





Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1"	1.562	***14WLI-G100***	**$43.35**
1½"	1.843	***14WLI-G150***	**43.40**
2"	2.062	***14WLI-G200***	**51.15**
3"	2.375	***14WLI-G300***	**98.75**
4"	2.688	***14WLI-G400***	**143.95**

I-Line Gaskets

Buna-N I-Line Gaskets

Size	Part #	Price/E
1"	***40IH100***	**$1.70**
1½"	***40IH150***	**1.50**
2"	***40IH200***	**1.70**
2½"	***40IH250***	**2.65**
3"	***40IH300***	**3.10**
4"	***40IH400***	**4.05**



- color code: red dot
- meets 21CFR 177.2600
- 3/32" thick

PTFE (Teflon®) I-Line Gaskets - *White Virgin*

Size	Part #	Price/E
1"	***40IT100***	**$1.90**
1½"	***40IT150***	**2.50**
2"	***40IT200***	**2.40**
2½"	***40IT250***	**2.70**
3"	***40IT300***	**3.20**
4"	***40IT400***	**4.20**



- color code: no dot
- meets 21CFR 177.1550
- pharmaceutical class VI approved
- 1/16" thick

EPDM I-Line Gaskets

Size	Part #	Price/E
1"	***40IE100***	**$2.30**
1½"	***40IE150***	**2.55**
2"	***40IE200***	**2.95**
2½"	***40IE250***	**3.80**
3"	***40IE300***	**4.50**
4"	***40IE400***	**7.05**



- color code: three green dots
- meets 21CFR 177.2600
- pharmaceutical class VI approved
- peroxide cured
- 3/32" thick

FKM (Viton®) I-Line Gaskets


Size	Part #	Price/E
1"	***40IV100***	**$9.05**
1½"	***40IV150***	**12.15**
2"	***40IV200***	**14.25**
2½"	***40IV250***	**16.90**
3"	***40IV300***	**21.20**
4"	***40IV400***	**26.65**



- color code: one white dot, one yellow dot
- meets 21CFR 177.2600
- passed USP Class VI Cytotoxicity testing
- 1/16" thick


Buttweld Elbows

90° Buttweld Elbows with Tangent, polished - *B2S*

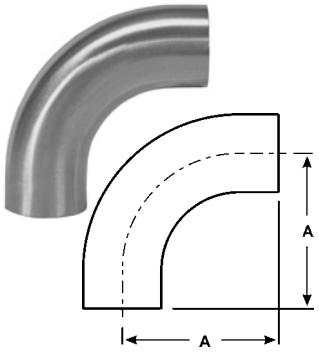


Tube OD	Dimension A	Nominal Wall	polished ID/OD *304 Stainless Steel* Part #	Price/E	polished ID/OD *316L Stainless Steel* Part #	Price/E
¾"	3.000	.065	---	---	***B2S-R75P***	**$220.10**
1"	2.062	.065	***B2S-G100P***	**$31.75**	***B2S-R100P***	**35.40**
1½"	2.937	.065	***B2S-G150P***	**33.95**	***B2S-R150P***	**39.60**
2"	4.062	.065	***B2S-G200P***	**36.90**	***B2S-R200P***	**55.00**
2½"	5.187	.065	***B2S-G250P***	**52.55**	***B2S-R250P***	**82.50**
3"	6.312	.065	***B2S-G300P***	**74.55**	***B2S-R300P***	**113.65**
4"	8.312	.083	***B2S-G400P***	**134.70**	***B2S-R400P***	**209.95**

90° Buttweld Elbows, polished - *B2WCL*

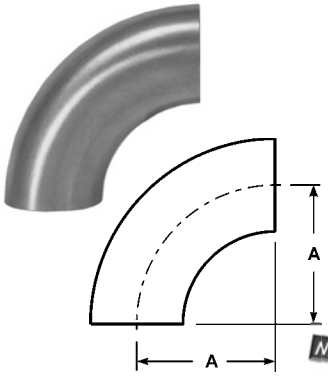


Tube OD	Dimension A	Nominal Wall	polished ID/OD *304 Stainless Steel* Part #	Price/E	polished ID/OD *316L Stainless Steel* Part #	Price/E
½"	1.125	.065	---	---	***B2WCL-R50P***	**$32.90**
¾"	1.125	.065	---	---	***B2WCL-R75P***	**138.15**
1"	1.500	.065	***B2WCL-G100P***	**$17.05**	***B2WCL-R100P***	**20.55**
1½"	2.250	.065	***B2WCL-G150P***	**21.80**	***B2WCL-R150P***	**27.50**
2"	3.000	.065	***B2WCL-G200P***	**29.75**	***B2WCL-R200P***	**37.90**
2½"	3.750	.065	***B2WCL-G250P***	**47.95**	***B2WCL-R250P***	**62.80**
3"	4.500	.065	***B2WCL-G300P***	**68.20**	***B2WCL-R300P***	**87.15**
4"	6.000	.083	***B2WCL-G400P***	**130.70**	***B2WCL-R400P***	**158.95**
6"	9.000	.109	***B2WCL-G600P***	**741.50**	***B2WCL-R600P***	**825.95**
NEW 8"	12.000	.120	***B2WCL-G800P***	**1401.55**	***B2WCL-R800P***	**1643.95**
10"	15.000	.109	***B2WCL-G1000P***	**3314.40**	---	---

90° Clamp x Buttweld Elbow, polished - *B2CM*

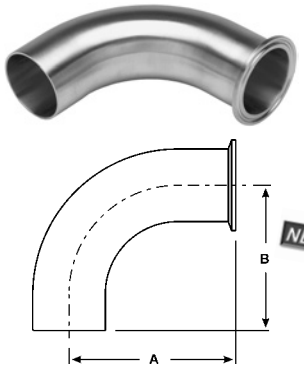

Tube OD	Dimensions A	Dimensions B	Nom. Wall	polished ID/OD *304 Stainless Steel* Part #	Price/E	NEW polished ID/OD *316L Stainless Steel* Part #	Price/E
1"	2.562	2.062	.065	***B2CM-G100***	**$79.55**	***B2CM-R100***	**$91.40**
1½"	3.438	2.937	.065	***B2CM-G150***	**74.70**	***B2CM-R150***	**90.25**
2"	4.562	4.062	.065	***B2CM-G200***	**89.20**	***B2CM-R200***	**103.45**
NEW 2½"	5.688	5.187	.065	***B2CM-G250***	**116.75**	***B2CM-R250***	**144.55**
3"	6.812	6.312	.065	***B2CM-G300***	**155.30**	***B2CM-R300***	**214.25**
4"	8.937	8.312	.083	***B2CM-G400***	**236.75**	***B2CM-R400***	**300.95**

Plain End Bevel Seat with Hex x 90° Buttweld Elbow, polished - *B2FP*

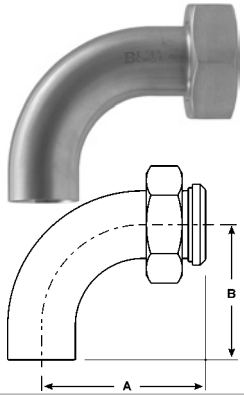

Tube OD	Dimensions A	Dimensions B	Nominal Wall	polished ID/OD *304 Stainless Steel* Part #	Price/E
1½"	3.656	2.937	.065	***B2FP-G150***	**$153.40**
2"	4.812	4.062	.065	***B2FP-G200***	**173.65**
2½"	6.062	5.187	.065	***B2FP-G250***	**239.50**
3"	7.218	6.312	.065	***B2FP-G300***	**315.65**


- hex nuts are CF8 (304) stainless

Buttweld Elbows

45° Buttweld Elbows with Tangent, polished - *B2KS*


Tube OD	Dimension A	Nominal Wall	polished ID/OD *304 Stainless Steel* Part #	Price/E	polished ID/OD *316L Stainless Steel* Part #	Price/E
¾"	2.250	.065	---	---	***B2KS-R75P***	**$139.60**
1"	1.188	.065	***B2KS-G100P***	**$26.10**	***B2KS-R100P***	**28.35**
1½"	1.625	.065	***B2KS-G150P***	**28.35**	***B2KS-R150P***	**33.35**
2"	2.312	.065	***B2KS-G200P***	**35.05**	***B2KS-R200P***	**46.15**
2½"	3.000	.065	***B2KS-G250P***	**48.30**	***B2KS-R250P***	**64.40**
3"	3.688	.065	***B2KS-G300P***	**65.35**	***B2KS-R300P***	**92.75**
4"	4.812	.083	***B2KS-G400P***	**112.50**	***B2KS-R400P***	**151.35**

NEW



45° Buttweld Elbows, polished - *B2WK*


Tube OD	Dimensions A	Dimensions R	Nom. Wall	polished ID/OD *304 Stainless Steel* Part #	Price/E	polished ID/OD *316L Stainless Steel* Part #	Price/E
1"	.625	1.500	.065	***B2WK-G100P***	**$19.15**	***B2WK-R100P***	**$20.70**
1½"	.937	2.250	.065	***B2WK-G150P***	**18.45**	***B2WK-R150P***	**21.05**
2"	1.250	3.000	.065	***B2WK-G200P***	**24.35**	***B2WK-R200P***	**33.70**
2½"	1.562	3.750	.065	***B2WK-G250P***	**35.60**	***B2WK-R250P***	**48.90**
3"	1.875	4.500	.065	***B2WK-G300P***	**60.25**	***B2WK-R300P***	**77.85**
4"	2.500	6.000	.083	***B2WK-G400P***	**114.40**	***B2WK-R400P***	**147.20**

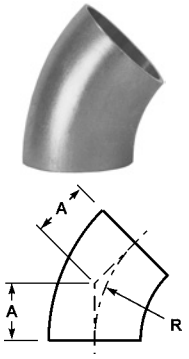

45° Clamp x Buttweld Elbow, polished - *B2KM*


Tube OD	Dimensions A	Dimensions B	Nom. Wall	polished ID/OD *304 Stainless Steel* Part #	Price/E	polished ID/OD *316L Stainless Steel* Part #	Price/E
1"	1.188	1.688	.065	***B2KM-G100***	**$90.30**	***B2KM-R100***	**$106.05**
1½"	1.625	2.125	.065	***B2KM-G150***	**93.65**	***B2KM-R150***	**123.25**
2"	2.312	2.812	.065	***B2KM-G200***	**118.25**	***B2KM-R200***	**144.05**
2½"	3.000	3.500	.065	***B2KM-G250***	**146.30**	***B2KM-R250***	**280.30**
4"	4.812	5.437	.083	***B2KM-G400***	**422.60**	***B2KM-R400***	**629.90**

NEW




Threaded Bevel Seat x 90° Buttweld Elbow, polished - *B2T*

Tube OD	Dimensions A	Dimensions B	Nominal Wall	polished ID/OD *304 Stainless Steel* Part #	Price/E
1½"	3.656	2.937	.065	***B2T-G150***	**$98.20**
2"	4.812	4.062	.065	***B2T-G200***	**121.25**

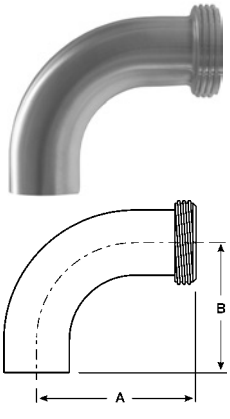

Buttweld Adapters

Buttweld Long Hose Adapters - *14WHRL*



Tube OD	Dimensions A	Dimensions B	Nominal Wall	316L Stainless Steel Part #	316L Stainless Steel Price/E
1"	3.000	1.030	.116	***14WHRL-R100***	**$36.80**
1½"	4.500	1.030	.116	***14WHRL-R150***	**62.80**
2"	4.500	2.030	.116	***14WHRL-R200***	**80.05**
2½"	5.000	2.030	.116	***14WHRL-R250***	**109.50**
3"	5.000	3.030	.116	***14WHRL-R300***	**130.60**
4"	4.875	4.030	.116	***14WHRL-R400***	**183.10**


- suitable for use with band clamps

SAFETY ALERT

Use of PVC tubing requires special techniques to prevent leakage. All assembly work must be done with heated tube. Cold durometer is 90 as opposed to rubber hose at 65 to 70 durometer. Banding buckles must be at 180° from one another.

Buttweld Crosses

Buttweld Cross, polished - *B9WWWW*

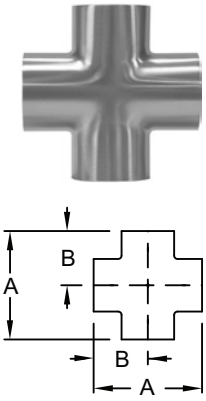


Tube OD	Dimensions A	Dimensions B	Nominal Wall	polished ID/OD 304 Stainless Steel Part #	polished ID/OD 304 Stainless Steel Price/E
1½"	3.312	1.656	.065	***B9WWWW-G150P***	**$227.30**
2"	4.125	2.062	.065	***B9WWWW-G200P***	**283.50**
3"	5.187	2.593	.065	***B9WWWW-G300P***	**409.10**

L Sanitary

Buttweld Tees

Buttweld Short Tees, polished - *B7WWW*

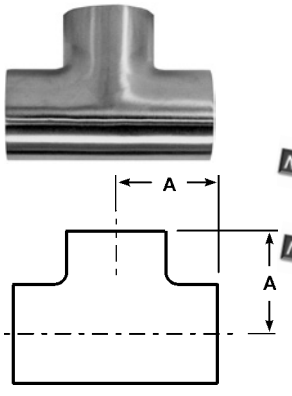


	Tube OD	Dimension A	Nominal Wall	polished ID/OD 304 Stainless Steel Part #	polished ID/OD 304 Stainless Steel Price/E	polished ID/OD 316L Stainless Steel Part #	polished ID/OD 316L Stainless Steel Price/E
NEW	1"	1.125	.065	***B7WWW-G100P***	**$36.80**	***B7WWW-R100P***	**$43.80**
	1½"	1.656	.065	***B7WWW-G150P***	**41.55**	***B7WWW-R150P***	**45.90**
	2"	2.062	.065	***B7WWW-G200P***	**52.25**	***B7WWW-R200P***	**58.20**
NEW	2½"	2.344	.065	***B7WWW-G250P***	**64.65**	***B7WWW-R250P***	**75.85**
	3"	2.594	.065	***B7WWW-G300P***	**91.35**	***B7WWW-R300P***	**112.35**

Buttweld Tees

Buttweld Long Tees, polished - *B7W*


Tube OD	Dimensions A	Dimensions B	Nom. Wall	polished ID/OD *304 Stainless Steel* Part #	polished ID/OD *304 Stainless Steel* Price/E	polished ID/OD *316L Stainless Steel* Part #	polished ID/OD *316L Stainless Steel* Price/E
¾"	4.000	2.000	.065	---	---	***B7W-R75P***	**$176.40**
1"	3.750	1.875	.065	***B7W-G100P***	**$41.70**	***B7W-R100P***	**49.55**
1½"	4.500	2.250	.065	***B7W-G150P***	**41.60**	***B7W-R150P***	**54.55**
2"	6.000	3.000	.065	***B7W-G200P***	**49.55**	***B7W-R200P***	**77.05**
2½"	6.000	3.000	.065	***B7W-G250P***	**67.85**	***B7W-R250P***	**107.10**
3"	6.500	3.250	.065	***B7W-G300P***	**101.45**	***B7W-R300P***	**133.00**

NEW

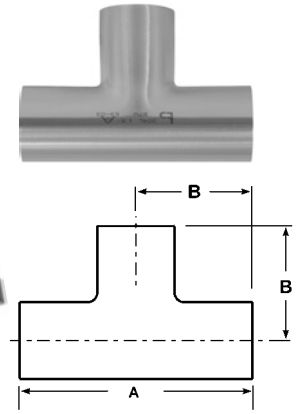


Buttweld Reducing Tees - *B7RWWW*


Tube OD	Dimensions A	Dimensions B	Dimensions C	Dimensions D	Nom. Wall	polished ID/OD *304 Stainless Steel* Part #	polished ID/OD *304 Stainless Steel* Price/E
2" x 1"	2.062	1.625	2.000	1.000	.065	***B7RWWW-G200100P***	**$88.00**
2" x 1½"	2.062	1.906	2.000	1.500	.065	***B7RWWW-G200150P***	**88.00**
3" x 1½"	2.594	2.406	3.000	1.500	.065	***B7RWWW-G300150P***	**135.25**
3" x 2"	2.594	2.562	3.000	2.000	.065	***B7RWWW-G300200P***	**135.25**

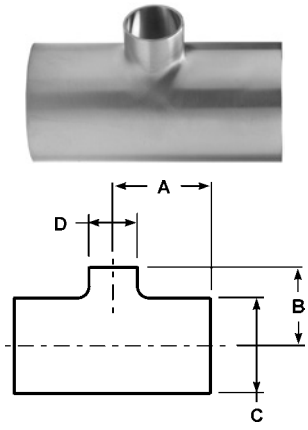

Buttweld Eccentric Reducers, polished - *B32W*


Tube OD	Dimensions A	Dimensions B	Dimensions C	Nom. Wall	polished ID/OD *304 Stainless Steel* Part #	polished ID/OD *304 Stainless Steel* Price/E
2" x 1"	4.000	2.000	1.000	.065	***B32W-G200100P***	**$149.45**
2½" x 1½"	4.000	2.500	1.500	.065	***B32W-G250150P***	**107.60**
2½" x 2"	2.000	2.500	2.000	.065	***B32W-G250200P***	**72.55**
3" x 2"	4.000	3.000	2.000	.065	***B32W-G300200P***	**117.40**
4" x 2"	8.000	4.000	2.000	.083	***B32W-G400200P***	**243.80**
4" x 3"	4.000	4.000	3.000	.083	***B32W-G400300P***	**140.40**






Buttweld Reducers

3 Buttweld Concentric Reducers, polished - *B31W*







Tube OD	Dimensions			Nom. Wall	polished ID/OD *304 Stainless Steel*		NEW polished ID/OD *316L Stainless Steel*	
	A	B	C		Part #	Price/E	Part #	Price/E
1½" x 1"	2.000	1.500	1.000	.065	***B31W-G150100P***	**$41.00**	***B31W-R150100P***	**$68.35**
2" x 1"	4.000	2.000	1.000	.065	***B31W-G200100P***	**71.85**	***B31W-R200100P***	**122.55**
2" x 1½"	2.000	2.000	1.500	.065	***B31W-G200150P***	**41.55**	***B31W-R200150P***	**70.20**
2½" x 1½"	4.000	2.500	1.500	.065	***B31W-G250150P***	**68.25**	***B31W-R250150P***	**138.90**
2½" x 2"	2.000	2.500	2.000	.065	***B31W-G250200P***	**48.45**	***B31W-R250200P***	**116.05**
3" x 1½"	6.000	3.000	1.500	.065	***B31W-G300150P***	**126.60**	***B31W-R300150P***	**221.50**
3" x 2"	4.000	3.000	2.000	.065	***B31W-G300200P***	**71.20**	***B31W-R300200P***	**123.60**
3" x 2½"	2.000	3.000	2.500	.065	***B31W-G300250P***	**84.55**	***B31W-R300250P***	**142.30**
4" x 2"	8.000	4.000	2.000	.083	***B31W-G400200P***	**184.05**	***B31W-R400200P***	**313.10**
4" x 2½"	6.000	4.000	2.500	.083	***B31W-G400250P***	**197.15**	***B31W-R400250P***	**335.50**
4" x 3"	4.000	4.000	3.000	.083	***B31W-G400300P***	**105.65**	***B31W-R400300P***	**182.35**
6" x 3"	5.500	6.000	3.000	.109	***B31W-G600300P***	**521.65**	***B31W-R600300P***	**609.85**
6" x 4"	5.500	6.000	4.000	.109	***B31W-G600400P***	**772.55**	***B31W-R600400P***	**1114.05**

Miscellaneous Configurations


Buttweld Laterals, polished - *B28WA*






Tube OD	Dimensions A	B	C	Nominal Wall	polished ID/OD *316L Stainless Steel* Part #	Price/E
1"	6.000	1.000	5.000	.065	***B28WA-R100P***	**$487.80**
1½"	7.375	1.188	6.188	.065	***B28WA-R150P***	**487.80**
2"	8.750	1.625	7.125	.065	***B28WA-R200P***	**547.95**

Buttweld True Y, polished - *B28W*






Tube OD	Dimensions A	B	Nominal Wall	polished ID/OD *316L Stainless Steel* Part #	Price/E
1"	2.000	2.438	.065	***B28W-R100P***	**$442.20**
1½"	2.000	2.438	.065	***B28W-R150P***	**486.20**
2"	2.625	3.250	.065	***B28W-R200P***	**486.85**
3"	4.000	4.875	.065	***B28W-R300P***	**738.15**
4"	5.375	5.375	.083	***B28W-R400P***	**1139.85**

180° Buttweld Return Bends, polished - *B2WUL*






Tube OD	Dimensions A	B	polished ID/OD *316L Stainless Steel* Part #	Price/E
1½"	4.500	3.000	***B2WUL-R150P***	**$306.75**
2"	6.000	4.000	***B2WUL-R200P***	**395.10**

• Bends are standard 1.5 x tube diameter

Unpolished Stub Ends - *14VB*

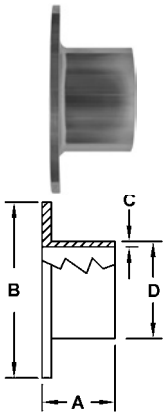


Tube OD	Dimensions				*316L Stainless Steel*	
	A	B	C	D	Part #	Price/E
2"	1.500	3.625	.065	2.000	***14VB-R200***	**$98.85**
3"	2.250	5.000	.065	3.000	***14VB-R300***	**164.70**

Flanges

Unpolished Weld Flanges - *B38SL*






Tube OD	Dimensions			No. & Dia. Bolt Holes	Bolt Circle	*304 Stainless Steel*		*316L Stainless Steel*	
	A	B	C			Part #	Price/E	Part #	Price/E
1"	4.250	.375	1.063	4/.625	3.125	***B38SL-G100***	**$87.60**	***B38SL-R100***	**$127.70**
1½"	5.000	.375	1.563	4/.625	3.875	***B38SL-G150***	**114.60**	***B38SL-R150***	**156.10**
2"	6.000	.437	2.063	4/.750	4.750	***B38SL-G200***	**141.50**	***B38SL-R200***	**262.45**
3"	7.500	.500	3.063	4/.750	6.000	***B38SL-G300***	**256.10**	***B38SL-R300***	**475.25**
4"	9.000	.562	4.063	8/.750	7.500	***B38SL-G400***	**370.65**	***B38SL-R400***	**673.85**
6"	11.000	.562	6.063	8/.875	9.500	***B38SL-G600***	**539.05**	***B38SL-R600***	**886.70**
8"	13.500	.687	8.063	8/.875	11.750	***B38SL-G800***	**1078.15**	***B38SL-R800***	**1560.50**

Wall Flanges - *B25*






Tube OD	Dimensions		Wall Thickness	*304 Stainless Steel*	
	A	B		Part #	Price/E
½"	.5202	3.0	.065	***B25-G050300***	**$28.25**
½"	.5202	5.0	.065	***B25-G050500***	**29.15**
¾"	.7702	3.0	.065	***B25-G075300***	**25.45**
¾"	.7702	5.0	.065	***B25-G075500***	**30.60**
1"	1.0202	3.0	.065	***B25-G100300***	**23.10**
1"	1.0202	5.0	.065	***B25-G100500***	**26.00**
1½"	1.5202	5.0	.065	***B25-G150500***	**26.55**
2"	2.0202	5.0	.065	***B25-G200500***	**27.10**
2½"	2.5202	5.0	.065	***B25-G250500***	**27.70**
3"	3.0202	6.0	.065	***B25-G300600***	**28.05**
4"	4.0202	7.0	.065	***B25-G400700***	**34.35**
6"	6.0202	10.0	.065	***B25-G6001000***	**147.10**
8"	8.0202	12.0	.065	***B25-G8001200***	**193.55**
10"	10.0202	14.0	.065	***B25-G10001400***	**224.40**
12"	12.0202	16.0	.065	***B25-G12001600***	**245.75**


Unpolished Elbows

90° Unpolished Weld Elbows with Tangent - *B2S*

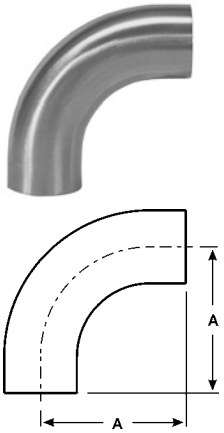


Tube OD	Dimension A	Nominal Wall	unpolished *304 Stainless Steel* Part #	Price/E	unpolished *316L Stainless Steel* Part #	Price/E
1"	2.062	.065	***B2S-G100U***	**$21.85**	***B2S-R100U***	**$28.65**
1½"	2.937	.065	***B2S-G150U***	**25.00**	***B2S-R150U***	**32.80**
2"	4.062	.065	***B2S-G200U***	**30.30**	***B2S-R200U***	**44.45**
2½"	5.187	.065	***B2S-G250U***	**43.60**	***B2S-R250U***	**69.45**
3"	6.312	.065	***B2S-G300U***	**68.80**	***B2S-R300U***	**102.80**
4"	8.312	.083	***B2S-G400U***	**121.90**	***B2S-R400U***	**196.55**

90° Unpolished Weld Elbows - *B2WCL*

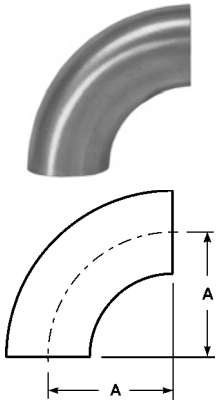


Tube OD	Dimension A	Nominal Wall	unpolished *304 Stainless Steel* Part #	Price/E	unpolished *316L Stainless Steel* Part #	Price/E
1"	1.500	.065	***B2WCL-G100U***	**$14.20**	***B2WCL-R100U***	**$18.60**
1½"	2.250	.065	***B2WCL-G150U***	**15.15**	***B2WCL-R150U***	**19.10**
2"	3.000	.065	***B2WCL-G200U***	**21.05**	***B2WCL-R200U***	**27.65**
2½"	3.750	.065	***B2WCL-G250U***	**34.10**	***B2WCL-R250U***	**43.95**
3"	4.500	.065	***B2WCL-G300U***	**49.25**	***B2WCL-R300U***	**64.20**
4"	6.000	.083	***B2WCL-G400U***	**98.05**	***B2WCL-R400U***	**124.85**
6"	9.000	.109	***B2WCL-G600U***	**449.80**	***B2WCL-R600U***	**599.75**

45° Unpolished Weld Elbows with Tangent - *B2KS*

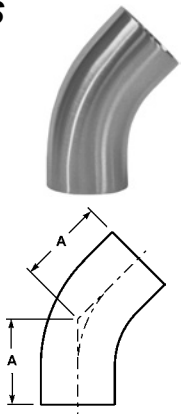

Tube OD	Dimension A	Nominal Wall	unpolished *304 Stainless Steel* Part #	Price/E	unpolished *316L Stainless Steel* Part #	Price/E
1"	1.188	.065	***B2KS-G100U***	**$19.80**	***B2KS-R100U***	**$24.20** NEW
1½"	1.625	.065	***B2KS-G150U***	**21.15**	***B2KS-R150U***	**28.40**
2"	2.312	.065	***B2KS-G200U***	**27.80**	***B2KS-R200U***	**36.15**
2½"	3.000	.065	***B2KS-G250U*** NEW	**37.90**	***B2KS-R250U***	**56.05**
3"	3.688	.065	***B2KS-G300U***	**53.05**	***B2KS-R300U***	**74.90** NEW
4"	4.812	.083	***B2KS-G400U***	**97.65**	***B2KS-R400U***	**131.25**

45° Unpolished Weld Elbows - *B2WK*

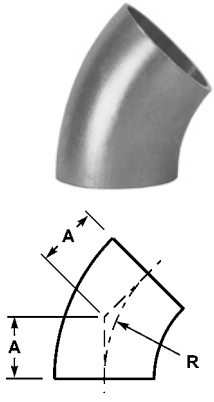


Tube OD	Dimensions A	Dimensions R	Nom. Wall	unpolished *304 Stainless Steel* Part #	Price/E	unpolished *316L Stainless Steel* Part #	Price/E
¾"	.466	1.125	.065	**---**	**---**	***B2WK-R75U***	**$51.30**
1"	.625	1.500	.065	***B2WK-G100U***	**$17.65**	**---**	**---**
1½"	.937	2.250	.065	***B2WK-G150U***	**14.40**	***B2WK-R150U***	**16.00**
2"	1.250	3.000	.065	***B2WK-G200U***	**18.60**	***B2WK-R200U***	**22.55**
2½"	1.562	3.750	.065	***B2WK-G250U***	**26.55**	***B2WK-R250U***	**35.80**
3"	1.875	4.500	.065	***B2WK-G300U***	**34.05**	**---**	**---**
4"	2.500	6.000	.083	***B2WK-G400U***	**74.80**	***B2WK-R400U***	**95.85**
6"	3.750	9.000	.109	***B2WK-G600U***	**337.15**	***B2WK-R600U***	**467.30**
8"	5.000	12.000	.120	**---**	**---**	***B2WK-R800U***	**633.85**

Unpolished Tees

Unpolished Weld Short Tees - *B7WWW*






Tube OD	Dimension A	Nominal Wall	unpolished *304 Stainless Steel* Part #	Price/E	unpolished *316L Stainless Steel* Part #	Price/E
1"	1.125	.065	***B7WWW-G100U***	**$20.65**	***B7WWW-R100U***	**$30.70**
1½"	1.656	.065	***B7WWW-G150U***	**22.10**	***B7WWW-R150U***	**40.40**
2"	2.062	.065	***B7WWW-G200U***	**28.10**	***B7WWW-R200U***	**49.75**
2½"	2.344	.065	***B7WWW-G250U***	**42.95**	***B7WWW-R250U*** NEW	**81.80**
3"	2.594	.065	***B7WWW-G300U***	**58.10**	***B7WWW-R300U***	**84.25**
4"	3.438	.083	***B7WWW-G400U***	**120.40**	***B7WWW-R400U***	**156.40**

Unpolished Weld Long Tees - *B7W*






Tube OD	Dimensions A	Dimensions B	Nom. Wall	unpolished *304 Stainless Steel* Part #	Price/E	unpolished *316L Stainless Steel* Part #	Price/E
¾"	4.000	2.000	.065	**---**	**---**	***B7W-R75U***	**$97.05**
1"	3.750	1.875	.065	***B7W-G100U***	**$23.35**	***B7W-R100U***	**29.75**
1½"	4.500	2.250	.065	***B7W-G150U***	**25.85**	***B7W-R150U***	**37.90**
2"	6.000	3.000	.065	***B7W-G200U***	**31.70**	***B7W-R200U***	**45.85**
3"	6.500	3.250	.065	***B7W-G300U***	**61.95**	***B7W-R300U***	**98.80**

Adapters

Male NPT x Weld - *B19WB*






Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1"	1.750	***B19WB-G100***	**$18.10**
1½"	1.750	***B19WB-G150***	**24.85**
2"	1.812	***B19WB-G200***	**35.85**
2½"	2.312	***B19WB-G250***	**61.05**
3"	2.500	***B19WB-G300***	**82.80**
4"	2.562	***B19WB-G400***	**158.80**

Unpolished Weld End Caps - *B16W*






Tube OD	Dimension A	*304 Stainless Steel* Part #	Price/E
1"	.375	***B16W-G100***	**$8.65**
1½"	.562	***B16W-G150***	**12.40**
2"	.750	***B16W-G200***	**21.00**
2½"	1.000	***B16W-G250***	**26.20**
3"	1.250	***B16W-G300***	**39.40**
4"	1.500	***B16W-G400***	**88.45**

Tube OD Reducers


Tube OD Weld Concentric Reducers - *B31W*

Tube OD	Dim. A	Nom. Wall	unpolished *304 Stainless Steel* Part #	Price/E	unpolished *316L Stainless Steel* Part #	Price/E
¾" x ½"	1.000	.065	---	---	***B31W-R7550U***	**$75.90**
1" x ¾"	1.000	.065	---	---	***B31W-R10075U***	**94.00**
1½" x ¾"	3.000	.065	---	---	***B31W-R15075U***	**165.60**
1½" x 1"	2.000	.065	***B31W-G150100U***	**$22.10**	***B31W-R150100U***	**27.95**
2" x 1"	4.000	.065	***B31W-G200100U***	**41.25**	***B31W-R200100U***	**62.90**
2" x 1½"	2.000	.065	***B31W-G200150U***	**24.90**	***B31W-R200150U***	**31.90**
2½" x 1½"	4.000	.065	***B31W-G250150U***	**51.55**	***B31W-R250150U***	**67.35**
2½" x 2"	2.000	.065	***B31W-G250200U***	**29.55**	***B31W-R250200U***	**35.45**
3" x 1½"	6.000	.065	***B31W-G300150U***	**85.70**	***B31W-R300150U***	**135.05**
3" x 2"	4.000	.065	***B31W-G300200U***	**50.20**	***B31W-R300200U***	**63.05**
3" x 2½"	2.000	.065	***B31W-G300250U***	**39.05**	***B31W-R300250U***	**48.80**
4" x 2"	8.000	.083	***B31W-G400200U***	**123.70**	***B31W-R400200U***	**141.30**
4" x 3"	4.000	.083	***B31W-G400300U***	**50.65**	***B31W-R400300U***	**68.20**
6" x 4"	5.500	.109	***B31W-G600400U***	**358.75**	***B31W-R600400U***	**478.85**

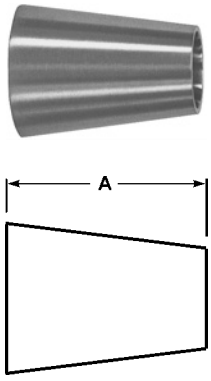

Tube OD Weld Eccentric Reducers - *B32W*


Tube OD	Dim. A	Nom. Wall	unpolished *304 Stainless Steel* Part #	Price/E	unpolished *316L Stainless Steel* Part #	Price/E
1" x ½"	2.000	.065	---	---	***B32W-R10050U***	**$98.70**
2" x 1½"	2.000	.065	***B32W-G200150U***	**$34.60**	***B32W-R200150U***	**37.25**
2½" x 2"	2.000	.065	***B32W-G250200U***	**45.85**	***B32W-R250200U***	**47.75**
3" x 2"	4.000	.065	***B32W-G300200U***	**68.60**	***B32W-R300200U***	**95.70**
3" x 2½"	2.000	.065	***B32W-G300250U***	**89.50**	***B32W-R300250U***	**107.95**
4" x 2"	8.000	.083	***B32W-G400200U***	**184.85**	***B32W-R400200U***	**252.50**
4" x 3"	4.000	.083	***B32W-G400300U***	**79.10**	***B32W-R400300U***	**120.45**



Tube OD Miscellaneous Configurations


Tube OD Weld Y - *B28W*

Tube OD	Dimensions A	Dimensions B	Nominal Wall	unpolished *316L Stainless Steel* Part #	Price/E
2½"	3.370	4.125	.065	***B28W-R250U***	**$627.75**
3"	4.000	4.875	.065	***B28W-R300U***	**771.10**
4"	5.375	5.375	.083	***B28W-R400U***	**852.30**

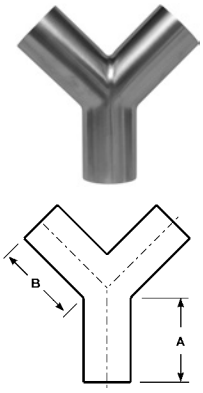


Tube OD Weld Laterals - *B28WA*

Tube OD	Dimensions A	Dimensions B	Dimensions C	unpolished *316L Stainless Steel* Part #	Price/E
1"	6.000	1.000	5.000	***B28WA-R100U***	**$432.90**
1½"	7.375	1.188	6.188	***B28WA-R150U***	**454.55**
2½"	10.000	1.500	8.500	***B28WA-R250U***	**627.75**
3"	10.750	1.875	8.875	***B28WA-R300U***	**771.10**

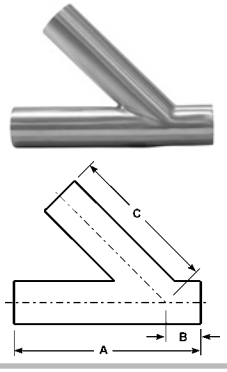

Tube Hangers


Hex Tube Hangers with Sleeves - *B24PS*

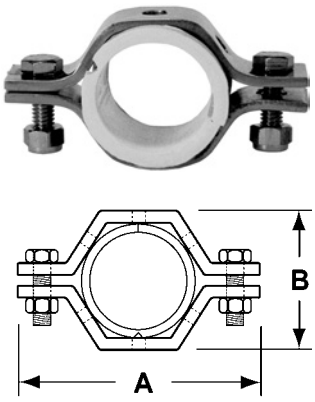

- supplied with an ABS plastic sleeve to contain the tube
- The ABS plastic sleeve is rated for operating temperatures up to **230°F**.

Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	Price/E
½"	2.800	1.150	***B24PS-G50***	**$8.55**
¾"	2.800	1.150	***B24PS-G75***	**8.55**
1"	3.425	1.450	***B24PS-G100***	**12.05**
1½"	4.000	2.125	***B24PS-G150***	**13.20**
2"	4.500	2.500	***B24PS-G200***	**15.80**
2½"	4.950	3.125	***B24PS-G250***	**18.45**
3"	5.500	3.750	***B24PS-G300***	**20.75**
4"	6.950	4.750	***B24PS-G400***	**27.35**
6"	9.250	6.625	***B24PS-G600***	**68.20**
8"	11.500	8.625	***B24PS-G800***	**104.20**


ABS Sleeves - *13PS*



- maximum temperature: **230°F**

Size	Part #	Price/E	Size	Part #	Price/E
½"	***13PS-50***	**$6.10**	2½"	***13PS-250***	**$7.15**
¾"	***13PS-75***	**6.10**	3"	***13PS-300***	**7.60**
1"	***13PS-100***	**4.90**	4"	***13PS-400***	**9.40**
1½"	***13PS-150***	**4.90**	6"	***13PS-600***	**22.40**
2"	***13PS-200***	**4.90**	8"	***13PS-800***	**29.40**


Hex Tube Hangers with Grommets - *B24RG*

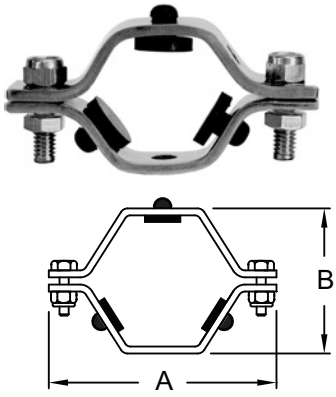

- supplied with three nitrile grommets to contain the tube
- The nitrile grommets have a maximum operating temperature of **230°F**.

Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* Part #	Price/E
½" - ¾"	3.425	1.450	***B24RG-G75***	**$10.55**
1"	3.425	1.450	***B24RG-G100***	**11.60**
1½"	4.000	2.125	***B24RG-G150***	**12.50**
2"	4.500	2.500	***B24RG-G200***	**15.10**
2½"	4.950	3.125	***B24RG-G250***	**17.20**
3"	5.500	3.750	***B24RG-G300***	**19.40**
4"	6.950	4.750	***B24RG-G400***	**25.30**
6"	9.250	6.625	***B24RG-G600***	**41.95**
8"	11.500	8.625	***B24RG-G800***	**89.75**

Round Tube Hangers - *B24RPH*

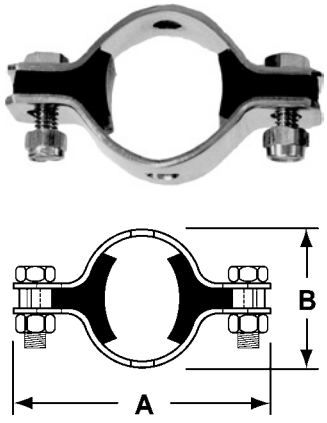


- supplied with shaped inserts that conform to the tube, cutting down on movement and vibration.
- The nitrile inserts have a maximum operating temperature of **230°F**.

Tube OD	Dimensions A	Dimensions B	*304 Stainless Steel* with Nitrile insert Part #	Price/E
½"	2.75	1.125	***B24RPH-G50***	**$11.85**
¾"	2.75	1.125	***B24RPH-G75***	**11.85**
1"	3.31	1.500	***B24RPH-G100***	**18.85**
1½"	3.81	2.000	***B24RPH-G150***	**20.10**
2"	4.25	2.562	***B24RPH-G200***	**23.25**
2½"	5.00	3.000	***B24RPH-G250***	**25.85**
3"	5.50	3.562	***B24RPH-G300***	**29.05**
4"	6.50	4.688	***B24RPH-G400***	**36.65**

Tube Hangers

Block Tube Hangers with Hang Plate - *B24**HAP*

Polypropylene (PP)
- maximum temperature: **212°F**

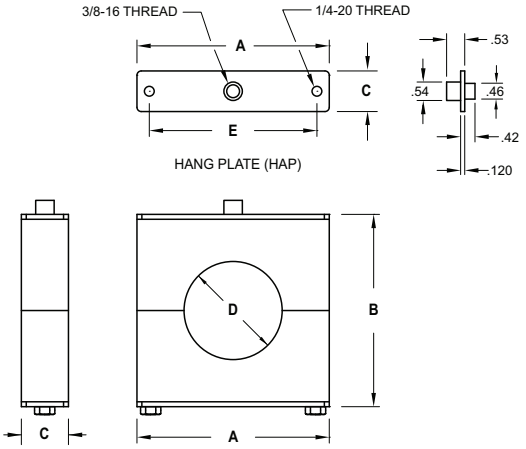


Santoprene™ (SP)
- FDA approved material
- maximum temperature: **302°F**



Tube OD	Dimensions					*Polypropylene Block*		*Santoprene™ Block*	
	A	B	C	D	E	Part #	Price/E	Part #	Price/E
½"	1.84	1.70	1.19	.50	1.33	***B24PPHAP-G50***	**$32.45**	***B24SPHAP-G50***	**$38.15**
¾"	1.84	1.70	1.19	.75	1.33	***B24PPHAP-G75***	**32.45**	***B24SPHAP-G75***	**38.15**
1"	3.33	2.85	1.19	1.00	2.55	***B24PPHAP-G100***	**39.65**	***B24SPHAP-G100***	**46.45**
1½"	3.33	2.85	1.19	1.50	2.55	***B24PPHAP-G150***	**39.65**	***B24SPHAP-G150***	**46.45**
2"	3.33	2.85	1.19	2.00	2.55	***B24PPHAP-G200***	**39.65**	***B24SPHAP-G200***	**46.45**
2½"	5.00	4.60	1.19	2.50	4.22	***B24PPHAP-G250***	**61.80**	***B24SPHAP-G250***	**68.00**
3"	5.00	4.60	1.19	3.00	4.22	***B24PPHAP-G300***	**61.80**	***B24SPHAP-G300***	**68.00**
4"	5.65	5.00	1.19	4.00	4.85	***B24PPHAP-G400***	**99.20**	***B24SPHAP-G400***	**109.05**

Block Tube Hangers with Standard Weld Plate - *B24**STW*

Polypropylene (PP)
- maximum temperature: **212°F**

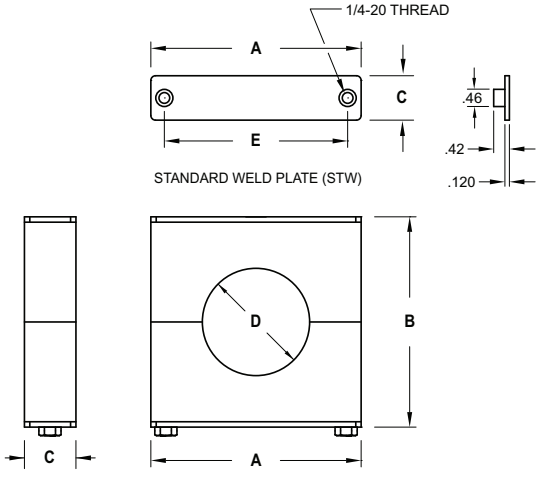

Santoprene™ (SP)
- FDA approved material
- maximum temperature: **302°F**




Tube OD	Dimensions					*Polypropylene Block*		*Santoprene™ Block*	
	A	B	C	D	E	Part #	Price/E	Part #	Price/E
½"	1.84	1.70	1.19	.50	1.33	***B24PPSTW-G50***	**$32.45**	***B24SPSTW-G50***	**$32.45**
¾"	1.84	1.70	1.19	.75	1.33	***B24PPSTW-G75***	**32.45**	***B24SPSTW-G75***	**32.45**
1"	3.33	2.85	1.19	1.00	2.55	***B24PPSTW-G100***	**39.65**	***B24SPSTW-G100***	**39.65**
1½"	3.33	2.85	1.19	1.50	2.55	***B24PPSTW-G150***	**39.65**	***B24SPSTW-G150***	**39.65**
2"	3.33	2.85	1.19	2.00	2.55	***B24PPSTW-G200***	**39.65**	***B24SPSTW-G200***	**39.65**
2½"	5.00	4.60	1.19	2.50	4.22	***B24PPSTW-G250***	**61.80**	***B24SPSTW-G250***	**61.80**
3"	5.00	4.60	1.19	3.00	4.22	***B24PPSTW-G300***	**61.80**	***B24SPSTW-G300***	**61.80**
4"	5.65	5.00	1.19	4.00	4.85	***B24PPSTW-G400***	**99.10**	***B24SPSTW-G400***	**99.10**

Spray Balls

Rotating



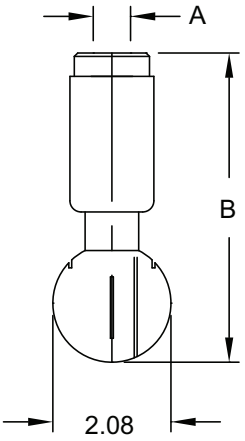


- 304 stainless steel
- stainless steel ball bearings to eliminate rust
- ideal for cleaning all types of tanks and vessels
- cleaning solution used to lubricate unit
- mirror-like finish (ID/OD)

Size	Type	Spray Pattern	Dimensions		*304 stainless steel*	
			A	B	Part #	Price/E
¾"	NPT	360°	¾" NPT	5.46	***SRH360NPT-G075***	**$157.70**


Fixed

- 316L stainless steel
- heavy stainless steel construction for longer life
- various spray patterns available, (blanks available as special order)
- stationary - designed to be mounted to a tube or pipe
- typical uses are in food and beverage industries for cleaning storage tanks






180° Top Pattern



180° Bottom Pattern




360° Pattern

Size	Spray Pattern	Dimensions			*316L stainless steel* Part #	Price/E
		A	B	C		
1"	360°	3.04	2.45	1.005	***STC-360-R100***	**$114.45**
1½"	360°	3.54	2.95	1.505	***STC-360-R150***	**169.40**
1"	180° bottom	3.54	2.95	1.005	***STC-180B-R100***	**117.85**
1½"	180° bottom	3.54	2.95	1.505	***STC-180B-R150***	**145.90**
1"	180° top	3.54	2.95	1.005	***STC-180T-R100***	**117.85**
1½"	180° top	3.54	2.95	1.505	***STC-180T-R150***	**138.90**

2-Way 3 Piece Encapsulated Ball Valves

- rated at **1,000 PSI** WOG (water, oil and gas)
- balanced encapsulated construction minimizes cold flow
- live loaded stem packing
- precision stainless steel balls reduce torque and friction losses while extending seat life
- meets 3A Sanitary Standard 68-00, authorization number 1022
- operating parts are stainless steel type CF8M (316) conforming to ASTM A351, (MTRs available upon request)
- integral ISO 5211 mounting pad
- ID polish is Ra 32 minimum
- lockable handle can prevent accidental actuation when used
- standard internal entry blow out proof stem design
- full port design matches ball and seat ports to tube ID for lower pressure drop and less turbulent flow
- compact design for areas with tight space restrictions
- fully encapsulated construction produces bubble tight seal
- identification tagging available

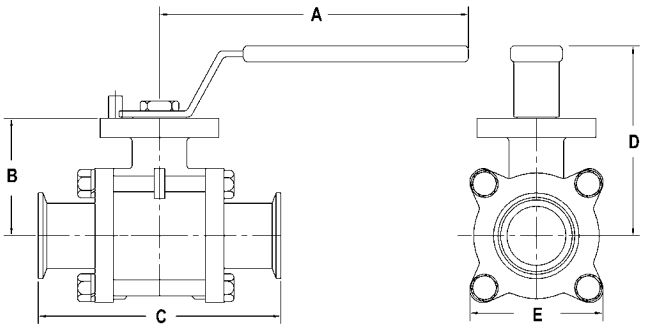



Size	Dimensions					*316 stainless steel*	
	A	B	C	D	E	Part #	Price/E
½"	4.7	1.5	4.3	3	1.9	***BV2CV-050CC-A***	**$143.45**
¾"	4.7	1.8	4.7	3.3	2.2	***BV2CV-075CC-A***	**173.25**
1"	5.2	2.1	4.9	3.6	2.4	***BV2CV-100CC-A***	**239.05**
1½"	7.2	2.7	5.6	4.4	3.1	***BV2CV-150CC-A***	**403.25**
2"	7.2	3.1	6.4	4.8	3.7	***BV2CV-200CC-A***	**583.40**
2½"	14.6	3.8	7.8	5.2	4.8	***BV2CV-250CC-A***	**1246.60**
3"	14.6	4.2	9	5.7	5.4	***BV2CV-300CC-A***	**1645.60**
4"	14.6	5.3	9.5	6.8	8.8	***BV2CV-400CC-A***	**2827.35**

Dixon Sanitary's commitment to excellence and continuous research and development for improving product quality may warrant periodic changes in design and specification. We reserve the right to modify product design without prior notification and without incurring any liability to provide these modifications to products previously purchased.

Seat Materials

Code	Designation	Material	Applications
V	Virgin PTFE	Virgin polytetrafluoroethylene	100% PTFE- Our standard seat material. Ideal for most sanitary services. Specified for applications requiring a low co-efficient of friction. 3A and FDA approved.
G	RTFE	15% glass reinforced tetrafluoroethylene	15% glass filled + 85% PTFE - Slightly higher temperature and pressure rating than PTFE. Specified for applications requiring higher cycle life than PTFE. 3A and FDA approved.
C	25% Carbon PTFE	25% carbon reinforced tetrafluoroethylene	25% carbon +75% PTFE - Specified for higher temperature pressure applications. Ideal for steam and thermal fluid applications. Higher cycle life than RTFE.
S	Stainless Steel PTFE	50% stainless steel filled tetrafluoroethylene	50% stainless steel + 50% PTFE - Specified for higher temperature pressure applications in a sanitary process. 3A and FDA approved.
U	UHMW	Ultra-high molecular weight polyethylene	Specified for its low modulus of abrasion and minimal property degradation when exposed to moderate levels of radiation. Ideal for applications where fluorocarbons are not acceptable. 3A and FDA approved.

Butterfly Valves

In addition to a variety of end and seat configurations this butterfly valve also has four handle options.

A. The *pull style handle* allows you to set the valve in four different positions simply by pulling and turning.
B. The *infinite handle* has incremental marks on the top which can be used when needing a throttling valve.
C. The stainless steel *trigger handle* offers twelve positions which make it easy to understand how to actuate the valve.
D. The push handle; the disc is closed against the seal when the handle is at right angles to the process line. The valve is fully open when the handle is turned 90° and is parallel with the line.


- 100% tested / 100% inspected
- 100% pressure hydraulic tested for reliability
- wetted surfaces polished to 3-A standards
- various end configurations available: weld, I-line, Q-line, bevel seat and John Perry
- actuation available: double-acting, air-to-spring, electric
- vacuum rating: 14.2 PSI at 68°F
- temperature range: **15°F** to **200°F**
- clamp style is standard


Butterfly Valves with Pull Handle - [A]



Size	*(CF8M) 316 stainless steel with silicone seal*		*(CF8M) 316 stainless steel with Viton® seal*		*(CF8M) 316 stainless steel with EPDM seal*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1"	***B5101S100CC-A***	**$292.25**	***B5101V100CC-A***	**$318.40**	***B5101E100CC-A***	**$286.50**
1½"	***B5101S150CC-A***	**284.30**	***B5101V150CC-A***	**324.95**	***B5101E150CC-A***	**277.05**
2"	***B5101S200CC-A***	**344.20**	***B5101V200CC-A***	**402.50**	***B5101E200CC-A***	**334.45**
2½"	***B5101S250CC-A***	**430.30**	***B5101V250CC-A***	**550.90**	***B5101E250CC-A***	**408.30**
3"	***B5101S300CC-A***	**574.75**	***B5101V300CC-A***	**764.05**	***B5101E300CC-A***	**557.60**
4"	***B5101S400CC-A***	**885.65**	***B5101V400CC-A***	**1265.55**	***B5101E400CC-A***	**857.95**
6"	***B5101S600CC-A***	**2002.95**	**---**	**—**	***B5101E600CC-A***	**1981.80**
8"	**---**	**—**	**---**	**—**	***B5101E800CC-A***	**5742.60**

- valves can be automated, call the factory at 800.789.1718 for details
- repair kits are available






Size	Dimensions							Break Torque (inch lbs.)	**PSI** @ 68°F
	A	B	C	D	E	F	G		
1"	4.4	2.8	1.4	0.9	3.5	0.9	3.1	75	**140**
1½"	4.4	2.8	1.4	0.9	3.5	1.4	3.1	130	**140**
2"	4.4	3.1	1.4	0.9	3.8	1.9	3.9	165	**140**
2½"	4.4	3.5	1.4	0.9	3.8	2.4	4.6	210	**110**
3"	6.2	3.8	1.3	1.2	4.1	2.9	5.2	350	**110**
4"	6.2	4.5	1.3	1.2	4.8	3.8	6.7	540	**85**
6"	11.5	5.5	1.3	1.2	5.5	5.8	8.5	1550	**60**
8"	18.0	6.9	1.6	1.2	4.9	7.8	11.2	1650	**60**


Butterfly Valves with Infinite Position Handle - [B]



Size	*(CF8M) 316 stainless steel with silicone seal*		*(CF8M) 316 stainless steel with Viton® seal*		*(CF8M) 316 stainless steel with EPDM seal*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1"	***B5101S100CC-B***	**$292.25**	***B5101V100CC-B***	**$318.40**	***B5101E100CC-B***	**$286.50**
1½"	***B5101S150CC-B***	**284.30**	***B5101V150CC-B***	**324.95**	***B5101E150CC-B***	**277.10**
2"	***B5101S200CC-B***	**344.25**	***B5101V200CC-B***	**402.50**	***B5101E200CC-B***	**334.45**
2½"	***B5101S250CC-B***	**430.30**	***B5101V250CC-B***	**550.90**	***B5101E250CC-B***	**408.30**
3"	***B5101S300CC-B***	**574.75**	***B5101V300CC-B***	**764.00**	***B5101E300CC-B***	**557.60**
4"	***B5101S400CC-B***	**885.65**	***B5101V400CC-B***	**1265.55**	***B5101E400CC-B***	**857.95**

- valves can be automated, call the factory at 800.789.1718 for details
- repair kits are available





Size	Dimensions							BreakTorque (inch lbs.)	**PSI** @ 68°F
	A	B	C	D	E	F	G		
1"	4.3	2.6	1.3	0.9	3.5	0.9	3.1	75	**140**
1½"	4.3	2.6	1.3	0.9	3.5	1.4	3.1	130	**140**
2"	4.3	2.9	1.3	0.9	3.8	1.9	3.9	165	**140**
2½"	4.3	3.3	1.3	0.9	3.8	2.4	4.6	210	**110**
3"	6.4	3.6	1.3	1.2	4.1	2.9	5.2	350	**110**
4"	6.4	4.4	1.3	1.2	4.8	3.8	6.7	540	**85**

Butterfly Valves


Butterfly Valves with Trigger Handle - [C]

Size	*(CF8M) 316 stainless steel with silicone seal*		*(CF8M) 316 stainless steel with Viton® seal*		*(CF8M) 316 stainless steel with EPDM seal*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1"	***B5101S100CC-C***	**$292.25**	***B5101V100CC-C***	**$318.40**	***B5101E100CC-C***	**$286.50**
1½"	***B5101S150CC-C***	**284.30**	***B5101V150CC-C***	**324.95**	***B5101E150CC-C***	**277.05**
2"	***B5101S200CC-C***	**344.20**	***B5101V200CC-C***	**402.50**	***B5101E200CC-C***	**334.45**
2½"	***B5101S250CC-C***	**430.30**	***B5101V250CC-C***	**550.90**	***B5101E250CC-C***	**408.30**
3"	***B5101S300CC-C***	**574.75**	***B5101V300CC-C***	**764.05**	***B5101E300CC-C***	**557.60**
4"	***B5101S400CC-C***	**885.65**	***B5101V400CC-C***	**1265.55**	***B5101E400CC-C***	**857.95**



- valves can be automated, call the factory at 800.789.1718 for details
- repair kits are available
- lock-out, tag-out ready, .271 diameter hole

Size	Dimensions							BreakTorque (inch lbs.)	**PSI** @ 68°F
	A	B	C	D	E	F	G		
1"	6.6	3	1.7	0.9	3.5	0.9	3.1	75	**140**
1½"	6.6	3	1.7	0.9	3.5	1.4	3.1	130	**140**
2"	6.6	3.5	1.7	0.9	3.8	1.9	3.9	165	**140**
2½"	6.6	3.7	1.7	0.9	3.8	2.4	4.6	210	**110**
3"	6.6	3.9	1.7	1.2	4.1	2.9	5.2	350	**110**
4"	6.6	4.8	1.7	1.2	4.8	3.8	6.7	540	**85**

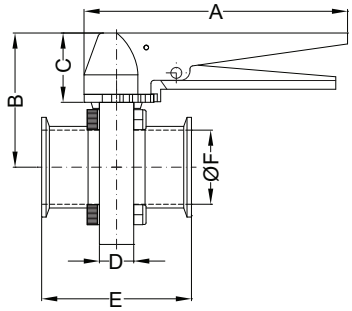


Butterfly Valves with Push Handle - [D]

Size	*(CF8M) 316 stainless steel with silicone seal*		*(CF8M) 316 stainless steel with Viton® seal*		*(CF8M) 316 stainless steel with EPDM seal*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1"	***B5101S100CC-D***	**$292.25**	***B5101V100CC-D***	**$318.40**	***B5101E100CC-D***	**$286.50**
1½"	***B5101S150CC-D***	**284.30**	***B5101V150CC-D***	**324.95**	***B5101E150CC-D***	**277.10**
2"	***B5101S200CC-D***	**344.25**	***B5101V200CC-D***	**402.50**	***B5101E200CC-D***	**334.45**
2½"	***B5101S250CC-D***	**430.30**	***B5101V250CC-D***	**550.90**	***B5101E250CC-D***	**408.30**
3"	***B5101S300CC-D***	**574.75**	***B5101V300CC-D***	**764.00**	***B5101E300CC-D***	**557.60**
4"	***B5101S400CC-D***	**885.65**	***B5101V400CC-D***	**1265.55**	***B5101E400CC-D***	**857.95**



- valves can be automated, call the factory at 800.789.1718 for details
- repair kits are available

Size	Dimensions							BreakTorque (inch lbs.)	**PSI** @ 68°F
	A	B	C	D	E	F	G		
1"	6.7	2.4	1.1	0.9	3.5	0.9	3.1	75	**140**
1½"	6.7	2.4	1.1	0.9	3.5	1.4	3.1	130	**140**
2"	6.7	2.7	1.1	0.9	3.8	1.9	3.9	165	**140**
2½"	6.7	3.1	1.1	0.9	3.8	2.4	4.6	210	**110**
3"	9	3.3	1.1	1.2	4.1	2.9	5.2	350	**110**
4"	9	4.1	1.1	1.2	4.8	3.8	6.7	540	**85**

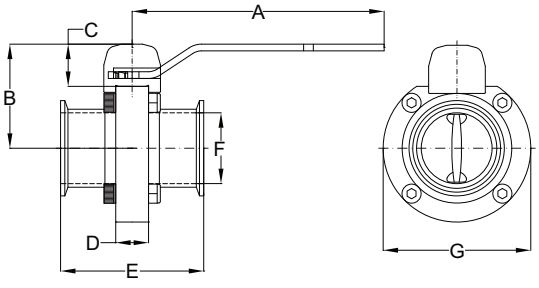

Dixon Sanitary's commitment to excellence and continuous research and development for improving product quality may warrant periodic changes in design and specification. We reserve the right to modify product design without prior notification and without incurring any liability to provide these modifications to products previously purchased.


Clamp Butterfly Valves

- valve is only 1-3/8" wide on all sizes
- valve uses only 3/4" of line space
- the grooved clamp housing connects directly to any sanitary clamp style fitting.
- Easy assembly uses a hex key for the handle and wing nuts to secure and seal the housing onto your lines.
- actuation available: double acting, spring return and electric



Size	*316L stainless steel with silicone seal*		*316L stainless steel with Viton® seal*		*316L stainless steel with EPDM seal*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1"	***B5102S100-A***	**$186.05**	***B5102V100-A***	**$229.85**	***B5102E100-A***	**$186.00**
1½"	***B5102S150-A***	**186.05**	***B5102V150-A***	**227.75**	***B5102E150-A***	**186.00**
2"	***B5102S200-A***	**226.35**	***B5102V200-A***	**278.10**	***B5102E200-A***	**226.35**
2½"	***B5102S250-A***	**292.20**	***B5102V250-A***	**356.70**	***B5102E250-A***	**292.20**
3"	***B5102S300-A***	**345.70**	***B5102V300-A***	**417.60**	***B5102E300-A***	**345.70**
4"	***B5102S400-A***	**505.30**	***B5102V400-A***	**606.25**	***B5102E400-A***	**505.30**

- valves can be automated, call the factory at 800.789.1718 for details
- repair kits are available

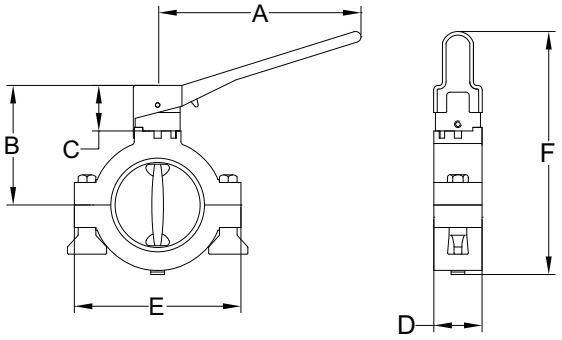

Size	Dimensions						BreakTorque (inch lbs.)	**PSI** @ 68°F
	A	B	C	D	E	F		
1"	5.6	2.8	1.3	1.3	3.6	5.6	125	**140**
1½"	5.6	2.8	1.3	1.3	3.6	5.6	185	**140**
2"	5.6	3	1.3	1.3	4.1	6.1	200	**120**
2½"	5.6	3.3	1.3	1.3	4.6	6.6	260	**120**
3"	5.6	3.6	1.3	1.3	5.3	7.1	350	**100**
4"	5.6	4.1	1.3	1.3	6.4	8.2	995	**70**

B5104 Series Butterfly Valves


L Sanitary

- push handle counter clockwise design
- low resistance to flow
- bi-directional flow
- suitable for low and medium viscosity fluids
- self draining
- all wetted surfaces are sanitary finished to < 32 Ra



Size	*316L stainless steel with silicone seal*		*316L stainless steel with FKM seal*		*316L stainless steel with EPDM seal*	
	Part #	Price/E	Part #	Price/E	Part #	Price/E
1"	***B5104S100CC-D***	**$280.15**	***B5104V100CC-D***	**$310.05**	***B5104E100CC-D***	**$280.15**
1½"	***B5104S150CC-D***	**286.85**	***B5104V150CC-D***	**316.30**	***B5104E150CC-D***	**286.85**
2"	***B5104S200CC-D***	**326.65**	***B5104V200CC-D***	**361.60**	***B5104E200CC-D***	**326.65**
2½"	***B5104S250CC-D***	**386.05**	***B5104V250CC-D***	**440.40**	***B5104E250CC-D***	**386.05**
3"	***B5104S300CC-D***	**524.35**	***B5104V300CC-D***	**601.40**	***B5104E300CC-D***	**524.35**
4"	***B5104S400CC-D***	**721.20**	***B5104V400CC-D***	**824.05**	***B5104E400CC-D***	**721.20**

- valves can be automated, call the factory at 800.789.1718 for details
- repair kits are available

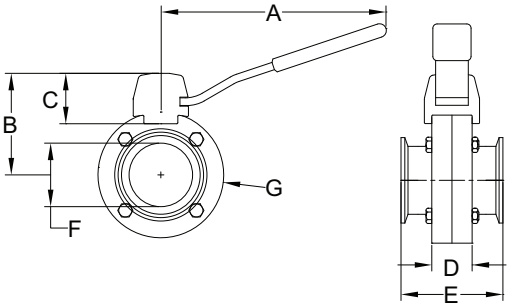

Size	Dimensions							BreakTorque (inch lbs.)	**PSI** @ 68°F
	A	B	C	D	E	F	G		
1"	6.6	2.9	1.2	1.9	3	0.9	3.1	50	**140**
1½"	6.6	2.9	1.2	1.9	3	1.4	3.1	60	**140**
2"	6.6	3.2	1.2	1.9	3	1.9	3.7	175	**140**
2½"	6.6	3.4	1.2	1.9	3	2.4	4.2	250	**110**
3"	6.6	3.7	1.2	1.9	3	2.9	4.8	300	**110**
4"	9.4	4.7	1.7	1.5	3.5	3.8	5.9	350	**85**


Spring Check Valves

This spring check valve is machined and polished to 3A standards. The clamp assembly design allows quick and easy maintenance and has a special angled plunger design to prevent even low pressure leak-through.



- maximum operating pressure: **145 PSI**
- operating temperature range of **0°F** to **200°F**
- full size flow plate with a long bushing helps minimize stem wear

Size	Dimensions				*316L stainless steel*	
	A	B	C	D	Part #	Price/E
½"	0.370	0.992	1.1	1.6	***B45MP-R50***	**$416.95**
¾"	0.620	0.992	1.1	1.6	***B45MP-R75***	**468.40**
1"	0.870	1.988	1.7	2.3	***B45MP-R100***	**527.40**
1½"	1.370	1.988	1.7	2.3	***B45MP-R150***	**480.75**
2"	1.870	2.516	1.7	2.3	***B45MP-R200***	**608.05**
2½"	2.370	3.051	1.7	2.3	***B45MP-R250***	**945.60**
3"	2.870	3.582	1.7	2.3	***B45MP-R300***	**1122.30**
4" [1]	3.834	4.682	2.2	2.7	***B45MP-R400***	**1437.95**



[1] 4 inch valve uses bolted construction

Repair Kits for Spring Check Valves

Repair Kit contains:
- (1) 316L spring
- (1) FKM (Viton®) stem O-ring
- (2) Buna body O-rings
  (note: 4" only has 1 O-ring)

Size	Part #	Price/E
½"	***B45MP-RK050***	**$20.45**
¾"	***B45MP-RK075***	**20.45**
1"	***B45MP-RK100***	**32.45**
1½"	***B45MP-RK150***	**33.95**
2"	***B45MP-RK200***	**40.80**
2½"	***B45MP-RK250***	**53.90**
3"	***B45MP-RK300***	**53.05**
4"	***B45MP-RK400***	**56.10**


Ball Check Valves

When liquid flows through the valve, the ball is forced into the branch of the valve allowing full fluid flow. When the liquid stops, equalizing the pressure, the ball drops back into the seat, preventing backflow. Should reverse flow occur, the differential pressure will cause the ball to seal firmly against the seat preventing leakage.



- two piece construction for easier alignment during installation
- various end configurations available: clamp,weld, I-line, Q-line, bevel seat and John Perry
- polished ID and OD to 3A standards
- all metal contact surfaces of 316L stainless steel construction
- sizes from 1½" - 3"
- air blow check valve can be added (see air blow for sizing)
- PTFE ball

Size	Dimensions						Seating Pressure Vertical (PSI)	*316L stainless steel*	
	A	B	C	D	E	F		Part #	Price/E
1½"	7.5	3.3	1.365	1.875	1.984	2.516	3.6	***B45BY-R150***	**$783.20**
2"	8.5	3.9	1.865	2.335	2.516	3.047	2.6	***B45BY-R200***	**977.75**
2½"	10.0	4.5	2.370	2.870	3.047	3.579	1.6	***B45BY-R250***	**1285.50**
3"	11.5	5.3	2.870	3.834	3.579	4.682	1.9	***B45BY-R300***	**2097.60**



- repair kits are available

Air Blow Check Valves


The air blow check valve is designed to pressurize lines with air to clean out product or cleaning solutions. It is fail-safe because the simple air-to-open, spring-to-close mechanism prevents backflow. Can be used with a ball check valve. The valves are available with three different end configurations to allow quick assembly and disassembly when replacing filter media, cleaning or inspecting. Conforms to 3A accepted practice 604-05 for supplying air under pressure in contact with milk products and product contact surfaces with optional filter disc.

- EPDM seat and gasket
- conforms to 3A practice 604-05
- filter discs sold separately in packs of 50











B45AB



B45BC

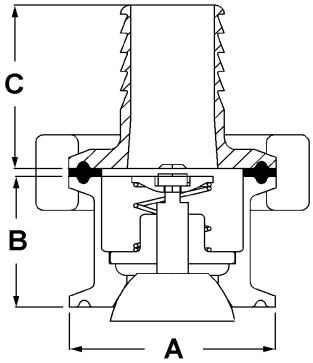

B45CC

L Sanitary

Size	Dimensions A	Dimensions B	*Quick Disconnect 316L Stainless* Part #	Price/E	Dim C	*Female NPT 316L Stainless* Part #	Price/E	Dim C	*Hose Barb 316L Stainless* Part #	Price/E	Dim C
1"-1½"	1.984	2.550	***B45AB-R100150***	**$340.10**	1.30	***B45BC-R100150***	**$340.10**	1.70	***B45CC-R100150***	**$340.10**	.60
2"	2.516	2.550	***B45AB-R200***	**346.50**	1.30	***B45BC-R200***	**346.55**	1.70	***B45CC-R200***	**346.55**	.60
2½"	3.047	2.550	***B45AB-R250***	**445.95**	1.30	***B45BC-R250***	**445.95**	1.70	***B45CC-R250***	**445.95**	.60
3"	3.579	2.550	***B45AB-R300***	**517.55**	1.30	***B45BC-R300***	**517.55**	1.70	***B45CC-R300***	**517.55**	.60
4"	4.682	2.550	***B45AB-R400***	**588.30**	1.30	***B45BC-R400***	**588.30**	1.70	***B45CC-R400***	**588.30**	.60

When using air blow check valves with ball check valves, refer to the sizing chart below.

Sizing Chart

Ball Check Valve size	Air Blow Check Valve size
1½"	2"
2"	2½"
2½"	3"
3"	4"

- repair kits are available

Dixon Sanitary's commitment to excellence and continuous research and development for improving product quality may warrant periodic changes in design and specification. We reserve the right to modify product design without prior notification and without incurring any liability to provide these modifications to products previously purchased.

Flat Seal Coupling Assemblies

Flat seal couplings are for lay flat hose and single jacket fire hose with a wall thickness between 5/64" and 3/16". Flat seal couplings are designed for use with flat seal clamps only. NPSM and NST coupling gaskets are available on page 270. Flat seal couplings for cam and groove are available on page 57.

Note: Torque values for clamps are based on dry bolts. The use of lubricants on bolts will adversely effect clamp performance.

SAFETY ALERT

Complete
Price includes clamps



Female
Price includes clamp



Male
Price includes clamp



Aluminum

Aluminum with brass swivel nut
NPSM

Size	Part #	Price/E
1½"	***FS150***	**$88.00**
2½"	***FS250***	**130.40**

Aluminum with brass swivel nut
NPSM

Size	Part #	Price/E
1½"	***FSF150***	**$44.75**
2½"	***FSF250***	**69.50**

Aluminum
NPSM

Size	Part #	Price/E
1½"	***FSM150***	**$43.25**
2½"	***FSM250***	**60.90**

Aluminum with brass swivel nut
NST (NH)

Size	Part #	Price/E
1½"	***FS150F***	**$104.65**
2½"	***FS250F***	**145.25**

Aluminum with brass swivel nut
NST (NH)

Size	Part #	Price/E
1½"	***FSF150F***	**$55.40**
2½"	***FSF250F***	**76.55**

Aluminum
NST (NH)

Size	Part #	Price/E
1½"	***FSM150F***	**$49.25**
2½"	***FSM250F***	**68.70**

Maximum recommended torque 40 ft./lbs.

Brass

Brass with brass swivel nut
NPSM

Size	Part #	Price/E
1½"	***BFS150***	**$145.85**
2½"	***BFS250***	**228.80**

Brass with brass swivel nut
NPSM

Size	Part #	Price/E
1½"	***BFSF150***	**$78.65**
2½"	***BFSF250***	**117.25**

Brass
NPSM

Size	Part #	Price/E
1½"	***BFSM150***	**$67.20**
2½"	***BFSM250***	**117.25**

Brass with brass swivel nut
NST (NH)

Size	Part #	Price/E
1½"	***BFS150F***	**$151.60**
2½"	***BFS250F***	**248.75**


Brass with brass swivel nut
NST (NH)

Size	Part #	Price/E
1½"	***BFSF150F***	**$84.40**
2½"	***BFSF250F***	**131.50**

Brass
NST (NH)

Size	Part #	Price/E
1½"	***BFSM150F***	**$67.20**
2½"	***BFSM250F***	**117.25**

Nuts and bolts are 316 stainless steel. Maximum recommended torque 20 ft/lbs.



Aluminum NPT

Size	Part #	Price/E [2]
1½"	***FSM150T***	**$50.15**
2½"	***FSM250T***	**55.55**
4"	***FSM400T*** [1]	**204.40**

[1] 4" does not have hex
[2] *Price includes clamp*



Flat Seal Gaskets

Size	Part #	Price/E
1½"	***FSG150***	**$1.35**
2½"	***FSG250***	**1.45**
3"	***FSG300***	**1.70**
4"	***FSG400***	**2.50**

- Buna

Items will be discontinued as stock is depleted.

Expansion Ring Fire Hose Couplings

Complete Set - Brass



Brass Rocker Lug

Rack Hose
(No Lugs on Male)


Size	Thread	Bowl	Part #	Price/E
1½"	NPSH	1-11/16"	***RRH15168***	**$85.10**
1½"	NST (NH)	1-11/16"	***RRH15168F***	**85.10**

Single Jacket

Size	Thread	Bowl	Part #	Price/E
1½"	NPSH	1-3/4"	***RS15175***	**$123.60**
1½"	NPSH	1-11/16"	***RS15168***	**123.60**
1½"	NPSH	1-13/16"	***RS15181***	**123.60**
2½"	NPSH	2-13/16"	***RS25281***	**170.85**
1½"	NST (NH)	1-3/4"	***RS15175F***	**123.60**
1½"	NST (NH)	1-11/16"	***RS15168F***	**123.60**
1½"	NST (NH)	1-13/16"	***RS15181F***	**123.60**
2½"	NST (NH)	2-13/16"	***RS25281F***	**170.85**

Double Jacket

Size	Thread	Bowl	Part #	Price/E
1½"	NPSH	1-15/16"	***RD15193***	**$123.60**
1½"	NPSH	2-1/16"	***RD15206***	**123.60**
2½"	NPSH	3"	***RD253***	**170.85**
1½"	NST (NH)	1-15/16"	***RD15193F***	**123.60**
1½"	NST (NH)	2-1/16"	***RD15206F***	**123.60**
2½"	NST (NH)	3"	***RD253F***	**170.85**



Brass Pin Lug

Single Jacket

Size	Thread	Bowl	Part #	Price/E
1½"	NPSH	1-3/4"	***S15175***	**$123.60**
1½"	NPSH	1-13/16"	***S15181***	**123.60**
2½"	NPSH	2-13/16"	***S25281***	**170.85**
1½"	NST (NH)	1-3/4"	***S15175F***	**123.60**
1½"	NST (NH)	1-13/16"	***S15181F***	**123.60**
2½"	NST (NH)	2-13/16"	***S25281F***	**170.85**

Double Jacket

Size	Thread	Bowl	Part #	Price/E
1½"	NPSH	1-15/16"	***D15193***	**$123.60**
2½"	NPSH	3"	***D253***	**170.85**
1½"	NST (NH)	1-15/16"	***D15193F***	**123.60**
2½"	NST (NH)	3"	***D253F***	**170.85**

Complete Set - Hardcoated finish



Aluminum Rocker Lug **

- **Special tooling is required to attach these couplings to hose (see page 443 for machine)**
- All couplings come complete with expansion rings, swivel and tail washers.

** 3 rocker lugs on male and female

Single Jacket

Size	Thread	Bowl	Part #	Price/E
1"	NPSH	1-1/4"	***S10125***	**$41.00**
1½"	NPSH	1-3/4"	***S16175***	**51.50**
1½"	NPSH	1-11/16"	***S16168***	**51.50**
1½"	NPSH	1-13/16"	***S16181***	**51.50**
2"	NPSH	2-1/4"	***S20225***	**84.15**
2"	NPSH	2-3/8"	***S20375***	**84.15**
2½"	NPSH	2-13/16"	***S26281***	**90.85**
1½"	NST (NH)	1-11/16"	***S16168F***	**51.50**
1½"	NST (NH)	1-3/4"	***S16175F***	**51.50**
1½"	NST (NH)	1-13/16"	***S16181F***	**51.50**
2½"	NST (NH)	2-11/16"	***S26268F***	**90.85**
2½"	NST (NH)	2-13/16"	***S26281F***	**90.85**

Double Jacket

Size	Thread	Bowl	Part #	Price/E
1½"	NPSH	1-13/16"	***D16181***	**$51.50**
1½"	NPSH	1-15/16"	***D16193***	**51.50**
1½"	NPSH	2-1/16"	***D16206***	**60.50**
NEW 2"	NPSH	2-5/16"	***D20231***	**84.50**
2½"	NPSH	3"	***D263***	**90.85**
1½"	NST (NH)	1-13/16"	***D16181F***	**51.50**
1½"	NST (NH)	1-15/16"	***D16193F***	**51.50**
1½"	NST (NH)	2-1/16"	***D16206F***	**60.50**
2½"	NST (NH)	2-7/8"	***D26287F***	**90.85**
2½"	NST (NH)	3"	***D263F***	**90.85**

M Fire


For females only, use 2/3 set price. For males only, use 1/2 set price. Both shipped from the factory only.

Fire Hose Coupling Washers

Swivel Washers

- Buna-N

ID	OD	Thickness	Part #	Price/E
1-1/16"	1-7/16"	1/8"	***SW100F***	**$2.00**
1-9/16"	2-1/16"	1/8"	***SW150***	**2.00**
2-9/16"	3-3/16"	3/16"	***SW250***	**3.15**
3-1/16"	3-3/4"	1/4"	***SW300F***	**4.80**
4-1/6"	5-1/8"	1/4"	***SW400F***	**9.15**
4-9/16"	5-7/8"	1/4"	***SW450F***	**10.20**
5-3/32"	6-13/32"	1/4"	***SW500F***	**13.90**
6-1/16"	7-1/8"	1/4"	***SW600F***	**14.25**



Tail Washers

- Buna-N

ID	OD	Thickness	Part #	Price/E
1-9/16"	1-3/4"	3/16"	***RTW150***	**$1.90**
1-9/16"	1-15/16"	3/16"	***STW150***	**1.80**
1-5/8"	2-1/8"	3/16"	***DTW150***	**1.90**
2-9/16"	3"	1/4"	***STW250***	**3.20**
2-5/8"	3-1/4"	1/4"	***DTW250***	**3.00**



Expansion Rings

- 85/15 red brass

OD	Length	Part #	Price/E
1"	1-1/4"	***ER10125***	**$7.10**
1-1/2"	3/4"	***ER1575***	**7.25**
1-1/2"	7/8"	***ER1587***	**7.40**
1-1/2"	1"	***ER1510***	**7.85**
1-1/2"	1-1/4"	***ER15125***	**8.05**
1-3/4"	1-1/4"	***ER17125***	**8.65**
2-7/16"	1-1/4"	***ER27125***	**12.00**
2-7/16"	1-1/2"	***ER27150***	**12.15**
3"	2"	***ER3020***	**22.60**



Style Brute X-Pander

Compact Hand Pump

- designed for forestry service, fire departments, small distributors and ski areas
- All-in-one design means fewer parts and no hydraulic connections making the X-Pander reliable and service free.
- may be used to attach 1" through 3" couplings
- ideal for in-house use or mounted in a service van for field repairs
- size: 13" wide x 17" deep x 10" high
- weight: 45 lbs.

Part #	Price/E
BruteXpand	**$8035.00**



Note: Brute expanders *do not* include any expansion unit assemblies. They must be ordered separately.

Expansion Unit Assemblies

Description	Part #	Price/E
1½"	***16154***	**$1078.30**
2½" (Storz also)	***16171***	**1046.45**



For a complete list of all available expansion units and sizes contact the factory for assistance.

Synthetic Mill Hose


Ideal for open end discharge applications. ***Not intended for fire fighting service.***

Outer construction:
single jacket, all polyester
Tube construction:
black, natural rubber liner

rated pressure: **250 PSI** at ambient temperature (70°F)
working pressure: **112 PSI** at ambient temperature (70°F)

Consult the factory for pricing and availability for any of the following features:

- 75' lengths
- other threads and configurations
- hoses coupled with field reattachable couplings (Flat Seal)

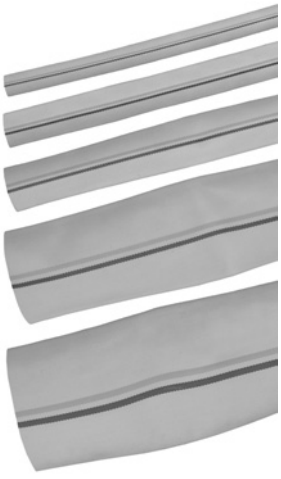

uncoupled

Uncoupled

Size	Bowl	Length	Part #	Price/E
1"	1-1/4"	50'	***M10-50UC***	**$78.35**
1"	1-1/4"	100'	***M10-100UC***	**156.75**
1½"	1-11/16"	25'	***M15-25UC***	**43.35**
1½"	1-11/16"	50'	***M15-50UC***	**86.70**
1½"	1-11/16"	100'	***M15-100UC***	**173.40**
2"	2-1/4"	25'	***M20-25UC***	**54.65**
2"	2-1/4"	50'	***M20-50UC***	**109.30**
2"	2-1/4"	100'	***M20-100UC***	**218.60**
2½"	2-11/16"	25'	***M25-25UC***	**76.15**
2½"	2-11/16"	50'	***M25-50UC***	**152.25**
2½"	2-11/16"	100'	***M25-100UC***	**304.50**
3"	3-3/8"	25'	***M30-25UC***	**91.15**
3"	3-3/8"	50'	***M30-50UC***	**182.35**
3"	3-3/8"	100'	***M30-100UC***	**364.65**
4"	4-3/8"	25'	***M40-25UC***	**138.90**
4"	4-3/8"	50'	***M40-50UC***	**277.80**
4"	4-3/8"	100'	***M40-100UC***	**555.60**
6"	6-3/8"	25'	***M60-25UC***	**244.20**
6"	6-3/8"	50'	***M60-50UC***	**488.40**



coupled

Coupled with female and male expansion ring couplings

Size	Length	Part #	Rocker Lug Aluminum *NST (NH)* **RAF**	Rocker Lug Brass *NST (NH)* **RBF**	Rocker Lug Aluminum *NPSH* **RAS**
1½"	50'	***M15-50***	**$155.20**	**$181.70**	**$155.20**
1½"	100'	***M15100***	**247.00**	**273.50**	**247.00**
2"	50'	***M20-50***	**---**	**---**	**209.90**
2"	100'	***M20100***	**---**	**---**	**321.75**
2½"	25'	***M25-25***	**178.55**	**---**	**---**
2½"	50'	***M25-50***	**246.65**	**---**	**---**
2½"	100'	***M25100***	**382.90**	**---**	**---**

Mill Hose - White

Ideal for open end discharge applications. ***Not intended for fire fighting service.***

Outer construction:
single jacket, all polyester
Tube construction:
black, natural rubber liner

Consult the factory for pricing and availability for any of the following features:
- additional lengths
- other configurations

Coupled with NPSH female and male King short shank couplings, preformed clamps Aluminum shank with brass pin lug swivel nut

Size	Clamps per End	Length	Working Pressure PSI at 70°F	Part #	Price/E
1½"	2	25'	**75**	***M15-25KAS***	**$80.00**
1½"	2	50'	**75**	***M15-50KAS***	**125.90**
2"	2	25'	**75**	***M20-25KAS***	**99.35**
2"	2	50'	**75**	***M20-50KAS***	**155.30**
2½"	2	25'	**50**	***M25-25KAS***	**129.05**
2½"	2	50'	**50**	***M25-50KAS***	**197.20**
3"	3	25'	**50**	***M30-25KAS***	**153.55**
3"	3	50'	**50**	***M30-50KAS***	**237.65**




Coupled with NST (NH) female and male King short shank couplings, preformed clamps Aluminum shank with brass pin lug swivel nut

Size	Clamps per End	Length	Working Pressure PSI at 70°F	Part #	Price/E
1½"	2	25'	**75**	***M15-25KAF***	**$95.80**
1½"	2	50'	**75**	***M15-50KAF***	**141.70**
2½"	2	25'	**50**	***M25-25KAF***	**149.25**
2½"	2	50'	**50**	***M25-50KAF***	**217.35**



Coupled with female and male (C & E) global aluminum cam and groove, preformed clamps

Size	Clamps per End	Length	Working Pressure PSI at 70°F	Part #	Price/E
1½"	2	25'	**112**	***M15-25GAX***	**$95.90**
1½"	2	50'	**112**	***M15-50GAX***	**141.85**
2"	2	25'	**112**	***M20-25GAX***	**114.80**
2"	2	50'	**112**	***M20-50GAX***	**170.75**
2½"	2	25'	**112**	***M25-25GAX***	**146.25**
2½"	2	50'	**112**	***M25-50GAX***	**214.40**
3"	2	25'	**112**	***M30-25GAX***	**167.80**
3"	2	50'	**112**	***M30-50GAX***	**251.90**



Synthetic Double Jacket Mill Hose - Uncoupled

Ideal for open end discharge applications. ***Not intended for fire fighting service.***



uncoupled

Outer construction:
double jacket, all polyester
Tube construction:
black, natural rubber liner

rated pressure: **250 PSI** at ambient temperature (70°F)
working pressure: **200 PSI** at ambient temperature (70°F)

Uncoupled

Size	Bowl	Length	Part #	Price/E
1½"	1-13/16"	50'	***DM15-50UC***	**$176.20**
1½"	1-13/16"	100'	***DM15-100UC***	**352.40**
2"	2-5/16"	50'	***DM20-50UC***	**205.50**
2"	2-5/16"	100'	***DM20-100UC***	**411.10**
2½"	2-7/8"	50'	***DM25-50UC***	**246.00**
2½"	2-7/8"	100'	***DM25-100UC***	**492.00**

* Double jacket hoses are ***not*** recommended for use with field reattachable couplings (Flat Seal).

Double Jacket Polyester Mill Hose - Coupled

Not intended for fire fighting service.



coupled

Outer construction:
double jacket, all polyester
Tube construction:
black, natural rubber liner

rated pressure: **250 PSI** at ambient temperature (70°F)
working pressure: **200 PSI** at ambient temperature (70°F)

Coupled **with female and male NST (NH) thread, rocker lug, aluminum expansion ring couplings**

Size	Bowl	Length	Part #	Price/E
1½"	1-13/16"	50'	***DM15-50RAF***	**$210.20**
1½"	1-13/16"	100'	***DM15100RAF***	**388.10**
2½"	2-7/8"	50'	***DM25-50RAF***	**338.40**
2½"	2-7/8"	100'	***DM25100RAF***	**576.55**

* Double jacket hoses are ***not*** recommended for use with field reattachable couplings (Flat Seal).

300# Single Jacket All Polyester Fire Hose

Outer construction:
single jacket, all polyester
Tube construction:
EPDM rubber lining

proof pressure: **300 PSI** at ambient temperature (70°F)
service test pressure: **150 PSI** at ambient temperature (70°F)
working pressure: **135 PSI** at ambient temperature (70°F)

Consult the factory for pricing and availability for any of the following features:

- 25' and 75' lengths
- U/L labeled hoses
- other threads and configurations
- hoses coupled with field reattachable couplings (Flat Seal)



uncoupled

Uncoupled

Size	Bowl	Length	Part #	Price/E
1½"	1-3/4"	50'	***A315-50UC***	**$156.85**
1½"	1-3/4"	100'	***A315-100UC***	**313.70**
2"	2-1/4"	50'	***A320-50UC***	**236.45**
2"	2-1/4"	100'	***A320-100UC***	**472.85**
2½"	2-13/16"	50'	***A325-50UC***	**275.75**
2½"	2-13/16"	100'	***A325-100UC***	**551.50**
3"	3-3/8"	50'	***A330-50UC***	**397.40**
3"	3-3/8"	100'	***A330-100UC***	**794.80**

Coupled **with female and male expansion ring couplings**

Size	Length	Part #	Rocker Lug Aluminum *NST (NH)* **RAF**	Rocker Lug Brass *NST (NH)* **RBF**	Pin Lug Brass *NST (NH)* **PBF**	Rocker Lug Aluminum *NPSH* **RAS**
1½"	50'	***A315-50***	**$220.10**	**$245.00**	**$264.50**	**$220.10**
1½"	100'	***A315100***	**366.70**	**375.65**	**400.20**	**366.70**
2"	50'	***A320-50***	**---**	**---**	**---**	**447.70**
2"	75'	***A320-75***	**---**	**---**	**---**	**565.95**
2"	100'	***A320100***	**---**	**---**	**---**	**684.15**
2½"	50'	***A325-50***	**397.60**	**453.35**	**477.55**	**397.60**
2½"	100'	***A325100***	**659.40**	**741.80**	**766.00**	**659.40**
3"	50'	***A330-50***	**---**	**---**	**---**	**638.85**
3"	75'	***A330-75***	**---**	**---**	**---**	**837.55**
3"	100'	***A330100***	**---**	**---**	**---**	**1036.25**

NEW

NEW



coupled

500# Single Jacket All Polyester Fire Hose



uncoupled

Outer construction:
single jacket, all polyester
Tube construction:
EPDM rubber lining

proof pressure: **500 PSI ***
service test pressure: **250 PSI ***
working pressure: **225 PSI ***
***** at ambient temperature (70°F)

Consult the factory for pricing and availability for any of the following features:
- 75' lengths
- U/L labeled hoses
- other threads and configurations
- hoses coupled with field reattachable couplings (Flat Seal)

Uncoupled

Size	Bowl	Length	Part #	Price/E
1½"	1-3/4"	50'	***A515-50UC***	**$171.40**
1½"	1-3/4"	100'	***A515-100UC***	**342.80**
2½"	2-13/16"	50'	***A525-50UC***	**289.35**
2½"	2-13/16"	100'	***A525-100UC***	**578.70**



coupled

Coupled **with female and male expansion ring couplings**

Size	Length	Part #	Rocker Lug Aluminum *NST (NH)* **RAF**	Rocker Lug Brass *NST (NH)* **RBF**	Pin Lug Brass *NST (NH)* **PBF**	Rocker Lug Aluminum *NPSH* **RAS**
1"	50'	***A510-50***	**---**	**---**	**---**	**$228.90** NEW
1"	100'	***A510100***	**---**	**---**	**---**	**367.25**
1½"	25'	***A515-25***	**$161.25**	**---**	**---**	**161.25**
1½"	50'	***A515-50***	**240.50**	**$260.55**	**$278.80**	**240.50**
1½"	100'	***A515100***	**393.25**	**412.50**	**429.90**	**393.25**
2½"	25'	***A525-25***	**266.70**	**---**	**---**	**266.70**
2½"	50'	***A525-50***	**407.50**	**460.60**	**477.60**	**407.50**
2½"	100'	***A525100***	**705.55**	**735.80**	**777.90**	**705.55**

500# Single Jacket All-Polyester Fire Hose - UL labeled

2010 NEW



Outer construction:
single jacket, all polyester
Tube construction:
EPDM rubber lining

proof pressure: **500 PSI ***
service test pressure: **250 PSI ***
working pressure: **225 PSI ***
***** at ambient temperature (70°F)

Consult the factory for pricing and availability for any of the following features:
- impregnated hose
- other lengths
- other threads and configurations

Coupled **with female and male NST expansion ring couplings**

Size	Coupling Type	Length	Part #	Price/E
1½"	combo lug, brass	50'	***A515U50CBF***	**$311.90**
1½"	combo lug, brass	75'	***A515U75CBF***	**415.00**
1½"	combo lug, brass	100'	***A515U100CBF***	**518.15**

500# Single Jacket Fire Hose - Color Impregnated

2010 NEW



coupled

Outer construction:
single jacket
Tube construction:
EPDM rubber lining

proof pressure: **500 PSI ***
service test pressure: **250 PSI ***
working pressure: **225 PSI ***
***** at ambient temperature (70°F)

Consult the factory for pricing and availability for any of the following features:
- other colors
- other lengths
- other threads and configurations

Size	Coupling Type	Length	Color	Part #	Price/E
1½"	rocker lug, aluminum, NST	50'	yellow	***A515Y50RAF***	**$281.70**
1½"	rocker lug, aluminum, NST	50'	red	***A515R50RAF***	**281.70**
1½"	rocker lug, aluminum, NPSH	50'	orange	***A515OR50RAS***	**281.70**

800# Double Jacket All Polyester Fire Hose

Outer construction:
double jacket, all polyester
Tube construction:
EPDM rubber lining

Consult the factory for pricing and availability for any of the following features:
- 75' lengths
- other threads and configurations

proof pressure: **800 PSI** [1]
service test pressure: **400 PSI** [1]
working pressure: **360 PSI** [1]
[1] at ambient temperature (70°F)


coupled

***Coupled* with female and male expansion ring couplings** [2]

Size	Length	Part #	Rocker Lug Aluminum *NST (NH)* **RAF**	Rocker Lug Brass *NST (NH)* **RBF**	Pin Lug Brass *NST (NH)* **PBF**	Rocker Lug Aluminum *NPSH* **RAS**
1½"	25'	***D815-25***	**$207.10**	**---**	**---**	**---**
1½"	50'	***D815-50***	**320.00**	**$340.75**	**$366.95**	**$320.00**
1½"	100'	***D815100***	**545.25**	**566.20**	**591.00**	**545.25**
2½"	25'	***D825-25***	**332.50**	**---**	**---**	**---**
2½"	50'	***D825-50***	**550.30**	**591.50**	**615.75**	**550.30**
2½"	100'	***D825100***	**922.95**	**966.25**	**989.00**	**922.95**

[2] Double jacket hoses are ***not*** recommended for use with field reattachable couplings (Flat Seal).

800# Double Jacket All Polyester Fire Hose - Yellow Impregnated

Outer construction:
double jacket, all polyester
Tube construction:
black, extruded synthetic rubber
Impregnation:
EPDM rubber lining

Consult the factory for pricing and availability for any of the following features:
- other lengths, threads, colors and configurations

proof pressure: **800 PSI** [1]
service test pressure: **400 PSI** [1]
working pressure: **360 PSI** [1]
[1] at ambient temperature (70°F)


coupled

Coupled* with female and male NST (NH) thread, rocker lug, aluminum expansion ring *couplings [2]

Size	Length	Part #	Price/E
1½"	50'	***D815Y50RAF***	**$360.00**
1½"	100'	***D815Y100RAF***	**630.00**
2½"	50'	***D825Y50RAF***	**576.95**
2½"	100'	***D825Y100RAF***	**1018.20**


[2] Double jacket hoses are ***not*** recommended for use with field reattachable couplings (Flat Seal).

Blue Double Jacket Potable Water Hose

Outer construction:
double jacket, all polyester
Tube construction:
thermoplastic
Impregnation:
blue (color coded for water)

- NSF approved materials for potable water

proof pressure: **600 PSI** [1]
service test pressure: **300 PSI** [1]
working pressure: **270 PSI** [1]
[1] at ambient temperature (70°F)



***Coupled* with female and male NPSH thread, rocker lug, brass expansion ring couplings**

Size	Length	Part #	Price/E
1½"	50'	***PW615B50RBS***	**$499.70**
1½"	100'	***PW615B100RBS***	**765.60**
2½"	50'	***PW625B50RBS***	**831.60**
2½"	100'	***PW625B100RBS***	**1291.65**

500# All Polyester Rack Hose - Aluminum Couplings non-UL Labeled



folded



coiled

Outer construction:
single jacket, all polyester
Tube construction:
clear thermoplastic

proof pressure: **500 PSI** [1]
service test pressure: **250 PSI** [1]
working pressure: **225 PSI** [1]
[1] at ambient temperature (70°F)

- ***Not*** to be used for washdown
  For pin rack service / emergency fire fighting only.

Coupled with female and male aluminum expansion ring couplings

Size	Length	Thread	*Folded* Part #	Price	*Coiled* Part #	Price
1½"	50'	NST	***R515-50RAF/F***	**$185.00**	***R515-50RAF***	**$185.00**
1½"	50'	NPSH	***R515-50RAS/F***	**185.00**	***R515-50RAS***	**185.00**
1½"	100'	NST	***R515100RAF/F***	**320.00**	***R515100RAF***	**320.00**
1½"	100'	NPSH	***R515100RAS/F***	**320.00**	***R515100RAS***	**320.00**

- Rack hoses are ***not*** recommended for use with field reattachable couplings (Flat Seal).

500# All Polyester Rack Hose - Aluminum Couplings UL Labeled



folded



coiled

Outer construction:
single jacket, all polyester
Tube construction:
clear thermoplastic

proof pressure: **300 PSI** [1]
service test pressure: **150 PSI** [1]
working pressure: **135 PSI** [1]
[1] at ambient temperature (70°F)

- ***Not*** to be used for washdown
  For pin rack service / emergency fire fighting only.

Coupled with female and male aluminum expansion ring couplings

Size	Length	Thread	*Folded* Part #	Price	*Coiled* Part #	Price
1½"	50'	NST	***R515U50RAF/F***	**$218.91**	***R515U50RAF***	**$218.91**
1½"	50'	NPSH	***R515U50RAS/F***	**218.91**	***R515U50RAS***	**218.91**
1½"	100'	NST	***R515U100RAF/F***	**378.91**	***R515U100RAF***	**378.91**
1½"	100'	NPSH	***R515U100RAS/F***	**378.91**	***R515U100RAS***	**378.91**

- Rack hoses are ***not*** recommended for use with field reattachable couplings (Flat Seal).

500# All Polyester Rack Hose - Brass Couplings non-UL Labeled

Outer construction:
single jacket, all polyester
Tube construction:
clear thermoplastic

proof pressure: **500 PSI** [1]
service test pressure: **250 PSI** [1]
working pressure: **225 PSI** [1]
[1] at ambient temperature (70°F)

- ***Not*** to be used for washdown
  For pin rack service / emergency fire fighting only.


folded


coiled

Coupled with female and male brass expansion ring couplings

Size	Length	Thread	*Folded* Part #	Price	*Coiled* Part #	Price
1½"	50'	NST	***R515-50CBF/F***	**$200.00**	***R515-50CBF***	**$200.00**
1½"	100'	NST	***R515100CBF/F***	**328.95**	***R515100CBF***	**328.95**


- Rack hoses are ***not*** recommended for use with field reattachable couplings (Flat Seal).

500# All Polyester Rack Hose - Brass Couplings UL Labeled

Outer construction:
single jacket, all polyester
Tube construction:
clear thermoplastic

proof pressure: **300 PSI** [1]
service test pressure: **150 PSI** [1]
working pressure: **135 PSI** [1]
[1] at ambient temperature (70°F)

- ***Not*** to be used for washdown
  For pin rack service / emergency fire fighting only.


folded


coiled

Coupled with female and male brass expansion ring couplings

Size	Length	Thread	*Folded* Part #	Price	*Coiled* Part #	Price
1½"	50'	NST	***R515U50CBF/F***	**$225.45**	***R515U50CBF***	**$225.45**
1½"	100'	NST	***R515U100CBF/F***	**392.75**	***R515U100CBF***	**392.75**

- Rack hoses are ***not*** recommended for use with field reattachable couplings (Flat Seal).

M
Fire

MSHA Approved Mine Fire Hose

Approved by MSHA - (Mine Safety and Health Administration), for all mine fire protection applications.

Outer construction:
single jacket, flame resistant synthetic
Tube construction:
flame resistant lining


coupled

Coupled with female and male expansion ring couplings

Size	Length	Part #	Proof Pressure at 70°F	Service Test Pressure at 70°F	Working Pressure at 70°F	Rocker Lug Aluminum *NST (NH)* **RAF**	Rocker Lug Aluminum *NPSH* **RAS**
1½"	50'	***SM515W50***	**500**	**250**	**225**	**$523.75**	**$523.75**
1½"	50'	***DM815W50***	**800**	**400**	**360**	**660.00**	**660.00**

400# Nitrile Covered Fire Hose - Light Duty - Red



uncoupled

Outer construction:
thin ribbed nitrile
Tube construction:
nitrile

proof pressure: **400 PSI** [1]
service test pressure: **200 PSI** [1]
working pressure: **180 PSI** [1]
[1] at ambient temperature (70°F)

- Synthetic rubber compound specially formulated for flexibility, as well as abrasion and chemical resistance. Ribbed for hose protection and easy handling.
- Ideal for industrial and construction washdown and discharge applications.

Consult the factory for pricing and availability for any of the following features:
- hoses coupled with field reattachable couplings (Flat Seal)

Uncoupled

Size	Bowl	Length	Part #	Price/E
2"	2-1/4"	50'	***H420R50UC***	**$509.00**



coupled

***Coupled* with Female and Male NPSH thread, brass expansion ring couplings with rocker lugs**

Size	Length	Part #	Price/E
2"	50'	***H420R50RBS***	**$669.00**

500# Nitrile Covered Fire Hose - Light Duty - Red



uncoupled

Outer construction:
thin ribbed nitrile
Tube construction:
nitrile

proof pressure: **500 PSI** [1]
service test pressure: **250 PSI** [1]
working pressure: **225 PSI** [1]
[1] at ambient temperature (70°F)

Consult the factory for pricing and availability for any of the following features:
- 25' lengths
- other colors, threads and configurations
- hoses coupled with field reattachable couplings (Flat Seal)
- ideal for industrial and construction washdown and discharge applications.

Uncoupled

Size	Bowl	Length	Part #	Price/E
1½" 2½"	1-13/16" 2-13/16"	50' 50'	***H515R50UC*** ***H525R50UC***	**$359.85** **509.00**



coupled

***Coupled* with female and male expansion ring couplings**

Size	Length	Part #	Rocker Lug Aluminum *NST (NH)* **RAF**	Rocker Lug Brass *NST (NH)* **RBF**	Pin Lug Brass *NST (NH)* **PBF**	Rocker Lug Aluminum *NPSH* **RAS**
1½" 2½"	50' 50'	***H515R50*** ***H525R50***	**$433.95** **644.85**	**$455.40** **727.30**	**$477.60** **751.50**	**$433.95** **644.85**

Nitrile Covered Fire Hose - Heavy Duty - Yellow

Outer construction:
thick ribbed nitrile
Tube construction:
nitrile

proof pressure:
1½" - 3": **600 PSI**
4": **400 PSI**
5": **400 PSI**
6": **300 PSI**
service test pressure:
1½" - 3": **300 PSI**
4": **200 PSI**
5": **200 PSI**
6": **150 PSI**
working pressure:
1½" - 3": **270 PSI**
4": **180 PSI**
5": **180 PSI**
6": **135 PSI**

- Extruded interlocking matrix fire hose with 100% synthetic circular woven polyester reinforcement.
- ideal for heavy-duty washdown, refineries and power plants
- heavy ribbed for severe service
- all pressures listed are at ambient temperature (70°F)

Consult the factory for pricing and availability for any of the following features:
- 25' lengths
- other colors, threads and configurations
- hoses coupled with field reattachable couplings (Flat Seal)




uncoupled

Uncoupled

Size	Bowl	Length	Part #	Price/E
1½"	1-13/16"	50'	***H615Y50UC***	**$402.45**
2"	2-1/4"	50'	***H620Y50UC***	**565.70**
2½"	2-13/16"	50'	***H625Y50UC***	**655.05**
3"	3-3/8"	50'	***H630Y50UC***	**750.30**
4"	4-3/8"	50'	***H440Y50UC***	**1035.10**
6"	6-3/8"	50'	***H360Y50UC***	**1667.30**

Coupled **with female and male expansion ring couplings**

Size	Length	Part #	Rocker Lug Aluminum *NST (NH)* **RAF**	Rocker Lug Brass *NST (NH)* **RBF**	Pin Lug Brass *NST (NH)* **PBF**	Rocker Lug Aluminum *NPSH* **RAS**
1½"	50'	***H615Y50***	**$489.70**	**$509.00**	**$533.35**	**$489.70**
2½"	50'	***H625Y50***	**743.30**	**804.05**	**824.25**	**743.30**



coupled


Coupled **with female and male segmented collar style couplings**

Size	Length	STORZ thread size	Part #	Price/E
4"	50'	4"	***H440Y50SZ***	**$1285.80**
5"	50'	5"	***H450Y50SZ***	**1587.25**



coupled

Chemical Booster Fire Hose

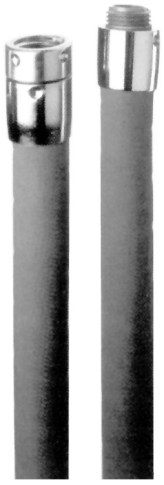

Coupled with female and male **NST (NH)** thread, hole type, chromed brass couplings. The vertical braid construction and red ozone resistant outer cover is designed to withstand the weathering and abrasion associated with severe service. See page 464 for hole type spanner wrench.

- working pressure: **800 PSI** at ambient temperature (70°F)

***Coupled* with female and male NST (NH) thread, chromed brass hole type couplings**

Size	Length	Part #	Price/E
¾"	50'	***80B07-50HCF***	**$1010.20**
¾"	100'	***80B07-100HCF***	**1679.05**
1"	50'	***80B10-50HCF***	**1200.30**
1"	100'	***80B10-100HCF***	**2016.25**

Aluminum Hose Type Booster Hose Couplings



- hardcoat finish
- complete set
- working pressure: **800 PSI** at ambient temperature (70°F)

Hose Size	Thread Type	Bowl Size	Part #	Price/E
¾"	1" NPSH	1-3/16"	***ABH08118***	**$164.40**
¾"	1" NPSH	1-1/4"	***ABH08125***	**164.40**
1"	1" NH (NST)	1-7/16"	***ABH10143F***	**174.30**
1"	1" NH (NST)	1-1/2"	***ABH10150F***	**174.30**
1"	1" NH (NST)	1-9/16"	***ABH10156F***	**174.30**

* *¾ and 1" NST threads are the same size*
Also known as **C**hemical **H**ose **T**hread (CHT) or Booster Hose Thread

Polished Chrome Plated Brass Hole Type Booster Hose Couplings



- complete set
- working pressure: **800 PSI** at ambient temperature (70°F)

Hose Size	Thread Type	Bowl Size	Part #	Price/E
¾"	¾" NH (NST)	1-3/16"	***BW07118F-PC***	**$309.85**
¾"	¾" NH (NST)	1-1/4"	***BW07125F-PC***	**309.85**
1"	1" NH (NST)	1-7/16"	***BW10143F-PC***	**353.25**
1"	1" NH (NST)	1-1/2"	***BW10150F-PC***	**353.25**
1"	1" NH (NST)	1-9/16"	***BW10156F-PC***	**353.25**


* *¾ and 1" NST threads are the same size.*
Also known as **C**hemical **H**ose **T**hread (CHT) or Booster Hose Thread

Style V Swing Wall Reels





hose and valve not included

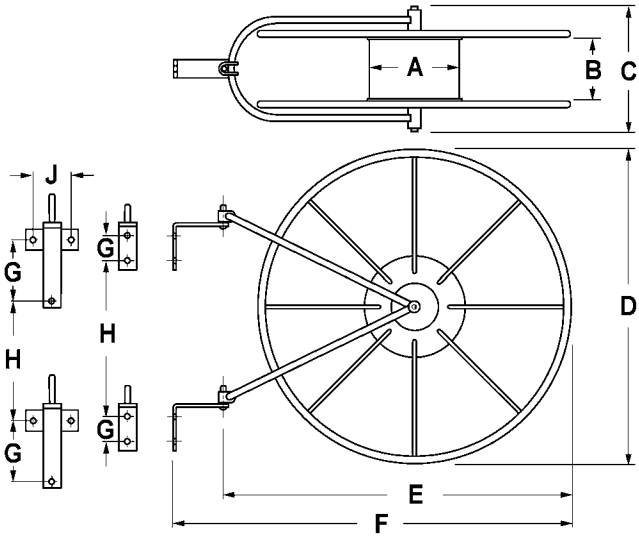

- Pivot mounting allows the reel to swing to the proper angle, preventing twists and kinks.
- red enameled all-steel construction for long, dependable service life
- Double row design of V5, V7, V8 and V9 holds two rows of hose for maximum capacity in minimum space.
- open sides allow hose to dry faster, preventing mold and mildew

Swing Wall Reels

Hose ID	Part #	Hose Capacity			A	B	C	D	E	F	G	H	J	Price/E
		Rack	Single	Double										
1½" - 1¾"	***FHR-V1***	100'	75'	50'	8"	3"	7½"	21"	23"	27"	2"	11 3/8"	--	**$273.80**
1½" - 1¾"	***FHR-V2***	150'	100'	75'	8"	3"	7½"	26"	29"	33"	2"	15"	--	**288.35**
1½"	***FHR-V5***	300'	200'	150'	8"	5½"	9½"	26"	30"	34"	2"	13"	--	**311.40**
2" - 2½"	***FHR-V5***	150'	100'	75'	8"	5½"	9½"	26"	30"	34"	2"	13"	--	**311.40**

Cover for Swing Wall Reels

- fluorescent red vinyl coated nylon with Velcro™ closures
- printed on both sides

used with	Dimensions	Part #	Price/E
FHR-V2	26" x 8"	***FHR-C***	**$56.25**
FHR-V1	21" x 6"	***FHR-C1***	**46.00**
FHR-V5	26" x 10"	***HSRC26***	**60.75**

M
Fire

Swing Type Hose Storage Reels

- red enamel finish
- steel construction
- 180° swing
- small reel hub allows for more hose storage



Hose ID	Part #	Hose Capacity		Price/E
		Light Weight	Rubber Lined	
1½"	***HSR18***	150'	50' - 75'	**$236.85**
1½"	***HSR24***	250'	100'	**284.15**
2½"	***HSR25-24***	100'	100'	**425.70**

Swing Type Hose Storage Reel Covers




Cover for	Fits Hose Reel Diameter	Part #	Price/E
HSR18	16" - 18"	***HSRC18***	**$42.45**
HSR24	24"	***HSRC24***	**51.15**
HSR25-24	24" - 25"	***HSRC25-24***	**53.00**


Continuous Flow Reels


Used to allow immediate and continuous flow of water at all times during deployment of hose. One-person operation. Use with non-collapsible hose shown on page 457 (hose not included in price).

Standard Features:

- powder coated with an electrostatically-applied, thermally-fused, red polyester finish steel drum
- rims and universal mounting stand
- female NPT inlet with male NST outlet

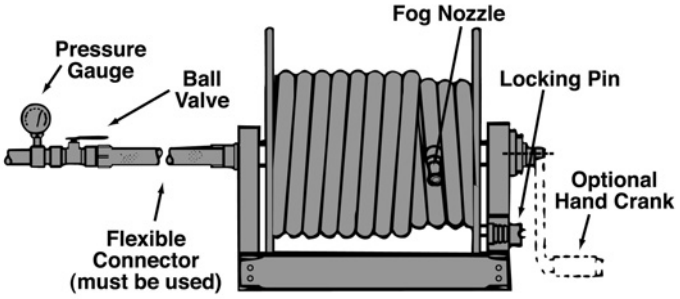





Part #	Hose Size and Capacity			Dimensions (inches)							Inlet Size (inches)	Outlet Size (inches)	Wt. (lbs)	Price/E
	¾"	1"	1½"	A	B	C	D	E	F	G				
CFR47-1-100	150	125	---	10½	11½	24	19¼	24	21¾	26	1	1	53	**$1953.00**
CFR47-150-100	250	150	100	10½	20½	24	28¼	33	21¾	26	1½	1½	60	**1953.00**
CFR47-1-200	400	300	150	10½	28	24	35¾	40½	21¾	26	1½	1½	64	**2021.25**
CFR47-150-200	---	---	200	10½	34	24	41¾	46½	21¾	26	1½	1½	72	**2021.25**

Note: A flexible connector assembly must be installed directly between the hose reel inlet hub and the water supply. Failure to use the flexible connector assembly shall void the warranty.

Optional Accessories

Description	Part #	Price/E
1" x 18" flexible connector	***DX2836***	**$172.75**
1½" x 18" flexible connector	***DX2839***	**172.75**
hand crank	***CFR-HC***	**145.45**
repair kit (contains O-ring, Teflon® retaining ring for the inlet casting, spacer washer, 2 steel retaining rings for the manifold)	***CFR-RK***	**107.00**

M
Fire

Continuous Flow Hose Reel Covers



Cover for	Dimensions	Part #	Price/E
CFR47-1-100	26" x 20"	***CFR47-C1***	**$119.40**
CFR47-1-200	26" x 36"	***CFR47-C2***	**162.50**
CFR47-150-100	26" x 29"	***CFR47-C3***	**176.75**
CFR47-150-200	26" x 42"	***CFR47-C4***	**193.95**

2010 NEW

Global Continuous Flow Reel
(original Wirt & Knox design)

Part #	Hose Size and Capacity			Dimensions (inches)							Inlet Size (inches)	Outlet Size (inches)	Wt. (lbs)	Price/E
	¾"	1"	1½"	A	B	C	D	E	F	G				
FD47I-150-100	250	150	100	10	20	24	19	31	24¾	26	1½	1½	92	**$670.85**

Saddle Hose Racks - Steel

2010 NEW

- can be used for fire or water hose
- fabricated of heavy, 12 gauge sheet steel for rugged industrial and shipboard use
- provides compact and economical hose storage
- curved saddle design avoids sharp bends in the hose prolonging hose life
- red enamel finish




Hose Size	Hose Capacity			Wt. Lbs.	Part #	Price/E
	Rack	Single Jacket	Double Jacket			
1½" - 1¾"	50'	---	---	---	***HR1610-3***	**$110.65**
1½" - 1¾"	100'	---	---	---	***HR1610-6***	**130.12**
1½" - 2½"	200'	150'	100'	7.8	***HR1610***	**162.80**
2" - 2½"	50'	---	---	---	***HR1610-4***	**119.43**

Non-collapsible Fire and Utility Hose - Red

- working pressure: **150 PSI**

Consult the factory for pricing and availability for any of the following features:
- other lengths
- other threads and configurations



Coupled **with female and male NST (NH) thread, rocker lug, brass expansion ring cou*plings***

Size	Length	Part #	Price/E
1½"	50'	***15B15-50RBF***	**$964.70**
1½"	100'	***15B15-100RBF***	**1825.15**

Hump Racks

- compact, neat and economical method of storing collapsible hose
- pivot mounting permits rack to swing, preventing kinks and twists
- rugged steel construction provides long, dependable service
- red enamel finish for protection and appearance
- open sides allow faster drying to prevent mold and mildew
- wall mounting brackets are standard



Hose Size	Hose Capacity			Part #	Price/ E
	Synthetic	Single Jacket	Double Jacket		
1½" - 1¾"	100'	50'	---	***FHHR-1***	**$278.20**
1½" - 1¾	150'	100'	50'	***FHHR-3***	**321.25**
2" - 2½"	100'	50'	---	***FHHR-2***	**278.20**
2" - 2½"	150'	100	50	***FHHR-4***	**327.30**
1½" - 1¾"	200'	150'	100'	***FHHR-5***	**340.65**

NEW

NEW

Cover for Hump Racks



Cover for	Dimensions	Part #	Price/E
FHHR-1 or FHHR-2	16" x 25½" x 6"	***FHHR-C***	**$118.90**
FHHR-3 or FHHR-4	24" x 29½" x 6"	***FHHR-C4***	**132.65**
FHHR-5	33½" x 35½" x 6"	***FHHR-C5***	**148.15**


Fire Hose Pin Rack and Accessories



FHPR150



PRN150F



PRWB



PRC

Description	Part #	Price/E
Red steel enameled rack is Underwriters Listed and Factory Mutual approved. Holds up to 100' of 1½" rack hose. For use with **PRN150F** and **AVF150**.	***FHPR150***	**$115.50**
Red steel enameled rack is Underwriters Listed and Factory Mutual approved. Holds up to 100' of 1½" rack hose. For use with **PRN250F** and **AVF250**.	***FHPR2515***	**125.70**
1½" male NPT x 1½" male NST (NH), polished brass rack nipple	***PRN150F***	**35.35**
2½" male NPT x 2½" male NST (NH), polished brass rack nipple	***PRN250F***	**84.05**
Aluminum wall bracket used to support hose rack independent of stand pipe valve	***PRWB***	**91.60**
Hose rack cover in 10 oz. red vinyl with Velcro™ closures Dimensions: 25" high x 30" wide x 6" deep	***PRC***	**60.00**

Continuous Swiveling Elbows



Cast brass finish. Measured from the center of the waterway to the end of the discharge thread.

- designed to allow a hose to swing when connected
- full waterway reduces friction loss

Female NPT x Male NST (NH)	Part #	Price/E
1½" x 1½" (short - 2½")	***CSES150F***	**$244.20**
2" x 1½" (short - 2½")	***CSES2015F***	**244.20**

Female NPT x Male NPT	Part #	Price/E
1½" x 1½" (short - 2½")	***CSES150T***	**$244.20**

Angle and Suction Elbows



45°

For use on pump discharge valves or suction inlets to minimize hose kinking.

- rocker lug


Female NST (NH) x Male NST (NH)	Material	Part #	Price/E
45°, 2½" x 2½"	brass	***RSE45250F***	**$207.45**
45°, 2½" x 2½"	chromed brass	***RSE45250F-C***	**222.00**
90°, 2½" x 2½"	brass	***RSE90250F***	**214.00**

Cast Brass Angle Hose Valves

- Underwriters Listed and Factory Mutual approved
- New York City Board of Standards and Appeals approved
- for pressures up to 300 lbs.
- cast brass with an aluminum wheel

Powhatan Cast Brass Domestic Angle Hose Valves

Description	Part #	Price/E	Pkg Qty
1½" female NPT x 1½" male NST (NH)	***AV150***	**$268.20**	10
2½" female NPT x 2½" male NST (NH)	***AV250***	**381.10**	6
1½" female NPT x 1½" female NPT	***AVF150***	**268.20**	10
2½" female NPT x 2½" female NPT	***AVF250***	**381.10**	6
1½" aluminum replacement wheel	***AV150-W***	**27.85**	--
2½" aluminum replacement wheel	***AV250-W***	**39.30**	--




female x male

Powhatan Cast Brass Import Angle Hose Valves

2010 NEW

Description	Part #	Price/E	Pkg Qty
1½" female NPT x 1½" male NST (NH)	***AV150-I***	**$90.15**	10
2½" female NPT x 2½" male NST (NH)	***AV250-I***	**207.60**	6
1½" female NPT x 1½" female NPT	***AVF150-I***	**90.15**	10
2½" female NPT x 2½" female NPT	***AVF250-I***	**207.60**	6
1½" aluminum replacement wheel	***AV150-W***	**27.85**	--
2½" aluminum replacement wheel	***AV250-W***	**39.30**	--



female x female

Adjustable Pressure Restricting Device

- intended for installation on Class I or Class III standpipe system hose outlets
- Use of this device restricts pressure in the piping system to such a degree that hose lines can be handled by persons untrained in the handling of heavy fire streams.
- listed by the New York City Board of Standards and Appeals
- Note: *restricts under flow conditions only*

Female	Male	WP PSI at 70°F	*Cast Brass* Dixon Part #	*Cast Brass* Powhatan Part #	Price/E
1½" NH	1½" NH	**175**	***APRD150F*** [1]	*18-255-00102*	**$287.45**
2½" NH	2½" NH	**175**	***APRD250F***	*18-255-00011*	**331.20**



[1] 1½" is not Underwriter Listed

Other threads and finishes, including chrome plated, are also available. *Consult factory for pricing and availability.*

M Fire

Roof Connections


straight


90°

Used to create roof connections, fire pump test connections, wall hydrants or sidewalk (free standing) hydrants.

- cast brass
- for pressures up to **175 PSI** at ambient temperature (70°F)
- provides 250 GPM minimum per outlet

Shape	Female NPT Inlet	(2) Male Outlets	Dixon Part #	Powhatan Part #	Price/E
straight	4"	2½" NPT	***FRC4025*** [1]	*26-294-00001*	**$242.45**
straight	4"	2½" NST	***FRC4025F*** [1]	*26-294-00003*	**242.45**
straight	6"	2½" NPT	***FRC6025***	*26-294-00010*	**575.75**
straight	6"	2½" NST	***FRC6025F***	*26-294-00011*	**575.75**
90°	4"	2½" NPT	***90FRC4025***	*26-296-00002*	**336.30**
90°	4"	2½" NST	***90FRC4025F***	*26-296-00003*	**336.30**
90°	6"	2½" NPT	***90FRC6025***	*26-296-00008*	**530.75**
90°	6"	2½" NST	***90FRC6025F***	*26-296-00011*	**530.75**

[1] ***Not Underwriters Listed***

Roof manifolds are also available, consult the factory for pricing and availability.

Single Clapper Siamese


straight - back outlet


90° - bottom outlet


Single swing clapper with (2) pin lug swivel inlets. Provides the required 500 GPM minimum to supplement the fire protection as an auxiliary inlet connection to the water supply. (250 GPM minimum per inlet.) The swing clapper design provides an unobstructed waterway. Exposed Fire Department Connections (FDC) provide an economical method to satisfy local fire codes.

- Underwriters Listed and Factory Mutual approved
- cast brass finish
- branding: Auto-Spkr only
- for use up to **250 PSI** at ambient temperature (70°F)

Shape	Female NPT Outlet	(2) Female Inlets NH (NST)	Dixon Part #	Powhatan Part #	Price/E
straight	4"	2½"	***SCS4025F***	*21-201-01976*	**$280.40**
90°	4"	2½"	***90SCS4025F***	*21-202-00054*	**324.20**

Double Clapper Siamese


straight - back outlet


90° - bottom outlet

Double drop clappers with (2) pin lug swivel inlets. Provides the required 500 GPM minimum to supplement the fire protection as an auxiliary inlet connection to the water supply (250 GPM minimum per inlet.) Exposed Fire Department Connections (FDC) provide an economical method to satisfy local fire codes.

- cast brass finish
- branding: Auto-Spkr (other branding also available, consult the factory for pricing and availability)
- for use up to **175 PSI** at ambient temperature (70°F)

Shape	Female NPT Outlet	(2) Female Inlets NH (NST)	Dixon Part #	Powhatan Part #	Price/E
straight	4"	2½"	***DCS4025F*** [1]	*21-132-00016*	**$585.25**
90°	4"	2½"	***90DCS4025F*** [1]	*21-133-00008*	**613.60**
straight	6"	2½"	***DCS6025F***	*21-132-00061*	**781.10**
90°	6"	2½"	***90DCS6025F***	*21-133-00060*	**668.75**

[1] Underwriters Listed and Factory Mutual approved

M
Fire

Brass Caps with Chain

- cast brass finish
- pin lug
- *not intended for pressure applications - for protection only* SAFETY ALERT

-***P*** polished
-***C*** polished chrome plated

Size	Thread	Dixon Part #	Powhatan Part #	Price/E
1"	NST (NH)	***RFC100F** **	*17-126-00026*	**$29.30**
1½"	NST (NH)	***FC150F***	*17-126-00038*	**21.40**
1½"	NST (NH)	***FC150F-C***	*17-126-00037*	**28.75**
1½"	NST (NH)	***RFC150F** **	*17-126-00055*	**21.40**
2½"	NST (NH)	***FC250F***	*17-126-00303*	**32.00**
2½"	NST (NH)	***FC250F-C***	*17-126-00085*	**40.70**
2½"	NST (NH)	***RFC250F** **	*17-126-00303*	**32.00**
3"	NST (NH)	***FC300F***	*17-126-00315*	**93.95**
4"	NST (NH)	***FC400F***	*17-126-00339*	**183.60**
4½"	NST (NH)	***FC450F***	*17-126-00350*	**191.30**
6"	NST (NH)	***FC600F***	*17-126-00364*	**256.80**
¾"	NPSH	***RFC075*** NEW	*17-126-00015*	**20.83**
1"	NPSH	***RFC100** **	*17-126-01303*	**29.30**
1½"	NPSH	***FC150***	*17-126-00034*	**21.40**
2½"	NPSH	***FC250***	*17-126-00183*	**32.00**
3"	NPSH	***FC300***	*17-126-00312*	**93.95**
6"	NPSH	***FC600***	*17-126-00365*	**256.80**

* rocker lug



Brass Plugs with Chain - Pin Lug

Not intended for pressure applications, for protection only. SAFETY ALERT

- cast brass finish

-***C*** polished chrome plated

Size	Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	NST (NH)	***FP150F***	*17-127-00008*	**$38.90**
2½"	NST (NH)	***FP250F***	*17-127-00147*	**55.40**
2½"	NST (NH)	***FP250F-C***	*17-127-00027*	**68.50**
2½"	NST (NH)	***RFP250F** **	*17-127-00218*	**87.80**
3"	NST (NH)	***FP300F***	*17-127-00225*	**91.40**
1½"	NPSH	***FP150***	*17-127-00005*	**38.90**
2½"	NPSH	***FP250***	*17-127-00149*	**55.40**

* rocker lug



Aluminum Caps and Plugs with Chain



- extruded hardcoated aluminum
- rocker lug

Size	Thread	Part #	Price/E
1"	NPSH	***AFC100***	**$41.25**
1½"	NPSH	***AFC150***	**47.80**
2"	NPSH	***AFC200***	**54.10**
1"	NST (NH)	***AFC100F***	**41.25**
1½"	NST (NH)	***AFC150F***	**47.80**
2"	NST (NH)	***AFC200F***	**54.10**
2½"	NST (NH)	***AFC250F***	**73.00**
3"	NST (NH)	***AFC300F***	**80.45**
4"	NST (NH)	***AFC400F***	**151.55**
4½"	NST (NH)	***AFC450F***	**163.35**
6"	NST (NH)	***AFC600F***	**230.30**

Not all sizes are stocked



- extruded hardcoated aluminum
- rocker lug

Size	Thread	Part #	Price/E
1½"	NST (NH)	***AFP150F***	**$57.50**
2½"	NST (NH)	***AFP250F***	**79.00**
3"	NST (NH)	***AFP300F***	**83.15**
4"	NST (NH)	***AFP400F***	**154.45**
4½"	NST (NH)	***AFP450F***	**196.00**
6"	NST (NH)	***AFP600F***	**288.00**

Not all sizes are stocked

Brass Plain Wye with Pin Lugs



- divides one stream into two
- female swivel, two male outlets

Female NST (NH)	(2) Male NST (NH)	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***PW15F15F***	*04-106-00009*	**$275.85**
2½"	1½"	***PW25F15F***	*04-106-00021*	**395.00**
2½"	2½"	***PW25F25F***	*04-106-00032*	**375.00**

Aluminum Plain Wyes with Rocker Lugs



- divides one stream into two
- 1 female swivel and 2 male outlets

Female Thread	Male NPSH	Dixon Part #	Price/E
1" NPSH	1"	***ARPW10S10S***	**$271.45**
1½" NST (NH)	1"	***ARPW15F10S***	**321.25**

Thermoplastic Caps with Chain

Prevents entry of foreign material and protects male outlet threads on valves and hydrants.

- red finish
- ***NOT** intended to be pressurized* SAFETY ALERT

Size	Thread	Part #	Price/E
1½"	NST (NH)	***PFCW150F***	**$14.60**
2½"	NST (NH)	***PFCW250F***	**15.30**
3"	NST (NH)	***PFCW300F***	**27.50**
1½"	NPSH	***PFCW150***	**14.60**
2"	NPSH	***PFCW200***	**19.85**



- red finish
- can be pressurized to **300 PSI**

Size	Thread	Part #	Price/E	Opt Qty
2½"	NST (NH)	***PFC250F***	**$37.75**	25



Thermoplastic Breakable Cap

Prevents entry of foreign material and protects female threads on pin lug fire department inlet connections.

- molded red thermoplastic
- used on pin lug females

Size	Part #	Price/E	Opt Qty
2½"	***PBC250***	**$8.00**	25



Thermoplastic Adjust-A-Plug

- molded red thermoplastic protective plug for swivel connections up to 2½"
- Two adjustable metal plates installed in the back of the plug can be mated with your local thread.
- The plug can be easily removed with a fire department spanner wrench.

Part #	Price/E
PAP250	**$8.00**



Universal Hose Cap

The universal push on - pull off cap protects all threads by gripping the valve or outlet on the inside of the waterway.

- ***NOT** intended to be pressurized* SAFETY ALERT

Size	Part #	Price/E
2½"	***PFC250U***	**$17.46**




Aluminum Breakable Cap

2010 NEW

- for use on fire department inlet connections
- prevents entry of foreign matter and protects female threads
- breakable ears feature permits fast hose connection
- two eyebolts with nuts for attachment to female pin lug swivel
- painted finish - red

Size	Part #	Price/E
2½"	***ABC250***	**$9.00**



M Fire

Spanner and Hydrant Wrenches

Aluminum Universal Spanner Wrench



Part #	Price/E	Pkg Qty	Wt. (lbs)
USW	**$23.05**	25	.62

- for 3/4" to 3" pin lug and rocker lug couplings
- includes gas cock shutoff, pry bar and belt hook eye
- overall length 11-7/8"

Universal Wrench



Part #	Price/E	Wt. (lbs)
233	**$43.20**	1.16

- for pin lug or sensible (rocker) lug couplings 1" thru 4½"
- a gas cock shutoff is provided in the handle
- iron, red epoxy painted
- overall length 11¾"

Aluminum Forestry Pocket Spanner Wrench



Part #	Price/E	Wt. (lbs)
FSW1	**$27.90**	.12

- for use on 1" and 1½" hoses
- meets USFDA specification 5100-101C
- overall length 5"

Forestry Hose Clamp and Spanner



Part #	Price/E	Wt. (lbs)
FHCS150	**$144.25**	.63

- hose clamp is constructed from cast aluminum and brass
- Off-set handle enables the user to easily operate the clamp while wearing gloves.
- designed to be used with lightweight 1" and 1½" hoses for pressures up to 200 PSI
- When clamped onto the hose the brass locking device safely holds the clamp in position. A spanner is an integral part of the clamp.
- overall length 10"

Hole Type Spanner Wrench



Part #	Price/E	Wt. (lbs)
HTSW	**$24.00**	.20

- Rugged and dependable compact hole spanner designed for use on ¾" and 1" booster hose couplings.
- constructed of AL-MAG 35
- overall length is 7½"

Storz Adjustable Hydrant Wrench



Part #	Price/E	Wt. (lbs)
SAHW	**$154.45**	6

- ductile iron head
- knurled chrome plated handle
- manganese bronze adjustable jaw

Storz Spanner Wrench



Part #	Price/E	Wt. (lbs)
SZW2	**$52.90**	1

- for use on 4", 5" and 6" Storz couplings
- one-piece design
- constructed of AL-MAG 35

Folding Pocket Spanner Wrenches



Material	Part #	Price/ E	Wt. (lbs)
aluminum	***PSW***	**$36.40**	.30
brass	***PSW-B***	**125.75**	.72
die cast zinc	***PSW-Z***	**32.00**	.56
yellow plastic	***PSW-Y***	**62.40**	.27

- a compact wrench easily carried in your jacket pocket
- designed to fit ¾" to 3" sensible (rocker) lug and pin lug couplings.

Spanner and Hydrant Wrenches

Adjustable Hydrant Wrench

- plated iron head and ½" plated steel handle
- for pentagon nuts up to 1¾"
- built-in spanner for pin or rocker lug couplings
- overall length 16¼"

Part #	Price/E	Pkg Qty	Wt. (lbs)
AHW	**$25.75**	20	2.7



Pigtail Adjustable Hydrant Wrench

- double spanner head fits pin lug or rocker (sensible) lug couplings, pentagon nuts up to 1½" from point to flat, 1½" - 6" rocker lug caps, 2" - 4½" pin lug caps, and square nuts up to 1-1/8"

Part #	Price/E	Wt. (lbs)
AHWPT	**$103.40**	4.5



Heavy Duty Adjustable Hydrant Wrench

- plated iron head, 7/8" plated steel handle
- for pentagon hydrant nuts up to 1¾" from point to flat
- notched to fit 1¼" square hydrant nut
- spanner for pin lug and sensible (rocker) lug couplings, 1½" thru 6"
- overall length 18"

Part #	Price/E	Pkg Qty	Wt. (lbs)
189	**$38.70**	15	4.7



Double Head Adjustable Hydrant Wrench

- for pentagon hydrant nuts up to 1-7/8" and square heads up to 1½"
- designed to fit ¾" - 6" rocker lug or pin lug couplings, can also be used for long handle couplings
- ductile iron head with a deeply knurled chrome plated steel handle
- replaceable adjustable jaw is made of manganese bronze
- overall length 19½"

Part #	Price/E	Wt. (lbs)
189DH	**$120.00**	5



5 Hole Hydrant Wrench

- 5 pentagon holes designed to fit common hydrant nut sizes
- built-in spanner for pin or rocker lug couplings
- plated iron

Part #	Price/E	Pkg Qty	Wt. (lbs)
PHW	**$22.40**	25	1.94



Grip-All Spanner Wrench

- lightweight aluminum, fits ¾" to 6" split lug, rocker lug and pin lug couplings
- can be operated in tight quarters
- A gas cock shutoff is provided in the handle. The handle is shaped to fit your hand allowing a positive grip on the coupling.

Part #	Price/E	Wt. (lbs)
GAW	**$58.20**	.52



Long Handle Suction Spanner Wrench

- plated iron spanner for use on long handle, rocker lug, or pin lug couplings from 2½" to 6"
- open end slips over long handles for additional leverage while the claw fits rocker lugs or pin lugs, the other end can be used as a pry or crowbar.
- inverted "T" body construction for lighter weight and improved strength
- can be used on Dixon's cam and groove pin lug or trapezoidal lug tank car adapters or 8" pin lug couplings
- overall length 18-3/4"

Part #	Price/E	Wt. (lbs)
LHW	**$302.55**	3.25



Additional spanner wrenches on page 270

Single Hydrant Gate Valve with Hand Wheel



The hydrant gate valve is used to throttle the flow from a fire hydrant without damaging the hydrant itself.

- O-ring seal
- Underwriters Listed
- for use on standpipes and fire pumps where UL listing is required
- for use up to **175 PSI** (water only) at ambient temperature (70°F)

female inlet x male outlet

Inlet Female NST (NH)	Outlet Male NST (NH)	*Cast Red Brass* Part #	Price/E	Wt (lbs)
2½"	2½"	***UHGV250F***	**$450.35**	9

replacement parts

Description	Part #	Price/E	Wt (lbs)
replacement valve wheel	***UHGV250-W***	**$28.00**	.5

Single Hydrant Gate Valves



- pin lug swivel, non-rising stem
- Underwriters Listed
- red hand wheel, ***metal-metal seal***
- designed to protect fire hydrants from damage that can occur if used for throttling
- for use up to **300 PSI** (water only) at ambient temperature (70°F)

Female x Male	Part #	Price/E
2½" NST (NH) x 2½" NST (NH)	***HGVW250F***	**$582.25**
replacement wheel	***HGVW250-W***	**28.05**

Brass Single Hydrant Gate Valves



- pin lug swivel, non-rising stem
- aluminum speed handle, ***rubber seal***
- designed to protect fire hydrants from damage that can occur if used for throttling
- for use up to **175 PSI** (water only) at ambient temperature (70°F)

Female x Male	Part #	Price/E	Pkg Qty
2½" NST (NH) x 2½" NPSH	***HGV250***	**$409.10**	4
2½" NST (NH) x 2½" NST (NH)	***HGV250F***	**409.10**	4
replacement handle	***HGV250-H***	**18.00**	1

Aluminum Single Hydrant Gate Valves



- pin lug swivel, non-rising stem
- aluminum speed handle, ***non-metallic seal***
- designed to protect fire hydrants from damage that can occur if used for throttling
- for use up to **175 PSI** (water only) at ambient temperature (70°F)

Female x Male	Part #	Price/E
2½" NST (NH) x 2½" NST (NH)	***AHGV250F***	**$561.80**
replacement handle	***AHGV250F-H***	**60.00**

Non-Rising Stem Wedge Disc Gate Valves



WDGV150F

- cast brass
- red iron wheel handle, with cap and chain
- solid wedge disc with tapered seats
- working pressure: **300 PSI**
- 2½" U/L Listed and FM approved

Female x Male	U/L	Working Pressure at 70°F	Dixon Part #	Powhatan Part #	Price/E	Pkg Qty
1½" NPT x 1½" male NST (NH)	No	**300 PSI**	***WDGV150F***	---	**$396.10**	2
2½" NPT x 2½" male NST (NH)	Yes	**300 PSI**	***WDGV250F***	*19-281-50000*	**609.85**	2

Note: Not recommended for wet standpipe systems. Use ***AV250*** on page 459 for wet standpipe systems.



WDGV250F

Wedge Disc Gate Valves - Non-rising Stem



- forged brass, satin finish
- red hand wheel
- solid wedge disc with tapered seats
- straightway pattern
- Underwriters Listed and Factory Mutual approved
- for use up to **300 PSI** working pressure at ambient temperature (70°F)
- for use on standpipes, fire pumps and hydrants

Inlet Female NPT	Outlet Male NST (NH)	U/L	Working Pressure	Part #	Price/E
2½"	2½"	Yes	**300 PSI**	***WDGV251F***	**$459.25**
3"	2½"	Yes	**300 PSI**	***WDGV3025F***	**505.35**

Rising Stem Wedge Disc Gate Valves



- cast brass
- red iron wheel handle, with cap and chain
- solid wedge disc with tapered seats
- Underwriters Listed

Female x Male	Working Pressure at 70°F	U/L	Dixon Part #	Powhatan Part #	Price/E	Pkg Qty
2½" NPT x 2½" male NST (NH)	**200 PSI**	No	***RWDGV250F***	*19-280-50000*	**$594.00**	2
3" NPT x 2½" male NST (NH)	**300 PSI**	Yes	***RWDGV3025F***	*19-280-50001*	**647.25**	2

Note: Not recommended for wet standpipe systems. Use ***AV250*** on page 459 for wet standpipe systems.

Backflow Preventer



Designed to give maximum protection against backflow caused by back-pressure or back-siphonage from a cross-connection wherein a contaminant hazard exists.

- consists of two spring-loaded poppet type check valves and a mechanically independent, hydraulically dependent pressure differential relief valve
- three top mounted test cocks ensure easy access during repair and maintenance
- supply pressures up to **175 PSIG** and water temperatures from **33°F** to **180°F**
- meets USC's FCCC and HR Manual, Sec. 10, ASSE 1015, AWWA C-510 and CSA B64.4 specifications
- Underwriters Listed and Factory Mutual approved

NPT	Working Pressure	Part #	Wt. (lbs)	Price/E
2"	**175 PSI**	***BFP200***	41	**$1273.00**

Create a Fire Hydrant Backflow Preventer by using the ***RSMSA25F20T*** (page 471) and the ***DMH2025F*** (page 478).

Brass Straight Globe Valves



male outlet



female outlet

- ideal for wet and combination systems
- cast brass with aluminum handwheel
- used with a fire hose rack assembly, or as a fire department outlet connection
- for use up to **300 PSI** at ambient temperature (70°F)

Inlet Female NPT	Outlet Male NST (NH)	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***SGV150F*** ***SGV250F***	*18-217-00010* *18-217-00083*	**$256.30** **400.50**

Inlet Female NPT	Outlet Female NPT	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***SGVF150*** ***SGVF250***	*18-217-00104* *18-217-00082*	**$256.30** **400.50**

M
Fire

Chicago Pattern Valves



- cast brass with a round aluminum handwheel
- for use up to **175 PSI** at ambient temperature (70°F)

Inlet Male NPT	Outlet Male	Dixon Part #	Powhatan Part #	Price/E
1½"	1½" NST (NH)	***CPV150F***	*18-180-00008*	**$222.35**

Wharf Hydrants



- cast brass finish
- used to provide a fire department outlet connection
- pentagon nut at top of spindle
- discourages unauthorized use
- hydrostatically tested for **300 PSI** at ambient temperature (70°F)

Inlet Female NPT	Outlet Male NST (NH)	Dixon Part #	Powhatan Part #	Price/E
3" 4" 4"	2½" 2½" 4½"	***WHYD3025F*** ***WHYD4025F*** ***WHYD4045F***	*18-251-00008* *18-251-00015* *18-251-00017*	**$818.00** **742.00** **1242.00**

Brass ¼ Turn Plug Type Wye Valves

- cast brass
- *not recommended for charged preconnected hose lines* SAFETY ALERT
- for use up to 175 PSI (water only) at ambient temperature (70°F)



Female x Male	Dixon Part #	Powhatan Part #	Price/E	Pkg Qty
2½" NST (NH) x 1½" NST (NH)	***S6175***	*06-175-00212*	**$695.35**	5
2½" NST (NH) x 1½" NPSH	***S6175S***	*06-175-00223*	**695.35**	5
replacement handle	***S6175-H***	*43-184-00002*	**54.00**	1

Brass ¼ Turn Ball Type Wye Valves

- operates easily under high pressure
- cast brass finish
- rocker lug swivel
- NSN# 4210-00-255-0234
- for use up to 175 PSI (water only) at ambient temperature (70°F)
- handles are not field replaceable



Female x Male	Dixon Part #	Powhatan Part #	Price/E
2½" NST (NH) x 1½" NPSH	***S7337S***	*07-337-00196*	**$930.00**

Full Flow Brass ¼ Turn Ball Type Hose Valves

- cast brass
- recommended for charged preconnected hose lines
- for use up to **175 PSI** (water only) at ambient temperature (70°F)



Female x Male	Dixon Part #	Powhatan Part #	Price/E
1½" NST (NH) x 1½" NST (NH)	***S7100-15***	*07-100-10003*	**$899.25**
2½" NST (NH) x 1½" NST (NH)	***S7100***	*07-100-20003*	**876.40**

Leader Line Wye ¼ Turn Ball Type Hose Valves

- body painted red with chrome trim
- rocker lug swivel
- for use up to **400 PSI** (water only) at ambient temperature (70°F)



Female x Male	Part #	Price/E
2½" NST (NH) x 1½" NST (NH)	***LLBV2515F***	**$568.55**

Straight Ball Drip Valves

2010 NEW

This valve is designed to drain the low point of a system. It should be placed between the fire department connection and the swing check valve.

- will seal automatically under pressure
- install in the vertical position only
- working pressure: **175 PSI** at ambient temperature (70°F)



Male NPT	Male NPT	Part #	Price/E	Wt. Lbs
½"	½"	***SBDV50***	**$28.50**	.41
¾"	¾"	***SBDV75***	**31.05**	.47

Brass Female Swivel Adapters - Pin Lug



- cast brass finish

Female NST (NH) Thread	Female NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***SF150F***	*23-270-00431*	**$89.00**
2½"	1½"	***SF25F15T***	*23-270-00436*	**165.35**
2½"	2"	***SF25F20T***	*23-270-00437*	**155.60**
2½"	2½"	***SF250F***	*23-270-00008*	**144.90**
2½"	3"	***SF25F30T***	*23-270-00036*	**162.75**
3"	3"	***SF300F***	*23-270-00225*	**206.35**

Female NPSH Thread	Female NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***SF150S***	*23-270-00507*	**$89.00**

Brass Female Swivel Adapters with Rocker Lugs



- cast brass finish

Female NST (NH) Thread	Female NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***RSF150F***	*23-270-00397*	**$89.00**
2½"	1½"	***RSF25F15T***	*23-270-00592*	**165.50**
2½"	2"	***RSF25F20T***	*23-270-00371*	**155.60**
2½"	2½"	***RSF250F***	*23-270-00352*	**117.95**

Aluminum Female Swivel Adapters with Rocker Lugs



- aluminum hardcoat finish

Female NST (NH) Thread	Female NPT Thread	Part #	Price/E
1½"	1½"	***ASF150F***	**$61.70**
2½"	2"	***ASF25F20T***	**142.15**
2½"	2½"	***ASF250F***	**154.45**
2½"	3"	***ASF25F30T***	**164.95**
2½"	4"	***ASF25F40T***	**197.90**
4"	4"	***ASF40F40T***	**355.00**
4½"	4"	***ASF45F40T***	**365.00**
6"	6"	***ASF60F60T***	**705.75**

Brass Female Swivel Suction Adapters with Screen - Rocker Lug



- cast brass finish
- suction intake with strainer screen

Female NST (NH) Thread	Female NPT Thread	Part #	Price/E
2½"	1½"	***RSFSA25F15T***	**$320.45**
2½"	2"	***RSFSA25F20T***	**320.45**
2½"	2½"	***RSFSA250F***	**307.15**
2½"	3"	***RSFSA25F30T***	**354.00**

Brass Male Swivel Adapters - Pin Lug

- cast brass finish

Female NST (NH) Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***SM150F***	*09-215-00277*	**$90.55**
2½"	1½"	***SM25F15T***	*09-215-00367*	**154.75**
2½"	2"	***SM25F20T***	*09-215-00140*	**146.00**
2½"	2½"	***SM250F***	*09-215-00279*	**103.20**
2½"	3"	***SM25F30T***	*09-215-00110*	**174.30**

Female NPSH Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***SM150S***	*09-215-00368*	**$90.55**

Female NPSH Thread	Male NST (NH) Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***SM15S15F***	*09-215-00399*	**$98.85**



Brass Male Swivel Adapters with Rocker Lugs

- cast brass finish

Female NST (NH) Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***RSM150F***	*09-215-00382*	**$90.55**
2½"	2"	***RSM25F20T***	*09-215-00294*	**146.00**
2½"	2½"	***RSM250F***	*09-215-00306*	**146.00**
2½"	3"	***RSM25F30T***	*09-215-00290*	**174.30**



Aluminum Male Swivel Adapters with Rocker Lugs

- aluminum hardcoat finish

Female NST (NH) Thread	Male NPT Thread	Dixon Part #	Price/E
1½"	1½"	***ASM150F***	**$70.80**
2½"	2"	***ASM25F20T***	**127.90**
2½"	2½"	***ASM250F***	**148.40**
2½"	3"	***ASM25F30T***	**200.05**
4"	4"	***ASM40F40T***	**386.50**
4½"	4"	***ASM45F40T***	**408.75**
6"	6"	***ASM60F60T***	**557.60**



Brass Male Swivel Suction Adapters with Screen - Rocker Lug

- cast brass finish
- suction intake with strainer screen

Female NST (NH) Thread	Male NPT Thread	Dixon Part #	Price/E
2½"	1½"	***RSMSA25F15T***	**$294.80**
2½"	2"	***RSMSA25F20T***	**308.50**
2½"	2½"	***RSMSA250F***	**311.85**
2½"	3"	***RSMSA25F30T***	**350.00**



Brass Double Female Swivels with Pin Lugs



- cast brass finish

Female NPSH Thread	Female NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DFP1515*** ***DFP2525***	*09-115-00023* *09-115-00110*	**$81.25** **164.40**

Female NST (NH) Thread	Female NST (NH) Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DFP1515F*** ***DFP2525F***	*09-115-00020* *09-115-00093*	**$81.25** **164.40**

Female NST (NH) Thread	Female NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DFP15F15S*** ***DFP25F25S***	*09-115-00295* *09-115-00321*	**$81.25** **164.40**

Brass Double Female Swivels with Rocker Lugs



- cast brass finish

Female NPSH Thread	Female NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DFR1515*** ***DFR2525***	*09-115-00036* *09-115-00335*	**$81.25** **164.40**

Female NST (NH) Thread	Female NST (NH) Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DFR1515F*** ***DFR2525F***	*09-115-00033* *09-115-00104*	**$81.25** **164.40**

M
Fire

Aluminum Double Female Swivels with Rocker Lugs



Female NPSH Thread	Female NPSH Thread	Part #	Price/E
1" 1½" 2½"	1" 1½" 2½"	***ADFR1010S*** ***ADFR1515*** ***ADFR2525***	**$53.30** **60.65** **105.25**

Female NST (NH) Thread	Female NST (NH) Thread	Part #	Price/E
1½" 1½" 2½"	1½" 2½" 2½"	***ADFR1515F*** ***ADFR1525F*** ***ADFR2525F***	**$60.65** **82.95** **105.25**

Female NST (NH) Thread	Female NPSH Thread	Part #	Price/E
1½" 2½"	1½" 2½"	***ADFR15F15S*** ***ADFR25F25S***	**$60.65** **105.25**

Brass Hydrant Adapters with Pin Lugs



reducer



same size



increaser

Female NST (NH)Thread	Male GHT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	¾"	***HA1576***	*09-130-00084*	**$39.60**
2½"	¾"	***HA2576***	*09-130-00263*	**29.35**

Female NST (NH)Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	¾"	***HA1575***	*09-130-00932*	**$39.60**
1½"	1"	***HA1510***	*09-130-00095*	**40.75**
1½"	1½"	***HA1515***	*09-130-00053*	**40.75**
2½"	1"	***HA2510***	*09-130-00283*	**29.70**
2½"	1½"	***HA2515***	*09-130-00298*	**29.70**
2½"	2"	***HA2520***	*09-130-00380*	**46.15**
2½"	2½"	***HA2525***	*09-140-00268*	**69.85**
2½"	3"	***HA2530***	*09-356-00226*	**105.20**

Female NST (NH)Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1"	***HA1510F***	*09-130-00096*	**$40.75**
1½"	1½"	***HA1515F***	*09-140-00696*	**40.75**
1½"	2½"	***HA1525F***	*09-356-00045*	**66.40**
2"	2½"	***HA2025F***	*09-335-00224*	**84.95**
2½"	1"	***HA2510F***	*09-130-01394*	**29.70**
2½"	1½"	***HA2515F***	*09-130-00297*	**29.70**
2½"	2"	***HA2520F***	*09-130-00382*	**46.15**
2½"	2½"	***HA2525F***	*09-140-00676*	**69.85**
2½"	3"	***HA2530F***	*09-356-00272*	**105.20**
3"	1½"	***HA3015F***	*09-130-01024*	**113.10**
3"	2½"	***HA3025F***	*09-130-00562*	**105.10**
4"	2½"	***HA4025F***	*09-149-00524*	**212.50**
4½"	2½"	***HA4525F***	*09-149-00519*	**253.80**

Female NST (NH)Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	¾"	***HA1575T***	*09-130-00083*	**$39.60**
1½"	1"	***HA1510T***	*09-130-01385*	**40.75**
1½"	1½"	***HA1515T***	*09-140-00748*	**40.75**
2½"	¾"	***HA2575T***	*09-130-00262*	**29.35**
2½"	1"	***HA2510T***	*09-130-01057*	**29.70**
2½"	1½"	***HA2515T***	*09-130-00299*	**29.70**
2½"	2"	***HA2520T***	*09-130-00381*	**46.15**
2½"	2½"	***HA2525T***	*09-140-00267*	**69.85**
2½"	3"	***HA2530T***	*09-356-00331*	**105.20**

Female NPSH Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1"	***HA15S10***	*09-130-00092*	**$40.75**

Female NPSH Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***HA15S15F***	*09-140-00562*	**$41.20**
2"	1½"	***HA20S15F***	*09-130-02495*	**72.90**
2"	2½"	***HA20S25F***	*09-356-00213*	**75.60**
2½"	1½"	***HA25S15F***	*09-130-00306*	**29.70**
2½"	2½"	***HA25S25F***	*09-140-00618*	**72.85**
3"	2½"	***HA30S25F***	*09-130-02368*	**105.10**

Female NPSH Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1"	***HA15S10T***	*09-130-01648*	**$40.75**
1½"	1½"	***HA15S15T***	*09-140-01020*	**41.20**
2½"	1"	***HA25S10T***	*09-130-01848*	**29.70**
3"	2½"	***HA30S25T***	*09-130-02500*	**116.25**

Female NPSH Thread	Male GHT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	¾"	***HA15S76***	*09-130-00086*	**$39.60**

Female NPT Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***HA15T15F***	*09-140-00668*	**$41.20**
2"	2½"	***HA20T25F***	*09-356-00223*	**75.60**

- other styles and sizes are also available
- not all configurations are stocked
- *consult the factory for pricing and availability*

Brass Hydrant Adapters with Rocker Lugs



reducer



same size



increaser

Female NST (NH)Thread	Male GHT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	¾"	***RHA1576***	*09-130-00786*	**$54.30**
2½"	¾"	***RHA2576***	*09-130-00809*	**43.85**

Female NPSH Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1"	***RHA15S10***	*09-130-00796*	**$46.60**
2½"	1½"	***RHA25S15***	*09-130-00825*	**85.85**

Female NST (NH)Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1"	***RHA1510***	*09-130-00791*	**$46.60**
1½"	1½"	***RHA1515***	*09-140-00077*	**55.80**
1½"	2"	***RHA1520***	*09-356-00443*	**94.10**
2½"	1"	***RHA2510***	*09-130-00919*	**45.90**
2½"	1½"	***RHA2515***	*09-130-00819*	**35.50**

Female NPSH Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***RHA15S15F***	*09-140-00066*	**$46.60**
2½"	1½"	***RHA25S15F***	*09-130-00827*	**50.05**
2½"	2½"	***RHA25S25F***	*09-140-00348*	**85.85**

Female NST (NH)Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1"	***RHA1510F***	*09-130-01686*	**$46.60**
1½"	1½"	***RHA1515F***	*09-140-00721*	**55.80**
1½"	2½"	***RHA1525F***	*09-356-00220*	**68.40**
2"	2½"	***RHA2025F***	*09-356-00267*	**94.40**
2½"	1"	***RHA2510F***	*09-130-01113*	**45.90**
2½"	1½"	***RHA2515F***	*09-130-00817*	**35.50**
2½"	1½"	***RHA2515F-C***	*09-130-00769*	**41.65**
2½"	2"	***RHA2520F***	*09-130-01211*	**94.40**

Female NPSH Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1"	***RHA15S10T***	*09-130-02412*	**$46.60**
1½"	1½"	***RHA15S15T***	*09-140-01661*	**46.60**

Female NST (NH)Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1"	***RHA1510T***	*09-130-00793*	**46.60**
1½"	1½"	***RHA1515T***	*09-140-00584*	**55.80**
2½"	1"	***RHA2510T***	*09-130-01697*	**45.90**
2½"	1½"	***RHA2515T***	*09-130-01126*	**85.85**
2½"	2"	***RHA2520T***	*09-130-00867*	**51.25**
2½"	2½"	***RHA2525T***	*09-140-00952*	**85.85**
2½"	3"	***RHA2530T***	*09-356-00339*	**117.35**

Female NPT Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***RHA15T15F***	*09-140-00809*	**$46.60**
2½"	2½"	***RHA25T25F***	*09-140-00798*	**85.85**

- ***-C*** chrome finish
- other styles and sizes are also available
- not all configurations are stocked
- *consult the factory for pricing and availability*

M
Fire

Aluminum Hydrant Adapters with Rocker Lugs



- extruded aluminum

Female NST (NH)Thread	Male GHT Thread	*Hardcoated* Part #	Price/E
1"	¾"	***AHA1076***	**$36.25**
1½"	¾"	***AHA1576***	**42.65**
2½"	¾"	***AHA2576***	**94.20**

Female NST (NH)Thread	Male NPT Thread	*Hardcoated* Part #	Price/E
1½"	1½"	***AHA1515T***	**$40.25**
2½"	1½"	***AHA2515T***	**57.70**
2½"	2"	***AHA2520T***	**77.70**
2½"	2½"	***AHA2525T***	**72.65**
3"	3"	***AHA3030T***	**156.65**
4"	4"	***AHA4040T***	**254.50**
4½"	4"	***AHA4540T***	**298.85**
5"	5"	***AHA5050T***	**452.50**
6"	6"	***AHA6060T***	**520.75**

Female NST (NH)Thread	Male NPSH Thread	Part #	Price/E
1"	1"	***AHA1010S***	**$40.55**
1½"	1"	***AHA1510***	**48.75**
1½"	1½"	***AHA1515***	**40.25**
2½"	1½"	***AHA2515***	**57.70**
2½"	2½"	***AHA2525***	**72.65**

Female NST (NH)Thread	Male NST (NH)Thread	Part #	Price/E
1"	1½"	***AHA1015F***	**$53.75**
1½"	1"	***AHA1510F***	**48.75**
1½"	1½"	***AHA1515F***	**40.25**
2½"	1½"	***AHA2515F***	**57.70**
2½"	2½"	***AHA2525F***	**72.65**
3"	2½"	***AHA3025F***	**101.50**

Female GHT Thread	Male NPSH Thread	Part #	Price/E
¾"	1"	***AHA7610S***	**$53.75**

Female GHT Thread	Male NST (NH)Thread	Part #	Price/E
¾"	1"	***AHA7610F***	**$53.75**

Female NPSH Thread	Male NPSH Thread	Part #	Price/E
1"	¾" GHT	***AHA10S76***	**$36.25**
1½"	¾" GHT	***AHA15S76***	**42.65**
1"	1½"	***AHA10S15***	**54.60**

Female NPSH Thread	Male NPT Thread	Part #	Price/E
1½"	1"	***AHA15S10T***	**$62.30**

Female NPSH Thread	Male NST (NH)Thread	Part #	Price/E
1"	1"	***AHA10S10F***	**$40.55**
1"	1½"	***AHA10S15F***	**53.75**
1½"	1"	***AHA15S10F***	**48.75**
1½"	1½"	***AHA15S15F***	**40.25**
2"	1½"	***AHA20S15F***	**57.40**
2½"	2½"	***AHA25S25F***	**72.65**
3"	2½"	***AHA30S25F***	**101.50**

- other styles and sizes are also available
- not all configurations are stocked
- *consult the factory for pricing and availability*

Long Handle Short Shank Females



female NST swivel nut x hose shank

- for suction and low pressure discharge only
- powder coated aluminum long handle swivel nut

Hose Shank	Swivel Nut NST (NH)	Part #	Price/E
4"	4"	***LHFS400F***	**$148.50**
4"	4½"	***LHFS4045F***	**231.00**

Cam and Groove Hydrant Adapters



female NST x male adapter

- Pin lugs allow for easy connection using standard spanner and hydrant wrenches (pages 464 and 465).
- supplied with a Buna-N washer in the threaded end

Female NST Thread	Male Adapter	*Brass* Part #	*Brass* Price/E	*Aluminum* Part #	*Aluminum* Price/E
1½"	1½"	***HA1515ADP***	**$75.50**	***AHA1515ADP***	**$34.65**
2½"	2½"	***HA2525ADP***	**83.30**	***AHA2525ADP***	**43.25**

Replacement Washers

- Buna-N

ID	OD	Thickness	Part #	Price/E
1-9/16"	2-1/16"	1/8"	***SW150***	**$2.00**
2-9/16"	3-3/16"	3/16"	***SW250***	**3.15**

Brass Double Female Hex Couplings



female x female

- cast brass finish

Female Thread	Female Thread	Dixon Part #	Powhatan Part #	Price/E
1½" NPT	1½" NST (NH)	***FFH1515F***	*14-156-00053*	**$26.20**
2½" NPT	2½" NST (NH)	***FFH2525F***	*14-156-00100*	**52.25**
1½" NST (NH)	1½" NST	***FFH15F15F***	*14-156-00059*	**26.20**
2½" NST (NH)	2½" NST	***FFH25F25F***	*14-156-00098*	**52.25**

Brass Single Male Outlet with Hex



Used to connect fire hose to a standpipe or sprinkler system.

- cast brass
- other sizes and threads are also available, consult the factory for pricing and availability
- not all configurations are stocked

-***P*** polished
-***C*** polished chrome plated

Female NPT	Male NH (NST)	Dixon Part #	Powhatan Part #	Price/E
2½"	2½"	***MOC250F-P***	*23-272-00003*	**$135.00**
	2½"	***MOC250F-C***	*23-272-00006*	**145.00**
3"	2½"	***MOC3025F-P***	*23-272-00023*	**160.00**
	2½"	***MOC3025F-C***	*23-272-00043*	**184.25**

Brass Female to Male Hex Nipples


reducer


same size


increaser

Female NPT Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1"	¾" GHT	***FM1076***	---	**$22.70**
1"	1"	***FM1010***	*14-155-00076*	**32.50**
1½"	1½"	***FM1515***	*14-155-00174*	**22.15**
2"	2"	***FM2020***	*14-155-00281*	**50.10**
2½"	2½"	***FM2525***	*14-155-00363*	**48.50**

Female NPT Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1"	1"	***FM1010F***	*14-155-00080*	**$32.50**
1"	1½"	***FM1015F***	*15-216-00046*	**40.50**
1½"	1½"	***FM1515F***	*14-155-00177*	**22.15**
1½"	2½"	***FM1525F***	*15-216-00090*	**62.25**
1½"	3"	***FM1530F***	*15-216-00533*	**86.00**
2"	1½"	***FM2015F***	*14-155-00265*	**62.50**
2"	2½"	***FM2025F***	*15-216-00192*	**85.30**
2½"	2½"	***FM2525F***	*14-155-00359*	**48.50**
3"	2½"	***FM3025F***	*14-155-00501*	**95.95**
3"	3"	***FM3030F***	*14-155-00516*	**140.40**
4"	2½"	***FM4025F***	*14-155-00675*	**213.50**
4"	4"	***FM4040F***	*14-155-00540*	**355.70**
4"	4½"	***FM4045F***	*15-216-00172*	**225.35**
6"	6"	***FM6060F***	*14-155-00711*	**525.60**

Female NPT Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
2½"	2½"	***FM2525T***	*14-155-00365*	**$48.50** NEW
3"	2½"	***FM3025T***	*14-155-00502*	**95.95**

Female NST (NH)Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***FM15F15S***	*14-155-00198*	**$22.15**
2½"	2½"	***FM25F25S***	*14-155-00395*	**78.50**

Female NPSH Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
¾" GHT	1"	***FM7610T***	---	**$22.00**
1"	¾" GHT	***FM10S76***	*14-155-00067*	**22.70**
1½"	1½"	***FM15S15T***	*14-155-00175*	**22.15**
2½"	2½"	***FM25S25T***	*14-155-00366*	**48.50**

Female NPSH Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***FM15S15F***	*14-155-00180*	**$22.15**
2"	1½"	***FM20S15F***	*14-155-00267*	**62.50**
2"	2½"	***FM20S25F***	*15-216-00106*	**85.30**
2½"	2½"	***FM25S25F***	*14-155-00362*	**48.50**
3"	2½"	***FM30S25F***	*14-155-00500*	**101.55**

Female NPSH Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
2"	1½"	***FM20S15***	*14-155-00264*	**$62.50**

Female NST (NH)Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1"	1"	***FM10F10T***	*14-155-00084*	**$32.50**
1½"	1½"	***FM15F15T***	*14-155-00199*	**22.15**
1½"	2"	***FM15F20T***	*15-216-00081*	**30.10**
1½"	2½"	***FM15F25T***	*15-216-00098*	**62.25**
2½"	¾"	***FM25F75T***	*14-155-00319*	**77.30**
2½"	1"	***FM25F10T***	*14-155-00324*	**70.10**
2½"	1½"	***FM25F15T***	*14-155-00328*	**77.70**
2½"	2"	***FM25F20T***	*14-155-00345*	**76.30**
2½"	2½"	***FM25F25T***	*14-155-00392*	**48.50**
2½"	3"	***FM25F30T***	*15-216-00134*	**87.15**
3"	2½"	***FM30F25T***	*14-155-00867*	**95.95**
3"	3"	***FM30F30T***	*14-155-00519*	**140.40**
4"	4"	***FM40F40T***	*14-155-00545*	**279.00**
4½"	4"	***FM45F40T***	*14-155-00561*	**441.00**
6"	6"	***FM60F60T***	*14-155-00995*	**525.60** NEW

Female NST (NH)Thread	Male NST (NH)Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***FM15F15F***	*14-155-00197*	**$22.15**
1½"	2½"	***FM15F25F***	*15-216-00097*	**62.25**
1½"	3"	***FM15F30F***	*15-216-00200*	**77.30**
2½"	1½"	***FM25F15F***	*14-155-00329*	**77.70**
2½"	2½"	***FM25F25F***	*14-155-00396*	**48.50**
2½"	3"	***FM25F30F***	*15-216-00216*	**87.15**
3"	2½"	***FM30F25F***	*14-155-00508*	**95.95**

Brass Double Male Hex Nipples

- cast brass
- other configurations are also available, consult the factory for pricing and availability


reducer

Male NPT Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1"	¾" GHT	***DMH1076***	---	**$20.20**
1"	1"	***DMH1010***	*14-146-00042*	**20.25**
1"	1½"	***DMH1015***	*14-146-00092*	**32.85**
1½"	1"	***DMH1510***	*14-146-00093*	**32.85**
1½"	1½"	***DMH1515***	*14-146-00110*	**23.15**
1½"	2"	***DMH1520***	*14-146-00155*	**46.00**
2"	1½"	***DMH2015***	*14-146-00153*	**46.00**
2"	2"	***DMH2020***	*14-146-00167*	**43.35**
2"	2½"	***DMH2025***	*14-146-00204*	**63.25**
2½"	2"	***DMH2520***	*14-146-00206*	**63.25**
2½"	2½"	***DMH2525***	*14-146-00226*	**45.35**
2½"	3"	***DMH2530***	*14-146-00295*	**107.40**
3"	2½"	***DMH3025***	*14-146-00290*	**99.00**
3"	3"	***DMH3030***	*14-146-00312*	**137.15**
4"	4"	***DMH4040***	*14-146-00337*	**177.65**


same size

Male NST (NH) Thread	Male NST (NH) Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***DMH15F15F***	*14-146-00132*	**$23.15**
1½"	2½"	***DMH15F25F***	*14-146-00188*	**63.00**
2½"	2½"	***DMH25F25F***	*14-146-00259*	**45.35**
2½"	3"	***DMH25F30F***	*14-146-00305*	**107.40**

Male NST (NH) Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***DMH15F15S***	*14-146-00118*	**$23.15**


increaser

Male NPT Thread	Male NST (NH) Thread	Dixon Part #	Powhatan Part #	Price/E
¾"	1½"	***DMH7515F***	*14-146-00088*	**$26.50**
1"	1"	***DMH1010F***	*14-146-01084*	**20.25**
1"	1½"	***DMH1015F***	*14-146-00090*	**32.85**
1"	2½"	***DMH1025F***	*14-146-00437*	**86.70**
1½"	1"	***DMH1510F***	*14-146-00097*	**32.85**
1½"	1½"	***DMH1515F***	*14-146-00115*	**23.15**
1½"	2½"	***DMH1525F***	*14-146-00187*	**63.00**
2"	1½"	***DMH2015F***	*14-146-00157*	**46.00**
2"	2½"	***DMH2025F***	*14-146-00367*	**63.25**
2½"	1½"	***DMH2515F***	*14-146-00192*	**85.25**
2½"	2½"	***DMH2525F***	*14-146-00221*	**45.35**
2½"	3"	***DMH2530F***	*14-146-00304*	**107.40**
3"	2½"	***DMH3025F***	*14-146-00294*	**99.00**
3"	3"	***DMH3030F***	*14-146-00313*	**137.15**
4"	4"	***DMH4040F***	*14-146-00339*	**177.65**
4"	4½"	***DMH4045F***	*14-146-00354*	**235.45**
5"	5"	***DMH5050F***	*14-146-00363*	**410.00**
6"	4½"	***DMH6045F***	*14-146-00364*	**425.50**
6"	6"	***DMH6060F***	*14-146-00431*	**459.50**

Male NPT Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***DMH15T15T***	*14-146-00113*	**$23.15**
2½"	3"	***DMH25T30T***	*14-146-00291*	**107.40**

Brass Double Males with Pin Lugs

- cast brass finish

Male NPSH Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DMP1515*** ***DMP2525***	*09-114-00075* *09-114-00133*	**$57.60** **115.40**

Male NST (NH) Thread	Male NST (NH) Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DMP1515F*** ***DMP2525F***	*09-114-00035* *09-114-00125*	**$57.60** **115.40**

Male NST (NH) Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
2½"	2½"	***DMP25F25S***	*09-114-00128*	**$115.40**

Male NST (NH) Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DMP15F15T*** ***DMP25F25T***	*09-114-00041* *09-114-00435*	**$57.60** **115.40**



Brass Double Males with Rocker Lugs

- cast brass finish

Male NST (NH) Thread	Male NST (NH) Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DMR1515F*** ***DMR2525F***	*09-114-00060* *09-114-00153*	**$60.45** **106.75**

Male NST (NH) Thread	Male NPT Thread	Dixon Part #	Powhatan Part #	Price/E
1½"	1½"	***DMR15F15T***	*09-114-00543*	**$60.45**

Male NPSH Thread	Male NPSH Thread	Dixon Part #	Powhatan Part #	Price/E
1½" 2½"	1½" 2½"	***DMR1515*** ***DMR2525***	*09-114-00432* *09-114-00505*	**$60.45** **106.75**



Aluminum Double Males with Rocker Lugs

- extruded aluminum

Male NST (NH) Thread	Male NST (NH) Thread	Part #	Price/E
1½" 2½"	1½" 2½"	***ADMR15F15F*** ***ADMR25F25F***	**$46.45** **60.25**

Male NPSH Thread	Male NPSH Thread	Part #	Price/E
1"	1"	***ADMR10S10S***	**$50.65**

- hardcoated aluminum

Male NPT Thread	Male NST (NH) Thread	Part #	Price/E
1½" 2½" 3" 6"	1½" 2½" 2½" 6"	***ADMR1515F*** ***ADMR2525F*** ***ADMR3025F*** ***ADMR6060F***	**$46.45** **60.25** **114.50** **414.35**



- Other styles and sizes are also available
- Not all configurations are stocked
- *Consult the factory for pricing and availability*

Constant Flow Thermoplastic Fog Nozzles



2½" provided with handles on CFB250NST



1" through 2"

- red polycarbonate with bumper, black plastic and steel stem
- shutoff - straight stream - fog
- 1" and 1½" are ULC listed
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)
- provides consistent volume at any spray angle
- replacement gaskets available below

Size	Thread	90° Spray GPM @ **100 PSI**	Part #	Price/E
¾"	GHT	8	***CFB75GHT***	**$30.80**
1"	SIPT (NPSH)	22	***CFB100S***	**30.15**
1½"	SIPT (NPSH)	75	***CFB150S*** [1]	**26.40**
1½"	SIPT (NPSH)	150	***HGCFB150S*** [2]	**83.75**
2"	SIPT (NPSH)	75	***CFB2015S*** [1]	**60.15**
2"	SIPT (NPSH)	150	***CFB200S*** [2]	**84.40**
1"	NST (NH)	22	***CFB100NST***	**30.15**
1½"	NST (NH)	75	***CFB150NST*** [1]	**26.40**
1½"	NST (NH)	150	***HGCFB150NST*** [2]	**83.75**
2½"	NST (NH)	150	***CFB250NST*** [3]	**171.15**
2½"	NST (NH)	215	***HGCFB250NST*** [2]	**185.05**

[1] standard flow
[2] high flow
[3] provided with handles

Blue Thermoplastic Refinery Fog Nozzles



- blue nylon with bumper and black plastic and steel stems
- glass-filled
- provides consistent volume at any spray angle
- shutoff - straight stream - fog
- resistant to petrochemicals
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)
- replacement gaskets available below

Size	Thread	GPM @ **100 PSI**	Part #	Price/E
1½"	SIPT	75	***RNB150S***	**$31.55**
1½"	NST (NH)	75	***RNB150NST***	**31.55**

Gaskets




- for use in Constant Flow and Refinery Fog Nozzles above
- *all dimensions are nominal*

Size	Thread Type	Dimensions ID	OD	Thickness	Part #	Price/E
1"	SIPT (NPSH)	.900"	1.270"	.125"	***CFG100S***	**$2.60**
1½"	SIPT (NPSH)	1.510"	1.878"	.125"	***CFG150S***	**2.65**
2"	SIPT (NPSH)	1.680"	2.340"	.156"	***CFG200S***	**2.80**
1"	NST (NH)	.900"	1.270"	.125"	***CFG100NST***	**2.60**
1½"	NST (NH)	1.510"	1.906"	.125"	***CFG150NST***	**2.65**
2½"	NST (NH)	2.250"	3.000"	.187"	***CFG250NST***	**2.95**


Thermoplastic Fog Nozzles

- red polycarbonate with brass stem
- adjusts from straight stream to fog
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)

** ¾" GHT discharge @ 100 PSI:
solid stream 20 GPM
45° spray 25.1 GPM
120° spray 30.9 GPM



¾"



1" - 1½"

Size	Thread	90° spray GPM @ **100 PSI**	Part # *with Bumper*	Price/E	Part # *without Bumper*	Price/E
¾"	GHT	**	***FNB75GHT***	**$40.80**	**---**	**---**
¾"	NPS	30.9	***FNB75S***	**40.80**	**---**	**---**
1"	NPS	11.4	***FNB100S***	**45.50**	***FN100S***	**$43.35**
1"	NPS	30.9	***HGB100S***	**50.35**	**---**	**---**
1½"	NPS	83.6	***FNB150S***	**40.25**	***FN150S***	**37.65**
1"	NST (NH)	11.4	***FNB100NST***	**45.50**	***FN100NST***	**43.35**
1"	NST (NH)	30.9	***HGB100NST***	**50.35**	**---**	**---**
1½"	NST (NH)	83.6	***FNB150NST***	**40.25**	***FN150NST***	**37.65**

Thermoplastic Fog Nozzles

- brass stem with locking nut
- adjusts from straight stream to fog
- wings on sleeve for ease of adjustment
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)
- SL series nozzles are Factory Mutual approved.



FM approved Domestic | Global

Size	Thread	90° spray GPM @ **100 PSI**	*Polycarbonate* Part # *with Bumper*	Price/E	*GE Lexan™* Part # *with Bumper*	Price/E
¾"	NPSH	30.9 [1]	***SL075***	**$44.90**	**---**	**---**
¾"	GHT	30.9 [1]	***SL075GHT***	**44.90**	**---**	**---**
1"	NPSH	30.9 [1]	***SL100***	**50.05**	***PFNB100S***	**$17.90**
1½"	NPSH	75	***SL150***	**47.25**	***PFNB150S***	**27.75**
1½"	NST (NH)	75	***SL150NST***	**47.25**	***PFNB150NST***	**27.75**

[1] 120° spray on ¾" and 1"

Thermoplastic Fog Nozzles for Electrical Fires




Size	Thread	GPM @ **100 PSI**	Part # *with Bumper*	Price/E
1½"	NPS	75	***FNBE150S***	**$41.25**
1½"	NST (NH)	75	***FNBE150NST***	**41.25**

- opens and closes in a 30° fog pattern - up to 120°
- **no straight stream**

Gaskets for Thermoplastic Nozzles

- *all dimensions are nominal*



Size	Thread Type	Dimensions ID	OD	Thickness	Part #	Price/E
1"	NPS	.937"	1.234"	.125"	***FNG100S***	**$4.25**
1"	NPS	1.000"	1.375"	.125"	***HGG100S***	**4.25**
1½"	NPS	1.500"	1.828"	.125"	***FNG150S***	**3.20**
1"	NST (NH)	.937"	1.281"	.125"	***FNG100NST***	**4.25**
1"	NST (NH)	1.000"	1.375"	.125"	***HGG100NST***	**4.25**
1½"	NST (NH)	1.500"	1.906"	.125"	***FNG150NST***	**3.20**

Brass Industrial Fog Nozzles

- shut off - straight stream - fog
- delivers 30° - 60° - 90° fog pattern
- supplied with bumper
- Underwriters Listed and Factory Mutual approved for Class A and B fires (except noted sizes)
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)



Size	Thread	90° Spray GPM @ **100 PSI**	Dixon Part #	Powhatan Part #	Price/E
¾"	GHT	---	***BFN75GHT*** [1]	*02-464-00001*	**$166.40**
¾"	NPSH	---	***BFN75***	*02-464-00005*	**166.40**
1"	NPSH	36	***BFN100***	*02-464-00013*	**194.35**
1½"	NPSH	85	***BFN150***	*02-464-00021*	**126.45**
2"	NPSH	108	***BFN200*** [1]	*02-200-00003*	**291.35**
1"	NST (NH)	36	***BFN100NST***	*02-464-00009*	**194.35**
1½"	NST (NH)	85	***BFN150NST***	*02-464-00017*	**126.45**
2½"	NST (NH)	205	***BFN250NST*** [1]	*02-464-00033*	**280.00**

[1] not Factory Mutual approved

Brass Electrical All-Fog Nozzles

Use of this nozzle is not likely to prove hazardous when nozzle is held in excess of 10 ft. from electrical apparatus and circuits not involving more than 250,000 volts.



- ***no straight stream***
- from shut off to 30° fog, adjustable thru 90° fog
- supplied with bumper
- Underwriters Listed for Class C fires
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)

Size	Thread	90° Spray GPM @ **100 PSI**	Dixon Part #	Powhatan Part #	Price/E
1½"	NST (NH)	90	***BFNE150NST***	*02-463-00001*	**$217.80**

Heavy Duty Brass Industrial Fog Nozzles

- shut off - straight stream - fog
- delivers 30° - 60° - 90° fog pattern
- supplied with bumper
- Underwriters Listed and Factory Mutual approved
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)



Size	Thread	90° Spray GPM @ **100 PSI**	Dixon Part #	Powhatan Part #	Price/E
1"	NPSH	---	***HFN100***	*02-250-00008*	**$204.10**
1½"	NPSH	88 (+/-12)	***HFN150***	*02-250-00019*	**161.40**
1"	NST (NH)	---	***HFN100NST***	*02-250-00012*	**204.10**
1½"	NST (NH)	88 (+/-12)	***HFN150NST***	*02-250-00022*	**161.40**

Higher Pressure Brass Industrial Fog Nozzles

- combination straight stream and fog
- shut off - straight stream - fog
- operating pressure from **25 PSI** to **300 PSI** *(water only)* at ambient temperature (70°F)
- large one-piece rubber bumper with molded teeth
- knurled base
- Factory Mutual approved



Size	Thread	90° Spray GPM @ **100 PSI**	Dixon Part #	Powhatan Part #	Price/E
1½"	NPSH	117	***HPFN150***	*02-425-00003*	**$186.95**
1½"	NST (NH)	117	***HPFN150NST***	*02-425-00001*	**186.95**

Brass Rack Nozzles

- shut off - straight stream - fog
- delivers 30° - 60° - 90° fog pattern
- supplied without bumper
- Underwriters Listed for Class A and B fires
- Factory Mutual approved
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)



Size	Thread	90° Spray GPM @ **100 PSI**	Part #	Price/E
1½"	NST (NH)	80	***BRN150NST***	**$125.10**

Global Brass Rack Nozzles

- supplied without bumper
- delivers 30° - 60° - 90° fog pattern shutoff - straight stream - fog
- Underwriters Listed for Class A and B fires
- Factory Mutual approved
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)



Size	Thread	90° Spray GPM @ **100 PSI**	Part #	Price/E
1½"	NST (NH)	80	***BRN151NST***	**$78.65**

Brass Plain Hose Nozzles

- brass with satin finish
- operating pressure up to **100 PSI** *(water only)* at ambient temperature (70°F)



Size	Thread	Length	Orifice	Dixon Part #	Powhatan Part #	Price/E
¾"	GHT	6"	1/4"	***BN6***	*03-107-00005*	**$30.15**
¾"	NPSH	6"	1/4"	***BN7***	*03-107-00001*	**30.15**
1"	NPSH	8"	5/16"	***BN10***	*03-107-00010*	**40.75**
1¼"	NPSH	10"	3/8"	***BN12***	*03-107-00026*	**56.60**
1½"	NPSH	10"	1/2"	***BN15***	*03-107-00049*	**55.65**
2"	NPSH	12"	9/16"	***BN20***	*03-107-00154*	**99.00**
2½"	NPSH	12"	1"	***BN25***	*03-107-00172*	**117.00**
1"	NST (NH)	8"	5/16"	***BN10F***	*03-107-00015*	**40.75**
1½"	NST (NH)	10"	1/2"	***BN15F***	*03-107-00053*	**55.65**
2½"	NST (NH)	12"	1"	***BN25F***	*03-107-00169*	**117.00**

U.S. Coast Guard Approved AFFF/Water Fog Nozzles

Nozzles designed for maximum efficiency with AFFF (Aqueous Film Forming Foams) or water on shipboard, offshore rigs and industrial applications.



CGSN150F



CGSN151F

- corrosion resistant brass construction
- Zytel® (nylon) horseshoe handle
- flush without shutting down
- constant gallonage in all fog and straight stream pattern
- rubber-like bumper and handle for added protection
- double row of molded teeth for excellent fog pattern
- combination fog and straight stream
- operating pressure up to **100 PSI** *(water* and *AFFF only)* at ambient temperature (70°F)

Size	Thread	Description	Fog Flow @ **100 PSI**	Orifice	Length	Weight	Approval #	Part #	Price/E
1½"	NST(NH)	nozzle	95 GPM	5/8"	10¼"	9 lbs.	162.027/13/0	***CGSN150F***	**$1628.00**
1½"	NST(NH)	nozzle w/pistol grip	95 GPM	15/16"	11½"	14.5 lbs.	162.027/11/0	***CGSN151F***	**1769.60**

U.S. Coast Guard Approved Fog Nozzles



- designed to U.S. Coast Guard specification for fighting fires with drafted water
- required equipment for all commercial vessels under U.S. registry
- corrosion resistant brass construction
- combination fog and straight stream for shipboard fire fighting
- operating pressure up to **100 PSI** *(water only)* at ambient temperature (70°F)


Size	Thread	Fog Flow **@100 PSI**	Approval #	Part #	Price/E
1½"	NST(NH)	55 GPM	162.027/9/0	***CGN150NST***	**$1572.20**
2½"	NST(NH)	108 GPM	162.027/10/0	***CGN250NST***	**1973.10**

Applicators are available on special order. *Consult the factory for pricing and availability.*

Size	Description	Part #	Price/E
1½"	replacement tip	***CGN150-TIP***	**$347.80**
2½"	replacement tip	***CGN250-TIP***	**410.00**

U/L Play Pipe with Tip


A component often required in hydrant houses by Insurance Underwriters.

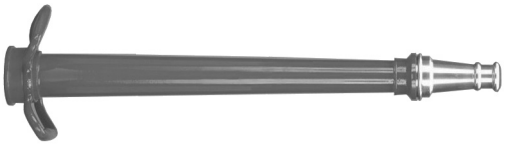

- swivel handle, red marlin trim
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)
- Underwriters Listed and Factory Mutual approved
- ULT male thread specification: 2-3/16" ODM x 12 TPI

Size	Female Inlet	Male Outlet	Orifice	Part #	Price/E
2½"	NST (NH)	ULT	1-1/8"	***UPP250F***	**$718.35**

Tip for U/L Play Pipe



- finish: satin
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)
- ULT male thread specification: 2-3/16" ODM x 12 TPI

Thread	Orifice	*Cast Brass* Part #	Price/E
ULT	1-1/8"	***UPPT***	**$78.25**
NEW ULT	1-1/4"	***UPPT125***	**78.25**
NEW ULT	1-1/2"	***UPPT150***	**78.25**
NEW ULT	1-3/4"	***UPPT175***	**78.25**

Aluminum Ball Shut-Off Nozzle - Bolted Style



- lightweight cast aluminum body with pistol grip
- hardcoated female swivel inlet and male outlet
- maximum operating pressure to **200 PSI** *(water only)* at ambient temperature (70°F)

Inlet Thread	Outlet Thread	Waterway	Part #	Price/E
1½" female NST (NH)	1½" male NST (NH)	1-3/8"	***ACPSO150F***	**$513.20**

Aluminum Tips for Ball Shut-Off Nozzles

- lightweight anodized aluminum construction
- for use up to **200 PSI** *(water only)* at ambient temperature (70°F)



Size	Thread	Orifice [1]	Length	Tip Part #	Price/E
1"	NST (NH)	½"	4"	***ANT100F***	**$182.30**
1½"	NST (NH)	½"	4¾"	***ANT150F***	**188.20**

[1] other orifice sizes available

Ball Shut-Off Nozzles




- Full time swivel base ensures the durable rubber-like handle is positioned for easy operation.
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)

Base Thread	Tip Thread	Waterway	Length	Part #	Price/E
1½" NST (NH)	1½" NST (NH)	1-3/8"	4¾"	***BSO150NST***	**$1018.20**
Zytel® replacement handle				***BSO150-H***	**64.30**

Brass Nozzle Tips

- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)



Size	Thread	GPM @ **100 PSI**	Orifice	Length	Tip Part #	Powhatan Part #	Price/E
1"	NST (NH)	74	½"	4-3/4"	***BNT100F***	*01-128-00036*	**$135.50**
1½"	NST (NH)	74	½"	4-3/8"	***BNT150F***	*01-128-00094*	**163.20**

FM Omega™ Monitor



- brass construction
- cast-in turning vanes for a more efficient flow
- 360° horizontal and 150° vertical travel
- full 3" waterway
- friction loss: 10 PSI at 800 GPM (.7 bar at 3030 LPM)
- other configurations available
- Factory Mutual approved
- 4 bolt hole pattern on flange

Size	Inlet Configuration	Outlet	Waterway	Flow	Weight	Part #	Price/E
17" x 11½"	3" flange	2½" male NST	3"	1250 GPM	72 lbs.	***AK3526-300FL***	**$4964.55**

FM Monitor Nozzle

Aquastream™ Master Stream, a fixed gallonage master stream designed for heavy-duty use on fixed monitors. Factory set at 500 GPM (1900 LPM) - can be changed in the field to 300 or 700 GPM (1140 or 2660 LPM). Operating pressure: **100 PSI** *(water only)* at ambient temperature (70°F)



- brass construction
- fixed teeth
- swivel nut
- Factory Mutual approved

Size	Thread	Length	Weight	Part #	Price/E
2½"	NST	7"	14.5 lbs.	***AK4450NST***	**$1474.20**

FM Steel FirePro™ Monitor



- seamless 2½" monitor - rated at 750 GPM
- carbon steel construction
- stainless steel discharge tip and ball bearings
- 360° horizontal and 140° vertical travel
- red epoxy finish standard
- 150# ASA raised face 4" flange
- Factory Mutual approved

Size	Inlet Configuration	Outlet	Waterway	Flow	Weight	Part #	Price/E
22" x 13"	4" flange	2½" male NST	2½"	750 GPM	50 lbs.	***FP475S***	**$3021.80**

2010 NEW

FM Master Stream Nozzle



- factory set at 500 GPM
- featuring a straight stream to fog 'quick throw' pattern change
- constant gallonage
- FM approved

Size	Thread	Material	Weight	Part #	Price/E
2½"	NST	brass	19 lbs.	***FP500B***	**$1649.45**
2½"	NST	aluminum	--	***FP500A***	**1354.18**

Storz Fittings

- machined from forged 6061 - T6 aluminum
- hardcoat anodized components per MIL-A-8625 Type III Class 1
- Buna-N gaskets
- working pressure: **150 PSI** at ambient temperature (70°F)
- stainless steel lock lever assembly on 4", 5" and 6"

Storz x Female Swivel

Storz x Female Swivel	Part #	Price/E
4" x 2½" NST	***SZSF4025F***	**$370.20**
4" x 4" NST	***SZSF4040F***	**486.40**
4" x 4½" NST	***SZSF4045F***	**500.50**
5" x 2½" NST	***SZSF5025F***	**416.75**
5" x 4" NST	***SZSF5040F***	**506.80**
5" x 4½" NST	***SZSF5045F***	**482.90**



Storz x Rigid Male

Storz x Rigid Male	Part #	Price/E
2½" x 2½" NST	***SZM2525F***	**$186.40**
4" x 2½" NST	***SZM4025F***	**303.00**
5" x 2½" NST	***SZM5025F***	**381.10**
5" x 4½" NST	***SZM5045F***	**427.30**
1½" x 1" NPT	***SZM1510T***	**205.25**
2" x 1½" NPT	***SZM2015T***	**171.90**
4" x 3" NPT	***SZM4030T***	**356.60**
5" x 4" NPT	***SZM5040T***	**420.90**
6" x 6" NPT	***SZM6060T***	**597.05**



Storz x Rigid Female

Storz x Rigid Female	Part #	Price/E
4" x 2½" NST	***SZF4025F***	**$300.00**
5" x 2½" NST	***SZF5025F***	**422.00**
5" x 4½" NST	***SZF5045F***	**464.25**
1½" x 1" NPT	***SZF1510T***	**148.40**
2" x 1½" NPT	***SZF2015T***	**175.70**
3" x 2" NPT	***SZF3020T***	**212.95**
4" x 3" NPT	***SZF4030T***	**395.90**
4" x 4" NPT	***SZF4040T***	**376.75**
5" x 4" NPT	***SZF5040T***	**453.35**
5" x 5" NPT	***SZF5050T***	**477.25**
5" x 6" NPT	***SZF5060T***	**518.30**
6" x 6" NPT	***SZF6060T***	**692.50**



Storz Cap with Cable

Storz Cap	Part #	Price/E
1½"	***SZC150***	**$106.40**
2"	***SZC200***	**136.15**
3"	***SZC300***	**151.15**
4"	***SZC400***	**183.75**
5"	***SZC500***	**257.25**
6"	***SZC600***	**416.25**



Storz Gaskets

- Buna-N
- gasket faces should be kept free of sand, grit, etc. and lubricated with O-ring grease or silicone

SAFETY ALERT

The pressure seals have a flat face  ; while the suction seals have a beaded face 

Storz Size	Application	Part #	Price/E
4"	pressure	***SZG400P***	**$23.10**
4"	suction	***SZG400S***	**45.00**
5"	pressure	***SZG500P***	**28.75**
5"	suction	***SZG500S***	**50.85**
6"	pressure / suction	***SZG600P***	**106.20**

Forestry Fire Hose - Non Weeping

Outer construction:
single jacket, all polyester
Tube construction:
thermoplastic
Impregnation:
yellow

Consult the factory for pricing and availability for any of the following features:
- 25' lengths
- other threads and configurations



Proof pressure: **600 PSI** [1]
Service test pressure: **300 PSI** [1]
Working pressure: **270 PSI** [1]
[1] at ambient temperature (70°F)

***Coupled* with female and male expansion ring couplings**

Size	Length	Part #	Rocker Lug Aluminum *NST (NH)* **RAF**	Rocker Lug Aluminum *NPSH* **RAS**
1"	50'	***NF610Y50***	**---**	**$333.50**
1"	100'	***NF610Y100***	**---**	**594.20**
1½"	50'	***NF615Y50***	**$382.80**	**382.80**
1½"	100'	***NF615Y100***	**688.10**	**688.10**

Forestry Mop Up Hose

Forest fire applications include mop-up, low volume hand lines, filling pump cans, supplying sprinklers and remote fire line protection. 50' coil diameter is 9".

Outer construction:
single jacket, synthetic
Tube construction:
thermoplastic
Impregnation:
yellow

Consult the factory for pricing and availability for any of the following features:
- other threads and configurations



Proof pressure: **300 PSI** [1]
Service test pressure: **150 PSI** [1]
Working pressure: **135 PSI** [1]
[1] at ambient temperature (70°F)

***Coupled* with female and male brass ferrule type garden hose couplings**

Size	Length	Part #	Price/E
¾"	50'	***NF307Y50GHT***	**$145.50**

M
Fire

¼ Turn Forestry Adapters

- forged aluminum
- maximum working pressure **300 PSI** at ambient temperature (70°F)
- adapters have a common quarter turn sexless head (a 1½" QT fitting will mate with a ¾" QT or 1" QT)
- replacement gaskets QTG-F



male



female

Thread	*Male* Part #	Price/E	*Female* Part #	Price/E
¾" GHT	***QTM75GHT-F***	**$46.55**	***QTF75GHT-F***	**$54.55**
1" NPS	***QTM100S-F***	**45.35**	***QTF100S-F***	**56.00**
1" NPT	***QTM100T-F***	**45.35**	***QTF100T-F***	**56.00**
1½" NST (NH)	***QTM150F-F***	**43.15**	***QTF150F-F***	**55.30**
1½" NPT	***QTM150T-F***	**43.15**	***QTF150T-F***	**55.30**

Thermoplastic Ball Shut-Off Nozzles



- lightweight
- glass reinforced plastic
- black pistol grip handle
- for use up to **150 PSI** *(water or AFFF only)* at ambient temperature (70°F)

Size	Thread	Part #	Price/E
1½"	SIPT	***PPSO150S***	**$305.00**
1½"	NST (NH)	***PPSO150F***	**305.00**

Thermoplastic Ball Shut-Off Nozzles



- lightweight
- glass reinforced plastic
- black pistol grip handle
- yellow nozzle tip can be detached to allow for installation of foam inductor
- for use up to **150 PSI** *(water or AFFF only)* at ambient temperature (70°F)

Size	Thread	GPM	Part #	Price/E
1½"	SIPT	30	***FNPSO150S-30***	**$403.10**
1½"	NST (NH)	30	***FNPSO150F-30***	**403.10**
1½"	SIPT	70	***FNPSO150S-70***	**403.10**
1½"	NST (NH)	70	***FNPSO150F-70***	**403.10**

Thermoplastic Plain Hose Nozzles



- thermoplastic
- red finish
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)

Size	Thread	Length	Orifice	Part #	Price/E
1½"	NPS	10"	½"	***PN15***	**$17.70**
1½"	NST (NH)	10"	½"	***PN15F***	**17.70**

Thermoplastic Penetrator Nozzle

The black and yellow penetrator nozzle is designed with standard 1½" NPSH male hose threads that are converted to female thread for connection to the hose using a double female rigid connector. It is specifically designed with a ¼" discharge orifice, which generates a high velocity water jet that is effective against deep seated wildland fires.



- for use up to **200 PSI** *(water only)* at ambient temperature (70°F)

Size	Thread	Length	Orifice	Part #	Price/E
1½"	NH (NST)	5½"	¼"	***PFN4005F***	**$38.80**

Twin Tip Straight Stream Forestry Nozzles



- molded high strength red polycarbonate
- The solid, one-piece reversible twin tips have 1/4" and 3/8" orifices.
- for use up to **100 PSI** *(water only)* at ambient temperature (70°F)

Size	Thread	Length with tip	Length without tip	Orifice of base nozzle	Part #	Price/E
1½"	NPSH	9"	7½"	½"	***PTTF150S***	**$27.15**
1½"	NH (NST)	9"	7½"	½"	***PTTF150F***	**27.15**

Ball Shut-Off Nozzles - Forestry Grade



- cast aluminum, anodized body, hardcoated threads, and acetal ball
- 1" - 1½" working pressure up to **600 PSI** at ambient temperature (70°F)

Size	Thread	Waterway	Part #	Price/E
1"	NPSH	¾"	***FBSO100S***	**$275.80**
1½"	NPSH	1"	***FBSO150S***	**281.25**
1"	NST (NH)	¾"	***FBSO100F***	**275.80**
1½"	NST (NH)	1"	***FBSO150F***	**281.25**

Ball Shut-Off Nozzles - Forestry Grade, Pistol Grip



- cast aluminum, anodized body, hardcoated threads, and acetal ball
- 1" - 1½" working pressure up to **600 PSI** at ambient temperature (70°F)

Size	Thread	Waterway	Part #	Price/E
1"	NPSH	¾"	***FBSO100S-PG***	**$409.70**
1½"	NPSH	1"	***FBSO150S-PG***	**414.95**
1"	NST (NH)	¾"	***FBSO100F-PG***	**409.70**
1½"	NST (NH)	1"	***FBSO150F-PG***	**414.95**

Aluminum Tips for Ball Shut-Off Nozzles



NPSH



NST

- lightweight anodized aluminum construction
- for use up to **200 PSI** *(water only)* at ambient temperature (70°F)

Size	Thread	Orifice [1]	Length	Tip Part #	Price/E
1"	NPSH	½"	4"	***ANT100***	**$182.30**
1½"	NPSH	½"	4¾"	***ANT150***	**188.20**
1"	NST (NH)	½"	4"	***ANT100F***	**182.30**
1½"	NST (NH)	½"	4¾"	***ANT150F***	**188.20**

[1] other orifice sizes available

Aluminum Fog Nozzles

- color: black
- constructed of anodized aluminum
- without bumper
- weight: 12 oz.
- adjustable fog or straight stream
- FSS certified



Size	Thread	60° Spray GPM @ **100 PSI** at 70°F	Part #	Price/E
1½"	NPS	52	***AFN150***	**$299.40**
1½"	NST (NH)	52	***AFN150NST***	**299.40**

Forestry Fog Nozzles

- 6061-T6 aluminum, corrosion resistant plated
- maroon hardcoated barrel allows for easy identification
- offers two straight stream and two fog patterns
- combination fog and straight stream
- dual flow rate nozzles
- operating pressure up to **600 PSI** *(water only)*



FFN75GHT



FFN100



FFN150NST

Size	Thread	Dual Flow Rates: 1st Straight Stream GPM @ **100 PSI** at 70°F	Dual Flow Rates: 2nd Straight Stream GPM @ **100 PSI** at 70°F	NSN	Forestry Service Specification	Part #	Price/E
¾"	GHT	1-2 *	3-4 *	---	---	***FFN75GHT***	**$171.00**
1"	NPSH	12	25	4210-01-165-6603	5100-239A	***FFN100***	**170.00**
1½"	NPSH	25	70	---	5100-107A	***FFN150***	**269.60**
1"	NST (NH)	12	25	---	5100-239A	***FFN100NST***	**170.00**
1½"	NST (NH)	25	70	4210-01-167-1123	5100-107A	***FFN150NST***	**269.60**

* GPM rating @ **40 PSI** at 70°F

Aluminum ¼ Turn Ball Type Wye Valves - Forestry Grade


- cast aluminum, anodized body, hard-coated threads
- swivel inlet
- water/AFFF
- built to United States Forest Service specifications




Female x Male	**PSI** at 70°F	Part #	Price/E
1" NPSH x 1" NPSH	**600**	***FWV10S10S***	**$462.50**
1½" NST (NH) x 1" NPSH	**600**	***FWV15F10S***	**561.60**
1½" NST (NH) x 1½" NST (NH)	**600**	***FWV15F15F***	**528.60**
2½" NST (NH) x 1½" NST (NH)	**400**	***FWV25F15F***	**589.00**
2½" NST (NH) x 2½" NST (NH)	**400**	***FWV25F25F***	**1298.75**

Dry Hydrants

Typical Dry Hydrant Installations

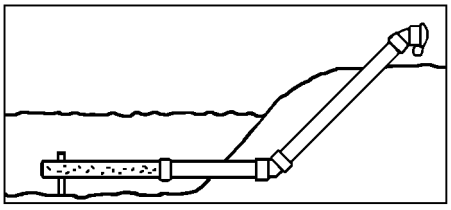

45°
(preferred)

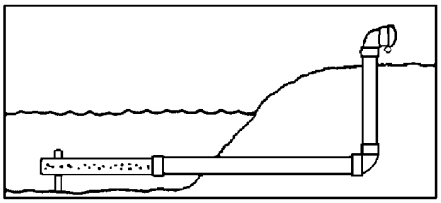


90°

Underwater Strainer Support



Description	Part #	Price/E
underwater strainer support	***DHSSC6***	**$68.55**

Back Flushing Strainers

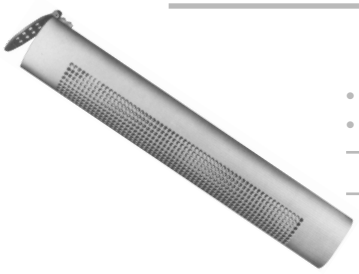

- material: Schedule 40 PVC pipe
- length: 37"

Size	Part #	Price/E
6"	***DHS6BF***	**$397.85**
8"	***DHS8BF*** *	**960.10**

* includes 8" x 6" reducer

Male Adapters and Caps



Adapters and caps sold separately

Male NST (NH)	90° Male Adapters *Hardcoated* Part #	90° Male Adapters *Hardcoated* Price/E	45° Male Adapters *Hardcoated* Part #	45° Male Adapters *Hardcoated* Price/E
4½"	***ADH90M45F***	**$437.40**	***ADH45M45F***	**$437.40**
6"	***ADH90M60F***	**460.55**	***ADH45M60F***	**460.55**

Rocker Lug Caps with Cable

Female NST (NH)	*Hardcoated* Part #	*Hardcoated* Price/E
4½"	***ADHC450F***	**$127.45**
6"	***ADHC600F***	**135.20**

Female Adapters and Plugs



Adapters and plugs sold separately

Female NST (NH)	90° Female Adapters *Hardcoated* Part #	90° Female Adapters *Hardcoated* Price/E	45° Female Adapters *Hardcoated* Part #	45° Female Adapters *Hardcoated* Price/E
4½"	***ADH90F45F***	**$537.80**	***ADH45F45F***	**$537.80**
6"	***ADH90F60F***	**576.80**	***ADH45F60F***	**576.80**

Rocker Lug Plugs with Cable

Male NST (NH)	*Hardcoated* Part #	*Hardcoated* Price/E
4½"	***ADHP450F***	**$222.80**
6"	***ADHP600F***	**315.50**

Fire Extinguisher Cabinets

2010 NEW

Surface Mount Fire Extinguisher Cabinets

- 8-1/8" w x 18¼" h x 6¼" d
- Break Rite® handle
- power coat white finish
- for use with 2½ lb. to 5 lb. dry chemical extinguishers

Description	*Galvanized Steel* Part #	Price/E
cabinet	***FEC9751***	**$79.55**
padlock	***FEC9751-PL***	**15.95**
replacement glass	***FEC9751-RG***	**11.95**
Break Rite® handle	***FEC9751-BRH***	**17.23**



- 9" w x 24" h x 6" d
- Break Rite® handle
- power coat white finish
- for use with 10 lb. dry chemical extinguishers

Description	*Galvanized Steel* Part #	Price/E
cabinet	***FEC9752***	**$95.45**
padlock	***FEC9752-PL***	**15.95**
replacement glass	***FEC9752-RG***	**21.25**
Break Rite® handle	***FEC9752-BRH***	**17.25**

- 9" w x 24" h x 6" d
- security lock
- Break Rite® handle
- tempered safety glass
- for use with 5 lb. to 10 lb. dry chemical extinguishers

Description	*Steel* Part #	Price/E
cabinet	***FEC7024B***	**$196.25**
security lock	***FEC7024B-PL***	**21.25**
replacement glass	***FEC7024B-RG***	**15.95**
Break Rite® handle	***FEC7024B-BRH***	**15.95**



Semi-Recessed Mount Fire Extinguisher Cabinets

- 9" w x 24" h x 5¾" d
- security lock
- Break Rite® handle
- tempered safety glass
- for use with 2½ lb. to 5 lb. dry chemical extinguishers

Description	*Steel* Part #	Price/E
cabinet	***FEC7012B***	**$196.25**
security lock	***FEC7012B-PL***	**21.25**
replacement glass	***FEC7012B-RG***	**15.95**
Break Rite® handle	***FEC7012B-BRH***	**15.95**



- 9" w x 24" h x 5" d
- security lock
- Break Rite® handle
- tempered safety glass
- for use with 5 lb. to 10 lb. dry chemical extinguishers


Description	*Steel* Part #	Price/E
cabinet	***FEC7022B***	**$180.30**
security lock	***FEC7022B-PL***	**21.25**
replacement glass	***FEC7022B-RG***	**15.95**
Break Rite® handle	***FEC7022B-BRH***	**15.95**

M Fire

Drum Plug Wrenches



DPW




ADPW

- sparkproof, natural finish is safe around flammables
- offset handle design reduces user stress and minimizes knuckle injury

Bronze		NEW *Aluminum*	
Part #	Price/E	Part #	Price/E
DPW	**$99.50**	***ADPW***	**$38.25**

Drum Faucets

Polyethylene Faucets



- Faucets are not to be used in applications where temperatures exceed **140°F (60°C)**.
- no wrench needed for screwing into drum opening
- 2" faucet is shipped with a gasket; the ¾" does not require a gasket

NPT Size	*Gold Polyethylene*	
	Part #	Price/E
¾"	***PEDF75***	**$6.30**
2"	***PEDF200***	**56.75**

Heavy Duty Stainless Adjustable Faucet

2010 NEW




- ¾" NPT connection
- adjustable shank is designed to easily adjust to proper drain position after installing in drum
- Teflon® gasket

Stainless Steel	
Part #	Price/E
HDSSF75	**$500.00**

Heavy Duty Brass Adjustable Faucet

2010 NEW




- ¾" NPT connection
- easy to use, self-closing design

Brass	
Part #	Price/E
AHDBF75	**$195.00**

Heavy Duty Brass Faucet with Rigid Shank

2010 NEW



- ¾" NPT connection
- easy to use, self-closing design
- Teflon® gasket

Brass	
Part #	Price/E
HDBF75	**$155.00**

Compression Bibb Faucets



- rough brass finish
- nozzle end is GHT
- *for water use only*

Size	*Brass*	
	Part #	Price/E
½"	***35-201-10***	**$24.65**
¾"	***35-202-10***	**24.65**

Drum Thread Adapter

- for use in gravity discharge from drums
- The male NPSH thread with gasket on the drum side allows for a connection to drums with female NPSH thread. Male NPSH thread seals on the gasket.
- The male NPT end allows for a connection with the female NPT found on most ball valves.



Size	*Cast Brass*	
	Part #	Price/E
2" x 2"	***DMH20DR20***	**$48.60**


Drum Gate Valves

- manually operated
- ideal for drawing non-flammable liquids from drums and tanks
- iron body
- Machined and lapped brass faceplate designed for oval discharge to ensure no splashing and smooth operation.
- black Japanned finish
- male NPT
- can be padlocked



NPT Size	*Iron*	
	Part #	Price/E
¾"	***D71***	**$75.75**
2"	***D75***	**101.00**

- Lightweight, durable aluminum body provides improved corrosion resistance for certain fluids.
- Sturdy 2" handle is stamped metal with black enamel finish.
- male NPT
- can be padlocked

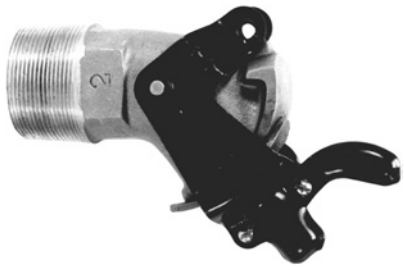

NPT Size	*Aluminum*	
	Part #	Price/E
2"	***D75AL***	**$145.50**

Self-Closing Gate Valves

- Features a gray iron body, brass sliding gate and machine lapped sealing surface.
- Gate closes automatically when handle is released, cleaning discharge surface.
- Ideal for dispensing viscous liquids such as oil, grease paint, varnish and syrups from drums and tanks.
- male NPT
- can be padlocked



NPT Size	*Iron*	
	Part #	Price/E
¾"	***D71SC***	**$118.25**
2"	***D75SC***	**300.00**

Gate Valves



- adjustable packing nut
- non-rising stem
- solid wedge disc
- iron handwheel
- 100% factory tested
- rated **200 PSI** non-shock cold water, oil or gas
- female NPT threaded ends
- threaded bonnet
- integral seat

NPT Size	*Brass*		*316 Stainless Steel*	
	Part #	Price/E	Part #	Price/E
1/4"	***BGV25***	**$19.60**	**---**	**---**
3/8"	***BGV38***	**19.60**	**---**	**---**
1/2"	***BGV50***	**19.30**	***SSGV50***	**$87.10**
3/4"	***BGV75***	**26.60**	***SSGV75***	**107.00**
1"	***BGV100***	**39.75**	***SSGV100***	**130.05**
1-1/4"	***BGV125***	**56.00**	***SSGV125***	**166.70**
1-1/2"	***BGV150***	**71.20**	***SSGV150***	**218.10**
2"	***BGV200***	**106.00**	***SSGV200***	**270.00**
2-1/2"	***BGV250***	**202.00**	**---**	**---**
3"	***BGV300***	**270.00**	**---**	**---**
4"	***BGV400***	**430.00**	**---**	**---**

2010 NEW



- Class 800
- ASTM A105, ANSI B120.1
- bolted bonnet
- female threaded ends
- rated to **1975 PSI**
- temperature: **800°F**
- can be used for steam service

NPT Size	*Forged Steel*	
	Part #	Price/E
1/2"	***FSGV50***	**$97.00**
3/4"	***FSGV75***	**103.00**
1"	***FSGV100***	**142.00**
1-1/4"	***FSGV125***	**325.00**
1-1/2"	***FSGV150***	**270.00**
2"	***FSGV200***	**350.00**

Globe Valves

2010 NEW



- Class 800
- ASTM A105, ANSI B120.1
- bolted bonnet
- female threaded ends
- rated to **1975 PSI**
- temperature: **800°F**
- can be used for steam service

NPT Size	*Forged Steel*	
	Part #	Price/E
1/2"	***FSGLBV50***	**$135.00**
3/4"	***FSGLBV75***	**148.00**
1"	***FSGLBV100***	**197.00**
1-1/4"	***FSGLBV125***	**350.00**
1-1/2"	***FSGLBV150***	**360.00**
2"	***FSGLBV200***	**450.00**

Check Valves

2010 NEW



- Class 800
- ASTM A105, ANSI B120.1
- bolted bonnet
- female threaded ends
- rated to **1975 PSI**
- temperature: **800°F**
- can be used for steam service

NPT Size	*Forged Steel*	
	Part #	Price/E
1/2"	***FSCV50***	**$110.00**
3/4"	***FSCV75***	**124.00**
1"	***FSCV100***	**173.00**
1-1/4"	***FSCV125***	**300.00**
1-1/2"	***FSCV150***	**325.00**
2"	***FSCV200***	**375.00**

Full Flow Ball Valves

- high flow rate; low pressure drop
- wetted parts are aluminum and stainless steel
- seals are FPM (Viton® and PTFE Teflon®)
- spindle can be disassembled even when ball valve is installed
- working pressure: **150 PSI** at ambient temperature (70°F)
- available in 2", 3" and 4" in standard flow and two-way flow
- standard valve ports - female NPT, socket weld for Schedule 40 pipe, grooved and 150# flange
- optional ports include DN flange and butt weld

One-Way Ball Valves / Female NPT ends

- two ports - one inlet and one outlet

Size	*Aluminum* Part #	Price/E
2"	***1WAYBV200***	**$804.25**
3"	***1WAYBV300***	**1069.60**
4"	***1WAYBV400***	**1553.70**



One-Way Ball Valves / Socket Weld Ends to Schedule 40 Pipe

2010 NEW

Size	Bore	*Aluminum* Part #	Price/E
2"	2.390"	***1WAYBV200SW***	**$804.25**
3"	3.530"	***1WAYBV300SW***	**1069.60**



One-Way Ball Valves / Grooved Ends

2010 NEW

Size	*Aluminum* Part #	Price/E
2"	***1WAYBV200VIC***	**$984.20**
3"	***1WAYBV300VIC***	**1308.95**



Full Flow Ball Valves

- high flow rate; low pressure drop
- wetted parts are aluminum and stainless steel
- seals are FPM (Viton® and PTFE Teflon®)
- spindle can be disassembled even when ball valve is installed
- working pressure: **150 PSI** at ambient temperature (70°F)
- available in 2", 3" and 4" in standard flow and two-way flow
- standard valve ports - female NPT, socket weld for Schedule 40 pipe, grooved and 150# flange
- optional ports include DN flange and butt weld

Two-Way Ball Valves / Female NPT ends



- three ports - one inlet and two outlets, valve directs the flow from the inlet to either of the two outlets
- commonly used for switching compartments or tanks

Size	*Aluminum* Part #	Price/E
2"	***2WAYBV200***	**$1120.00**
3"	***2WAYBV300***	**1442.70**
4"	***2WAYBV400***	**3131.50**

2010 NEW Two-Way Ball Valves / Socket Weld Ends to Schedule 40 Pipe



Size	Bore	*Aluminum* Part #	Price/E
2"	2.390"	***2WAYBV200SW***	**$1120.00**
3"	3.530"	***2WAYBV300SW***	**1442.70**

2010 NEW Two-Way Ball Valves / Grooved Ends




Size	*Aluminum* Part #	Price/E
2"	***2WAYBV200VIC3***	**$1390.00**
3"	***2WAYBV300VIC3***	**1801.70**

N
Valves

Solder End Brass Ball Valves

- This valve is designed for the best protection against potential gas leakage under extreme duty, or low pressure applications.
- rated to **600 PSI** WOG - **150 PSI** WSP
- maximum temperature **366°F**
- Underwriters approved
- brass body
- blow-out proof stem
- chrome-plated brass ball
- PTFE seats, seals, and thrust washer
- adjustable stem packing nut

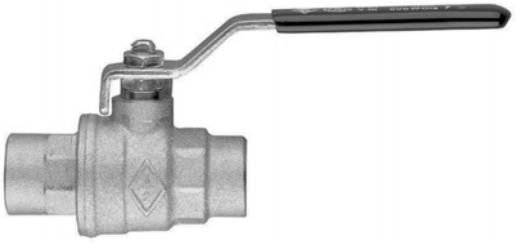

female NPT x female NPT


Size	Port Type	*Brass* Part #	Price/E
½"	full	***FBV50SE***	**$24.25**
¾"	full	***FBV75SE***	**33.05**
1"	full	***FBV100SE***	**48.75**
1¼"	full	***FBV125SE***	**87.90**
1½"	full	***FBV150SE***	**128.85**
2"	full	***FBV200SE***	**180.40**

Domestic Brass Ball Valves

- For control of air, water, oil and gas in hose or pipe lines. For other services, please contact the factory.
- rated to **600 PSI** WOG; **150 PSI** saturated steam
- brass valve bodies, balls and stems
- blow-out proof stems
- Glass-filled reinforced Teflon® seats and stuffing box ring; stem seals and washers.
- plated steel handles and nuts with vinyl sleeves, both styles repairable
- meets WW-V 35C, Type II Composition
- ball valve handle replacements available, consult factory for pricing.

female NPT x female NPT

Size	Port Type	*Brass* Part #	Price/E
1/4"	full	***BBV25***	**$27.00**
3/8"	full	***BBV38***	**27.00**
1/2"	full	***BBV50***	**27.00**
3/4"	standard	***BBV75***	**44.50**
1"	standard	***BBV100***	**56.10**
1-1/4"	standard	***BBV125***	**94.10**
1-1/2"	standard	***BBV150***	**120.25**
2"	standard	***BBV200***	**150.70**

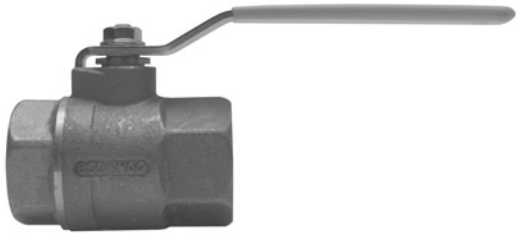


Locking Handle Brass Ball Valves

- For control of air, water, oil and gas in hose or pipe lines. For other services, please contact the factory.
- rated to **600 PSI** WOG; **150 PSI** steam
- blow-out proof RPTFE stem
- chrome-plated brass ball
- Stainless steel sliding lock mechanism secures handle in open or closed position; can be padlocked opened or closed.

female NPT x female NPT

Size	Port Type	*Brass* Part #	Price/E
1/4"	full	***BBLV25***	**$35.50**
3/8"	full	***BBLV38***	**35.50**
1/2"	full	***BBLV50***	**35.50**
3/4"	standard	***BBLV75***	**52.90**
1"	standard	***BBLV100***	**64.00**
1-1/4"	standard	***BBLV125***	**102.40**
1-1/2"	standard	***BBLV150***	**128.50**
2"	standard	***BBLV200***	**158.75**

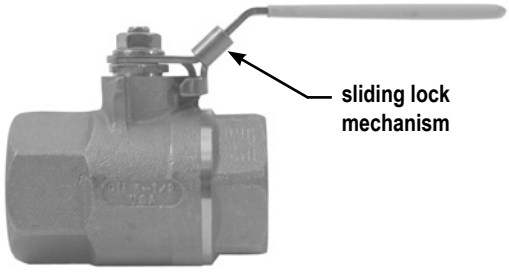

Global Brass Ball Valves

- For control of air, water, oil and gas in hose or pipe lines.
- rated to **600 PSI** WOG
- body: forged brass, UNS#C37700
- adjustable stem packing nut
- Silicone free
- maximum temperature **300°F** (150°C)
- Underwriters approved
- CSA approved (Canadian Standards Association)


female NPT x female NPT

Size	Port Type	*Brass* Part #	Price/E
½"	full	***FBVG50***	**$16.50**
¾"	full	***FBVG75***	**26.25**
1"	full	***FBVG100***	**39.50**
1¼"	full	***FBVG125***	**62.00**
1½"	full	***FBVG150***	**87.00**
2"	full	***FBVG200***	**120.00**



Imported Brass Ball Valves

- For control of air, water, oil and gas in hose or pipe lines. For other services, please contact the factory.
- rated to **600 PSI** WOG; **150 PSI** WSP
- forged brass bodies
- blow-out proof stems
- PTFE seats, seals and thrust washers
- chrome-plated brass balls and plated steel handles
- maximum temperature **366°F**
- Underwriters, Factory Mutual, American Gas Association and Canadian Gas Association approved
- NSF61 approved

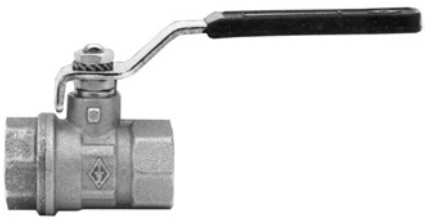

female NPT x female NPT

Size	Port Type	Brass Part #	Price/E
¼"	full	***FBV25***	**$18.65**
3/8"	full	***FBV38***	**18.65**
½"	full	***FBV50***	**22.85**
¾"	full	***FBV75***	**32.55**
1"	full	***FBV100***	**48.40**
1¼"	full	***FBV125***	**84.75**
1½"	full	***FBV150***	**124.60**
2"	full	***FBV200***	**176.65**

female NPT x female NPT

Size	Port Type	Brass Part #	Price/E
2½"	full	***FBV250***	**$390.00**
3"	full	***FBV300***	**557.30**
4"	full	***FBV400***	**921.00**

female NPT x female NPT

Size	Port Type	Brass Part #	Price/E
½"	standard	***BV50***	**$17.65**
¾"	standard	***BV75***	**21.40**
1"	standard	***BV100***	**29.60**
1¼"	standard	***BV125***	**46.00**
1½"	standard	***BV150***	**61.50**
2"	standard	***BV200***	**91.10**

- For control of air, water, oil and gas in hose or pipe lines. For other services, please contact the factory.
- rated to **600 PSI** WOG; **150 PSI** WSP
- forged brass bodies
- blow-out proof stems
- PTFE seats, seals and thrust washers
- chrome-plated brass balls and plated steel handles
- maximum temperature **366°F**

female NPT x female NPT

Size	Port Type	Brass Part #	Price/E
½"	full	***FBVI50***	**$17.25**
¾"	full	***FBVI75***	**23.70**
1"	full	***FBVI100***	**33.50**
1¼"	full	***FBVI125***	**58.00**
1½"	full	***FBVI150***	**82.60**
2"	full	***FBVI200***	**129.25**

- For control of air, water, oil and gas in hose or pipe lines. For other services, please contact the factory.
- rated to **600 PSI** WOG; **150 PSI** WSP
- blow-out proof stems
- PTFE seats, double O-ring stem packing
- chrome-plated brass ball
- maximum temperature **366°F**
- Underwriters approved

Mini Ball Valves



- rated to **150 PSI**
- nickel plated brass body
- Teflon® seats and Buna-N stem seal
- blow-out proof stem
- maximum temperature **150°F**

female NPT x female NPT


Size	Port Type	Brass Part #	Price/E
1/8"	standard	***MBV12***	**$13.75**
1/4"	full	***MBV25***	**13.75**
3/8"	full	***MBV38***	**12.80**
1/2"	standard	***MBV50***	**18.80**

Safety Vented Ball Valves

- rated to **600 PSI**
- for air service only
- Lockable ball valves vent downstream air in accordance with OSHA regulation 1910.147 for pneumatic systems.
- brass valve
- chromium plated ball
- RTFE seats and stuffing box ring
- blow-out proof stem design
- adjustable packing gland

female NPT x female NPT

Size	Port Type	*Brass* Part #	Price/E
1/4"	full	***BBV25LV***	**$39.70**
3/8"	full	***BBV38LV***	**39.70**
1/2"	full	***BBV50LV***	**39.70**
3/4"	standard	***BBV75LV***	**57.25**
1"	standard	***BBV100LV***	**73.00**
1-1/4"	standard	***BBV125LV***	**115.60**
1-1/2"	standard	***BBV150LV***	**141.70**
2"	standard	***BBV200LV***	**172.00**

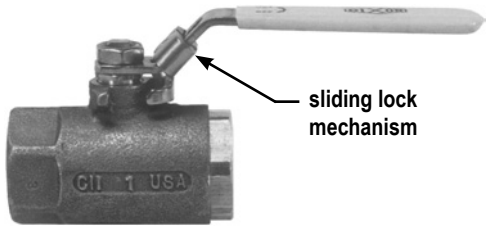

"Deadman" Spring Return Handle Ball Valves

Bronze

- rated to **600 PSI** WOG; **150 PSI** saturated steam
- vacuum service to 29 inches Hg
- stainless steel lever
- chromium plated ball
- RTFE seats and stuffing box ring
- blow-out proof stem design
- adjustable packing gland
- spring return closes valve when not held open
- operating torque approximately three times standard valve torque

female NPT x female NPT

Size	Port Type	*Bronze* Part #	Price/E
½"	full	***BBV50SR***	**$198.25**
¾"	standard	***BBV75SR***	**222.25**
1"	standard	***BBV100SR***	**237.30**
1½"	standard	***BBV150SR***	**364.75**
2"	standard	***BBV200SR***	**429.25**



316 Stainless Steel

- rated to **2000 PSI** WOG ½" to 1"; **1500 PSI** WOG 1¼" to 2"
- **150 PSI** saturated steam, all sizes
- vacuum service to 29 inches Hg, all sizes
- PTFE seals
- blow-out proof stem design
- adjustable packing gland
- spring return closes valve when not held open
- operating torque approximately three times standard valve torque


female NPT x female NPT

Size	Port Type	*316 Stainless* Part #	Price/E
½"	full	***SSBV50SR***	**$240.00**
¾"	standard	***SSBV75SR***	**310.00**
1"	standard	***SSBV100SR***	**350.00**
1¼"	standard	***SSBV125SR***	**570.00**
1½"	standard	***SSBV150SR***	**610.00**
2"	standard	***SSBV200SR***	**760.00**



3-Way Diverting Ball Valves

T Flow Pattern

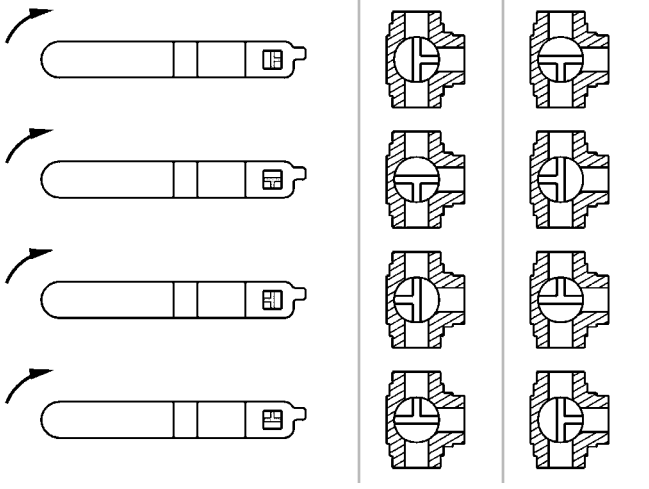

Note: ¼ turn handle can be adjusted to any orientation. Notches on the valve stem reflect the three openings on the ball.



- rated to **400 PSI** WOG; **100 PSI** saturated steam
- brass body
- blow-out proof stem
- chrome plated brass ball
- PTFE seats, seals, and thrust washer
- adjustable stem packing
- maximum temperature: **320°F**

female NPT x female NPT x female NPT

Size	Port Type	*Brass* Part #	Price/E
½"	standard	***BBV50DTW***	**$111.40**
¾"	standard	***BBV75DTW***	**123.50**
1"	standard	***BBV100DTW***	**188.50**
1¼"	standard	***BBV125DTW***	**276.25**
1½"	standard	***BBV150DTW***	**420.00**
2"	standard	***BBV200DTW***	**686.00**

3-Way Diversion Ball Valves


L Flow Pattern



- can be used with gasoline and diesel fuel
- rated to **400 PSI** WOG
- bronze body
- blow-out proof stem
- chromium-plated ball
- RPTFE seats and stuffing box ring
- stainless steel handle and nut with vinyl sleeve
- adjustable packing gland

female NPT x female NPT x female NPT

Size	Port Type	*Brass* Part #	Price/E
½"	full	***BBV50TW***	**$54.75**
¾"	standard	***BBV75TW***	**76.00**
1"	standard	***BBV100TW***	**100.00**

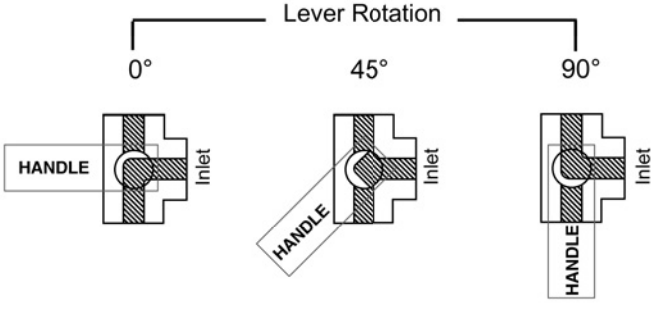


- rated to **800 PSI** WOG
- stainless steel body and ball
- blow-out proof stem
- RPTFE seats and stuffing box ring
- stainless steel handle and nut with vinyl sleeve
- adjustable packing gland
- meets NACE MR-01-75

female NPT x female NPT x female NPT

Size	Port Type	*Stainless Steel* Part #	Price/E
½"	full	***SSBV50TW***	**$230.00**
¾"	standard	***SSBV75TW***	**300.00**
1"	standard	***SSBV100TW***	**375.00**

Domestic Full Port Ball Valves

- machined solid chrome-plated ball
- multi-fill PTFE seats and seals
- adjustable packing
- blow-out proof stem design
- bronze castings
- vacuum service to 29 inches Hg
- rated to **600 PSI** WOG; **150 PSI** saturated steam

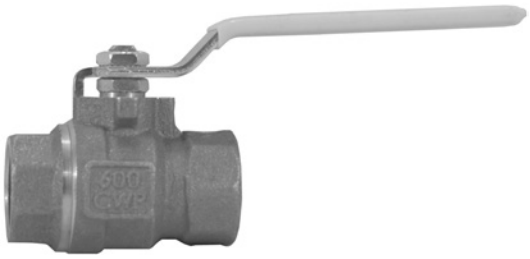


female NPT x female NPT

Size	Port Type	*Bronze* Part #	Price/E
1/4"	full	***BBV25FP***	**$26.00**
3/8"	full	***BBV38FP***	**26.00**
1/2"	full	***BBV50FP***	**26.00**
3/4"	full	***BBV75FP***	**42.20**
1"	full	***BBV100FP***	**53.40**
1-1/4"	full	***BBV125FP***	**124.50**
1-1/2"	full	***BBV150FP***	**165.10**
2"	full	***BBV200FP***	**284.50**

Dual Y Valves

- dual action valve, ideal for compressor applications
- female NPT threads
- non-vented rated to **600 PSI** WOG
- vented rated to **125 PSI** CWP (Cold Working Pressure)

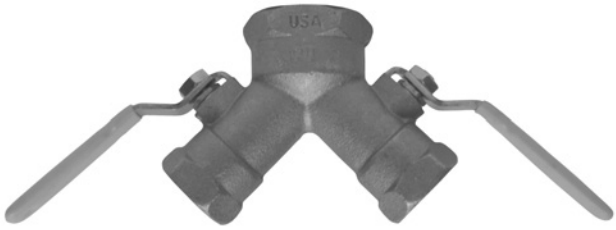

Non-Vented

Female NPT Inlet (1)	Female NPT Outlet (2)	*Brass* Part #	Price/E
1"	¾"	***BBV100DW***	**$118.50**
1¼"	¾"	***BBV125DW***	**118.50**

Vented

Female NPT Inlet (1)	Female NPT Outlet (2)	*Brass* Part #	Price/E
1"	¾"	***BBV100DWV***	**$118.50**
1¼"	¾"	***BBV125DWV***	**118.50**

Bronze Ball Valves with NPT Tap for Drain


- recommended for water and air service
- rated to **125 PSI** WOG
- bronze ball valves vent downstream air in accordance with OSHA regulations for pneumatic systems.
- chromium plated ball
- RTFE seats and stuffing box ring
- blow-out proof stem design
- adjustable packing gland
- auto-drain / auto-vent
- A ¼" NPT tapped port provides additional options such as an air venting elbow or noise muffler.



female NPT x female NPT

Size	Port Type	*Bronze* Part #	Price/E
1/4"	full	***BBV25VT***	**$42.25**
3/8"	full	***BBV38VT***	**42.25**
1/2"	full	***BBV50VT***	**42.25**
3/4"	full	***BBV75VT***	**85.25**
1"	full	***BBV100VT***	**119.50**

250 Lb. Steam Ball Valves

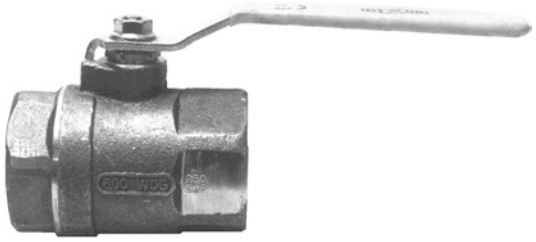

- recommended for use with fluids with widely varying temperatures and/or thermal expansion rates
- rated to **600 PSIG**; **250 PSI** saturated steam
- vacuum service to 29 inches Hg
- threaded bronze valve
- 316 stainless steel ball and stem
- multi-fill RPTFE seats
- multi-fill stuffing box ring
- high temperature MTFE stem packing
- blow-out proof stem design
- adjustable packing gland
- maximum temperature rating **406°F**

female NPT x female NPT

Size	Port Type	*Bronze* Part #	Price/E
½"	full	***BBV50ST***	**$59.00**
¾"	standard	***BBV75ST***	**95.40**
1"	standard	***BBV100ST***	**110.00**
2"	standard	***BBV200ST***	**311.00**

Carbon Steel Ball Valves




- for control of air, water, oil and gas in hose or pipe lines, for other services, please contact the factory
- rated to **150 PSI** saturated steam
- ¼" - 1" rated to **2000 PSI**; 1¼" - 2" rated to **1500 PSI**
- carbon steel body
- chromium plated ball
- RPTFE seats and seals
- blow-out proof stem
- adjustable packing gland

female NPT x female NPT

Size	Port Type	*Carbon Steel* Part #	Price/E
1/4"	full	***IBV25***	**$51.95**
3/8"	full	***IBV38***	**51.95**
1/2"	standard	***IBV50***	**51.95**
3/4"	standard	***IBV75***	**59.90**
1"	standard	***IBV100***	**80.05**
1-1/4"	standard	***IBV125***	**122.10**
1-1/2"	standard	***IBV150***	**169.10**
2"	standard	***IBV200***	**219.60**

High Pressure Full-Bore Ball Valves

- blow out proof stem
- rugged construction
- Viton® shaft seals
- female thread




female x female

Size	PSI	*Carbon Steel* NPTF Part #	Price/E	SAE Part #	Price/E	PSI	*Stainless Steel* NPTF Part #	Price/E
1/4"	**7350**	***HPBV25***	**$63.90**	***HPBV25SAE***	**$71.65**	**7250**	***HPBV25SS***	**$427.50**
3/8"	**7350**	***HPBV38***	**67.80**	***HPBV38SAE***	**80.70**	**7250**	***HPBV38SS***	**497.50**
1/2"	**7350**	***HPBV12***	**73.70**	***HPBV12SAE***	**87.10**	**7250**	***HPBV12SS***	**595.00**
3/4"	**5880**	***HPBV34***	**145.05**	***HPBV34SAE***	**162.20**	**5800**	***HPBV34SS***	**950.00**
1"	**5145**	***HPBV10***	**173.10**	***HPBV10SAE***	**190.00**	**5075**	***HPBV10SS***	**1050.00**
1¼"	**5880**	***HPBV125***	**452.90**	***HPBV125SAE***	**490.20**	**---**	**---**	**---**
1½"	**5880**	***HPBV150***	**548.90**	***HPBV150SAE***	**583.00**	**---**	**---**	**---**
2"	**5880**	***HPBV200***	**831.00**	***HPBV200SAE***	**870.00**	**---**	**---**	**---**

Stainless Steel Ball Valves


- for use in water, oil and gas
- ¼" - 2" rated to **1000 PSI** WOG (CWP); 2½" - 3" rated to **800 PSI** WOG (CWP); **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- plastic cover on handle
- blow-out proof stem design
- temperature range **-60°F** to **450°F**

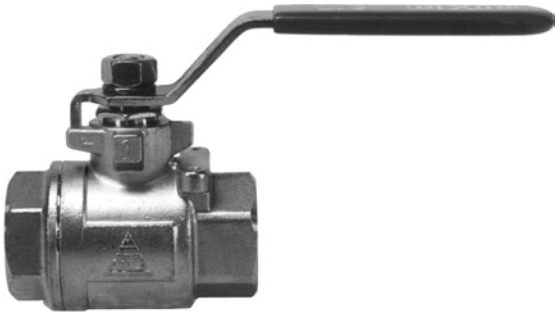

female NPT x female NPT

Size	Port Type	*Stainless Steel* Part #	Price/E
1/4"	full	***SSBV25***	**$50.00**
3/8"	full	***SSBV38***	**55.00**
1/2"	full	***SSBV50***	**58.00**
3/4"	full	***SSBV75***	**70.00**
1"	full	***SSBV100***	**104.00**
1-1/4"	full	***SSBV125***	**140.00**
1-1/2"	full	***SSBV150***	**183.00**
2"	full	***SSBV200***	**250.00**
2-1/2"	full	***SSBV250***	**626.50**
3"	full	***SSBV300***	**850.00**


- for use in water, oil and gas
- rated to **1000 PSI** WOG; **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- plastic cover on handle
- blow-out proof stem design
- temperature range **-60°F** to **450°F**
- lockable

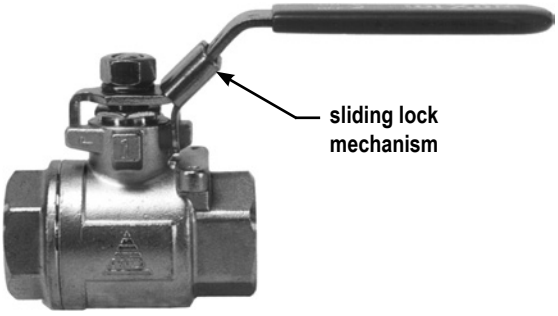

female NPT x female NPT

Size	Port Type	*316 Stainless Steel* Part #	Price/E
1/4"	full	***SSLBV25***	**$55.00**
3/8"	full	***SSLBV38***	**56.90**
1/2"	full	***SSLBV50***	**63.00**
3/4"	full	***SSLBV75***	**78.00**
1"	full	***SSLBV100***	**113.00**
1-1/4"	full	***SSLBV125***	**153.00**
1-1/2"	full	***SSLBV150***	**200.00**
2"	full	***SSLBV200***	**278.00**

- for use in water, oil and gas
- rated to **800 PSI** WOG; **100 PSI** saturated steam
- 316 stainless steel body, ball and stem
- Teflon® seat, joint gasket and thrust washer
- plastic cover on handle
- blow-out proof stem design
- temperature range **-60°F** to **450°F**
- lockable

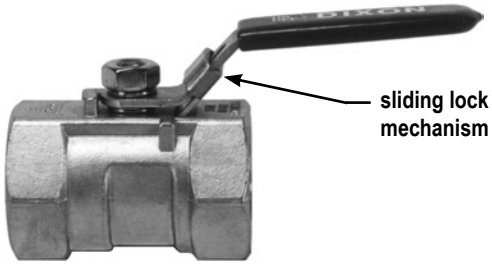

female NPT x female NPT

Size	Port Type	*316 Stainless Steel* Part #	Price/E
1/4"	reduced	***SSLBV25SP***	**$39.75**
3/8"	reduced	***SSLBV38SP***	**42.45**
1/2"	reduced	***SSLBV50SP***	**48.40**
3/4"	reduced	***SSLBV75SP***	**61.00**
1"	reduced	***SSLBV100SP***	**92.75**
1-1/4"	reduced	***SSLBV125SP***	**110.00**
1-1/2"	reduced	***SSLBV150SP***	**139.15**
2"	reduced	***SSLBV200SP***	**186.90**

Stainless Steel Ball Valves




- for use in water, oil and gas
- ¼" - 1" rated to **2000 PSI** (CWP); 1¼" - 2" rated to **1500 PSI** (CWP)
- body conforms to ASTM A-351 Grade CF8M
- ball is 316 stainless steel
- PTFE, glass-filled seat
- blow-out proof stem design
- temperature range: **-60°F** to **450°F**

female NPT x female NPT

Size	Port Type	*Stainless Steel* Part #	Price/E
1/4"	reduced	***SSBV25RP***	**$42.60**
3/8"	reduced	***SSBV38RP***	**51.00**
1/2"	reduced	***SSBV50RP***	**55.00**
3/4"	reduced	***SSBV75RP***	**66.00**
1"	reduced	***SSBV100RP***	**99.00**
1-1/4"	reduced	***SSBV125RP***	**132.00**
1-1/2"	reduced	***SSBV150RP***	**172.00**
2"	reduced	***SSBV200RP***	**230.00**

3-Piece Stainless Steel Ball Valves

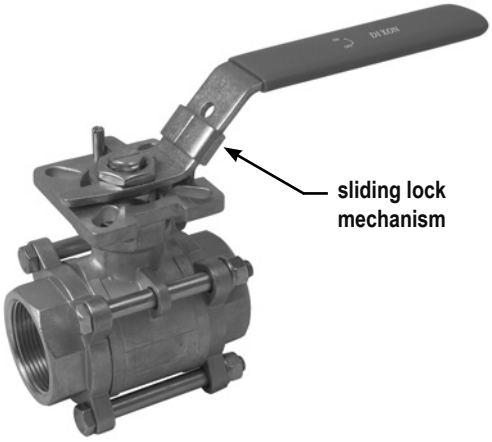

- 15% glass reinforced RTFE seats
- swing-out design for easy maintenance
- ISO 5211 mounting pad
- 316 stainless steel stem
- CF8M body and ball
- spring loaded stem packing using Belleville washers
- temperature range: **-40°F** to **400°F**

female NPT x female NPT

Size	Port Type	PSI @ 65°F	Body Length	*Stainless Steel* Part #	Price/E
½"	full	**1000**	2.5"	***3SSBV50***	**$79.75**
¾"	full	**1000**	2.9"	***3SSBV75***	**104.75**
1"	full	**1000**	3.2"	***3SSBV100***	**151.55**
1¼"	full	**1000**	3.7"	***3SSBV125***	**210.15**
1½"	full	**1000**	4.3"	***3SSBV150***	**274.25**
2"	full	**1000**	4.8"	***3SSBV200***	**368.75**
2½"	full	**800**	6.2"	***3SSBV250***	**791.35**
3"	full	**800**	7.5"	***3SSBV300***	**1065.80**
4"	full	**600**	8.9"	***3SSBV400***	**1941.50**

N
Valves

2-Piece 316 Stainless Steel Domestic Ball Valves



- rated to **1,000 PSI** CWP
- rated to **150 PSI** saturated steam
- vacuum service to 29 inches Hg
- 316 stainless body, ball and stem
- PTFE seals
- blow-out proof stem
- vinyl handle cover
- temperature range: **-40°F** to **400°F**

female NPT x female NPT

Size	Port Type	*316 Stainless Steel* Part #	Price/E
¼"	full	***DSBV25***	**$82.00**
3/8"	full	***DSBV38***	**82.00**
½"	full	***DSBV50***	**86.00**
¾"	full	***DSBV75***	**115.00**
1"	full	***DSBV100***	**160.00**
1¼"	full	***DSBV125***	**200.00**
1½"	full	***DSBV150***	**315.00**
2"	full	***DSBV200***	**390.00**

Electrically Actuated 2 Piece Stainless Ball Valves


2-Piece Stainless Ball Valve

- CF8M stem and ball
- RTFE seats and seals
- pressure rating: **1000 PSI** WOG
- temperature range: **-40°F** to **450°F**
- ISO 5211 mounting pad
- blow-out proof stem
- spring loaded stem packing

Electric Actuator

- lightweight powder coated aluminum alloy housing
- NEMA 4/4X waterproof and dustproof
- H-insulation class
- manual over-ride standard: ½" - 1½"
- extended duty cycle induction motor
- high alloy steel gear train
- working temperature: **-41°F** to **140°F**
- ISO 9001, CS, CE and CSA-C US Certified
- space heater is standard
- visual position indication
- RoHS compliant



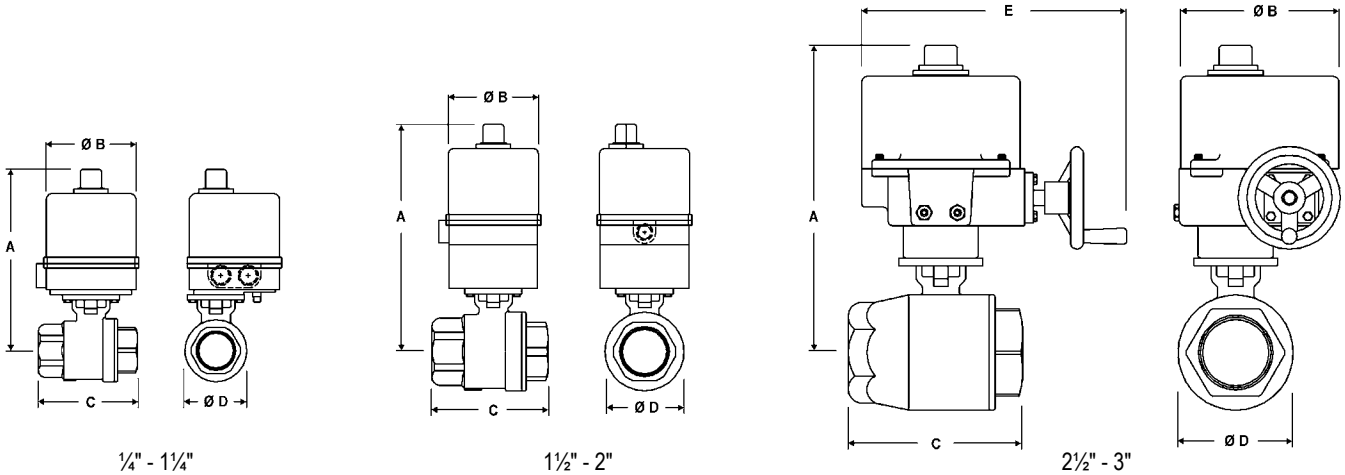

¼" - 1¼" 1½" - 2" 2½" - 3"

Dimensions are approximate.

Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	A	B	C	D	E	Override	*Stainless Steel* Part #	110VAC Voltage **-EA**	24VDC Voltage **-EG**	12VDC Voltage **-ET**	220VAC Voltage **-EK**	24VAC Voltage **-ES**
1/4"	7.79	4.50	2.56	1.40	NA	standard	***BV2HG-02511***	**$879.70**	**$879.70**	**$879.70**	**$879.70**	**$879.70**
3/8"	7.79	4.50	2.56	1.40	NA	standard	***BV2HG-03811***	**879.70**	**879.70**	**879.70**	**879.70**	**879.70**
1/2"	7.74	4.50	2.95	1.40	NA	standard	***BV2HG-05011***	**885.50**	**885.50**	**885.50**	**885.50**	**885.50**
3/4"	7.84	4.50	3.15	1.75	NA	standard	***BV2HG-07511***	**907.90**	**907.90**	**907.90**	**907.90**	**907.90**
1"	8.09	4.50	3.54	1.75	NA	standard	***BV2HG-10011***	**923.60**	**923.60**	**923.60**	**923.60**	**923.60**
1¼"	8.29	4.50	4.33	2.58	NA	standard	***BV2HG-12511***	**966.10**	**966.10**	**966.10**	**966.10**	**966.10**
1½"	8.69	4.50	4.72	2.97	NA	standard	***BV2HG-15011***	**1014.50**	**1014.50**	**1014.50**	**1014.50**	**1014.50**
2"	11.13	4.50	5.51	2.73	NA	N/A	***BV2HG-20011***	**1679.80**	**1679.80**	**1679.80**	**1679.80**	**1679.80**
2½"	13.72	7.08	7.28	4.68	12.83	handwheel	***BV2HG-25011EP*** *	**2909.00**	**--**	**--**	**--**	**--**
2½"	10.69	6.06	7.28	4.68	NA	N/A	***BV2HG-25011***	**2909.00**	**2909.00**	**2909.00**	**2909.00**	**2909.00**
3"	13.72	7.08	8.07	5.44	12.83	handwheel	***BV2HG-30011***	**4069.10**	**4069.10**	**4069.10**	**4069.10**	**4069.10**

* for 110VAC 2½" with manual override use EP

A wide variety of options are available: modulating, extra switches, transmitters, potentiometer, etc.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.

For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.

SAFETY ALERT


Pneumatically Actuated 2 Piece Stainless Ball Valves



2-Piece Stainless Ball Valve
- CF8M stem and ball
- RTFE seats and seals
- pressure rating: **1000 PSI** WOG
- temperature range: **-40°F** to **450°F**
- ISO 5211 mounting pad
- blow-out proof stem
- spring loaded stem packing

Rack and Pinion Actuator
- bi-directional stops for ±5º travel adjustment
- 80 PSI plant air required
- maximum operating pressure: **120 PSI**
- operating temperature range: **-40ºF** to **200ºF**
- hard anodized aluminum body
- NAMUR mounting
- nickel plated anti-blowout pinion
- Buna-N O-rings
- visual position indication
- tested to one million cycles


Spring Return (normally closed)

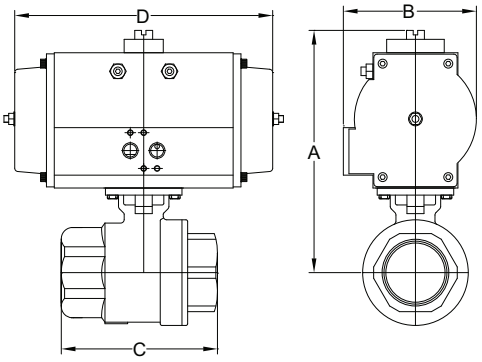

Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	A	B	C	D	*Stainless Steel* Part #	Price/E
1/4"	5.21	2.80	2.56	5.49	***BV2HG-02511-BBC***	**$550.10**
3/8"	5.21	2.80	2.56	5.49	***BV2HG-03811-BBC***	**550.10**
1/2"	5.16	2.80	2.95	5.49	***BV2HG-05011-BBC***	**555.90**
3/4"	5.26	2.80	3.15	5.49	***BV2HG-07511-BBC***	**578.30**
1"	6.64	3.74	3.54	8.09	***BV2HG-10011-BBC***	**593.60**
1¼"	6.84	3.74	4.33	8.09	***BV2HG-12511-BBC***	**636.10**
1½"	8.14	4.69	4.72	9.84	***BV2HG-15011-BBC***	**785.55**
2"	8.69	4.69	5.51	9.84	***BV2HG-20011-BBC***	**1194.85**
2½"	9.54	5.53	7.28	13.98	***BV2HG-25011-BBC***	**1444.70**
3"	11.39	7.29	8.07	16.61	***BV2HG-30011-BBC***	**2983.75**

Double Acting

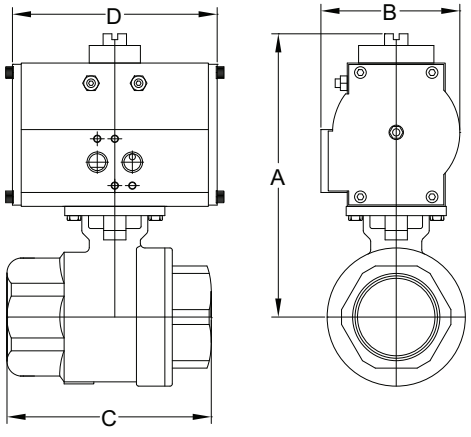

Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	A	B	C	D	*Stainless Steel* Part #	Price/E
1/4"	4.25	1.77	2.56	4.33	***BV2HG-02511-BCC***	**$350.60**
3/8"	4.25	1.77	2.56	4.33	***BV2HG-03811-BCC***	**350.60**
1/2"	4.20	1.77	2.95	4.33	***BV2HG-05011-BCC***	**414.20**
3/4"	4.30	1.77	3.15	4.33	***BV2HG-07511-BCC***	**378.80**
1"	5.89	3.20	3.54	5.68	***BV2HG-10011-BCC***	**501.35**
1¼"	6.09	3.20	4.33	5.68	***BV2HG-12511-BCC***	**543.90**
1½"	7.24	3.74	4.72	5.87	***BV2HG-15011-BCC***	**671.05**
2"	7.79	3.74	5.51	5.87	***BV2HG-20011-BCC***	**1077.35**
2½"	8.75	4.69	7.28	7.20	***BV2HG-25011-BCC***	**1320.60**
3"	10.01	5.53	8.07	10.22	***BV2HG-30011-BCC***	**2542.40**

A wide variety of switches, solenoids, positioners, etc., are available.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.

For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.

SAFETY ALERT

Electrically Actuated 3 Piece Stainless Ball Valves


3-Piece Stainless Ball Valve

- blow-out proof stainless steel stem
- CF8M body and ball
- 15% glass reinforced RTFE seats
- ½" - 2" rated to **1000 PSI** WOG; 3" rated to **800 PSI** WOG
- temperature range: **-40°F** to **400°F**
- ISO 5211 mounting pad
- swing out in-line easy maintenance
- spring loaded stem packing

Electric Actuator

- lightweight powder coated aluminum alloy housing
- NEMA 4/4X waterproof and dustproof
- H-insulation class
- manual over-ride standard: ½" - 1½"
- extended duty cycle induction motor
- high alloy steel gear train
- working temperature: **-41°F** to **140°F**
- ISO 9001, CS, CE and CSA-C US Certified
- space heater is standard
- visual position indication
- RoHS compliant



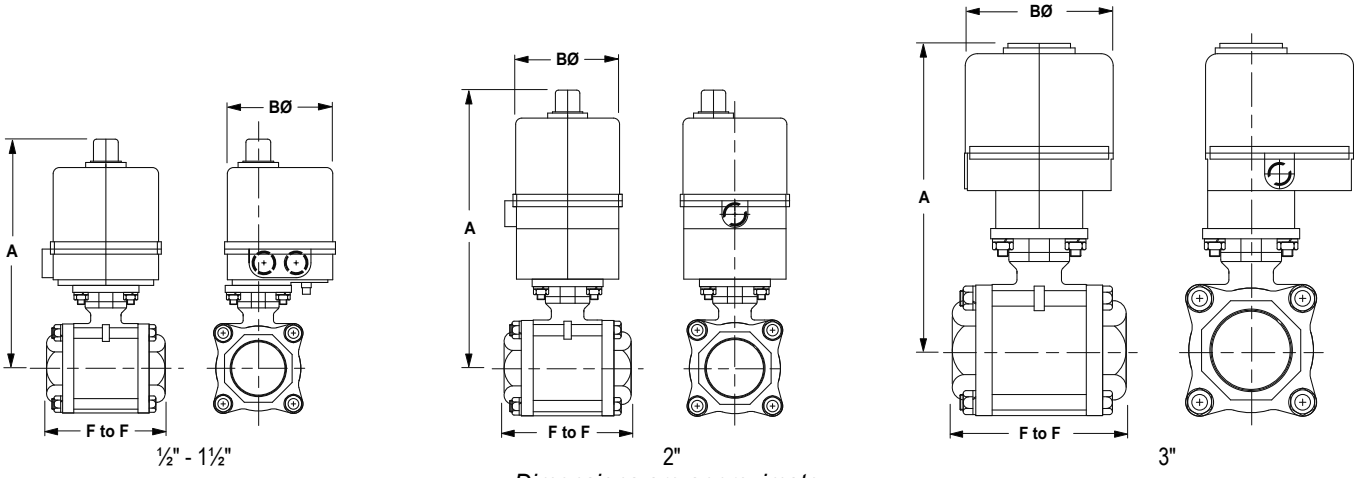

Dimensions are approximate.
Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	F to F	A	B	Override	*Stainless Steel* Part #	110VAC Voltage **-EA**	24VDC Voltage **-EG**	12VDC Voltage **-ET**	220VAC Voltage **-EK**	24VAC Voltage **-ES**
½"	2.6	7.8	4.5	standard	***BV2IG-05011***	**$903.55**	**$903.55**	**$903.55**	**$903.55**	**$903.55**
¾"	3.0	8.0	4.5	standard	***BV2IG-07511***	**928.55**	**928.55**	**928.55**	**928.55**	**928.55**
1"	3.4	8.3	4.5	standard	***BV2IG-10011***	**950.20**	**950.20**	**950.20**	**950.20**	**950.20**
1¼"	4.0	8.5	4.5	standard	***BV2IG-12511***	**1008.90**	**1008.90**	**1008.90**	**1008.90**	**1008.90**
1½"	4.7	9.2	4.5	standard	***BV2IG-15011***	**1044.80**	**1044.80**	**1044.80**	**1044.80**	**1044.80**
2"	5.2	11.4	4.5	N/A	***BV2IG-20011***	**1398.30**	**1398.30**	**1398.30**	**1398.30**	**1398.30**
3"	7.2	12.2	6.1	N/A	***BV2IG-30011***	**2568.20**	**2568.20**	**2568.20**	**2568.20**	**2568.20**

A wide variety of options are available: modulating, extra switches, transmitters, potentiometer, etc.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.

For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.

SAFETY ALERT

Pneumatically Actuated 3 Piece Stainless Ball Valves




3-Piece Stainless Ball Valve

- blow-out proof stainless steel stem
- CF8M body and ball
- 15% glass reinforced RTFE seats
- ½" - 2" rated to **1000 PSI** WOG; 3" rated to **800 PSI** WOG
- temperature range: **-40°F** to **400°F**
- ISO 5211 mounting pad
- swing out in-line easy maintenance
- spring loaded stem packing

Rack and Pinion Actuator

- bi-directional stops for ±5º travel adjustment
- 80 PSI plant air required
- maximum operating pressure: **120 PSI**
- operating temperature range: **-40ºF** to **200ºF**
- hard anodized aluminum body
- NAMUR mounting
- nickel plated anti-blowout pinion
- Buna-N O-rings
- visual position indication
- tested to one million cycles

Spring Return - 3 Piece (normally closed)

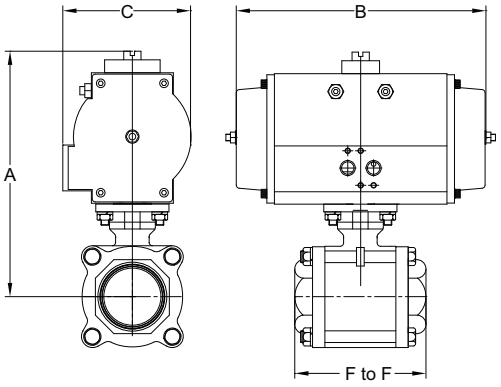


Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	F to F	A	B	C	Stainless Steel Part #	Price/E
½"	2.6	7.0	7.7	3.2	***BV2IG-05011-BBC***	**$573.95**
¾"	3.0	7.2	7.7	3.2	***BV2IG-07511-BBC***	**598.95**
1"	3.4	6.1	7.7	3.2	***BV2IG-10011-BBC***	**620.20**
1¼"	4.0	6.3	7.7	3.2	***BV2IG-12511-BBC***	**678.85**
1½"	4.7	7.7	8.1	3.7	***BV2IG-15011-BBC***	**815.85**
2"	5.2	8.8	8.1	3.7	***BV2IG-20011-BBC***	**910.30**
3"	7.2	10.2	9.8	4.7	***BV2IG-30011-BBC***	**1768.60**

* bracket and coupler required for ½" and ¾" spring return actuator
line art shown with bracket and coupler

Double Acting - 3 Piece

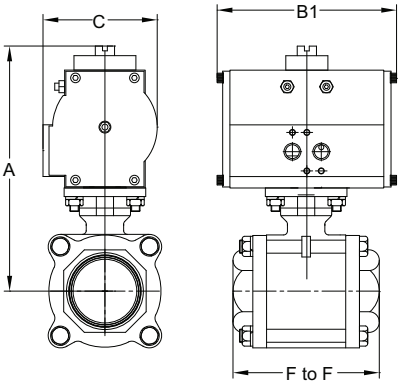

Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	F to F	A	B1	C	Stainless Steel Part #	Price/E
½"	2.6	5.0	4.7	2.4	***BV2IG-05011-BCC***	**$374.50**
¾"	3.0	5.2	4.7	2.4	***BV2IG-07511-BCC***	**399.50**
1"	3.4	6.1	5.7	3.2	***BV2IG-10011-BCC***	**528.00**
1¼"	4.0	6.3	5.7	3.2	***BV2IG-12511-BCC***	**586.60**
1½"	4.7	7.7	5.9	3.7	***BV2IG-15011-BCC***	**701.35**
2"	5.2	8.0	5.9	3.7	***BV2IG-20011-BCC***	**795.80**
3"	7.2	10.2	7.2	4.7	***BV2IG-30011-BCC***	**1644.50**

A wide variety of switches, solenoids, positioners, etc., are available.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.

For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.


SAFETY ALERT

Electrically Actuated Brass Ball Valves


2-Piece Brass Ball Valve
- brass ball
- blow-out proof brass stem
- PTFE seats with double O-ring stem packing
- pressure rating: **600 PSI** WOG - **150 PSI** WSP
- maximum temperature: **366°F**
- ISO 5211 mounting pad
- Viton® elastomers

Electric Actuator
- lightweight powder coated aluminum alloy housing
- NEMA 4/4X waterproof and dustproof
- H-insulation class
- manual over-ride standard: ½" - 1½"
- extended duty cycle induction motor
- high alloy steel gear train
- working temperature: **-41°F** to **140°F**
- ISO 9001, CS, CE and CSA-C US Certified
- space heater is standard
- visual position indication
- RoHS compliant






½" - 1½"
bracket & coupler
included



2"

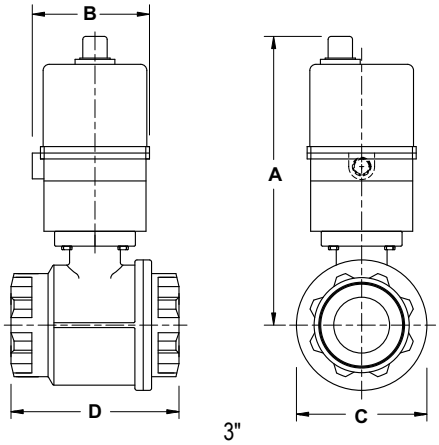

3"

Dimensions are approximate.
Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	A	B	C	D	Override	*Brass* Part #	110VAC Voltage **-EA**	24VDC Voltage **-EG**	12VDC Voltage **-ET**	220VAC Voltage **-EK**	24VAC Voltage **-ES**
½"	8.8	4.5	3.1	2.6	standard	***BV2BV-05011***	**$829.80**	**$829.80**	**$829.80**	**$829.80**	**$829.80**
¾"	9.2	4.5	3.1	3.0	standard	***BV2BV-07511***	**829.80**	**829.80**	**829.80**	**829.80**	**829.80**
1"	9.4	4.5	3.1	3.4	standard	***BV2BV-10011***	**901.90**	**901.90**	**901.90**	**901.90**	**901.90**
1¼"	9.5	4.5	3.1	3.7	standard	***BV2BV-12511***	**949.70**	**949.70**	**949.70**	**949.70**	**949.70**
1½"	8.7	4.5	3.1	4.1	standard	***BV2BV-15011***	**985.20**	**985.20**	**985.20**	**985.20**	**985.20**
2"	9.0	4.5	3.1	4.8	N/A	***BV2BV-20011***	**1010.60**	**1010.60**	**1010.60**	**1010.60**	**1010.60**
3"	11.8	6.1	5.4	6.9	N/A	***BV2BV-30011***	**1889.75**	**1889.75**	**1889.75**	**1889.75**	**1889.75**

A wide variety of options are available: modulating, extra switches, transmitters, potentiometer, etc.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.

For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.

SAFETY ALERT


Pneumatically Actuated Brass Ball Valves



2-Piece Brass Ball Valve
- brass stem and ball
- PTFE seats with double O-ring stem packing
- pressure rating: **600 PSI** WOG - **150 PSI** WSP
- maximum temperature: **366°F**
- ISO 5211 mounting pad
- Viton® elastomers

Rack and Pinion Actuator
- bi-directional stops for ±5º travel adjustment
- 80 PSI plant air required
- maximum operating pressure: **120 PSI**
- operating temperature range: **-40ºF** to **200ºF**
- hard anodized aluminum body
- NAMUR mounting
- nickel plated anti-blowout pinion
- Buna-N O-rings
- visual position indication
- tested to one million cycles


Spring Return (normally closed)

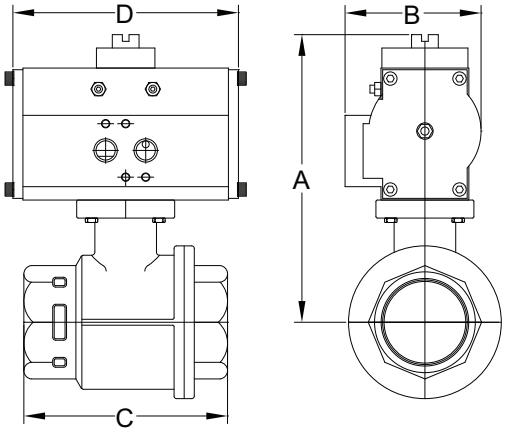

All dimensions are given in inches, unless noted. Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	A	B	C	D	*Brass* Part #	Price/E
1/4"	4.80	2.80	2.64	5.49	***BV2BV-02511-BBC***	**$571.50**
3/8"	4.80	2.80	2.64	5.49	***BV2BV-03811-BBC***	**571.50**
1/2"	4.80	2.80	2.64	5.49	***BV2BV-05011-BBC***	**547.30**
3/4"	4.88	2.80	3.00	5.49	***BV2BV-07511-BBC***	**547.30**
1"	5.31	2.80	3.35	5.49	***BV2BV-10011-BBC***	**572.30**
1¼"	5.45	2.80	3.66	5.49	***BV2BV-12511-BBC***	**620.10**
1½"	6.04	2.80	4.13	5.49	***BV2BV-15011-BBC***	**728.10**
2"	6.40	2.80	4.80	5.49	***BV2BV-20011-BBC***	**781.70**
2½"	8.13	3.74	6.10	8.09	***BV2BV-25011-BBC***	**1133.10**
3"	8.50	3.74	6.89	8.09	***BV2BV-30011-BBC***	**1401.75**
4"	10.14	4.69	8.03	9.84	***BV2BV-40011-BBC***	**1967.40**

Double Acting

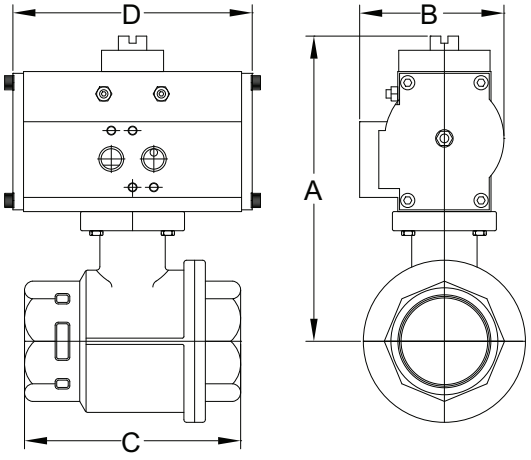

Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

Size	A	B	C	D	*Brass* Part #	Price/E
1/4"	3.84	1.77	2.64	4.33	***BV2BV-02511-BCC***	**$429.85**
3/8"	3.84	1.77	2.64	4.33	***BV2BV-03811-BCC***	**429.85**
1/2"	3.84	1.77	2.64	4.33	***BV2BV-05011-BCC***	**347.85**
3/4"	3.92	1.77	3.00	4.33	***BV2BV-07511-BCC***	**347.85**
1"	4.35	1.77	3.35	4.33	***BV2BV-10011-BCC***	**454.55**
1¼"	4.49	1.77	3.66	4.33	***BV2BV-12511-BCC***	**478.45**
1½"	6.42	3.20	4.13	5.68	***BV2BV-15011-BCC***	**613.60**
2"	6.78	3.20	4.80	5.68	***BV2BV-20011-BCC***	**667.20**
2½"	8.13	3.74	6.10	5.87	***BV2BV-25011-BCC***	**1018.60**
3"	8.50	3.74	6.89	5.87	***BV2BV-30011-BCC***	**1427.20**
4"	10.14	4.69	8.03	7.20	***BV2BV-40011-BCC***	**1843.40**

A wide variety of switches, solenoids, positioners, etc., are available.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.

For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.

SAFETY ALERT

Electrically Actuated 3-Way 'T/L' Port Stainless Ball Valves


3-Way Stainless Ball Valve

- spring loaded stem packing
- blow-out proof stem
- 100% air tested under water at **80 PSI**
- working pressure: ¼" to 1": **1000 PSI**; 1¼" to 2": **800 PSI**
- temperature range: **-20°F** to **450°F**
- ISO 5211 mounting pad
- female NPT ends
- full port style

Electric Actuator


- lightweight powder coated aluminum alloy housing
- NEMA 4/4X waterproof and dustproof
- H-insulation class
- manual over-ride standard: ½" - 1½"
- extended duty cycle induction motor
- high alloy steel gear train
- working temperature: **-41°F** to **140°F**
- ISO 9001, CS, CE and CSA-C US Certified
- space heater is standard
- visual position indication
- RoHS compliant

Default Flow Paths

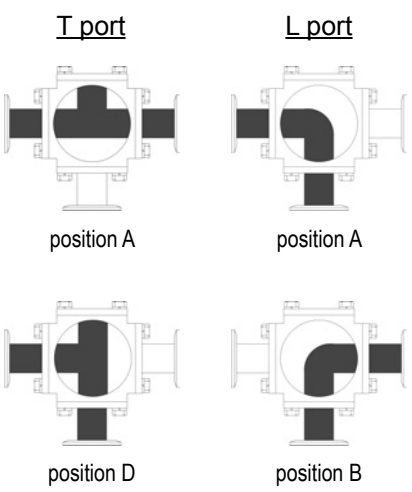


Refer to page 633 for alternate flow paths.



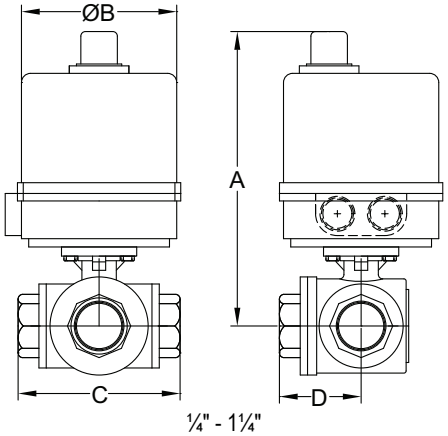

¼" - 1¼"

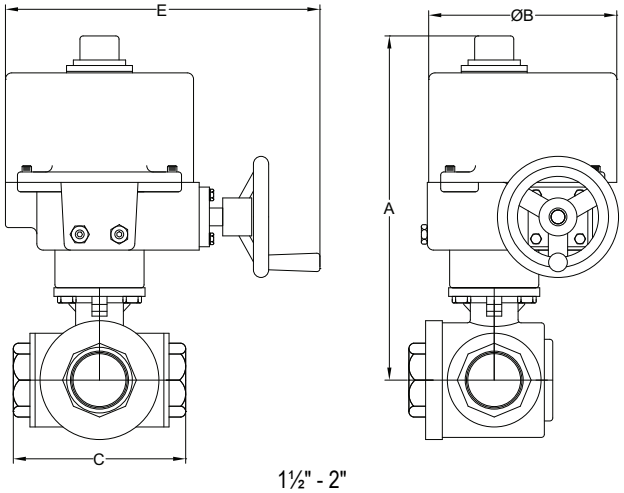

1½" - 2"

Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

* ***T*** = t-port style
* ***L*** = l-port style

Size	A	B	C	D	E	Override	*Stainless Steel* Part #	110VAC Voltage **-EA**	24VDC Voltage **-EG**	12VDC Voltage **-ET**	220VAC Voltage **-EK**	24VAC Voltage **-ES**
1/4"	9.01	6.06	2.83	1.41	N/A	standard	***BV3IG*F-0251***	**$1192.90**	**$1192.90**	**$1192.90**	**$1192.90**	**$1192.90**
3/8"	9.01	6.06	2.83	1.41	N/A	standard	***BV3IG*F-0381***	**1192.90**	**1192.90**	**1192.90**	**1192.90**	**1192.90**
1/2"	9.21	6.06	3.26	1.63	N/A	standard	***BV3IG*F-0501***	**1192.90**	**1192.90**	**1192.90**	**1192.90**	**1192.90**
3/4"	9.21	6.06	3.89	1.94	N/A	standard	***BV3IG*F-0751***	**1380.00**	**1380.00**	**1380.00**	**1380.00**	**1380.00**
1"	9.74	6.06	4.40	2.20	N/A	standard	***BV3IG*F-1001***	**1543.00**	**1543.00**	**1543.00**	**1543.00**	**1543.00**
1¼"	10.04	6.06	4.92	2.46	N/A	standard	***BV3IG*F-1251***	**1825.50**	**1825.50**	**1825.50**	**1825.50**	**1825.50**
1½"	12.92	7.87	5.86	2.93	12.99	handwheel	***BV3IG*F-1501***	**2933.90**	**2933.90**	**2933.90**	**2933.90**	**2933.90**
2"	13.67	7.87	6.85	3.42	12.99	handwheel	***BV3IG*F-2001***	**3834.80**	**3834.80**	**3834.80**	**3834.80**	**3834.80**

A wide variety of options are available: modulating, extra switches, transmitters, potentiometer, etc.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.

For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.


SAFETY ALERT

Pneumatically Actuated 3-Way 'T/L' Port Stainless Ball Valves




Default Flow Paths

T port




position A


L port



position A



position D



position B

Refer to page 633 for alternate flow paths.


3-Way Stainless Ball Valve
- spring loaded stem packing
- blow-out proof stem
- 100% air tested under water at 80 PSI
- working pressure for ¼" to 1": **1000 PSI**; 1¼" to 2": **800 PSI**
- temperature range: **-20°F** to **450°F**
- ISO 5211 mounting pad
- female NPT ends
- full port style


Rack and Pinion Actuator
- bi-directional stops for ±5º travel adjustment
- 80 PSI plant air required
- maximum operating pressure: **120 PSI**
- operating temperature range: **-40ºF** to **200ºF**
- hard anodized aluminum body
- NAMUR mounting
- Nickel plated anti-blowout pinion
- Buna-N O-rings
- visual position indication
- tested to one million cycles

Spring Return (normally closed)

All dimensions are given in inches, unless noted. Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

* ***T*** = t-port style
* ***L*** = l-port style







Size	A	B	C	D	E	*Stainless Steel* Part #	Price/E
1/4"	5.35	3.20	2.83	7.10	1.41	***BV3IG*F-0251BBC***	**$862.90**
3/8"	5.35	3.20	2.83	7.10	1.41	***BV3IG*F-0381BBC***	**862.90**
1/2"	5.55	3.20	3.26	7.10	1.63	***BV3IG*F-0501BBC***	**862.90**
3/4"	6.30	3.74	3.89	7.45	1.94	***BV3IG*F-0751BBC***	**1129.15**
1"	6.83	3.74	4.40	7.45	2.20	***BV3IG*F-1001BBC***	**1292.10**
1¼"	7.13	3.74	4.92	7.45	2.46	***BV3IG*F-1251BBC***	**1596.60**
1½"	8.43	4.69	5.86	9.10	2.93	***BV3IG*F-1501BBC***	**2111.25**
2"	9.97	5.53	6.85	12.99	3.42	***BV3IG*F-2001BBC***	**3352.10**

Double Acting

Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

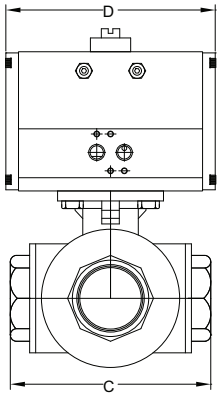

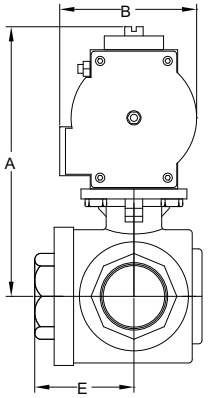

Size	A	B	C	D	E	*Stainless Steel* Part #	Price/E
1/4"	5.35	3.20	2.83	7.10	1.41	***BV3IG*F-0251BCC***	**$770.65**
3/8"	5.35	3.20	2.83	7.10	1.41	***BV3IG*F-0381BCC***	**770.65**
1/2"	5.55	3.20	3.26	7.10	1.63	***BV3IG*F-0501BCC***	**770.65**
3/4"	6.30	3.74	3.89	7.45	1.94	***BV3IG*F-0751BCC***	**957.75**
1"	6.83	3.74	4.40	7.45	2.20	***BV3IG*F-1001BCC***	**1177.45**
1¼"	7.13	3.74	4.92	7.45	2.46	***BV3IG*F-1251BCC***	**1630.45**
1½"	8.43	4.69	5.86	9.10	2.93	***BV3IG*F-1501BCC***	**1987.20**
2"	9.97	5.53	6.85	12.99	3.42	***BV3IG*F-2001BCC***	**2910.70**

A wide variety of switches, solenoids, positioners, etc., are available.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

Caution !

SAFETY ALERT

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.

SAFETY ALERT

For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.

Electrically Actuated 3-Way 'T/L' Port Brass Ball Valves


3-Way Brass Ball Valve

- pressure rating: **400 PSI** WOG **100 PSI** WSP
- maximum temperature: 344ºF
- blow-out proof stem
- chrome-plated brass ball
- PTFE seats with O-ring backing for low operating torque
- PTFE seats and double O-ring stem packing
- 100% tested
- reduced port
- ISO 5211 mounting pad

Electric Actuator


- lightweight powder coated aluminum alloy housing
- NEMA 4/4X waterproof and dustproof
- H-insulation class
- manual over-ride standard: ½" - 1½"
- extended duty cycle induction motor
- high alloy steel gear train
- working temperature: **-41°F** to **140°F**
- ISO 9001, CS, CE and CSA-C US Certified
- space heater is standard
- visual position indication
- RoHS compliant

Default Flow Paths

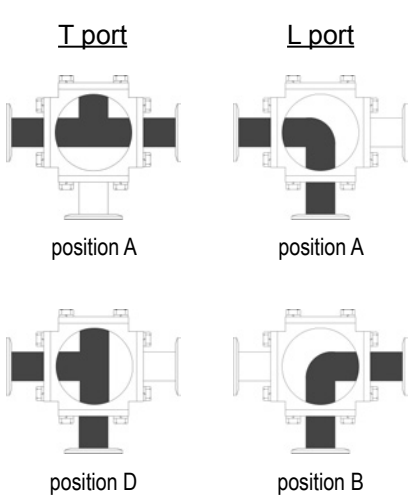




Refer to page 633 for alternate flow paths.

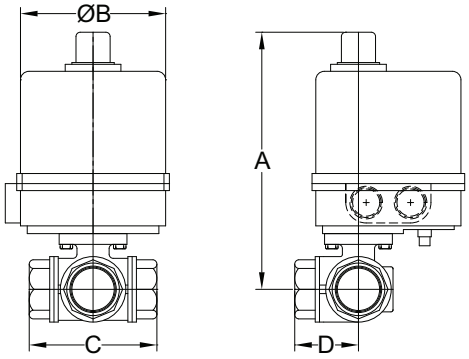

¼" - 1½"

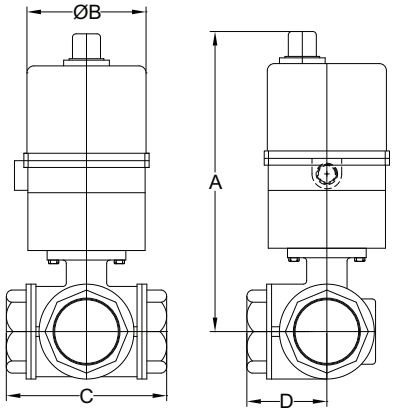

2" - 3"

Dimensions are approximate. Engineering dimensions are available upon request.
Specifications are subject to change without notice.

* ***T*** = t-port style
* ***L*** = l-port style

Size	A	B	C	D	Override	*Stainless Steel* Part #	110VAC Voltage **-EA**	24VDC Voltage **-EG**	12VDC Voltage **-ET**	220VAC Voltage **-EK**	24VAC Voltage **-ES**
1/4"	8.76	6.06	2.64	1.32	standard	***BV3BV*R-0251***	**$975.65**	**$975.65**	**$975.65**	**$975.65**	**$975.65**
3/8"	8.76	6.06	2.64	1.32	standard	***BV3BV*R-0381***	**975.65**	**975.65**	**975.65**	**975.65**	**975.65**
1/2"	8.76	6.06	2.87	1.44	standard	***BV3BV*R-0501***	**975.65**	**975.65**	**975.65**	**975.65**	**975.65**
3/4"	8.85	6.06	3.19	1.60	standard	***BV3BV*R-0751***	**999.70**	**999.70**	**999.70**	**999.70**	**999.70**
1"	9.19	6.06	3.74	1.87	standard	***BV3BV*R-1001***	**1066.00**	**1066.00**	**1066.00**	**1066.00**	**1066.00**
1¼"	9.41	6.06	4.39	2.20	standard	***BV3BV*R-1251***	**1152.50**	**1152.50**	**1152.50**	**1152.50**	**1152.50**
1½"	9.90	6.06	4.86	2.43	standard	***BV3BV*R-1501***	**1381.00**	**1381.00**	**1381.00**	**1381.00**	**1381.00**
2"	10.89	4.25	5.73	2.87	standard	***BV3BV*R-2001***	**2051.70**	**2051.70**	**2051.70**	**2051.70**	**2051.70**
2½"	11.34	4.25	6.93	3.47	standard	***BV3BV*R-2501***	**2850.00**	**2850.00**	**2850.00**	**2850.00**	**2850.00**
3"	11.34	4.25	7.08	3.54	standard	***BV3BV*R-3001***	**2868.00**	**2868.00**	**2868.00**	**2868.00**	**2868.00**

A wide variety of options are available: modulating, extra switches, transmitters, potentiometer, etc.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.


For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.

SAFETY ALERT

Pneumatically Actuated 3-Way 'T/L' Port Brass Ball Valves



Default Flow Paths

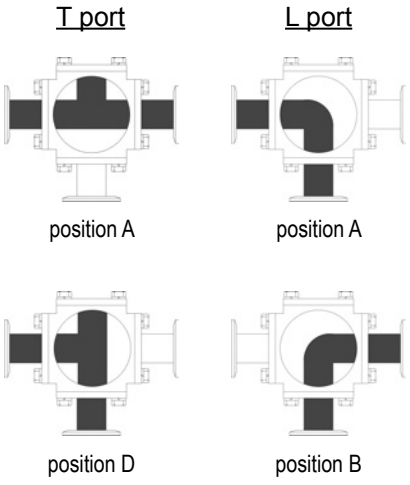

Refer to page 633 for alternate flow paths.

3-Way Brass Ball Valve

- pressure rating: **400 PSI** WOG **100 PSI** WSP
- maximum temperature: **344ºF**
- blow-out proof stem
- chrome-plated brass ball
- PTFE seats with O-ring backing for low operating torque
- PTFE seats and double O-ring stem packing
- 100% tested
- reduced port
- ISO 5211 mounting pad


Rack and Pinion Actuator

- bi-directional stops for ±5º travel adjustment
- 80 PSI plant air required
- maximum operating pressure: **120 PSI**
- operating temperature range: **-40ºF** to **200ºF**
- hard anodized aluminum body
- NAMUR mounting
- nickel plated anti-blowout pinion
- Buna-N O-rings
- visual position indication
- tested to one million cycles

Spring Return (normally closed)

All dimensions are given in inches, unless noted. Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.


* ***T*** = t-port style
* ***L*** = l-port style

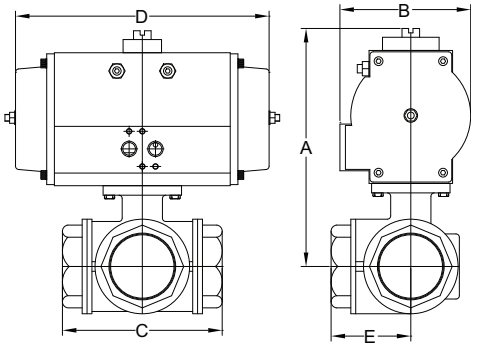

Size	A	B	C	D	E	*Brass* Part #	Price/E
1/4"	4.72	2.80	2.64	5.49	1.32	***BV3BV*R-0251BBC***	**$646.05**
3/8"	4.72	2.80	2.64	5.49	1.32	***BV3BV*R-0381BBC***	**646.05**
1/2"	4.72	2.80	2.87	5.49	1.44	***BV3BV*R-0501BBC***	**646.05**
3/4"	4.81	2.80	3.19	5.49	1.60	***BV3BV*R-0751BBC***	**670.10**
1"	6.28	3.74	3.74	7.45	1.87	***BV3BV*R-1001BBC***	**815.10**
1¼"	6.50	3.74	4.39	7.45	2.20	***BV3BV*R-1251BBC***	**948.25**
1½"	6.99	3.74	4.86	7.45	2.43	***BV3BV*R-1501BBC***	**1176.75**
2"	8.45	4.69	5.73	9.10	2.87	***BV3BV*R-2001BBC***	**1721.65**
2½"	8.90	4.69	6.93	9.10	3.47	***BV3BV*R-2501BBC***	**2519.95**
3"	8.90	4.69	7.08	9.10	3.54	***BV3BV*R-3001BBC***	**2537.95**

Double Acting

Dimensions are approximate. Engineering dimensions are available upon request. Specifications are subject to change without notice.

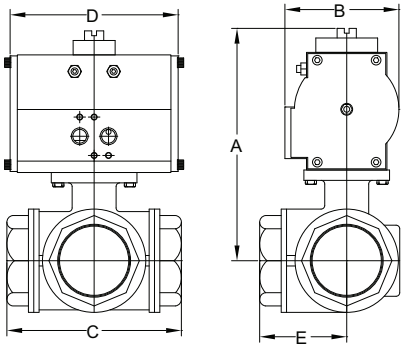

Size	A	B	C	D	E	*Brass* Part #	Price/E
1/4"	3.76	1.77	2.64	4.33	1.32	***BV3BV*R-0251BCC***	**$504.40**
3/8"	3.76	1.77	2.64	4.33	1.32	***BV3BV*R-0381BCC***	**504.40**
1/2"	3.76	1.77	2.87	4.33	1.44	***BV3BV*R-0501BCC***	**504.40**
3/4"	3.85	1.77	3.19	4.33	1.60	***BV3BV*R-0751BCC***	**528.45**
1"	5.53	3.20	3.74	5.32	1.87	***BV3BV*R-1001BCC***	**643.70**
1¼"	5.75	3.20	4.39	5.32	2.20	***BV3BV*R-1251BCC***	**776.90**
1½"	6.24	3.20	4.86	5.32	2.43	***BV3BV*R-1501BCC***	**1005.40**
2"	7.55	3.74	5.73	5.51	2.87	***BV3BV*R-2001BCC***	**1449.20**
2½"	8.00	3.74	6.93	5.51	3.47	***BV3BV*R-2501BCC***	**2247.50**
3"	8.00	3.74	7.08	5.51	3.54	***BV3BV*R-3001BCC***	**2265.50**

A wide variety of switches, solenoids, positioners, etc., are available.
Contact the factory at 800.789.1718 or visit bradfordfittings.com for details.

SAFETY ALERT

Caution !

Even though there are torque safety factors built into our automated ball valve packages, actual service conditions must also be considered when selecting the proper product for the appropriate application.


For example: Severe service conditions such as dirty water, dirty air, all slurries, raw sewage water, oils, and other viscous fluids can have a dramatic affect in raising the torque requirements of ball valves as much as 75% and therefore larger actuators may be required. Please consult the factory when dealing with these types of applications.

SAFETY ALERT

Actuation

All Bradford™ actuators, accessories and mounting hardware can be sold separately, call Dixon Sanitary at 800.789.1718 for details.

- Dixon Sanitary can actuate all of our butterfly and ball valves with Bradford™ actuators.
- Dixon Sanitary ships all actuated valves from the Valve Automation Department in Wisconsin.
- Bradford™ actuators are tested to one million cycles and are backed with a one year manufacturer's warranty.
- Our professionally trained specialists assemble and test each automation package to guarantee performance in the field.
- Documentation is filed on each automated valve package in case it is needed at any point in the future.
- Each unit is individually foam packed to ensure they arrive in top condition.
- Most standard orders can be shipped within 24 hours.

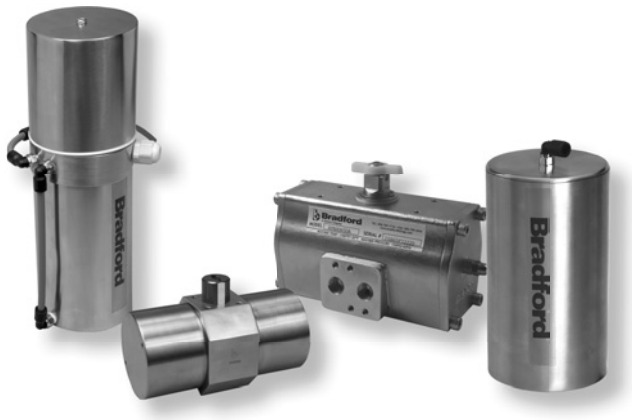

stainless steel actuators

- vertical canister
- rack and pinion
- control top



aluminum actuators

- 90° and 180° rotation
- spring return and double acting
- bi-directional travel stops



electric actuators

- variety of voltages
- manual overrides
- feedback and modulation available

Actuated Valve Accessories

Limit Switches



- visual position indicator
- 3D open/close indication
- quick-set cam
- mechanical SPDT switches (standard)
- multipoint terminal strip
- various switch options available
- cable entry: (2) ½" NPT

Enclosures available:

NEMA 4 4/X
- water and dust tight for indoor or outdoor use
- corrosion resistant

NEMA 7
- water and dust tight for indoor or outdoor use
- corrosion resistant
- for use in indoor hazardous locations
- explosion proof

Enclosure	Part #	Price/E
NEMA 4/4X	***XLS-B4A0120P***	**$311.30**
NEMA 7	***XLS-B7A0120P***	**760.40**

Solenoids




- pressure range: 30 PSI to 150 PSI
- duty cycle: 100% extended duty
- voltages available:
  12VDC, 24VDC, 24VAC, 48VAC, 110VAC, 220VAC
- electroless nickel plated spool
- easy-to-use manual override
- port sizes: inlet and exhaust ¼" NPT

Enclosures available:

NEMA 4 4/X
- water and dust tight for indoor or outdoor use
- corrosion resistant

Description	Part #	Price/E
single coil, 115VAC	***XSO-4S4D-0A***	**$201.10**
single coil, 24VDC	***XSO-4S4B-0A***	**201.10**
dual coil, 115VAC	***XSO-4D4D-0A***	**322.20**
dual coil, 24VDC	***XSO-4D4B-0A***	**322.20**

Positioners

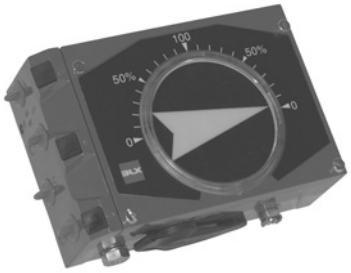

- air capacity:
  at 29 PSI (200kPa): 9.5 SCFM
  at 87 PSI (600kPa): 28.3 SCFM
  at 145 PSI (1MPa): 47.1 SCFM
- air connections: 1/4" NPT
- gauges: 1/8" NPT
- cable entry: 1/2" NPT


Electro-Pneumatic
- input range: 4-20mA (Ri<250ohms)
- supply pressure: 21.8 to 145 PSI (0.15 to 1MPa)
- linearity error: <1.0% f.s
- hysteresis: <0.6% f.s
- repeatability: <0.5% f.s

Pneumatic
- input range: 3 to 15 PSI (20-100kPa)
- supply pressure: < 145 PSI (<1MPa)
- linearity error: <0.7% f.s
- hysteresis: <0.4% f.s
- repeatability: <0.3% f.s

Positioner Type	Part #	Price/E
Electro-Pneumatic	***XPO-E4F***	**$2466.70**
Pneumatic	***XPO-P4F***	**1151.55**

Speed Control Mufflers


aluminum


brass

- maximum operating pressure: **300 PSI**
- operating temperature: **-65°F** to **300°F**

NPT Thread Size	Approx. Full Oper. Height	Maximum Adjusted SCFM	*2011T3 Aluminum* Part #	Price/E	*Brass* Part #	Price/E
1/8"	1-5/16"	20	***ASCM18***	**$8.00**	***SCM18***	**$5.50**
1/4"	1-9/16"	30	***ASCM28***	**9.10**	***SCM28***	**6.35**
3/8"	1-5/8"	40	***ASCM38***	**12.10**	***SCM38***	**9.25**
1/2"	2"	60	***ASCM48***	**16.50**	***SCM48***	**14.25**
3/4"	2-3/8"	70	***ASCM68***	**28.95**	***SCM68***	**18.90**
1"	2-1/2"	100	***ASCM88***	**35.85**	***SCM88***	**30.60**

Cast Iron Y Line Strainers

- cast iron body, female x female NPT ends
- graphite gasket
- **400 PSI** WOG, **250 PSI** working steam pressure
- plug ported for blowdown service

products used with the strainer:
- MNPT threaded close nipples, page 548
- brass ball valves, page 500
- MNPT threaded plugs, page 541



NPT Size	Description	*Cast Iron* Part #	Price/E	*304 Stainless Replacement Screens* Part #	Price/E
1/4"	20 x 20 mesh	***Y001***	**$23.75**	***P183000***	**$22.25**
3/8"	20 x 20 mesh	***Y002***	**23.75**	***P183000***	**22.25**
1/2"	20 x 20 mesh	***Y003***	**28.50**	***P183000***	**22.25**
3/4"	20 x 20 mesh	***Y004***	**34.75**	***P180600***	**27.10**
1"	20 x 20 mesh	***Y005***	**43.50**	***P185800***	**22.75**
1-1/4"	20 x 20 mesh	***Y006***	**61.70**	***P187600***	**22.40**
1-1/2"	20 x 20 mesh	***Y007***	**76.00**	***G3231-00***	**14.00**
2"	20 x 20 mesh	***Y008***	**113.90**	***P191700***	**84.00**

Bronze Y Line Strainers

- cast bronze body, female x female NPT ends
- **400 PSI** WOG, **300 PSI** working steam pressure



NPT Size	Description	*Bronze* Part #	Price/E	*304 Stainless Replacement Screens* Part #	Price/E
1/4"	50 x 50 mesh	***59-001***	**$37.75**	***G3271-00***	**$4.65**
3/8"	50 x 50 mesh	***59-002***	**37.75**	***G2457-00***	**5.00**
1/2"	50 x 50 mesh	***59-003***	**37.75**	***G2457-00***	**5.00**
3/4"	20 x 20 mesh	***59-004***	**71.70**	***G3224-00***	**4.55**
1"	20 x 20 mesh	***59-005***	**94.90**	***G3225-00***	**10.00**
1-1/4"	20 x 20 mesh	***59-006***	**170.80**	***G3231-00***	**14.00**
1-1/2"	20 x 20 mesh	***59-007***	**189.00**	***G3229-00***	**15.25**
2"	20 x 20 mesh	***59-008***	**310.60**	***G3230-00***	**11.75**

N
Valves

Polypropylene Y Line Strainers

- protects and prevents clogging of pipelines, pumps and spray tips
- glass-filled polypropylene body, female x female NPT ends
- easy access for cleaning
- maximum working pressure **90 PSI** at **70°F**



NPT Size	Description	*Polypropylene* Part #	Price/E	*304 Stainless Replacement Screens* Part #	Price/E
¾"	40 mesh	***PYLS7540***	**$33.00**	***61450***	**$15.25**
1"	40 mesh	***PYLS10040***	**40.75**	***61746***	**16.25**
1½"	40/20 mesh	***PYLS15040***	**89.25**	***61509***	**38.55**
2"	40/20 mesh	***PYLS20040***	**89.25**	***61509***	**38.55**

Polypropylene T Line Strainers



- white polypropylene allows easy inspection
- female x female NPT ends
- 40 mesh stainless steel screen
- maximum working pressure **100 PSI** at **70°F**

NPT Size	Description	*Polypropylene* Part #	Price/E	*Stainless Replacement Screens* Part #	Price/E
¾"	40 mesh	***PTLS7540***	**$24.20**	***61405***	**$10.00**
1"	40 mesh	***PTLS10040***	**24.20**	***61405***	**10.00**

Single Union Polypropylene Ball Valves



- rated to **125 PSI** at **70°F**
- corrosion resistant polypropylene
- Teflon® ball seats
- EPDM O-rings
- FDA approved material

female NPT x female NPT

Size	Port Type	*Polypropylene* Part #	Price/E	Pkg Qty
½"	full	***SUBV50***	**$18.40**	24
¾"	full	***SUBV75***	**20.00**	24
1"	full	***SUBV100***	**25.55**	24
1¼"	full	***SUBV125***	**42.60**	12
1½"	full	***SUBV150***	**52.00**	12
2"	full	***SUBV200***	**66.65**	12
3"	full	***SUBV300***	**197.30**	4

45° Single Union Polypropylene Nozzle Valves



- rated to **125 PSI** at **70°F**
- corrosion resistant polypropylene
- Teflon® ball seats
- EPDM O-rings
- FDA approved material

female NPT x nozzle

Size	*Polypropylene* Part #	Price/E	Pkg Qty
1"	***SUBVN100***	**$26.65**	24


Bolted Polypropylene Ball Valves

- ½" - 3" is rated to **125 PSI** at **70°F**; 4" is rated to **90 PSI** at **70°F**
- chemically-resistant, reinforced polypropylene
- FDA approved material
- Teflon® ball seats
- EPDM O-Ring body seals, Viton® O-Ring stem seals
- 304 stainless steel nuts and bolts

4-bolt valve design

female NPT x female NPT


Size	Port Type	*Polypropylene* Part #	Price/E	Opt Qty
½"	full	***PVFP50***	**$43.70**	24
¾"	full	***PVFP75***	**43.70**	24
1"	full	***PVFP100***	**50.90**	24
1½"	full	***PVFP150***	**65.05**	24
1"	standard	***PV100***	**43.65**	24
2"	standard	***PV200***	**63.15**	24



6-bolt valve design

female NPT x female NPT

Size	Port Type	*Polypropylene* Part #	Price/E	Opt Qty
2"	full	***PVFP200***	**$92.25**	12
3"	full	***PVFP300***	**222.35**	8
4"	full	***PVFP400***	**447.40**	4

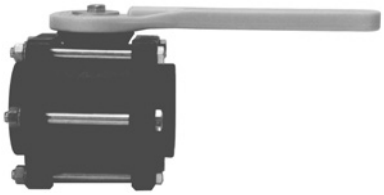

Bolted Polypropylene Ball Valves with Nozzles

- rated to **125 PSI** at **70°F**
- chemically-resistant, reinforced polypropylene
- Teflon® ball seat
- EPDM O-ring body seals, Viton® O-ring stem seals
- 304 stainless steel nuts and bolts
- body-to-flange design allows for low torque operation
- FDA approved material

female NPT x nozzle

Size	Port Type	*Polypropylene* Part #	Price/E	Opt Qty
1½"	full	***PVFPN150***	**$88.95**	12
2"	full	***PVFPN200***	**125.15**	9
2"	standard	***PVN200***	**91.65**	12



Compact Bolted Polypropylene Ball Valves

- rated to **125** PSI at **70°F**
- chemically-resistant, reinforced polypropylene
- FDA approved material
- Teflon® ball seats
- EPDM O-ring body seals, Viton® O-ring stem seals
- 304 stainless steel nuts and bolts

female NPT x female NPT

Size	Port Type	Body Length	*Polypropylene* Part #	Price/E
2"	full	4-7/8"	***PVFPS200***	**$72.75**



female NPT x male adapter

Size	Port Type	Body Length	*Polypropylene* Part #	Price/E
2"	full	6-7/8"	***PVFPSA200***	**$72.75**



Ductile Iron Butterfly Valves

SAFETY ALERT *NOT RECOMMENDED FOR STEAM SERVICE*

- for use between two 150 lb. flanges
- will lock "open" or "closed"
- rated to **200 PSI** at ambient temperature (70°F)



- ductile iron body, ASTM A536
- aluminum bronze disc, ASTM B148, ALY.954
- Buna-N seal and stem seals
- PTFE bushing
- stainless steel top and bottom stems
- The number of holes on the valve should match the number of holes for the specific flange size listed in the Pipe and Flange dimensions chart on page 619.

threaded lug style with bronze disc

Size	*with Buna-N liner*		*with EPDM liner*	
	Part #	Price/E	Part #	Price/E
2"	***BFVL200***	**$145.00**	***BFVL200E***	**$145.00**
3"	***BFVL300***	**181.25**	***BFVL300E***	**181.25**
4"	***BFVL400***	**270.00**	***BFVL400E***	**270.00**
6"	***BFVL600***	**475.00**	***BFVL600E***	**475.00**



- ductile iron body, ASTM A536
- aluminum bronze disc, ASTM B148, ALY.954
- Buna-N seal and stem seals
- PTFE bushing
- stainless steel top and bottom stems
- The number of holes on the valve depends on the body size.

wafer style with bronze disc

Size	*with Buna-N liner*		*with EPDM liner*	
	Part #	Price/E	Part #	Price/E
2"	***BBFVW200***	**$133.00**	***BBFVW200E***	**$133.00**
3"	***BBFVW300***	**170.00**	***BBFVW300E***	**170.00**
4"	***BBFVW400***	**240.00**	***BBFVW400E***	**240.00**
6"	***BBFVW600***	**420.00**	***BBFVW600E***	**420.00**



- ductile iron body, ASTM A536
- stainless steel disc, ASTM A351, GR. CF-8M
- Buna-N seal and stem seals
- PTFE bushing
- stainless steel top and bottom stems
- The number of holes on the valve depends on the body size.

wafer style with stainless disc

Size	*with Buna-N liner*	
	Part #	Price/E
2"	***BFVW200***	**$150.00**
3"	***BFVW300***	**185.00**
4"	***BFVW400***	**250.00**
6"	***BFVW600***	**440.00**

Econovalves

The Econovalve series of ball valves are solidly constructed and designed for rugged service such as the mining and construction industries. The unique one piece ball and stem provides positive on/off action with no slacks and no leaks.

Specifications:

- body: spheroidal graphite cast iron to ISO 1083-1987; 400-250-15 SGI
- seals: nitrile butadiene
- handle: 1½" - 2" spheroidal graphite cast iron to ISO 1083-1987. other sizes have pressed mild steel handles
- ball and stem: spheroidal graphite cast iron to ISO 1083-1987; copper chrome plated to AS1192. ¾" and 1" are top-loading making in-line maintenance easy.
- bolts: hex, M10 x 1.5 x 90, grade 8, black
- nuts: hex, M10 x 1.5, grade 8, zinc plated

Pressure Ratings

Size	Working PSI at 70°F	Burst PSI
½"	**300**	1160
¾"	**300**	1015
1"	**300**	1015
1½"	**300**	860
2"	**300**	860

Female NPT Standard Valves

female NPT x female NPT

Size	*Iron* Part #	Price/E
¾"	***EVNPT75***	**$47.90**
1"	***EVNPT100***	**47.20**
1½"	***EVNPT150***	**99.80**
2"	***EVNPT200***	**97.50**



Grooved Standard Valves

grooved end x grooved end

Size	*Iron* Part #	Price/E
1"	***EVGR100***	**$47.20**
1½"	***EVGR150*** *	**POR**
2"	***EVGR200***	**105.00**

* item will be discontinued as stock is depleted






FNPT x Grooved Standard Valves

female NPT x grooved end


NPT Size	Grooved End Size	*Iron* Part #	Price/E
1"	2"	***EVNPTGR100200***	**$49.70**
2"	2"	***EVNPTGR200***	**106.80**



FNPT x Surelock Standard Valves

female NPT x small Surelock connection

Size	*Iron* Part #	Price/E
1"	***EVNPTSL100***	**$53.20**




Surelock x Surelock Standard Valves

small Surelock connection x small Surelock connection

Iron Part #	Price/E
EVSL100	**$51.80**



Spring-Loaded Check Valves




- 1½" - 2" rated to **400 PSI** WOG;
  3" - 4" rated to **175 PSI** WOG
- cracking pressure: 0.50 PSI
- brass with NBR seat
- soft seat for bubble tight shutoff, spring loaded for fast seating action
- flow profile designed to minimize head loss
- temperature range **10°F** to **210°F** (-10°C to 100°C)

NPT Size	*Brass* Part #	Price/E
½"	***CV050 ****	**$16.90**
¾"	***CV075 ****	**22.70**
1"	***CV100 ****	**30.75**
1¼"	***CV125 ****	**49.65**
1½"	***CV150 ****	**72.00**
2"	***CV200 ****	**102.00**
3"	***CV300***	**323.00**
4"	***CV400***	**500.25**

* NSF61 approved

Strainer with Spring-Loaded Check Valve

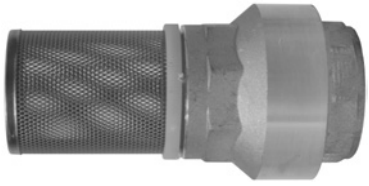

- 1½" - 2" rated to **400 PSI** WOG;
  3" - 4" rated to **175 PSI** WOG
- cracking pressure: 0.50 PSI
- brass with NBR seat
- stainless steel strainer
- soft seat for bubble tight shutoff, spring loaded for fast seating action.
- flow profile designed to minimize head loss
- temperature range **10°F** to **210°F** (-10°C to 100°C)

NPT Size	*Brass* Part #	Price/E
1½"	***BVFS20 ****	**$81.40**
2"	***BVFS25 ****	**123.75**
3"	***BVFS35***	**344.70**
4"	***BVFS40***	**520.00**

* NSF61 approved

Horizontal Swing Check Valves



- Swing check valves are designed to prevent back flow in plumbing and liquid piping systems, while offering full flow performance with a minimum of turbulence or pressure loss.
- A positive seating disc allows flow only in one direction and a screw-in cap provides easy access for periodic cleaning.
- for horizontal or vertical use
- rated to **200 PSI** WOG
- temperature range **-20°** to **150°F**
- brass body
- brass disc

female NPT x female NPT


Size	*Brass* Part #	Price/E
½"	***SWCV50***	**$22.10**
¾"	***SWCV75***	**28.95**
1"	***SWCV100***	**39.50**
1¼"	***SWCV125***	**58.80**
1½"	***SWCV150***	**79.00**
2"	***SWCV200***	**116.50**
3"	***SWCV300***	**344.20**

Ball Cone Check Valves

- For use with water, oil, air lines or inert gases. Not recommended for use on or near reciprocating pumps or other similar vibration causing machinery.
- tight shut-off with liquid media
- no radial alignment necessary
- straight through and streamlined for minimum change in velocity
- Reinforced TFE check is spring loaded for fast seating action.
- rated to **400 PSIG** WOG, cold non-shock; **125 PSIG** saturated steam
- cracking pressure is .5 PSI
- temperature range **-20°F** to **353°F**


Pressure Ratings

Degrees in Farenheit	Pressure WOG
-20 to 100	**400**
200	**200**
250	**160**
275	**150**
300	**140**
325	**130**
353	**125**



female NPT x female NPT

Size	*Brass* Part #	Price/E	*Stainless Steel* Part #	Price/E
1/4"	***61-101***	**$46.30**	***62-101***	**$115.00**
3/8"	***61-102***	**46.30**	***62-102***	**115.00**
1/2"	***61-103***	**46.30**	***62-103***	**132.50**
3/4"	***61-104***	**66.10**	***62-104***	**215.00**
1"	***61-105***	**89.50**	***62-105***	**290.00**
1-1/4"	***61-106***	**158.25**	**---**	**---**
1-1/2"	***61-107***	**201.50**	**---**	**---**
2"	***61-108***	**328.25**	**---**	**---**
2-1/2"	***61-109***	**669.80**	**---**	**---**
3"	***61-100***	**1120.10**	**---**	**---**



male NPT x female NPT

Size	*Brass* Part #	Price/E
1/4"	***61-201***	**$68.00**
3/8"	***61-202***	**68.00**
1/2"	***61-203***	**68.00**
3/4"	***61-204***	**92.00**
1"	***61-205***	**130.00**
1-1/4"	***61-206***	**220.00**
1-1/2"	***61-207***	**275.00**
2"	***61-208***	**475.00**



Straub Grip-L Axial Restraint Pipe Couplings


Straub Grip-L couplings are suitable particularly for pipes within the lower pressure range. Applications include, but are not limited to: ship building, water and waste water treatment plants, and industrial process pipework.

- Joins like or dissimilar pipe materials: steel, galvanized, painted, stainless steel, thin-wall stainless steel, PVC, copper
- Requires no special tools or pipe-end preparation; only a torque wrench is required for a secure and safe pipe connection that seldom needs retightening.
- highest quality 316 Ti stainless steel construction
- accommodates up to 5° of pipe misalignment
- vary gap between pipe ends
- absorbs vibration, water hammer, and sound
- special patented grip ring for superior holding power on hard-surfaced pipes
- 5 year limited warranty
- reusable
- built to ASTM 1476, Type 2, Class 2 specifications

Specifications:
- casing: AISI 316Ti
- screws: AISI 316 L
- bolts: AISI 316 Ti
- anchoring ring: AISI 301
- sealing sleeve: EPDM standard (NBR and Viton® A are also available, contact the factory for additional information)
- EPDM sealing sleeve: temperature range **- 4°F** to **176°F** (-20°C to 80°C)

Approvals:
- American Bureau of Shipping (ABS) up to 230 PSI
- Underwriter's Laboratories (UL)
- National Sanitation Foundation (NSF)



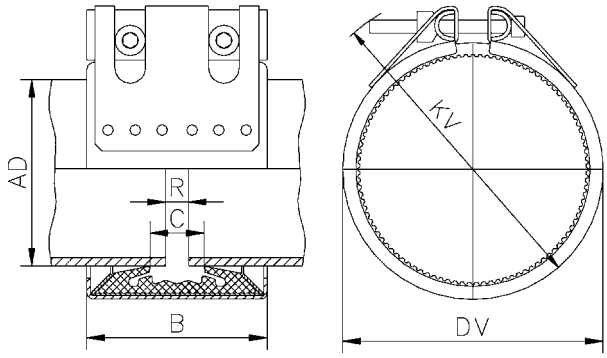

Size	Pipe OD actual	Pipe OD range min to max	Working Pressure **PSI**	Torque Rating (ft. lbs.)	Coupling Dimensions B	Coupling Dimensions C	Assembled Dimensions DV	Assembled Dimensions KV	Max. Distance Between Pipe End R	*Stainless Steel* Part #	*Stainless Steel* Price/E
¾"	1.05"	0.85" to 1.25"	**670**	5.5	1.8"	0.7"	1.7"	2.8"	0.2"	***STR20000***	**$138.50**
1"	1.31"	1.11" to 1.51"	**550**	5.5	1.8"	0.7"	2"	3"	0.2"	***STR20100***	**147.00**
1½"	1.90"	1.70" to 2.10"	**440**	11	2.4"	1.0"	2.6"	3.9"	0.2"	***STR20300***	**181.50**
2"	2.37"	2.17" to 2.67"	**320**	11	3.0"	1.5"	3.1"	4.3"	0.4"	***STR20450***	**212.75**
2½"	2.87"	2.67" to 3.17"	**450**	15	3.7"	1.6"	3.8"	5.3"	0.4"	***STR20500***	**271.00**
3"	3.50"	3.10" to 3.90"	**320**	15	3.7"	1.6"	4.4"	5.9"	0.4"	***STR20650***	**300.00**
4"	4.50"	4.10" to 4.90"	**232**	18	3.7"	1.6"	5.4"	6.6"	0.4"	***STR20900***	**330.50**
5"	5.56"	5.06" to 6.16"	**232**	30	4.3"	2.1"	6.5"	8.3"	0.4"	***STR21150***	**489.50**
6"	6.63"	5.93" to 7.23"	**232**	30	4.3"	2.1"	7.6"	9.1"	0.4"	***STR21350***	**532.00**
8"	8.63"	7.73" to 9.43"	**232**	45	5.6"	3.2"	9.8"	11.6"	0.4"	***STR21400***	**930.00**

SAFETY ALERT

All Straub couplings require the correct use of a torque wrench for a safe and proper installation. Straub couplings must be torqued to the specified value as printed on each individual coupling. Failure to do so can result in serious injury or death.

SAFETY ALERT

Not for steam or refrigerant service.


Straub Open-Flex 1L Couplings


Straub Open-Flex 1L couplings are suitable for repairing or joining pipes where access to the pipe end is difficult or not possible. This unique wrap-around design differs from similar type repair products because the installation or repair is permanent due to the unique flexible lipseal gasket design. Open-Flex couplings will also act as an expansion joint. *Straub Open-Flex couplings do require the pipes to be properly anchored and restrained as they are not pull-out resistant like the Straub Grip-L couplings.* Use Straub Open-Flex couplings to replace bolted sleeve type couplings (AWWA Std. C-219) or for permanent repairs or installation.

- Joins like or dissimilar pipe materials: steel, galvanized, painted, stainless steel, thin-wall stainless steel, PVC, copper
- Requires no special tools or pipe-end preparation; only a torque wrench is required for a secure and safe pipe connection that seldom needs retightening.
- highest quality 316 Ti stainless steel construction
- accommodates up to 5° of pipe misalignment
- vary gap between pipe ends
- absorbs vibration, water hammer, and sound
- acts an an expansion joint; will accept up to .25" of axial movement
- 5 year limited warranty
- reusable
- conforms to ASTM 1476, Type 2, Class 3 specifications

Specifications:
- casing: AISI 316Ti
- screws: AISI 4135 steel
- bolts: AISI 12L 14 Galvanized
- EPDM sealing sleeve: temperature range **- 4°F** to **176°F** (-20°C to 80°C)

Approvals:
- American Bureau of Shipping (ABS) up to 230 PSI
- Underwriter's Laboratories (UL)
- National Sanitation Foundation (NSF)

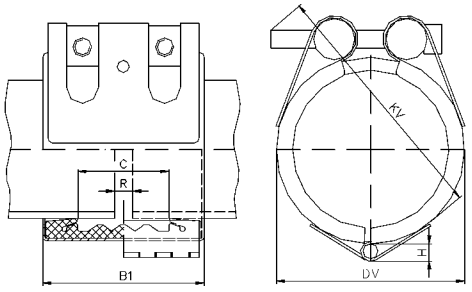

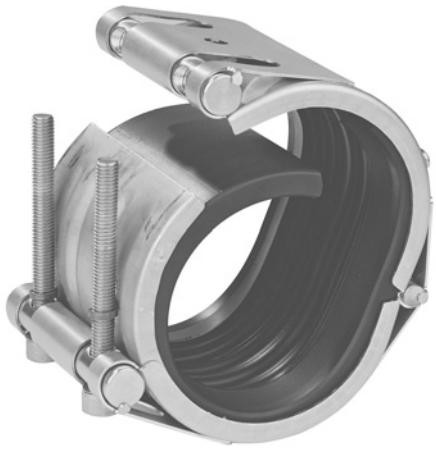

Size	Pipe OD actual	Pipe OD range min to max	Working Pressure **PSI**	Coupling Dimensions B	Coupling Dimensions C	Coupling Dimensions H	Assembled Dimensions DV	Assembled Dimensions KV	Max. Distance Between Pipe End R	Weight (lbs.)	*Stainless Steel* Part #	*Stainless Steel* Price/E
1½"	1.90"	1.85" to 1.95"	**232**	3.0"	1.4"	.28	2.8"	3.3"	.20"	1.10	***STR35001***	**$220.00**
2"	2.38"	2.32" to 2.42"	**232**	3.0"	1.4"	.28	3.2"	3.7"	.20"	1.34	***STR35151***	**233.25**
2½"	2.88"	2.81" to 2.93"	**232**	3.7"	2.0"	.36	3.7"	4.6"	.20"	1.80	***STR35201***	**255.00**
3"	3.50"	3.44" to 3.56"	**232**	3.7"	2.0"	.36	4.4"	5.2"	.20"	2.10	***STR35351***	**265.00**
4"	4.50"	4.43" to 4.57"	**232**	3.7"	2.0"	.36	5.4"	6.2"	.20"	2.33	***STR35651***	**281.00**
5"	5.56"	5.51" to 5.62"	**232**	4.2"	2.4"	.38	6.4"	6.9"	.20"	3.20	***STR35901***	**355.00**
6"	6.63"	6.52" to 6.71"	**232**	4.2"	2.4"	.38	7.5"	8.1"	.20"	3.70	***STR36051***	**380.50**

◎ Pipe & Welding

SAFETY ALERT

Not pull-out resistant.

Ensure that pipes are properly anchored and supported.

SAFETY ALERT

Assembly tool available, ***STR6648***, **$307.60**




Weld End Female Metal Hose Fittings

- All fittings have 316 seamless stainless steel tubes

Straight






Female Threaded 37° JIC x Weld End

Tube OD	Pressure Rating **PSI** at 70°F	L Length	Gauge	*304 Stainless Steel Nut & Sleeve* Part #	Price/E	*Carbon Steel Nut & Sleeve* Part #	Price/E
1/4"	**5000**	1.500"	.049"	***SFMF250***	**$27.30**	***FMF250***	**$16.65**
3/8"	**4500**	1.500"	.049"	***SFMF375***	**30.75**	***FMF375***	**20.40**
1/2"	**4000**	1.500"	.049"	***SFMF500***	**50.55**	***FMF500***	**27.55**
3/4"	**2600**	1.500"	.049"	***SFMF750***	**86.90**	***FMF750***	**40.45**
1"	**2500**	2.000"	.049"	***SFMF1000***	**135.85**	***FMF1000***	**61.00**
1¼"	**2050**	2.375"	.065"	***SFMF1250***	**230.90**	***FMF1250***	**121.20**
1½"	**1700**	2.375"	.065"	***SFMF1500***	**391.60**	***FMF1500***	**168.20**
2"	**1250**	2.500"	.065"	***SFMF2000***	**760.10**	***FMF2000***	**312.55**

45° Elbow






Female Threaded 37° JIC x Weld End

Tube OD	Pressure Rating **PSI** at 70°F	A Dim.	B Dim.	Bend Radius	Gauge	*304 Stainless Steel Nut & Sleeve* Part #	Price/E	*Carbon Steel Nut & Sleeve* Part #	Price/E
1/4"	**5000**	0.750"	0.750"	0.380"	.049"	***SFMF250-45***	**$23.60**	***FMF250-45***	**$27.60**
3/8"	**4500**	1.000"	1.000"	0.500"	.049"	***SFMF375-45***	**34.30**	***FMF375-45***	**36.75**
1/2"	**4000**	1.250"	1.250"	1.000"	.049"	***SFMF500-45***	**59.95**	***FMF500-45***	**66.55**
3/4"	**2600**	1.450"	1.450"	1.500"	.049"	***SFMF750-45***	**96.90**	***FMF750-45***	**68.70**
1"	**2500**	1.800"	1.800"	2.000"	.049"	***SFMF1000-45***	**159.60**	***FMF1000-45***	**106.90**
1¼"	**2050**	2.100"	2.100"	2.000"	.065"	***SFMF1250-45***	**268.10**	***FMF1250-45***	**192.45**
1½"	**1700**	2.300"	2.300"	2.000"	.065"	***SFMF1500-45***	**486.70**	***FMF1500-45***	**282.50**
2"	**1250**	3.000"	3.000"	3.000"	.065"	***SFMF2000-45***	**634.75**	***FMF2000-45***	**586.30**

90° Elbow






Female Threaded 37° JIC x Weld End

Tube OD	Pressure Rating **PSI** at 70°F	A Dim.	B Dim.	Bend Radius	Gauge	*304 Stainless Steel Nut & Sleeve* Part #	Price/E	*Carbon Steel Nut & Sleeve* Part #	Price/E
1/4"	**5000**	1.000"	1.000"	0.375"	.049"	***SFMF250-90***	**$31.05**	***FMF250-90***	**$32.40**
3/8"	**4500**	1.250"	1.250"	0.500"	.049"	***SFMF375-90***	**35.05**	***FMF375-90***	**39.05**
1/2"	**4000**	1.830"	1.830"	1.000"	.049"	***SFMF500-90***	**61.40**	***FMF500-90***	**56.70**
3/4"	**2600**	2.350"	2.350"	1.500"	.049"	***SFMF750-90***	**104.25**	***FMF750-90***	**91.70**
1"	**2500**	3.100"	3.100"	2.000"	.049"	***SFMF1000-90***	**166.35**	***FMF1000-90***	**123.05**
1¼"	**2050**	3.500"	3.500"	2.000"	.065"	***SFMF1250-90***	**297.00**	***FMF1250-90***	**197.35**
1½"	**1700**	3.750"	3.750"	2.000"	.065"	***SFMF1500-90***	**415.60**	***FMF1500-90***	**251.05**
2"	**1250**	4.900"	4.900"	2.000"	.065"	***SFMF2000-90***	**833.45**	***FMF2000-90***	**606.80**

NPT Threaded Pipe Fittings

Size	Overall Length	*Carbon Steel* Part #	Price/E	*304 Stainless Steel* Part #	Price/E	*Aluminum* Part #	Price/E
1/4"	2"	***PN250***	**$1.90**	***PNS250***	**$7.80**	**---**	**---**
3/8"	2"	***PN375***	**2.10**	***PNS375***	**9.60**	**---**	**---**
1/2"	2"	***PN500***	**1.55**	***PNS500***	**11.20**	**---**	**---**
3/4"	2"	***PN750***	**1.90**	***PNS750***	**13.35**	**---**	**---**
1"	2"	***PN1000***	**2.90**	***PNS1000***	**16.70**	**---**	**---**
1¼"	2"	***PN1250***	**3.70**	***PNS1250***	**19.70**	**---**	**---**
1½"	2"	***PN1500***	**4.40**	***PNS1500***	**22.45**	**---**	**---**
2"	2"	***PN2000***	**5.60**	***PNS2000***	**30.75**	**---**	**---**
2½"	3"	***PN2500***	**17.80**	***PNS2500***	**74.10**	**---**	**---**
3"	3"	***PN3000***	**22.35**	***PNS3000***	**100.10**	***APN3000***	**$42.00**
4"	4"	***PN4000***	**35.90**	***PNS4000***	**155.70**	***APN4000***	**62.30**



Dixon Hex Nipples for Welding to Metal Hose

Size	*Carbon Steel* [1] Part #	Price/E	opt qty	*Machined Brass* Part #	Price/E	*304 Stainless Steel* [1] Part #	Price/E	opt qty	*316 Stainless Steel* [1] Part #	Price/E
1/4"	***FM250***	**$2.60**	200	***FMB250***	**$5.00**	***FMS250***	**$8.90**	200	**---**	**---**
3/8"	***FM375***	**3.05**	100	***FMB375***	**8.90**	***FMS375***	**11.15**	100	**---**	**---**
1/2"	***FM500***	**3.90**	50	***FMB500***	**9.60**	***FMS500***	**10.70**	50	***FMR500***	**$11.00**
3/4"	***FM750***	**4.90**	50	***FMB750***	**13.00**	***FMS750***	**11.00**	50	***FMR750***	**12.90**
1"	***FM1000***	**6.65**	50	***FMB1000***	**20.85**	***FMS1000***	**16.05**	50	***FMR1000***	**23.60**
1¼"	***FM1250***	**13.30**	50	**---**	**---**	***FMS1250***	**56.60**	50	**---**	**---**
1½"	***FM1500***	**14.20**	50	**---**	**---**	***FMS1500***	**56.75**	50	***FMR1500***	**55.00**
2"	***FM2000***	**37.80**	10	**---**	**---**	**---**	**---**		**---**	**---**



[1] Dixon suggests using 308 LSI welding rod.

Dixon Octagonal Nipples for Welding to Metal Hose

Size	Overall Length	Weld-On Length	Hex Length	*Carbon Steel* Part #	Price/E	*304 Stainless Steel* Part #	Price/E
2"	2½"	7/8"	9/16"	***OCTOE32***	**$26.25**	***OCTOES32***	**$49.55**



Dixon Octagonal Wrench Grips

Size	Across Outside Flats	Across Inside Flats	Width	*Carbon Steel* Part #	Price/E	*304 Stainless Steel* Part #	Price/E
1½"	2.230"	1.910"	9/16"	**---**	**---**	***OCTS24***	**$13.50**
2"	2.781"	2.385"	9/16"	***OCT32***	**$8.50**	***OCTS32***	**15.75**
3"	3.750"	3.510"	7/8"	**---**	**---**	***OCTS48***	**36.35**



Dixon Weld-On Hex Wrench Grips

Size	*Investment Cast Steel* Part #	Price/E
1"	***WN12***	**$6.20**
1¼"	***WN16***	**5.75**
1½"	***WN21***	**5.75**
2"	***WN26***	**6.20**
2½"	***WN31***	**8.30**
3"	***WN36***	**10.00**
4"	***WN46***	**20.75**



Notched Turned Back Nipples

- When used with an appropriate notched ferrule, these fittings can be swaged or crimped onto hose, thereby providing improved shank retention.
- The stem can be removed from a damaged hose by cutting away the ferrule, without necessarily damaging the fitting. *After inspection to determine its suitability for reuse,* it can be reinstalled into another hose by *using a new ferrule*.
- When used with double bolt or band clamps, notched turned back nipples will provide shank retention similar to that of the King turned back nipples.
- Notched turned back nipples let you use the same ferrules used with the notched (NO) cam and groove on page 38. This lets you *maximize your inventory usage and reduce costs*. *You must purchase a fitting and the matching ferrule to create an assembly*.
- Stems are for use with lap joint flanges on page 531.


SAFETY ALERT



stems

Size	Carbon Steel Part #	Carbon Steel Price/E	316 Stainless Steel Part #	316 Stainless Steel Price/E
1½"	***N150NO***	**$31.50**	***RN150NO***	**$80.60**
2"	***N200NO***	**35.55**	***RN200NO***	**92.70**
NEW 2½"	***N250NO***	**55.00**	***RN250NO***	**125.00**
3"	***N300NO***	**84.25**	***RN300NO***	**159.65**
4"	***N400NO***	**137.45**	***RN400NO***	**248.25**

* Special pushers required: 1½" stem - RN150NOPUSH
2" stem - RN200NOPUSH
2½" stem - RN250NOPUSH
3" stem - RN300NOPUSH
4" stem - RN400NOPUSH



ferrules


Hose ID	Hose O.D. from	Hose O.D. to	304 Stainless Steel Part #	304 Stainless Steel Price/E
1½"	1-60/64"	2-12/64"	***GAS2334NO***	**$33.60**
	2-4/64"	2-22/64"	***GAS2370NO***	**35.10**
2"	2-30/64"	2-44/64"	***GAS2709NO***	**30.10**
	2-42/64"	2-54/64"	***GAS2885NO***	**61.55**
NEW 2½"	2-54/64"	3"	***GAS3012NO***	**60.00**
	3-1/64"	3-13/64"	***GAS3260NO***	**64.00**
3"	3-30/64"	3-46/64"	***GAS3760NO***	**43.90**
	3-47/64"	3-54/64"	***GAS3885NO***	**60.00**
4"	4-40/64"	4-47/64"	***GAS5010NO***	**250.00**

SAFETY ALERT

Dixon stems and ferrules are specifically designed to be used together as a coupling system.
Due to differences in dimensions and tolerances for safety reasons,
do not use other manufacturer's stems or ferrules with Dixon Holedall products.

King Turned Back Hose Nipples for Floating Flanges

- A turned back nipple, when used in a floating flange assembly, allows the flange to be aligned without stressing (twisting) the hose. This generally increases the hose's service life by eliminating a common cause of premature hose failure.
- For use with Lap Joint flanges shown on page 531



Size	Plated Carbon Steel Part #	Plated Carbon Steel Price/E	316 Stainless Steel Part #	316 Stainless Steel Price/E
¾"	***N5*** [1]	**$34.35**	**---**	**---**
1"	***N10***	**42.15**	***RN10***	**$117.00**
1¼"	***N15***	**42.15**	***RN15***	**125.00**
1½"	***N20***	**75.00**	***RN20***	**152.35**
2"	***N25***	**78.30**	***RN25***	**190.40**
2½"	***N30***	**107.15**	***RN30***	**265.00**
3"	***N35***	**93.00**	***RN35***	**301.80**
4"	***N40***	**148.70**	***RN40***	**437.85**
6"	***N60***	**237.50**	***RN60***	**890.00**
8"	***N80***	**361.80**	***RN80***	**1350.00**
10"	***N100***	**578.15**	***RN100***	**POR**
12"	***N120***	**995.00**	***RN120***	**POR**

[1] will be deleted as inventory is depleted

King Turned Back Weld-To-Metal Hose Nipples

- MSS Type C
- For use with Slip-On and Lap Joint flanges shown on page 531.




Size	Length	Phono-Finish Face Schedule 40 Plated Carbon Steel Part #	Phono-Finish Face Schedule 40 Plated Carbon Steel Price/E	Phono-Finish Face Schedule 10 304 Stainless Steel Part #	Phono-Finish Face Schedule 10 304 Stainless Steel Price/E	Smooth Face Schedule 10 304 Stainless Steel Part #	Smooth Face Schedule 10 304 Stainless Steel Price/E
¾"	2"	***NW5***	**$25.55**	***GNW5***	**$32.00**	***GNWP5***	**$15.25**
1"	2"	***NW10***	**26.25**	***GNW10***	**32.65**	***GNWP10***	**20.20**
1¼"	2"	***NW15***	**35.85**	***GNW15***	**45.85**	***GNWP15***	**54.00**
1½"	2"	***NW20***	**37.70**	***GNW20***	**52.70**	***GNWP20***	**22.35**
2"	2½"	***NW25***	**39.10**	***GNW25***	**67.70**	***GNWP25***	**28.15**
2½"	2½"	***NW30***	**52.95**	***GNW30***	**80.00**	***GNWP30***	**34.85**
3"	2½"	***NW35***	**56.40**	***GNW35***	**88.85**	***GNWP35***	**50.50**
4"	3"	***NW40***	**76.30**	***GNW40***	**108.25**	***GNWP40***	**53.35**
6"	3½"	***NW60***	**114.60**	***GNW60***	**255.00**	***GNWP60***	**186.00**
8"	4"	***NW80***	**146.65**	***GNW80***	**360.00**	***GNWP80***	**270.30**
10"	5"	***NW100***	**282.80**	***GNW100***	**525.00**	***GNWP100***	**500.00**
12"	6"	***NW120***	**395.00**	***GNW120***	**756.00**	***GNWP120***	**526.30**

150 LB. ASA Forged Flanges

Lap-Joint

- raised shoulder with no raised face
- The lap joint flange is commonly called a Van Stone or a floating flange.

Size	*Carbon Steel* Part #	Price/E
1"	***LJ100***	**$54.00**
1¼"	***LJ125***	**36.00**
1½"	***LJ150***	**37.00**
2"	***LJ200***	**38.00**
2½"	***LJ250***	**60.00**
3"	***LJ300***	**64.00**
4"	***LJ400***	**93.00**
5"	***LJ500***	**105.00**
6"	***LJ600***	**127.30**
8"	***LJ800***	**225.00**
10"	***LJ1000***	**280.00**
12"	***LJ1200***	**420.00**






Slip-On

- square shoulder with raised face


Size	*Carbon Steel* Part #	Price/E	*Stainless Steel* Part #	Price/E
1"	***SO100***	**$30.00**	**---**	**---**
1¼"	***SO125***	**30.00**	**---**	**---**
1½"	***SO150***	**30.00**	***SOR150***	**$170.00**
2"	***SO200***	**33.00**	***SOR200***	**214.00**
2½"	***SO250***	**59.00**	**---**	**---**
3"	***SO300***	**55.00**	***SOR300***	**340.00**
4"	***SO400***	**72.70**	***SOR400***	**465.40**
5"	***SO500***	**108.00**	**---**	**---**
6"	***SO600***	**103.00**	***SOR600***	**704.00**
8"	***SO800***	**160.00**	**---**	**---**
10"	***SO1000***	**245.00**	**---**	**---**
12"	***SO1200***	**375.00**	**---**	**---**





NPT Threaded

Size	*Carbon Steel* Part #	Price/E	*Stainless Steel* Part #	Price/E
1"	***T100***	**$63.00**	**---**	**---**
1¼"	***T125***	**55.00**	**---**	**---**
1½"	***T150***	**54.00**	***TR150***	**$169.00**
2"	***T200***	**60.00**	***TR200***	**223.40**
2½"	***T250***	**66.60**	**---**	**---**
3"	***T300***	**70.00**	***TR300***	**320.00**
4"	***T400***	**87.00**	***TR400***	**576.00**
5"	***T500***	**150.80**	**---**	**---**
6"	***T600***	**152.25**	***TR600***	**970.00**
8"	***T800***	**288.90**	**---**	**---**
10"	***T1000***	**755.00**	**---**	**---**
12"	***T1200***	**900.00**	**---**	**---**






2010 NEW

150 LB. ASA Forged Flanges

Weld Neck





- raised face

Size	*Carbon Steel* Part #	Price/E
1"	***WN100***	**$45.25**
1¼"	***WN125***	**45.25**
1½"	***WN150***	**46.00**
2"	***WN200***	**52.00**
3"	***WN300***	**61.40**
4"	***WN400***	**74.50**
5"	***WN500***	**115.00**
6"	***WN600***	**113.00**
8"	***WN800***	**195.00**
10"	***WN1000***	**310.00**

150 LB. MSS Flanges



Size	*316 Stainless Steel* Part #	Price/E
1½"	***TRMS150***	**$128.30**
2"	***TRMS200***	**172.50**
3"	***TRMS300***	**269.10**
4"	***TRMS400***	**422.05**
6"	***TRMS600***	**767.25**

Flange Gaskets

- standard drop-ring type all 1/16" thick
- reference page 586 for Joint Sealant Gasket Material

Size	*Neoprene* Part #	Price/E	*Klingersil ® C-4401* Part #	Price/E
1"	***NG10***	**$1.60**	***AG10***	**$2.80**
1¼"	***NG15***	**1.95**	***AG15***	**3.10**
1½"	***NG20***	**1.95**	***AG20***	**3.20**
2"	***NG25***	**2.10**	***AG25***	**3.35**
2½"	***NG30***	**2.80**	***AG30***	**4.10**
3"	***NG35***	**2.30**	***AG35***	**5.30**
4"	***NG40***	**3.20**	***AG40***	**6.40**
5"	***NG50***	**6.70**	**---**	**---**
6"	***NG60***	**4.15**	***AG60***	**9.85**
8"	***NG80***	**6.80**	***AG80***	**13.75**

For dimensional information and diagrams, see pages 618 and 619

TTMA Series Flange Adapters

- provides a simple and easy way to quickly convert threaded components to a standard 4" TTMA flange configuration
- more durable than welded fabrications due to the solid cast lightweight aluminum design
- design improves flow through adapter even on the 3" reducer
- compact size reduces the overall space needed to install
- for flange drilling standards, see page 619

Male Threaded

TTMA flange x standard male NPT

TTMA Flange	Male NPT	*Aluminum* Part #	Price/E
3"	3"	***TTF3AL-3MT***	**$51.15**
4"	3"	***TTF4AL-3MT***	**51.15**
4"	4"	***TTF4AL-4MT***	**51.15**



Extended Length - Male Threaded

TTMA flange x extended length male NPT

TTMA Flange	Male NPT	*Aluminum* Part #	Price/E
4"	3"	***TTF4AL-3EMT***	**$73.35**
4"	4"	***TTF4AL-4EMT***	**73.35**



Female Threaded

TTMA flange x female NPT

TTMA Flange	Female NPT	*Aluminum* Part #	Price/E
4"	3"	***TTF4AL-3FT***	**$65.50**
4"	4"	***TTF4AL-4FT***	**65.50**



Slip-On

NEW 2010

TTMA flange x Slip-on


TTMA Flange	Slip-on	*Aluminum* Part #	Price/E
4"	4"	***TTF400SP***	**$64.40**



Sight Flow Indicators

Bronze


- verifies flow and monitors color and clarity in fluid lines
- double window snap ring design
- bronze body
- ABS indicator
- tempered soda lime sight glass
- Buna-N seals
- maximum pressure **125 PSI**
- maximum temperature **200°F**
- made in the USA





Size	Overall Length	Width	Height	*Bronze* Part #	Price/E	Opt Qty
½"	3-13/16"	2-7/16"	2-7/16"	***SF1631-050***	**$351.75**	1
¾"	3-13/16"	2-7/16"	2-7/16"	***SF1631-075***	**371.40**	1
1"	4-3/8"	3"	3-1/8"	***SF1631-100***	**477.00**	1
1½"	4-5/8"	3-13/16"	4"	***SF1631-150***	**727.50**	1
2"	4-5/8"	3-13/16"	4"	***SF1631-200***	**751.75**	1


Stainless Steel

- Features a radial sealing method and bolt-on body design that provides years of reliable service with no torquing maintenance required.
- verifies flow and monitor color and clarity in fluid lines
- A white Delrin® propeller style indicator is standard. Best for observations at a distance or with opaque liquids [1].
- tempered soda lime sight glass [2]
- Viton® seals are standard [3]
- maximum pressure **200 PSI** at **150°F**
- maximum temperature **225°F** at **150 PSI**
- made in the USA



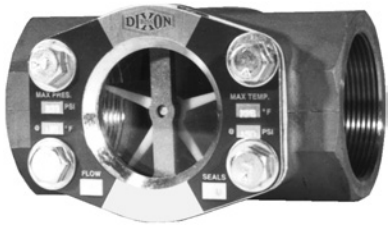

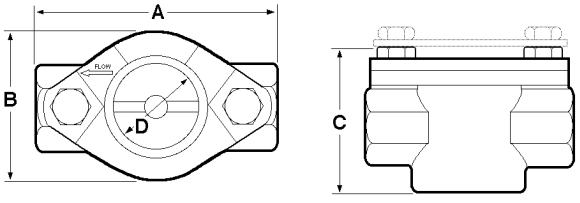

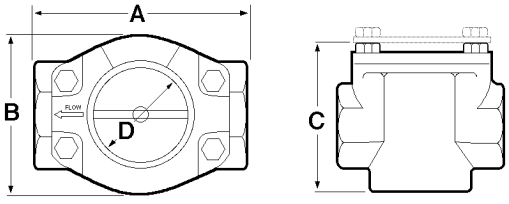

Female NPT x Female NPT [4]

Size	Overall Length A	Width B	Height C	Diameter of Sight Opening D	Weight	*Stainless Steel* Part #	Price/E	Opt Qty
½"	3-1/4"	2"	2-3/8"	1-1/8"	1.4	***SF1471-050***	**$737.20**	1
¾"	4-1/4"	2-9/16"	3-1/4"	1-1/2"	3.0	***SF1471-075***	**795.00**	1
1"	4-1/4"	2-9/16"	3-1/4"	1-1/2"	2.7	***SF1471-100***	**1002.20**	1
1½"	5-5/8"	3-5/16"	4-5/16"	2"	7.9	***SF1471-150***	**1329.75**	1
2"	5-5/8"	3-5/16"	4-5/16"	2"	6.6	***SF1471-200***	**1566.00**	1

[1] Plain, flapper or drip tube style indicators are available, as are Teflon® indicators. *Consult the Factory for price and availability*.
[2] Special units with tempered Borosilicate glass are available. *Consult the Factory for price and availability*.
[3] Teflon®, EPR and Buna-N seals are available. *Consult the Factory for price and availability*.
[4] 150# flanged units, as well as other metals, are also available. *Consult the Factory for price and availability*.

NPT Threaded Reducer Hex Bushings



Male NPT	Female NPT	150# Iron		Galvanized		316 Stainless Steel		Forged Steel		Brass	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	1/8"	***HB2518***	**$4.05**	***HB2518G***	**$5.80**	***HB2518SS***	**$3.50**	***HB2518FS***	**$4.60**	**---**	**---**
3/8"	1/8"	***HB3818***	**4.05**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
3/8"	1/4"	***HB3825***	**4.05**	***HB3825G***	**5.80**	***HB3825SS***	**3.90**	***HB3825FS***	**4.60**	**---**	**---**
1/2"	1/8"	***HB5018***	**4.05**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
1/2"	1/4"	***HB5025***	**4.05**	***HB5025G***	**5.80**	***HB5025SS***	**5.20**	***HB5025FS***	**4.70**	**---**	**---**
1/2"	3/8"	***HB5038***	**4.05**	***HB5038G***	**5.80**	***HB5038SS***	**5.20**	***HB5038FS***	**4.70**	**---**	**---**
3/4"	1/8"	***HB7518***	**3.95**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
3/4"	1/4"	***HB7525***	**3.95**	***HB7525G***	**6.00**	***HB7525SS***	**7.75**	***HB7525FS***	**5.70**	**---**	**---**
3/4"	3/8"	***HB7538***	**3.95**	***HB7538G***	**6.70**	***HB7538SS***	**7.75**	***HB7538FS***	**5.70**	**---**	**---**
3/4"	1/2"	***HB7550***	**3.65**	***HB7550G***	**5.40**	***HB7550SS***	**8.30**	***HB7550FS***	**5.70**	**---**	**---**
1"	1/8"	***HB1018***	**4.60**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
1"	1/4"	***HB1025***	**4.90**	***HB1025G***	**7.10**	***HB1025SS***	**11.70**	***HB1025FS***	**9.10**	**---**	**---**
1"	3/8"	***HB1038***	**5.00**	***HB1038G***	**11.25**	***HB1038SS***	**11.35**	***HB1038FS***	**9.10**	**---**	**---**
1"	1/2"	***HB1050***	**3.75**	***HB1050G***	**6.50**	***HB1050SS***	**11.00**	***HB1050FS***	**9.10**	**---**	**---**
1"	3/4"	***HB1075***	**3.75**	***HB1075G***	**6.10**	***HB1075SS***	**11.00**	***HB1075FS***	**9.10**	**---**	**---**
1-1/4"	1/2"	***HB1250***	**5.40**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
1-1/4"	3/4"	***HB1275***	**4.85**	**---**	**---**	***HB1275SS***	**17.80**	***HB1275FS***	**15.00**	**---**	**---**
1-1/4"	1"	***HB1210***	**4.85**	***HB1210G***	**8.20**	***HB1210SS***	**16.70**	***HB1210FS***	**15.00**	***HB1210B***	**$20.50**
1-1/2"	1/2"	***HB1550***	**6.20**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
1-1/2"	3/4"	***HB1575***	**6.20**	***HB1575G***	**12.00**	***HB1575SS***	**21.00**	***HB1575FS***	**17.00**	***HB1575B***	**32.00**
1-1/2"	1"	***HB1510***	**5.40**	***HB1510G***	**10.75**	***HB1510SS***	**21.00**	***HB1510FS***	**17.00**	***HB1510B***	**26.00**
1-1/2"	1-1/4"	***HB1512***	**6.20**	***HB1512G***	**9.90**	***HB1512SS***	**18.65**	***HB1512FS***	**17.00**	***HB1512B***	**26.00**
2"	1/2"	***HB2050***	**9.30**	***HB2050G***	**15.00**	**---**	**---**	**---**	**---**	***HB2050B***	**47.15**
2"	3/4"	***HB2075***	**7.90**	***HB2075G***	**13.75**	***HB2075SS***	**34.50**	***HB2075FS***	**25.80**	***HB2075B***	**46.50**
2"	1"	***HB2010***	**7.40**	***HB2010G***	**13.00**	***HB2010SS***	**34.50**	***HB2010FS***	**25.80**	***HB2010B***	**46.50**
2"	1-1/4"	***HB2012***	**7.40**	***HB2012G***	**13.00**	***HB2012SS***	**34.50**	***HB2012FS***	**25.80**	***HB2012B***	**38.50**
2"	1-1/2"	***HB2015***	**8.20**	***HB2015G***	**11.50**	***HB2015SS***	**36.90**	***HB2015FS***	**25.80**	***HB2015B***	**38.50**
2-1/2"	1-1/2"	***HB2515***	**12.50**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
2-1/2"	2"	***HB2520***	**12.40**	***HB2520G***	**18.75**	***HB2520SS***	**61.90**	***HB2520FS***	**81.70**	**---**	**---**
3"	1"	***HB3010***	**18.50**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
3"	1-1/2"	***HB3015***	**18.20**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
3"	2"	***HB3020***	**17.00**	***HB3020G***	**25.25**	***HB3020SS***	**90.75**	***HB3020FS***	**130.00**	***HB3020B***	**115.00**
3"	2-1/2"	***HB3025***	**17.25**	**---**	**---**	***HB3025SS***	**88.60**	***HB3025FS***	**130.00**	***HB3025B***	**115.00**
4"	1"	***HB4010***	**35.50**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
4"	1-1/2"	***HB4015***	**35.50**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
4"	2"	***HB4020***	**33.70**	***HB4020G***	**52.50**	***HB4020SS***	**137.80**	**---**	**---**	***HB4020B***	**315.00**
4"	2-1/2"	***HB4025***	**33.70**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
4"	3"	***HB4030***	**33.70**	***HB4030G***	**55.70**	***HB4030SS***	**145.10**	***HB4030FS***	**280.00**	***HB4030B***	**270.00**
5"	4"	***HB5040***	**61.50**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
6"	3"	***HB6030***	**89.00**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
6"	4"	***HB6040***	**89.00**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**

NPT Threaded Reducing Union

Female NPT	Female NPT	150# Iron	
		Part #	Price/E
3/4"	1/2"	***MIRU7550***	**$14.75**



NPT Threaded Unions



- other sizes are also available
- 304 stainless steel fittings are also available, *consult the factory for pricing and availability*

Female NPT	300# Iron		150# Iron		Galvanized		316 Stainless Steel		Forged Steel		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	---	---	MIU18	$16.25	---	---	---	---	---	---	---	---
1/4"	---	---	MIU25	15.50	---	---	TUN025SS	$15.10	---	---	TUN2F	$24.05
3/8"	---	--	MIU38	10.50	TUN038G	$12.50	---	---	---	---	TUN3F	26.45
1/2"	300MIU50	$23.70	MIU50	10.00	TUN050G	12.50	TUN050SS	18.65	TUN050FS	$26.50	TUN4F	29.90
3/4"	300MIU75	26.25	MIU75	12.00	TUN075G	14.75	TUN075SS	24.40	TUN075FS	31.75	TUN5F	39.20
1"	300MIU100	34.25	MIU100	15.50	TUN100G	18.50	TUN100SS	39.80	TUN100FS	41.50	TUN6F	49.30
1-1/4"	---	---	MIU125	20.75	TUN125G	25.00	TUN125SS	52.75	---	---	TUN7F	71.70
1-1/2"	300MIU150	59.00	MIU150	25.25	TUN150G	32.25	TUN150SS	68.90	TUN150FS	80.50	TUN8F	89.60
2"	---	---	MIU200	38.25	TUN200G	42.90	TUN200SS	97.95	TUN200FS	104.75	TUN9F	140.00
2-1/2"	---	---	MIU250	92.00	---	---	---	---	---	---	---	---
3"	300MIU300	300.00	MIU300	111.50	---	---	---	---	---	---	---	---
4"	---	---	MIU400	276.00	---	---	---	---	---	---	---	---

NPT Threaded Bell Reducers



- other sizes are also available
- 304 stainless steel fittings are also available, *consult the factory for pricing and availability*

Female NPT	Female NPT	300# Iron		150# Iron		Galvanized		316 Stainless Steel		Forged Steel		Brass	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	1/8"	---	---	BR1418	$3.60	---	---	---	---	---	---	---	---
3/8"	1/8"	---	---	BR3818	3.60	---	---	---	---	---	---	---	---
3/8"	1/4"	---	---	BR3825	3.60	---	---	BR3825SS	$6.50	---	---	---	---
1/2"	1/4"	300BR5025	$20.30	BR5025	3.35	BR5025G	$4.10	BR5025SS	8.85	---	---	---	---
1/2"	3/8"	---	---	BR5038	3.15	BR5038G	3.85	BR5038SS	8.25	BR5038FS	$14.00	BR5038B	$9.55
3/4"	1/4"	---	---	BR7525	4.15	---	---	---	---	---	---	---	---
3/4"	3/8"	---	---	BR7538	4.15	---	---	BR7538SS	11.40	---	---	---	---
3/4"	1/2"	300BR7550	20.80	BR7550	3.60	BR7550G	4.50	BR7550SS	10.65	BR7550FS	36.00	BR7550B	14.30
1"	1/4"	---	---	BR1025	6.40	---	---	---	---	---	---	---	---
1"	3/8"	---	---	BR1038	6.50	---	---	---	---	---	---	---	---
1"	1/2"	---	---	BR1050	5.60	BR1050G	7.50	BR1050SS	14.00	---	---	---	---
1"	3/4"	300BR1075	24.80	BR1075	5.60	BR1075G	7.00	BR1075SS	13.20	BR1075FS	21.75	BR1075B	23.25
1-1/4"	1/2"	---	---	BR1250	8.10	---	---	---	---	---	---	---	---
1-1/4"	3/4"	---	---	BR1275	7.00	---	---	---	---	---	---	---	---
1-1/4"	1"	300BR1210	32.75	BR1210	7.00	BR1210G	9.60	BR1210SS	19.45	---	---	BR1210B	37.95
1-1/2"	3/4"	---	---	BR1575	11.50	---	---	---	---	---	---	BR1575B	50.25
1-1/2"	1"	300BR1510	45.00	BR1510	10.25	BR1510G	12.30	BR1510SS	25.00	BR1510FS	39.00	BR1510B	48.30
1-1/2"	1-1/4"	300BR1512	51.00	BR1512	8.90	BR1512G	11.75	BR1512SS	25.00	BR1512FS	39.00	---	---
2"	3/4"	---	---	BR2075	14.75	---	---	---	---	---	---	---	---
2"	1"	300BR2010	65.00	BR2010	13.90	BR2010G	16.75	BR2010SS	45.75	BR2010FS	56.60	BR2010B	74.50
2"	1-1/4"	300BR2012	77.00	BR2012	14.75	---	---	---	---	---	---	---	---
2"	1-1/2"	300BR2015	115.00	BR2015	12.90	BR2015G	16.75	BR2015SS	48.00	BR2015FS	56.60	BR2015B	71.30
2-1/2"	1"	---	---	BR2510	37.40	---	---	---	---	---	---	---	---
2-1/2"	1-1/2"	---	---	BR2515	38.50	---	---	---	---	---	---	---	---
2-1/2"	2"	---	---	BR2520	32.75	BR2520G	52.00	---	---	---	---	---	---
3"	1"	---	---	BR3010	52.25	---	---	---	---	---	---	---	---
3"	1-1/4"	---	---	BR3012	59.40	---	---	---	---	---	---	---	---
3"	1-1/2"	---	---	BR3015	51.25	---	---	---	---	---	---	---	---
3"	2"	---	---	BR3020	42.40	BR3020G	65.00	BR3020SS	104.75	---	---	BR3020B	155.50
3"	2-1/2"	---	---	BR3025	51.25	BR3025G	69.00	---	---	---	---	---	---
4"	1"	---	---	BR4010	102.50	---	---	---	---	---	---	---	---
4"	1-1/2"	---	---	BR4015	102.50	---	---	---	---	---	---	---	---
4"	2"	---	---	BR4020	102.50	---	---	---	---	---	---	---	---
4"	2-1/2"	---	---	BR4025	102.50	---	---	---	---	---	---	---	---
4"	3"	---	---	BR4030	102.50	BR4030G	149.00	---	---	---	---	BR4030B	345.00
6"	3"	---	---	BR6030	255.00	---	---	---	---	---	---	---	---
6"	4"	---	---	BR6040	255.00	---	---	---	---	---	---	---	---

NPT Threaded Couplings Both Ends



Female NPT	300# Iron		150# Iron		Galvanized		316 Stainless Steel		Forged Steel		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	---	---	RHC18	$4.45	RHC18G	$5.10	---	---	---	---	---	---
1/4"	300RHC25	$12.80	RHC25	3.75	RHC25G	4.80	RHC25SS	$4.35	RHC25FS	$7.25	RHC25B	$7.25
3/8"	300RHC38	12.80	RHC38	3.75	RHC38G	4.80	RHC38SS	5.45	RHC38FS	7.25	RHC38B	7.35
1/2"	300RHC50	14.30	RHC50	3.05	RHC50G	3.85	RHC50SS	7.35	RHC50FS	6.25	RHC50B	9.10
3/4"	300RHC75	16.40	RHC75	3.60	RHC75G	4.45	RHC75SS	10.90	RHC75FS	8.00	RHC75B	12.00
1"	300RHC100	18.80	RHC100	5.50	RHC100G	7.30	RHC100SS	15.20	RHC100FS	14.25	RHC100B	18.25
1-1/4"	300RHC125	22.30	RHC125	7.00	RHC125G	10.00	RHC125SS	19.90	RHC125FS	23.70	RHC125B	28.50
1-1/2"	300RHC150	33.50	RHC150	9.40	RHC150G	11.50	RHC150SS	28.50	RHC150FS	30.50	RHC150B	38.50
2"	300RHC200	48.00	RHC200	13.60	RHC200G	16.75	RHC200SS	42.00	RHC200FS	36.50	RHC200B	64.00
2-1/2"	---	---	RHC250	37.20	---	---	---	---	---	---	---	---
3"	---	---	RHC300	50.20	RHC300G	68.50	RHC300SS	110.00	---	---	---	---
4"	---	---	RHC400	100.00	RHC400G	145.70	RHC400SS	170.90	---	---	---	---
5"	---	---	RHC500	207.75	---	---	---	---	---	---	---	---
6"	---	---	RHC600	268.50	---	---	---	---	---	---	---	---

NPT Threaded 90° Threaded Elbows

- other sizes are also available
- 304 stainless steel fittings are also available, *consult the factory for pricing and availability*



Female NPT	300# Iron		150# Iron		Galvanized		316 Stainless Steel		Forged Steel		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	---	---	EL9018	$3.15	EL9018G	$4.35	EL9018SS	$4.65	---	---	---	---
1/4"	300EL9025	$14.20	EL9025	3.00	EL9025G	4.15	EL90025SS	4.30	EL9025FS	$20.00	---	---
3/8"	300EL9038	12.60	EL9038	3.00	EL9038G	4.15	EL90038SS	5.55	EL9038FS	20.00	---	---
1/2"	300EL9050	16.35	EL9050	2.25	EL9050G	2.75	EL90050SS	6.50	EL9050FS	15.25	---	---
3/4"	300EL9075	18.45	EL9075	2.75	EL9075G	3.30	EL90075SS	9.80	EL9075FS	19.00	---	---
1"	300EL90100	29.60	EL90100	4.80	EL90100G	6.20	EL90100SS	16.90	EL90100FS	27.50	EL90100B	$21.20
1-1/4"	300EL90125	34.25	EL90125	7.80	EL90125G	9.50	EL90125SS	25.50	EL90125FS	55.25	---	---
1-1/2"	300EL90150	40.50	EL90150	10.25	EL90150G	12.50	EL90150SS	34.50	EL90150FS	70.20	EL90150B	40.25
2"	300EL90200	58.00	EL90200	17.50	EL90200G	20.75	EL90200SS	45.50	EL90200FS	88.50	EL90200B	71.70
2-1/2"	---	---	EL90250	38.25	---	---	---	---	---	---	---	---
3"	---	---	EL90300	57.00	EL90300G	86.00	EL90300SS	143.25	---	---	---	---
4"	---	---	EL90400	121.00	EL90400G	150.00	EL90400SS	188.85	---	---	---	---
5"	---	---	EL90500	268.25	---	---	---	---	---	---	---	---
6"	---	---	EL90600	452.75	---	---	---	---	---	---	---	---

NPT Threaded 45° Threaded Elbows



Female NPT	150# Iron Part #	Price/E
1/8"	***EL4518***	**$4.60**
1/4"	***EL4525***	**4.70**
3/8"	***EL4538***	**4.25**
1/2"	***EL4550***	**3.70**
3/4"	***EL4575***	**4.50**
1"	***EL45100***	**5.70**
1-1/4"	***EL45125***	**10.10**
1-1/2"	***EL45150***	**12.50**
2"	***EL45200***	**18.75**
2-1/2"	***EL45250***	**52.75**
3"	***EL45300***	**68.50**
4"	***EL45400***	**132.90**
5"	***EL45500***	**440.50**
6"	***EL45600***	**452.75**

NPT Threaded Side Outlet Elbows



Female NPT	150# Iron Part #	Price/E
1/8"	***SOE18***	**$10.00**
1/4"	***SOE25***	**10.00**
3/8"	***SOE38***	**10.00**
1/2"	***SOE50***	**10.00**
3/4"	***SOE75***	**11.00**
1"	***SOE100***	**21.00**
1-1/4"	***SOE120***	**23.75**
1-1/2"	***SOE150***	**29.50**
2"	***SOE200***	**50.75**

NPT Threaded Reducing Elbows



- other sizes are also available
- 304 stainless steel fittings are also available, *consult the factory for pricing and availability*

Female NPT	Female NPT	150# Iron Part #	Price/E
1/4"	1/8"	***REL2518***	**$5.90**
1/2"	1/4"	***REL5025***	**4.25**
1/2"	3/8"	***REL5038***	**4.15**
3/4"	1/2"	***REL7550***	**4.30**
1"	1/2"	***REL1050***	**5.75**
1"	3/4"	***REL1075***	**5.50**
1-1/4"	1"	***REL1210***	**8.90**
1-1/2"	1"	***REL1510***	**14.50**
1-1/2"	1-1/4"	***REL1525***	**14.50**
2"	1"	***REL2010***	**21.00**
2"	1-1/2"	***REL2015***	**18.50**
2-1/2"	2"	***REL2520***	**51.00**
3"	2"	***REL3020***	**82.10**
4"	2"	***REL4020***	**140.70**
4"	3"	***REL4030***	**140.70**

NPT Threaded 45° Street Elbows

Size	150# Iron		Galvanized	
	Part #	Price/E	Part #	Price/E
1/8"	***SE4518***	**$7.10**	**---**	**---**
1/4"	***SE4525***	**5.30**	***SE4525G***	**$7.00**
3/8"	***SE4538***	**6.00**	**---**	**---**
1/2"	***SE4550***	**4.80**	***SE4550G***	**6.10**
3/4"	***SE4575***	**7.40**	***SE4575G***	**9.90**
1"	***SE45100***	**8.60**	**---**	**---**
1-1/4"	***SE45125***	**15.00**	***SE45125G***	**18.40**
1-1/2"	***SE45150***	**18.50**	***SE45150G***	**22.25**
2"	***SE45200***	**31.00**	***SE45200G***	**38.25**
2-1/2"	***SE45250***	**66.25**	***SE45250G***	**82.50**
3"	***SE45300***	**100.00**	***SE45300G***	**134.80**
4"	***SE45400***	**190.25**	***SE45400G***	**220.00**



NPT Threaded 90° Street Elbows



- other sizes are also available
- 304 stainless steel fittings are also available, *consult the factory for pricing and availability*

Size	150# Iron		Galvanized		316 Stainless Steel		Forged Steel		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	***SE9018***	**$4.60**	***SE9018G***	**$5.90**	***SE9018SS***	**$5.40**	**---**	**---**	**---**	**---**
1/4"	***SE9025***	**4.60**	***SE9025G***	**5.70**	***SE9025SS***	**5.40**	***SE9025FS***	**$30.00**	**---**	**---**
3/8"	***SE9038***	**4.55**	***SE9038G***	**5.70**	***SE9038SS***	**7.35**	***SE9038FS***	**29.50**	**---**	**---**
1/2"	***SE9050***	**4.70**	***SE9050G***	**5.90**	***SE9050SS***	**10.50**	***SE9050FS***	**29.50**	**---**	**---**
3/4"	***SE9075***	**4.55**	***SE9075G***	**5.70**	***SE9075SS***	**12.10**	***SE9075FS***	**36.50**	***SE9075B***	**$18.10**
1"	***SE9010***	**6.60**	***SE9010G***	**7.75**	***SE9010SS***	**18.25**	***SE9010FS***	**49.50**	***SE9010B***	**27.85**
1-1/4"	***SE9012***	**10.00**	***SE9012G***	**13.00**	***SE9012SS***	**27.25**	***SE9012FS***	**88.25**	***SE9012B***	**46.00**
1-1/2"	***SE9015***	**13.50**	***SE9015G***	**16.00**	***SE9015SS***	**50.00**	***SE9015FS***	**106.75**	***SE9015B***	**59.80**
2"	***SE9020***	**21.75**	***SE9020G***	**27.75**	***SE9020SS***	**44.80**	***SE9020FS***	**156.65**	***SE9020B***	**100.05**
2-1/2"	***SE90250***	**53.50**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
3"	***SE90300***	**81.80**	***SE9030G***	**115.00**	**---**	**---**	**---**	**---**	**---**	**---**
4"	***SE90400***	**133.25**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
6"	***SE90600***	**353.00**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**

NPT Threaded Female Reducing Tees

Female NPT	Female NPT	150# Iron	
		Part #	Price/E
3/8"	1/4"	***FRT3825***	**$6.10**
1/2"	3/8"	***FRT5038***	**6.30**
3/4"	1/2"	***FRT7550***	**6.50**
1"	1/2"	***FRT1050***	**8.20**
1-1/4"	1"	***FRT1210***	**13.00**
1-1/2"	1"	***FRT1510***	**16.50**
2"	1"	***FRT2010***	**25.75**
2"	1-1/2"	***FRT2015***	**27.25**
3"	2"	***FRT3020***	**90.50**



NPT Threaded Side Outlet Tees



Female NPT	150# Iron Part #	Price/E
1/2"	***SOT50***	**$13.00**
3/4"	***SOT75***	**16.50**
1"	***SOT100***	**23.25**
1-1/4"	***SOT120***	**41.50**
1-1/2"	***SOT150***	**44.50**
2"	***SOT200***	**60.30**

NPT Threaded Street Service Tees



Female NPT	150# Iron Part #	Price/E
1/2"	***SST50***	**$10.50**
3/4"	***SST75***	**14.40**
1"	***SST100***	**19.00**
1-1/2"	***SST150***	**43.25**

NPT Threaded Female Tees



Female NPT	300# Iron Part #	300# Iron Price/E	150# Iron Part #	150# Iron Price/E	Galvanized Part #	Galvanized Price/E	316 Stainless Steel Part #	316 Stainless Steel Price/E	Forged Steel Part #	Forged Steel Price/E	Brass Part #	Brass Price/E
1/8"	---	---	***FT18***	**$4.85**	---	---	---	---	---	---	---	---
1/4"	***300FT25***	**$17.85**	***FT25***	**4.55**	***FT25G***	**$5.40**	***FT25SS***	**$6.30**	***FT25FS***	**$24.30**	---	---
3/8"	***300FT38***	**18.90**	***FT38***	**4.60**	***FT38G***	**5.40**	***FT38SS***	**8.40**	---	---	---	---
1/2"	***300FT50***	**24.10**	***FT50***	**2.95**	***FT50G***	**3.30**	***FT50SS***	**9.50**	***FT50FS***	**21.90**	---	---
3/4"	---	---	***FT75***	**4.15**	***FT75G***	**5.60**	***FT75SS***	**13.45**	***FT75FS***	**29.30**	***FT75B***	**$17.25**
1"	***300FT10***	**31.25**	***FT10***	**7.40**	***FT100G***	**9.10**	***FT10SS***	**22.50**	***FT100FS***	**37.70**	***FT10B***	**30.50**
1-1/4"	***300FT120***	**45.00**	***FT120***	**12.00**	***FT120G***	**14.50**	***FT120SS***	**32.40**	***FT120FS***	**75.60**	---	---
1-1/2"	---	---	***FT15***	**15.00**	***FT150G***	**18.00**	***FT150SS***	**39.50**	***FT150FS***	**88.25**	***FT15B***	**59.00**
2"	***300FT200***	**77.00**	***FT200***	**25.25**	***FT200G***	**30.00**	***FT200SS***	**47.45**	***FT200FS***	**115.00**	***FT20B***	**97.00**
2-1/2"	---	---	***FT250***	**52.00**	---	---	---	---	---	---	---	---
3"	---	---	***FT30***	**78.00**	***FT300G***	**93.00**	---	---	---	---	---	---
4"	---	---	***FT40***	**185.00**	***FT400G***	**220.00**	---	---	---	---	---	---
5"	---	---	***FT500***	**495.00**	---	---	---	---	---	---	---	---
6"	---	---	***FT60***	**524.00**	---	---	---	---	---	---	---	---

NPT Threaded Bull Head Tees



Female NPT	Female NPT	150# Iron Part #	Price/E
1/2"	3/4"	***BHT1575***	**$7.40**
1/2"	1"	***BHT1510***	**10.75**
3/4"	1"	***BHT7510***	**9.30**
1"	1-1/2"	***BHT1015***	**26.00**
1"	2"	***BHT1020***	**31.70**
1-1/2"	2"	***BHT1520***	**27.25**
2"	2-1/2"	***BHT2025***	**67.90**

NPT Threaded Square Head Plugs



Male NPT	150# Iron		Galvanized		316 Stainless Steel		Forged Steel		Brass	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	***SHP18***	**$1.95**	***SHP18G***	**$3.15**	***SHP18SS***	**$3.05**	**---**	**---**	**---**	**---**
1/4"	***SHP14***	**1.95**	***SHP14G***	**3.15**	***SHP14SS***	**3.25**	***SHP14FS***	**$3.40**	**---**	**---**
3/8"	***SHP38***	**1.95**	***SHP38G***	**3.15**	***SHP38SS***	**3.50**	***SHP38FS***	**3.50**	**---**	**---**
1/2"	***SHP50***	**2.05**	***SHP50G***	**3.95**	***SHP50SS***	**4.25**	***SHP50FS***	**3.65**	***SHP50B***	**$7.50**
3/4"	***SHP75***	**2.05**	***SHP75G***	**3.95**	***SHP75SS***	**5.40**	***SHP75FS***	**4.55**	***SHP75B***	**9.75**
1"	***SHP100***	**2.60**	***SHP100G***	**4.35**	***SHP100SS***	**8.40**	***SHP100FS***	**7.00**	***SHP100B***	**16.50**
1-1/4"	***SHP125***	**3.25**	***SHP125G***	**6.70**	***SHP125SS***	**11.45**	**---**	**---**	**---**	**---**
1-1/2"	***SHP150***	**4.55**	***SHP150G***	**9.10**	***SHP150SS***	**13.70**	***SHP150FS***	**16.50**	**---**	**---**
2"	***SHP200***	**6.50**	***SHP200G***	**11.50**	***SHP200SS***	**25.55**	**---**	**---**	**---**	**---**
2-1/2"	***SHP250***	**11.75**	***SHP250G***	**22.50**	***SHP250SS***	**38.50**	**---**	**---**	**---**	**---**
3"	***SHP300***	**16.25**	***SHP300G***	**31.80**	***SHP300SS***	**47.00**	***SHP300FS***	**113.50**	**---**	**---**
4"	***SHP400***	**34.10**	***SHP400G***	**66.00**	***SHP400SS***	**102.80**	**---**	**---**	**---**	**---**
5"	***SHP500***	**73.10**	**---**	**---**	**---**	**---**	**---**	**---**	**---**	**---**
6"	***SHP600***	**90.50**	***SHP600G***	**130.75**	**---**	**---**	**---**	**---**	**---**	**---**

NPT Threaded Crosses

Female NPT	150# Iron	
	Part #	Price/E
1/8"	***MIC18***	**$9.25**
1/4"	***MIC25***	**9.25**
3/8"	***MIC38***	**9.40**
1/2"	***MIC50***	**10.75**
3/4"	***MIC75***	**13.00**
1"	***MIC100***	**16.00**
1-1/4"	***MIC125***	**26.20**
1-1/2"	***MIC150***	**32.50**
2"	***MIC200***	**53.50**
2-1/2"	***MIC250***	**94.60**
3"	***MIC300***	**141.25**
4"	***MIC400***	**290.00**



NPT Threaded Caps

- other sizes are also available
- 304 stainless steel fittings are also available, *consult the factory for pricing and availability*




Female NPT	300# Iron		150# Iron		Galvanized		316 Stainless Steel	
	Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/8"	**---**	**---**	***MICAP18***	**$2.95**	**---**	**---**	***SSCAP18***	**$3.20**
1/4"	**---**	**---**	***MICAP25***	**2.95**	**---**	**---**	***SSCAP25***	**3.45**
3/8"	**---**	**---**	***MICAP38***	**2.95**	**---**	**---**	***SSCAP38***	**3.85**
1/2"	***300MICAP50***	**$13.00**	***MICAP50***	**2.25**	***MICAP50G***	**$2.85**	***SSCAP50***	**5.35**
3/4"	***300MICAP75***	**16.40**	***MICAP75***	**3.05**	***MICAP75G***	**4.10**	***SSCAP75***	**7.10**
1"	***300MICAP100***	**21.50**	***MICAP100***	**3.70**	**---**	**---**	***SSCAP10***	**8.40**
1-1/4"	***300MICAP125***	**23.90**	***MICAP120***	**4.85**	**---**	**---**	***SSCAP12***	**15.25**
1-1/2"	***300MICAP150***	**35.00**	***MICAP150***	**6.60**	**---**	**---**	***SSCAP15***	**17.30**
2"	***300MICAP200***	**48.50**	***MICAP200***	**8.60**	***MICAP200G***	**10.50**	***SSCAP20***	**27.00**
2-1/2"	**---**	**---**	***MICAP250***	**21.30**	**---**	**---**	**---**	**---**
3"	**---**	**---**	***MICAP300***	**31.75**	**---**	**---**	**---**	**---**
4"	**---**	**---**	***MICAP400***	**49.50**	**---**	**---**	**---**	**---**
5"	**---**	**---**	***MICAP500***	**104.25**	**---**	**---**	**---**	**---**
6"	**---**	**---**	***MICAP600***	**200.00**	**---**	**---**	**---**	**---**

NPT Threaded Floor Flanges



Size	*Iron* Part #	Price/E
1/4"	***FF14***	**$8.20**
3/8"	***FF38***	**8.20**
1/2"	***FF50***	**8.20**
3/4"	***FF75***	**8.90**
1"	***FF100***	**11.50**
1-1/4"	***FF120***	**12.30**
1-1/2"	***FF150***	**13.40**
2"	***FF200***	**17.50**

Extruded NPT Threaded Reducer Hex Bushings



Female NPTF	Male NPTF	*Brass* Part #	Price/E	Opt Qty
1/8"	1/4"	***HB1F2M***	**$1.62**	25
1/8"	3/8"	***HB1F3M***	**1.95**	25
1/8"	1/2"	***HB1F4M***	**3.32**	25
1/8"	3/4"	***HB1F6M***	**5.57**	25
1/4"	3/8"	***HB2F3M***	**2.20**	25
1/4"	1/2"	***HB2F4M***	**3.45**	25
1/4"	3/4"	***HB2F6M***	**6.11**	25
1/4"	1"	***HB2F8M***	**11.46**	25
3/8"	1/2"	***HB3F4M***	**2.91**	25
3/8"	3/4"	***HB3F6M***	**5.40**	25
3/8"	1"	***HB3F8M***	**10.80**	25
1/2"	3/4"	***HB4F6M***	**5.94**	10
1/2"	1"	***HB4F8M***	**10.88**	10
3/4"	1"	***HB6F8M***	**9.01**	10


Extruded NPT Threaded 90° Female Pipe Elbows



Female NPTF	*Brass* Part #	Price/E	Opt Qty
1/8"	***EL1F1F***	**$3.78**	25
1/4"	***EL2F2F***	**5.77**	25
3/8"	***EL3F3F***	**7.73**	25
1/2"	***EL4F4F***	**15.16**	25
3/4"	***EL6F6F***	**22.01**	25


Extruded NPT Threaded Reducer Hex Nipples

Male NPT	Male NPT	*Brass* Part #	Price/E	Opt Qty
1/4"	1/8"	***HN2M1M***	**$2.24**	25
3/8"	1/4"	***HN3M2M***	**3.07**	25
1/2"	1/4"	***HN4M2M***	**4.40**	25
1/2"	3/8"	***HN4M3M***	**4.57**	25
3/4"	1/2"	***HN6M4M***	**7.14**	25




Extruded NPT Threaded Reducer Couplings

Female NPT	Female NPT	*Brass* Part #	Price/E	Opt Qty
1/4"	1/8"	***RC2F1F***	**$3.70**	25
3/8"	1/4"	***RC3F2F***	**4.15**	25
1/2"	1/4"	***RC4F2F***	**5.90**	25
1/2"	3/8"	***RC4F3F***	**5.73**	25
3/4"	1/2"	***RC6F4F***	**9.22**	25




Extruded NPT Threaded Reducer Adapters

Female NPTF	Male NPT	*Brass* Part #	Price/E	Opt Qty
1/8"	1/8"	***RA1F1M***	**$1.83**	25
1/4"	1/8"	***RA2F1M***	**3.20**	25
1/4"	1/4"	***RA2F2M***	**3.28**	25
3/8"	1/4"	***RA3F2M***	**3.74**	25
3/8"	3/8"	***RA3F3M***	**3.90**	25
1/2"	1/4"	***RA4F2M***	**5.69**	25
1/2"	3/8"	***RA4F3M***	**4.98**	25
1/2"	1/2"	***RA4F4M***	**6.27**	25
3/4"	1/2"	***RA6F4M***	**8.81**	10



Extruded NPT Threaded Couplings

Female NPTF	*Brass* Part #	Price/E	Opt Qty
1/8"	***BA1F1F***	**$2.37**	100
1/4"	***BA2F2F***	**3.99**	25
3/8"	***BA3F3F***	**4.61**	25
1/2"	***BA4F4F***	**6.77**	10
3/4"	***BA6F6F***	**11.71**	100




Extruded NPT Threaded Female Tees




Female NPT	Brass Part #	Price/E	Opt Qty
1/8"	***322-0202***	**$4.15**	25
1/4"	***322-0404***	**7.31**	25
3/8"	***322-0606***	**9.68**	25
1/2"	***322-0808***	**18.81**	25

Extruded NPT Threaded 90° Street Elbows



Female NPT	Male NPT	Brass Part #	Price/E	Opt Qty
1/8"	1/8"	***SE1F1M***	**$3.74**	10
1/4"	1/4"	***SE2F2M***	**5.86**	10
3/8"	3/8"	***SE3F3M***	**8.18**	10
1/2"	1/2"	***SE4F4M***	**14.66**	10

Extruded NPT Threaded Hex Nipples



Male NPT	Brass Part #	Price/E	Opt Qty
1/8"	***BCN12***	**$1.91**	100
1/4"	***BCN25***	**2.37**	100
3/8"	***BCN37***	**3.20**	50
1/2"	***BCN50***	**4.78**	25
3/4"	***BCN75***	**6.11**	100
1"	***BCN100***	**14.74**	50

Extruded NPT Threaded Hex Head Plugs



Male NPT	Brass Part #	Price/E	Opt Qty
1/8"	***HHP1M***	**$1.04**	25
1/4"	***HHP2M***	**1.58**	300
3/8"	***HHP3M***	**2.08**	25
1/2"	***HHP4M***	**3.74**	25
3/4"	***HHP6M***	**5.44**	25

Schedule 80 Threaded Polypropylene Fittings

Nipples

NPT Size	Length	Polypropylene Part #	Price/E
¾"	4"	***62223***	**$3.25**
¾"	6"	***62224***	**3.95**
1"	4"	***62225***	**3.50**
1"	6"	***62226***	**4.35**
2"	4"	***62192***	**11.10**
2"	6"	***62193***	**12.75**



King Nipples

NPT Size	Polypropylene Part #	Price/E
1½"	***HB150***	**$4.40**
2"	***HB200***	**5.60**
3"	***HB300***	**14.75**
4"	***HB400***	**33.15**



Reducer Nipples

NPT Size	NPT Size	Polypropylene Part #	Price/E
¾"	½"	***62233***	**$2.60**
1"	¾"	***62234***	**3.05**
1¼"	1"	***62235***	**3.45**
1½"	1¼"	***62236***	**3.75**
2"	1½"	***60549***	**4.20**



Hex Nipples

NPT Size	Polypropylene Part #	Price/E
½"	***62221***	**$1.75**
¾"	***60554***	**2.75**
1"	***60555***	**3.20**
1¼"	***60556***	**3.35**
1½"	***60547***	**4.75**
2"	***60548***	**5.20**
3"	***61769***	**17.70**



Pipe Caps

NPT Size	Polypropylene Part #	Price/E
¾"	***62250***	**$6.05**
1"	***62251***	**6.05**



Reducer Bushings

NPT Size	NPT Size	Polypropylene Part #	Price/E
½"	¼"	***62267***	**$3.05**
¾"	½"	***62272***	**3.05**
1"	½"	***62275***	**3.20**
1"	¾"	***62276***	**3.20**
1¼"	¾"	***62277***	**3.35**
1¼"	1"	***62278***	**3.35**
1½"	¾"	***62279***	**4.70**
1½"	1"	***62280***	**4.70**
1½"	1¼"	***62281***	**4.70**
2"	¾"	***62195***	**5.40**
2"	1"	***62196***	**5.40**
2"	1¼"	***62197***	**5.40**
2"	1½"	***62198***	**5.40**
3"	2"	***60330***	**16.30**



Schedule 80 Threaded Polypropylene Fittings

Crosses



NPT Size	Polypropylene Part #	Price/E
1"	***62263***	**$22.80**

90° Street Elbows



NPT Size	Polypropylene Part #	Price/E
½"	***62243***	**$4.70**
¾"	***62244***	**5.05**
1"	***62245***	**5.90**
1¼"	***62246***	**7.55**
1½"	***62247***	**11.55**
2"	***62199***	**13.95**
3"	***62248***	**65.20**

90° Elbows



NPT Size	Polypropylene Part #	Price/E
½"	***62215***	**$4.40**
¾"	***62216***	**5.05**
1"	***62217***	**5.90**
1½"	***62219***	**11.35**
2"	***62191***	**13.60**
3"	***62220***	**65.20**

Pipe Couplings



NPT Size	Polypropylene Part #	Price/E
¾"	***62238***	**$4.90**
1"	***62239***	**5.90**
1½"	***62241***	**13.15**
2"	***62194***	**14.50**

Pipe Plugs



NPT Size	Polypropylene Part #	Price/E
¾"	***62256***	**$3.05**
1"	***62257***	**3.05**
1¼"	***62258***	**3.35**
1½"	***62259***	**5.35**
2"	***62201***	**5.60**

Tees



NPT Size	Polypropylene Part #	Price/E
½"	***62209***	**$5.30**
¾"	***62210***	**5.50**
1"	***62211***	**7.65**
1¼"	***62212***	**9.20**
1½"	***62213***	**13.35**
2"	***62190***	**16.90**
3"	***62214***	**74.10**

Bulkhead Fittings

female NPT fittings

Female NPT	Hole Size	*Polypropylene* Part #	Price/E
½"	1-3/8"	***62834***	**$11.55**
¾"	1-3/8"	***60401***	**9.25**
1"	2-1/4"	***60427***	**11.55**
1¼"	2-1/4"	***60403***	**11.55**
1½"	3"	***60124***	**17.35**
2"	3"	***60405***	**16.55**
3"	4-5/8"	***62299*** [1]	**72.60**

[1] 3" does not contain a washer

- constructed of glass reinforced polypropylene for strength and chemical resistance
- for use on most poly storage tanks and many steel and fiberglass tanks
- EPDM gaskets are standard
- Viton® gaskets are available



gaskets

Size	*EPDM* Part #	Price/E
½" - ¾"	***60402***	**$2.05**
1" - 1¼"	***60404***	**2.90**
1½" - 2"	***60406***	**3.95**
3"	***60331***	**14.45**

Bolted Fittings

Bolts are threaded into the back plate of the fitting so there are no welds or bolt holes as potential points of leakage. The fittings come standard without a gasket. However, a gasket (sold separately) is required to be installed on the inside of the tank.

Stainless Steel

female NPT fittings

Size	*Stainless Steel* Part #	Price/E
¾"	***63035***	**$171.40**
1"	***62948***	**189.15**
1½"	***63037***	**218.75**
2"	***63038***	**260.20**

- stainless steel body
- 316 stainless steel bolted fitting
- cross-linked polyethylene gaskets are standard (sold separately)
- Viton® and EPDM gaskets are available



gaskets

Size	*Cross-Linked Polyethylene* Part #	Price/E
¾" - 1"	***62950***	**$3.80**
1½"	***63042***	**4.95**
2"	***62848***	**5.50**

Polypropylene

female NPT fittings

Size	*Polypropylene* Part #	Price/E
¾"	***60502***	**$41.15**
1"	***60505***	**41.15**
1½"	***60513***	**67.60**
2"	***60516***	**67.60**

- polypropylene body
- 316 stainless steel bolts
- EPDM gaskets are standard (sold separately)
- Viton® gaskets are available



gaskets

Size	*EPDM* Part #	Price/E
¾" - 1"	***60498***	**$5.75**
1½" - 2"	***60497***	**5.65**

Brass Double Male Hex Nipples


NPT Size	NPSH Size	*Brass* Part #	Price/E
1½"	1½"	***DMH1515***	**$23.15**
2"	2"	***DMH2020***	**43.35**
2½"	2½"	***DMH2525***	**45.35**
3"	3"	***DMH3030***	**137.15**
4"	4"	***DMH4040***	**177.65**



Pipe Nipples


SAFETY ALERT *Do not use pipe nipples as hose inserts.* SAFETY ALERT

Straight Hex Nipples




Male NPT	*Stainless Steel* Part #	Price/E
3/8"	***HN38SS***	**$4.60**
1/2"	***HN50SS***	**6.50**
3/3/4"	***HN75SS***	**9.20**
1"	***HN100SS***	**12.75**

Reducing Hex Nipples



Male NPT	Male NPT	*316 Stainless Steel* Part #	Price/E
3/8"	1/4"	***RHN3825SS***	**$5.55**
1/2"	3/8"	***RHN5038SS***	**6.60**
3/4"	1/2"	***RHN7550SS***	**8.15**

Close Nipples



- made from schedule 40 welded pipe
- male NPT x male NPT design
- brass nipples are available on page 304

Male NPT	Overall Length	*Carbon Steel* Part #	Price/E	*Galvanized* Part #	Price/E	*316 Stainless Steel* Part #	Price/E	Opt Qty
1/8"	3/4"	**---**	**---**	**---**	**---**	***CN012SS***	**$4.05**	1
1/4"	7/8"	***CN025***	**$2.25**	***CN025G***	**$2.55**	***CN025SS***	**4.55**	25
3/8"	1"	***CN037***	**2.30**	**--**	**---**	***CN037SS***	**5.60**	25
1/2"	1-1/8"	***CN050***	**2.10**	***CN050G***	**2.25**	***CN050SS***	**7.50**	10
3/4"	1-3/8"	***CN075***	**2.30**	***CN075G***	**2.75**	***CN075SS***	**9.70**	10
1"	1-1/2"	***CN100***	**3.40**	***CN100G***	**3.75**	***CN100SS***	**13.45**	10
1-1/4"	1-5/8"	***CN125***	**4.35**	**---**	**---**	**---**	**---**	10
1-1/2"	1-1/2"	***CN150***	**5.30**	***CN150G***	**5.90**	***CN150SS***	**22.75**	10
2"	2"	***CN200***	**7.25**	***CN200G***	**8.25**	***CN200SS***	**35.30**	10
2½"	2½"	***CN250***	**22.00**	**---**	**---**	**---**	**---**	--
3"	2-5/8"	***CN300***	**26.90**	***CN300G***	**29.50**	***CN300SS***	**95.00**	1
4"	2-5/8"	***CN400***	**40.90**	**---**	**---**	***CN400SS***	**128.30**	5
6"	3-1/8"	***CN600***	**122.10**	**---**	**---**	**---**	**---**	--

Pipe Nipples

SAFETY ALERT **Do not use pipe nipples as hose inserts.** SAFETY ALERT

Threaded Both Ends

- made from schedule 40 welded pipe
- male NPT x male NPT design
- brass nipples are available on page 304
- other lengths are also available, consult factory for pricing

Male NPT	Overall Length	*Carbon Steel* Part #	Price/E	*316 Stainless Steel* Part #	Price/E
½"	2"	***TN050X2***	**$1.95**	**---**	**---**
¾"	2"	***TN075X2***	**2.40**	**---**	**---**
1"	2"	***TN100X2***	**3.60**	**---**	**---**
1¼"	2"	***TN125X2***	**4.65**	**---**	**---**
1½"	2"	***TN150X2***	**5.50**	**---**	**---**
½"	3"	***TN050X3***	**2.15**	**---**	**---**
¾"	3"	***TN075X3***	**2.75**	**---**	**---**
1"	3"	***TN100X3***	**3.75**	**---**	**---**
1½"	3"	***TN150x3***	**6.20**	**---**	**---**
2"	3"	***TN200X3***	**8.00**	**---**	**---**
3"	3"	***TN300X3***	**28.50**	**---**	**---**
½"	4"	***TN050X4***	**2.95**	**---**	**---**
¾"	4"	***TN075X4***	**3.50**	**---**	**---**
1"	4"	***TN100X4***	**4.85**	**---**	**---**
1¼"	4"	***TN125X4***	**6.05**	**---**	**---**
1½"	4"	***TN150X4***	**7.15**	**---**	**---**
2"	4"	***TN200X4***	**10.00**	**---**	**---**
3"	4"	***TN300X4***	**34.75**	**---**	**---**
4"	4"	***TN400X4***	**47.05**	**---**	**---**
2"	5"	***TN200X5***	**12.00**	**---**	**---**
¼"	6"	**---**	**---**	***TN025X6SS***	**$15.25**
½"	6"	***TN050X6***	**3.80**	***TN050X6SS***	**30.00**
¾"	6"	***TN075X6***	**4.95**	***TN075X6SS***	**33.80**
1"	6"	***TN100X6***	**7.15**	***TN100X6SS***	**45.65**
1¼"	6"	***TN125X6***	**8.60**	***TN125X6SS***	**58.85**
1½"	6"	***TN150X6***	**10.00**	***TN150X6SS***	**69.00**
2"	6"	***TN200X6***	**13.45**	***TN200X6SS***	**90.50**
3"	6"	***TN300X6***	**41.45**	***TN300X6SS***	**183.80**
4"	6"	***TN400X6***	**57.15**	***TN400X6SS***	**245.90**
6"	6"	***TN600X6***	**170.00**	**---**	**---**
2"	8"	***TN200X8***	**19.25**	**---**	**---**
4"	8"	***TN400X8***	**81.00**	**---**	**---**
6"	8"	***TN600X8***	**250.00**	**---**	**---**



Merchant Couplings

- other sizes are also available

Female NPSM	*Black Iron* Part #	Price/E
1/4"	***MRCH25***	**$2.00**
3/8"	***MRCH38***	**2.35**
1/2"	***MRCH50***	**2.50**
3/4"	***MRCH75***	**3.25**
1"	***MRCH100***	**4.50**
1-1/4"	***MRCH125***	**5.75**
1-1/2"	***MRCH150***	**7.30**
2"	***MRCH200***	**10.40**
3"	***MRCH300*** [1]	**41.50**




[1] 3" has NPT thread

Standard Couplings - Series S

Standard couplings are designed for a wide range of applications: commercial/industrial construction, mining, process piping, and many others. The housing design allows for optimum strength without excessive casting weight.

- ductile iron body with rust inhibiting paint.
- Underwriters Listed and Factory Mutual approved
- see page 556 for replacement gaskets
- Interchangeable with:
  Victaulic's #77
  Grinnell's #7001






Nominal Size	Pipe OD	Max Work. Pressure **PSI** at 70°F	Maximum End Load Lbs.	Coupling Dimensions A	B	C	Approx. Weight (lbs.)	Bolts qty	size	length	*Ductile Iron w/ EPDM gasket* Part #	*Ductile Iron w/ Buna-N gasket* Part #	Price/E
1½"	1.900	**1000**	2835	4-9/16"	3-1/4"	1-3/4"	1.5	2	3/8"	2-1/4"	***C115***	***C115BU***	**$67.30**
2"	2.375	**1000**	4430	5-3/8"	3-5/8"	1-3/4"	2.6	2	1/2"	2-1/2"	***C12***	***C12BU***	**25.80**
2½"	2.875	**1000**	6492	6-1/4"	4-1/4"	1-3/4"	3.4	2	1/2"	2-1/2"	***C125***	***C125BU***	**29.80**
3"	3.500	**1000**	9621	7"	5"	1-3/4"	4.2	2	1/2"	2-3/4"	***C13***	***C13BU***	**37.20**
4"	4.500	**1000**	15904	8-1/2"	6-3/8"	2-1/16"	6.0	2	5/8"	3-1/4"	***C14***	***C14BU***	**54.00**
6"	6.625	**1000**	34472	11-1/2"	8-7/8"	2-1/16"	10.8	2	3/4"	4-1/4"	***C16***	***C16BU***	**93.60**
8"	8.625	**800**	46741	14-1/4"	11-1/4"	2-3/8"	21.8	2	7/8"	5"	***C18***	***C18BU***	**142.45**
10"	10.750	**800**	72610	16"	13-1/2"	2-1/2"	24.2	2	7/8"	5-1/2"	***C20***	***C20BU***	**225.60**
12"	12.750	**800**	102141	18"	15-1/2"	2-1/2"	27.5	2	7/8"	6"	***C24***	***C24BU***	**261.60**

Lightweight Flexible Couplings - Series L

Lightweight flexible couplings are designed for applications requiring moderate internal pressure or where weight is a factor. Applications include: general purpose, mining, irrigation, and compressed air where a deflection of 5% or less is required.

- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- see page 556 for replacement gaskets
- Interchangeable with:
  Victaulic's #75
  Grinnell's #7000





© Pipe & Welding


Nominal Size	Pipe OD	Max Work. Pressure **PSI** at 70°F	Maximum End Load Lbs.	Coupling Dimensions A	B	C	Approx. Weight (lbs.)	Bolts qty	size	length	*Ductile Iron w/ EPDM gasket* Part #	*Ductile Iron w/ Buna-N gasket* Part #	Price/E
1½"	1.900	**500**	1418	4-1/2"	2-7/8"	1-3/4"	1.5	2	3/8"	2-1/4"	***L215***	***L215BU***	**$59.60**
2"	2.375	**500**	2215	5-5/32"	3-11/32"	1-3/4"	1.7	2	3/8"	1-7/8"	***L02***	***L02BU***	**16.95**
2½"	2.875	**300**	3246	5-25/32"	3-29/32"	1-3/4"	2.2	2	3/8"	2"	***L025***	***L025BU***	**19.40**
3"	3.500	**300**	4811	6-35/64"	4-3/8"	1-51/64"	2.8	2	1/2"	2-1/2"	***L03***	***L03BU***	**22.80**
4"	4.500	**300**	6362	8-3/64"	5-21/32"	1-15/16"	3.7	2	1/2"	2-3/4"	***L04***	***L04BU***	**30.00**
5"	5.563	**300**	9722	9-1/2"	6-3/4"	2"	5.7	2	5/8"	3-1/4"	***L05***	***L05BU***	**162.25**
6"	6.625	**300**	13789	10-53/64"	7-7/8"	2"	7.4	2	5/8"	3-1/4"	***L06***	***L06BU***	**48.00**
8"	8.625	**300**	20449	13-7/8"	10-13/64"	2-13/32"	12.8	2	3/4"	4-1/4"	***L08***	***L08BU***	**81.60**

Quick Release Couplings - Series Q

Quick release couplings are specially designed for applications requiring a quick connection and/or disconnection of a pipe joint. A locking pin through the handle prevents accidental opening of the coupling.

- ductile iron body with zinc plating and steel safety clip
- see page 556 for replacement gaskets
- Interchangeable with:
  Victaulic's #78
  Grinnell's #7003






Nominal Size	Pipe OD	Max Work. Pressure **PSI** at 70°F	Maximum End Load Lbs.	Coupling Dimensions A	B	C	Approx. Weight (lbs.)	*Ductile Iron w/ EPDM gasket* Part #	*Ductile Iron w/ Buna-N gasket* Part #	Price/E
1½"	1.900	**300**	850	4-3/4"	3-1/2"	1"	1.5	***H315***	***H315BU***	**$129.85**
2"	2.375	**300**	1329	5-1/2"	3-3/4"	1-7/8"	2.5	***H32***	***H32BU***	**124.55**
2½"	2.875	**300**	2120	5-7/8"	4-3/4"	1-7/8"	3.1	***H325***	***H325BU***	**136.90**
3"	3.500	**300**	2886	7-1/4"	5-1/4"	1-7/8"	5.3	***H33***	***H33BU***	**160.00**
4"	4.500	**300**	4771	8-1/2"	6-1/2"	2"	6.0	***H34***	***H34BU***	**206.00**
6"	6.625	**300**	10341	10-5/8"	8-1/2"	2"	8.6	***H36***	***H36BU***	**442.60**

Rigid Couplings - Series R

This lightweight, low pressure, rigid style coupling is ideal for fire protection, plumbing, low pressure air and drainage. Small gripping teeth hold the housing into the groove allowing a straight run of pipe and preventing any flex at the joint.

- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- see page 556 for replacement gaskets



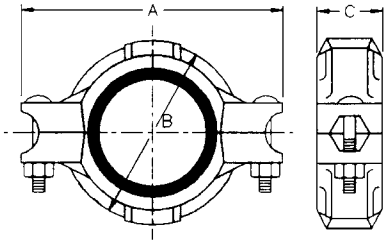


Nominal Size	Pipe OD	Max Work. Pressure **PSI** at 70°F	Maximum End Load Lbs.	Coupling Dimensions A	B	C	Approx. Weight (lbs.)	Bolts qty	size	length	*Ductile Iron w/ EPDM gasket* Part #	*Ductile Iron w/ Buna-N gasket* Part #	Price/E
2"	2.375	**175**	4425	5"	3-15/64"	1-3/4"	1.5	2	3/8"	2"	***R72***	***R72BU***	**$20.40**
2½"	2.875	**175**	6490	5-5/8"	3-45/64"	1-3/4"	1.7	2	3/8"	2"	***R725***	***R725BU***	**16.20**
3"	3.500	**175**	9620	6-29/64"	4-5/16"	1-3/4"	2.5	2	3/8"	2"	***R73***	***R73BU***	**24.75**
4"	4.500	**175**	12720	7-53/64"	5-17/32"	2"	3.6	2	1/2"	2-3/4"	***R74***	***R74BU***	**31.20**
6"	6.625	**175**	27570	10-23/64"	7-37/64"	2"	5.8	2	5/8"	3-1/4"	***R76***	***R76BU***	**52.80**
8"	8.625	**175**	35050	13-25/32"	10"	2-21/64"	15.9	2	5/8"	3-1/4"	***R78***	***R78BU***	**78.00**


Mechanical Tees - Series T

Mechanical tees provide a fast easy way to install a threaded connection along a length of pipe. After drilling or cutting a hole in the pipe at the location of the branch connection, simply attach the clamps around the pipe for a leak-free threaded outlet connection. See chart below for drilling hole specifications

- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- maximum working pressure: **300 PSI** at ambient temperature (70°F)
- Interchangeable with:
  Victaulic's #920
  Grinnell's #7045






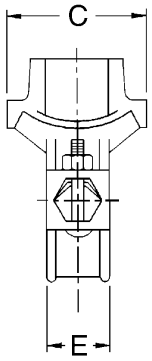

Nominal Size	Branch Size	Hole Saw DIA	Maximum Hole DIA	Coupling Dimensions					Approx. Weight (lbs.)	Bolts			*Ductile Iron*	
				A	B	C	D	E		qty	size	length	Part #	Price/E
2"	1"	1-1/2"	1-5/8"	5-1/16"	1-1/2"	2-3/4"	2-5/8"	1-7/8"	2.4	2	3/8"	2"	***MT2010***	**$36.00**
2"	1-1/4"	1-3/4"	1-7/8"	5-1/16"	1-1/2"	2-15/16"	2-3/4"	1-7/8"	2.9	2	3/8"	2"	***MT20125***	**39.60**
2"	1-1/2"	1-3/4"	1-7/8"	5-1/16"	1-1/2"	2-15/16"	2-3/4"	1-7/8"	2.8	2	3/8"	2"	***MT20150***	**39.60**
2-1/2"	1"	1-1/2"	1-5/8"	5-5/32"	1-11/16"	3"	2-31/32"	2"	3.1	2	1/2"	2-5/8"	***MT25010***	**45.60**
2-1/2"	1-1/4"	2"	2-1/8"	5-13/16"	1-11/16"	3-11/32"	3"	2"	3.3	2	1/2"	2-5/8"	***MT250125***	**49.20**
3"	1"	1-1/2"	1-5/8"	6-11/32"	2-1/8"	3-3/32"	3-1/16"	2"	3.3	2	1/2"	2-3/4"	***MT3010***	**54.00**
3"	1-1/4"	2"	2-1/8"	6-11/32"	2-1/8"	3-3/4"	3-3/8"	2"	4.0	2	1/2"	2-3/4"	***MT30125***	**49.20**
3"	1-1/2"	2"	2-1/8"	6-11/32"	2-1/8"	3-3/4"	3-3/8"	2"	3.4	2	1/2"	2-3/4"	***MT30150***	**49.20**
3"	2"	2-1/2"	2-5/8"	6-11/32"	2-1/8"	4-1/8"	3-3/8"	2"	4.0	2	1/2"	2-3/4"	***MT3020***	**55.50**
4"	1"	1-1/2"	1-5/8"	7-5/16"	2-9/16"	3-3/32"	3-1/2"	2"	4.4	2	1/2"	2-3/4"	***MT4010***	**68.70**
4"	1-1/4"	2"	2-1/8"	7-5/16"	2-9/16"	3-3/4"	3-7/8"	2"	5.1	2	1/2"	2-3/4"	***MT40125***	**56.40**
4"	1-1/2"	2"	2-1/8"	7-5/16"	2-9/16"	3-3/4"	3-7/8"	2"	4.9	2	1/2"	2-3/4"	***MT40150***	**58.80**
4"	2"	2-1/2"	2-5/8"	7-5/16"	2-9/16"	4-1/8"	4"	2"	5.3	2	1/2"	2-3/4"	***MT4020***	**58.80**
4"	2-1/2"	2-3/4"	2-7/8"	7-5/16"	2-9/16"	4-3/8"	4"	2"	5.4	2	1/2"	2-3/4"	***MT40250***	**61.20**
4"	3"	3-1/2"	3-5/8"	7-5/16"	2-9/16"	5-1/4"	4-1/4"	2"	6.4	2	1/2"	2-3/4"	***MT4030***	**65.40**
6"	1-1/4"	2-1/2"	2-5/8"	10-5/32"	3-11/16"	4-1/8"	4-7/8"	2-1/4"	8.6	2	5/8"	3-1/4"	***MT60125***	**73.80**
6"	1-1/2"	2-1/2"	2-5/8"	10-5/32"	3-11/16"	4-1/8"	4-7/8"	2-1/4"	8.4	2	5/8"	3-1/4"	***MT60150***	**73.80**
6"	2"	2-1/2"	2-5/8"	10-5/32"	3-11/16"	4-1/8"	5"	2-1/4"	7.6	2	5/8"	3-1/4"	***MT6020***	**73.80**
6"	2-1/2"	2-3/4"	2-7/8"	10-5/32"	3-11/16"	4-3/8"	5-1/8"	2-1/4"	8.4	2	5/8"	3-1/4"	***MT60250***	**88.80**
6"	3"	3-1/2"	3-5/8"	10-5/32"	3-11/16"	5-1/4"	5-3/8"	2-1/4"	9.2	2	5/8"	3-1/4"	***MT6030***	**85.20**
6"	4"	4-1/2"	4-5/8"	10-5/32"	3-11/16"	6-1/4"	5-3/8"	2-1/4"	9.8	2	5/8"	3-1/4"	***MT6040***	**93.60**

Grooved End Fittings - Series 45

- designed to provide minimum pressure drop and uniform strength
- maximum working pressure is **1000 PSI** at ambient temperature (70°F)
- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- Interchangeable with:
  Victaulic's #110
  Grinnell's #7051






Nominal Size	C to E	Approx. Weight (Lbs.)	*Ductile Iron* Part #	Price/E
2"	2"	1.4	***L2045***	**$21.30**
2½"	2¼"	2.3	***L2545***	**21.25**
3"	2½"	3.2	***L3045***	**33.60**
4"	3"	5.3	***L4045***	**49.15**
5"	3¼"	7.9	***L5145***	**121.20**
6"	3½"	11.0	***L6045***	**100.80**
8"	4¼"	20.0	***L8045***	**198.00**

Grooved End Fittings - Series 90

- designed to provide minimum pressure drop and uniform strength
- maximum working pressure is **1000 PSI** at ambient temperature (70°F)
- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- Interchangeable with:
  Victaulic's #10
  Grinnell's #7050






Nominal Size	C to E	Approx. Weight (Lbs.)	*Ductile Iron* Part #	Price/E
2"	3¼"	2.1	***L502***	**$21.60**
2½"	3¾"	3.0	***L5025***	**24.85**
3"	4¼"	4.7	***L503***	**39.60**
4"	5"	7.3	***L504***	**52.05**
6"	6½"	17.6	***L506***	**123.60**
8"	7¾"	31.9	***L508***	**276.00**

Grooved End Fittings - Series T

- designed to provide minimum pressure drop and uniform strength
- maximum working pressure is **1000 PSI** at ambient temperature (70°F)
- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- Interchangeable with:
  Victaulic's #20
  Grinnell's #7060






Nominal Size	C to E	Approx. Weight (Lbs.)	*Ductile Iron* Part #	Price/E
2"	3¼"	3.2	***T602***	**$31.20**
2½"	3¾"	4.5	***T6025***	**38.40**
3"	4¼"	5.9	***T603***	**52.80**
4"	5"	11.0	***T604***	**61.20**
6"	6½"	24.6	***T606***	**210.00**
8"	7¾"	40.0	***T608***	**404.40**

Flange Adapters - Series FA

Flange adapters are used to connect an ANSI Class 125 and 150 flange to a grooved pipe using a grooved clamp. To assemble to another flange, position bolt heads on the adapter (grooved) side. These adapters provide a rigid one piece connection that can be disconnected by removing the clamp assembly. Painted ductile iron.






Nominal Size	Pipe OD	Max **PSI** at 70°F	Flange Dimensions A	Flange Dimensions B	Approx. Weight (lbs.)	Bolts qty	Bolts size	*Ductile Iron* Part #	*Ductile Iron* Price/E
2"	2.375	**300**	6"	2-3/8"	2.8	4	5/8"	***FA20***	**$34.80**
3"	3.500	**300**	7¼"	2-3/8"	5.3	4	5/8"	***FA30***	**58.80**
4"	4.500	**300**	8½"	2-3/8"	6.4	8	5/8"	***FA40***	**74.40**
6"	6.625	**300**	11"	2-9/16"	11.5	8	3/4"	***FA60***	**136.80**
8"	8.625	**300**	13¼"	3"	23.0	8	3/4"	***FA80***	**168.00**

ANSI Split Flange - Series SF

The split flange coupling is designed to provide a direct connection between a grooved adapter and an ANSI Class 125 and 150 raised face flanged component. It can be used with flat face flanges by removing the raised projections on the outside face of the flange.

- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- Buna gaskets are available upon request
- Interchangeable with:
  Victaulic's #741
  Grinnell's #7012






Nominal Size	Pipe OD	Max **PSI** at 70°F	Flange Dimensions A	Flange Dimensions B	Approx. Weight (lbs.)	Bolts qty	Bolts size	*Ductile Iron w/ gasket* Part #	*Ductile Iron w/ gasket* Price/E	*Replacement Gaskets EPDM* Part #	*Replacement Gaskets EPDM* Price/E
2"	2.375"	**300**	6"	13/16"	3.5	4	5/8"	***ANSI20***	**$72.90**	***FLG200E***	**$7.80**
2½"	2.875"	**300**	7"	13/16"	4.6	4	5/8"	***ANSI25***	**78.90**	***FLG250E***	**9.00**
3"	3.500"	**300**	7½"	13/16"	5.1	4	5/8"	***ANSI30***	**94.80**	***FLG300E***	**10.50**
4"	4.500"	**300**	9"	15/16"	8.8	8	5/8"	***ANSI40***	**126.00**	***FLG400E***	**12.00**
6"	6.625"	**300**	11"	1"	10.6	8	3/4"	***ANSI60***	**150.00**	***FLG600E***	**18.60**
8"	8.625"	**300**	13½"	1-1/8"	17.0	8	3/4"	***ANSI80***	**192.00**	***FLG800E***	**32.70**

Reducing Adapters - Series RA

- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved
- Interchangeable with:
  Victaulic's #50
  Grinnell's #7072





Nominal Size	Nominal Size	E to E	Approx. Weight (Lbs.)	*Ductile Iron* Part #	*Ductile Iron* Price/E
2"	1½"	2.5	0.9	***RAGG20150***	**$25.20**
2½"	2"	2.5	1.1	***RAGG25020***	**26.40**
3"	2"	2.5	1.2	***RAGG3020***	**25.20**
3"	2½"	2.5	1.5	***RAGG30250***	**31.20**
4"	2"	3.0	2.2	***RAGG4020***	**31.20**
4"	2½"	3.0	2.4	***RAGG40250***	**35.10**
4"	3"	3.0	2.4	***RAGG4030***	**39.60**
5"	4"	3.5	4.4	***RAGG5040***	**67.20**
6"	2"	4.0	4.0	***RAGG6020***	**75.60**
6"	2½"	4.0	4.4	***RAGG60250***	**86.80**
6"	3"	4.0	4.6	***RAGG6030***	**79.20**
6"	4"	4.0	7.0	***RAGG6040***	**79.20**


End Caps

ANSI Caps with Tapped Outlet - Series EC

- ductile iron construction with rust inhibiting galvanized finish

Nominal Size	Outlet	E to E	Approx. Weight (Lbs.)	*Ductile Iron* Part #	Price/E
2"	1"	7/8"	.50	***EC201***	**$22.20**
2½"	1"	7/8"	.70	***EC251***	**28.80**
3"	1"	7/8"	1.05	***EC301***	**31.20**
4"	1"	1"	2.30	***EC401***	**31.20**
4"	2"	1"	2.10	***EC402***	**31.20**
6"	1"	1"	5.10	***EC601***	**69.60**
6"	2"	1"	5.35	***EC602***	**69.60**
8"	2"	1-3/16"	10.10	***EC802***	**136.80**






Blank Caps - Series BE

- Interchangeable with:
  Victaulic's #60
  Grinnell's #7074
- ductile iron body with rust inhibiting paint
- Underwriters Listed and Factory Mutual approved

Nominal Size	E to E	Approx. Weight (Lbs.)	*Ductile Iron* Part #	Price/E
2"	7/8"	.6	***BEC20***	**$26.40**
2½"	7/8"	.7	***BEC25***	**34.80**
3"	7/8"	1.1	***BEC30***	**36.00**
4"	1"	2.6	***BEC40***	**37.20**
6"	1"	5.0	***BEC60***	**93.00**
8"	1-3/16"	11.0	***BEC80***	**171.60**





Adapter Nipples


Short Hex Style - Series HN

- These adapter nipples are designed to provide minimum pressure drop and uniform strength.
- maximum working pressure is **1000 PSI**

Nominal Size	E to E	*Ductile Iron* Part #	Price/E
2"	2-3/8"	***A712S***	**$30.00**
2½"	2-5/8"	***A7125S***	**36.00**
3"	2-7/8"	***A713S***	**55.20**
4"	3-1/2"	***A714S***	**74.40**


Note: items will be discontinued as stock is depleted






Long Pipe Style - Series AN


Nominal Size	E to E	*Ductile Iron* Part #	Price/E
2"	4"	***A712***	**$48.65**
2½"	4"	***A7125***	**57.05**
3"	4"	***A713***	**88.60**
4"	6"	***A714***	**115.80**
5"	6"	***A715***	**241.20**
6"	6"	***A716***	**311.70**






Victaulic x Weld

Nominal Size	*Aluminum* Part #	Price/E	*Carbon Steel* Part #	Price/E	*316 Stainless Steel* Part #	Price/E
2"	***AVN2000-200***	**$17.25**	***VN2000-200***	**$18.15**	***VNR2000-200***	**$24.60**
2½"	***AVN2500-200***	**21.00**	***VN2500-200***	**20.50**	***VNR2500-200***	**26.75**
3"	***AVN3000-200***	**22.70**	***VN3000-200***	**22.85**	***VNR3000-200***	**32.05**
4"	***AVN4000-200***	**40.00**	***VN4000-200***	**35.35**	***VNR4000-200***	**49.00**





Gaskets

- check gasket color code to be certain it is recommended for the service intended
- use lubricant on gasket
- For services not listed contact Dixon for recommendations.

2010 NEW

Viton®

- compound type: Fluoro Elastomer
- temperature range: **-13°F** to **350°F**
- color code: black with blue stripe

General service application:
- resistant to oxidizing acids, petroleum oils, hydraulic fluids, halogenated hydrocarbons and lubricants

Size	*Viton®* Part #	Price/E
2"	***G200V***	**$35.00**
3"	***G300V***	**48.00**
4"	***G400V***	**67.00**

EPDM

- compound type: EPDM
- temperature range: **-22°F** to **230°F**
- color code: black with green stripe

General service application:
- water, dilute acids, alkalies, salts, and many chemical services not involving hydrocarbons, oils, or gases.
- Excellent oxidation resistance.

Not for use with hydrocarbons SAFETY ALERT

Size	*EPDM* Part #	Price/E
1½"	***G150E***	**$31.90**
2"	***G200E***	**8.90**
2½"	***G250E***	**10.65**
3"	***G300E***	**11.80**
4"	***G400E***	**17.20**
5"	***G500E***	**56.10**
6"	***G600E***	**31.05**
8"	***G800E***	**50.55**

Buna-N

- compound type: Buna-N
- temperature range: **-24°F** to **176°F**
- color code: black with orange stripe

General service application:
- petroleum products, vegetable oils, mineral oils, and air contaminated with petroleum oils.

Not for use in hot water services SAFETY ALERT

Size	*Black Buna with orange stripe* Part #	Price/E	*White Buna* Part #	Price/E
1½"	***G150T***	**$31.90**	**---**	**---**
2"	***G200T***	**8.90**	**---**	**---**
2½"	***G250T***	**10.65**	**---**	**---**
3"	***G300T***	**11.80**	**---**	**---**
4"	***G400T***	**17.20**	***G400N***	**$28.20**
5"	***G500T***	**56.10**	**---**	**---**
6"	***G600T***	**31.05**	**---**	**---**
8"	***G800T***	**50.55**	**---**	**---**

Nuts and Bolts

- the nuts are a heavy hexagon design
- Nuts and bolts are made of electroplated carbon steel and conform to ASTM A183.
- The bolts are specifically designed for use with the couplings on pages 550-551.

Bolt Thread	Bolt Length	Torque, Ft. Lbs.	*Carbon Steel* Part #	Price/E
3/8"	2"	30	***BLT38200***	**$5.70**
3/8"	2¼"	30	***BLT38225***	**13.15**
1/2"	2½"	50	***BLT50212***	**5.70**
1/2"	2¾"	50	***BLT50234***	**7.80**
5/8"	3¼"	75	***BLT58314***	**5.10**
3/4"	4¼"	75	***BLT75414***	**16.80**
7/8"	6"	100	***BLT78600***	**24.00**

Gruvlok Lubricant - Groove Lube



- water soluble
- non-toxic
- non-corrosive
- non-flammable
- NSF approved for use with potable water SAFETY ALERT

Should not be used with HDPE pipe.

Size	Container	Part #	Price/E
4½ oz.	Tube	***GROOVLUB4***	**$47.35**
1 qt.	Tub	***GROOVLUB32***	**242.75**

© Pipe & Welding

Tight Fill Couplers

Complete Units

- aluminum body
- brass handle and cam arms with buna gasket
- steel bolts on inlet end
- plexiglass sight flow insert with buna seals

Coupler Size	Inlet Size	Inlet Type	*Aluminum* Part #	Price/E
3"	3"	male adapter	***300300MAE***	**$568.00**
3"	4"	male adapter	***3004030MAE***	**602.75**
3"	3"	female coupler	***300300FCE***	**681.70**

Coupler Body

plunger type handle

Size	*Aluminum* Part #	Price/E
3"	***300-TFG***	**$507.00**



Inlet Ends

Inlet Size	Inlet Type	*Aluminum* Part #	Price/E
3"	male adapter	***300-MAE***	**$62.85**
4"	male adapter	***4030-MAE***	**95.75**
3"	female coupler	***300-FCE***	**174.70**




female coupler


male adapter


Parts List

Item #	Description	Part #	Price/E
1	screw-inlet end	***P3-TFG-1***	**$1.30**
2	plexiglass-shell only	***P3-TFG-2***	**28.90**
3	plunger	***P3-TFG-3***	**60.80**
4	full grip plunger	***P3-TFG-4***	**154.60**
5	plunger cap	***P3-TFG-5***	**5.00**
6	spring	***P3-TFG-6***	**6.80**
7	plexiglass gasket	***P3-TFG-7***	**3.25**
8	right cam arm	***P3-TFG-8***	**41.20**
9	left cam arm	***P3-TFG-9***	**42.00**
10	rod	***P3-TFG-10***	**7.15**
11	disc	***P3-TFG-11***	**8.80**
12	pin	***300-P***	**2.10**
13	coupler gasket	***300-G-BU***	**1.20**
14	body	***P3-TFG-13***	**---**

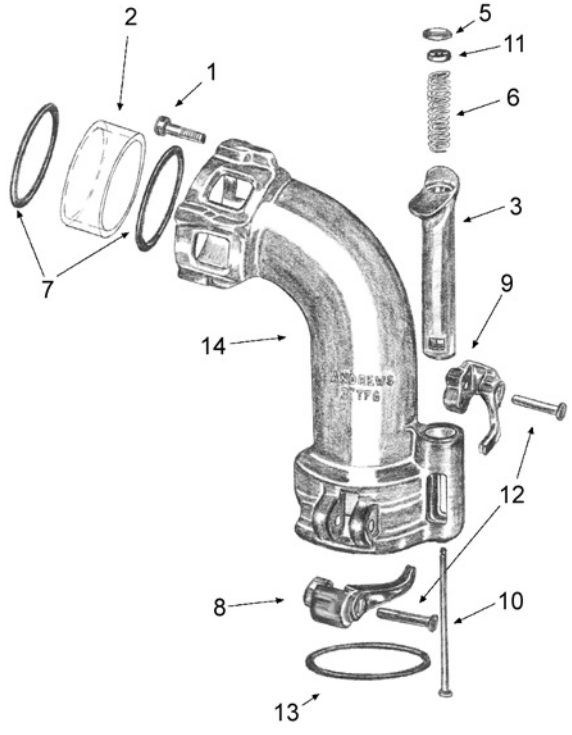

Drop Elbows

- modular cast aluminum construction
- brass handle and cam arms with buna gasket
- stainless steel bolts on inlet end
- acrylic sight glass with buna seals



drop elbow with side lever
no inlet

'Side Lever' type handle

Size	Inlet Type	'A' Overall Height	'B' Ground Clearance	*Aluminum* Part #	*Aluminum* Price/E
4"	*no inlet*	17-3/4"	10-7/8"	***6200***	**$838.15**
4"	male adapter inlet only	17-3/4"	10-7/8"	***6200A***	**942.10**
4"	anti-spill tube, *no inlet*	17-3/4"	10-7/8"	***6200T***	**912.40**
4"	female coupler inlet only	17-3/4"	10-7/8"	***6200D***	**1018.15**


drop elbow with side lever
and female coupler inlet

'Side Lever' type handle - extended body

Size	Inlet Type	'A' Overall Height	'B' Ground Clearance	*Aluminum* Part #	*Aluminum* Price/E
4"	*no inlet*	21"	13-3/4"	***6200X***	**$935.80**
4"	male adapter inlet only	21"	13-3/4"	***6200XA***	**1055.60**
4"	anti-spill tube, *no inlet*	21"	13-3/4"	***6200XT***	**1015.35**
4"	female coupler inlet only	21"	13-3/4"	***6200XD***	**1121.45**
4"	anti-spill tube & female coupler inlet	21"	13-3/4"	***6200XDT***	**1200.95**


self-locking drop elbow

2010 NEW

Self-Locking

Size	Inlet Type	'A' Overall Height	'B' Ground Clearance	*Aluminum* Part #	*Aluminum* Price/E
4"	tightfill elbow with locking handle	17-3/4"	10-7/8"	***6500***	**$887.20**
4"	tightfill elbow with locking handle and 4" adapter	17-3/4"	10-7/8"	***6500A***	**936.05**

Inlet Ends


female coupler
6000-14, 6000-15


male adapter
6000-16, 6000-17


female

Inlet Size	Inlet Type	*Aluminum* Part #	*Aluminum* Price/E
3"	male adapter	***6000-16***	**$89.60**
4"	male adapter	***6000-17***	**89.60**
3"	female coupler	***6000-15***	**164.35**
4"	female coupler	***6000-14***	**164.35**
NEW 3"	male adapter for vapor elbows	***VR6000-6***	**52.30**
4"	female with FNPT	***6000-20***	**89.75**


Top Side Lever Elbow
Fits 6200 Elbow Only

Bill Of Materials

Item #	Description	Part #	Price/E	Qty
1	body	***6200-1***	**$165.75**	1
2	pin	***PIN5/16x11/4P***	**2.45**	2
3	handle	use kit ***6200-15ASSM***	**---**	1
4	handle linkage	use kit ***6200-15ASSM***	**---**	1
5	stud	use kit ***6200SHK***	**---**	1
6	washer	use kit ***6200SHK***	**---**	2
7	hex nut	use kit ***6200SHK***	**---**	1
8A	Baylast™ gasket	***4433***	**8.05**	2
8B	Viton® gasket (optional)	***4426***	**10.00**	2
9	lock washer	use kit ***6000EHK***	**---**	4
10	bolt	use kit ***6000EHK***	**---**	4
11	sight glass	use kit ***6200SGK***	**---**	1
12	bushing	use kit ***6200SHK***	**---**	1

Repair Kits

Part #	Description	Includes	Price/E
6200SGK	replacement sight glass and Baylast™ seals	8, 11	**$46.40**
6000EHK	replacement bolts and washers	9, 10	**7.45**
6200-15ASSM	replacement handle,	2, 3, 4	**48.05**
6200SHK	lever and pin replacement pivot stud, bushing, washer & lock nut	5, 6, 7, 12	**13.95**

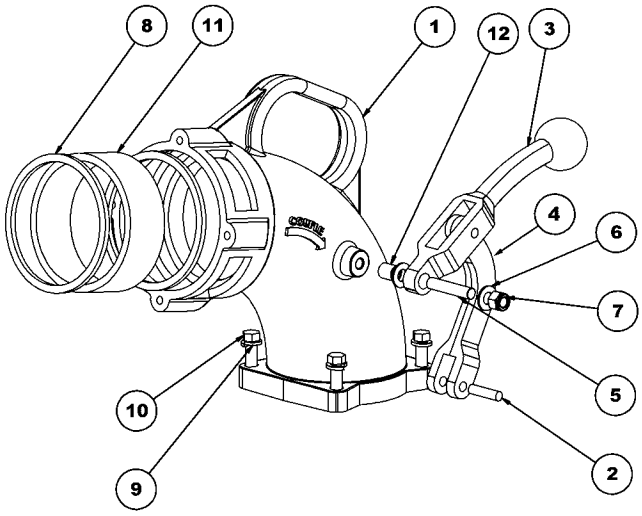


Bottom Unit, for Side Lever Elbows
Fits 6200, 6400 & 6500 Standard & Tall Elbows

Bill Of Materials

Item #	Description	Part #	Price/E	Qty
1	body	**---**	**---**	1
2	small bushing	use kit ***6200BK***	**---**	2
3	large bushing	use kit ***6200BK***	**---**	2
4A	handle stem (standard)	***6200-7***	**$62.95**	1
4B	handle stem (tall)	***6200-7X***	**78.25**	1
5	main gasket	***6000-9***	**7.50**	1
6	spring	***112012***	**4.90**	1
7	O-ring	***AS156***	**2.25**	1
8	grease nipple	***NIPPLE/1***	**2.90**	1
9	right arm	use kit ***6200ARK***	**---**	1
10	left arm	use kit ***6200ARK***	**---**	1
11	pin	***PIN5/16x11/4P***	**2.45**	1

Repair Kits

Part #	Description	Includes	Price/E
6230	complete "standard" replacement bottom unit	all	**$367.45**
6230X	complete "tall" replacement bottom unit	all 2, 3, 5, 7,	**466.85**
6200ARK	replacement L & R arms, main gasket, O-rings, small & large bushings	9, 10	**130.90**
6200BK	replacement small & large bushings	2, 3	**39.55**

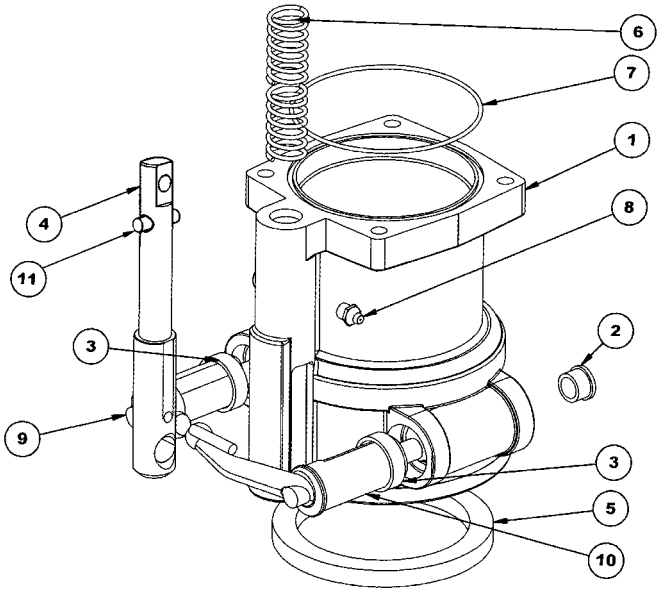

Vapor Recovery Drop Elbows




- for use in two point vapor recovery system
- one-piece bronze locking arms housed in polymer bushings
- advanced design side lever locking system
- Viton® main seal with buna poppet seal and stainless steel hardware
- bolt on 3" male outlet included (can rotate for extended life)
- lubrication fitting on locking stem

Note: See drop elbow below for single point vapor recovery co-axial elbow 6400.

Description	*Aluminum* Part #	Price/E
3" male inlet adapter with no probe and poppet	***VR6200NP***	**$657.80**
3" male inlet adapter & probe and poppet	***VR6200***	**749.00**

VR6200 Series Vapor Elbows

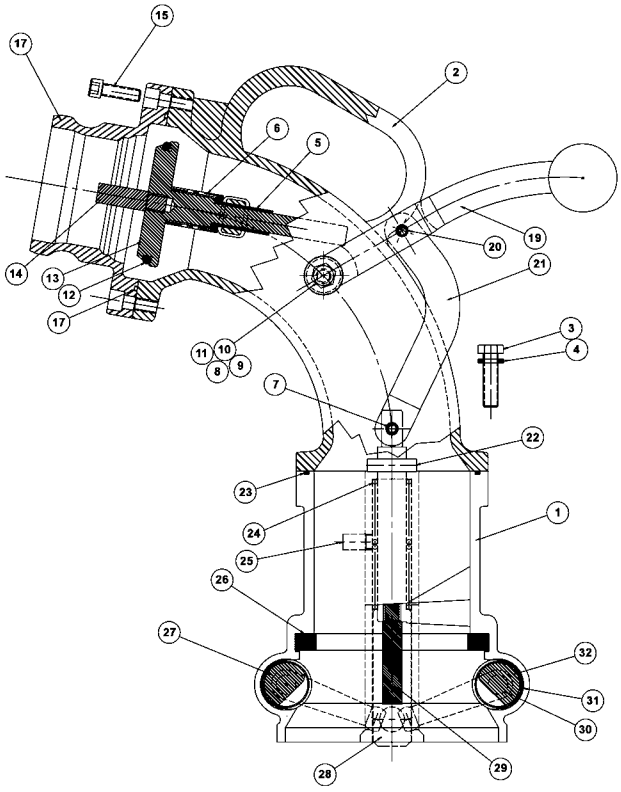

Bill Of Materials

Item #	Description	Part #	Price/E	Qty
1	bottom body	—	---	1
2	top elbow body	—	---	1
3	bolt	use kit ***6000EHK***	---	4
4	lock washer	use kit ***6000EHK***	---	4
5	poppet bushing (VR6200)	***VR6000-3***	**$10.75**	1
6	poppet spring (VR6200)	***L1110-L2287***	**15.60**	1
7	stem pin	***PIN5/16x11/4P***	**2.45**	1
8	pivot stud	use kit ***6200SHK***	---	1
9	pivot bushing	use kit ***6200SHK***	---	1
10	pivot washer	use kit ***6200SHK***	---	2
11	pivot lock nut	use kit ***6200SHK***	---	1
12	Viton® poppet seal (VR6200)	***O-RING-AS-334***	**9.85**	1
13	poppet valve (VR6200)	***VR6000-4***	**50.50**	1
14	poppet valve "stand off" (VR6200)	***VR6000-5***	**11.20**	1
15	outlet adapter bolt	use kit ***6000NPHK***	---	4
16	outlet adapters & O-ring	***VR6000-6***	**52.30**	1
17	outlet O-ring	***110319***	**2.15**	1
18	lock washer	use kit ***6000NPHK***	---	4
19	handle	use kit ***6200-15ASSM***	---	1
20	handle pin	***PIN5/16x11/4P***	**2.45**	1
21	handle linkage	use kit ***6200-15ASSM***	---	1
22	stem pin	***PIN5/16x11/4P***	**2.45**	1
23	body O-ring	***AS156***	**2.25**	1
24	stem spring	***112012***	**4.90**	1
25	grease nipple	***NIPPLE/1***	**2.90**	1
26	main seal gasket	***6000-9***	**7.50**	1
27	left arm	***VR6000-9***	**64.00**	1
28	stem	***6200-7***	**62.95**	1
29	probe	***VR6000-7***	**8.20**	1
30	small bushing	use kit ***6200BK***	---	2
31	large bushing	use kit ***6200BK***	---	2
32	right arm	***VR6000-8***	**64.00**	1


Repair Kits

Part #	Description	Includes	Price/E
VR6230	complete replacement bottom unit	1, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33	**$382.55**
6200BK	replacement small (2) & large (2) bushing kit	31, 32	**39.55**
6000EHK	replacement body lock washers and bolts	4, 5	**7.45**
6200SHK	replacement pivot stud, bushing, washers & lock nut	9, 10, 11, 12	**13.90**
6000NPHK	adapter kit bolts (4) & lock washers	16, 19	**5.00**
6200-15ASSM	replacement handle, linkage and pin	20, 21, 22	**48.05**

Co-axial Drop Elbows

- for single point vapor recovery only
- 3" male vapor outlet (top)
- comes assembled with 4" male inlet
  Note: Inlets made special for co-axials only.
- quality cast aluminum construction with solid bronze arms
- bolt-on inlets/outlets for easy, fast replacement
- acrylic sight glass with buna seals

Description	*Aluminum* Part #	Price/E
4" male inlet	***6400***	**$1224.35**

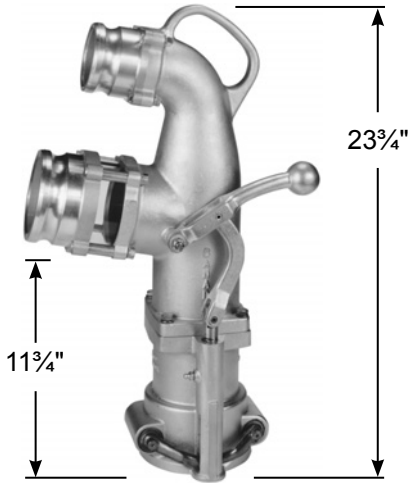

Side Seal Drop Elbows

- for use with special 4" side seal style fill collars only
- modular, easy to repair, bolt together aluminum construction
- comes with acrylic sight glass with buna seals (2), bronze locking levers and buna main seal
- 4" male and lock ring installed

Description	*Aluminum* Part #	Price/E
4" male inlet	***6000ASAL***	**$744.80**



Side Seal Adapter

- allows conventional elbows to be used with special side seal style fill collars
- bottom connects to side seal fill collar
- top section with standard 4" top seal collar profile to accept clamping of standard 4" drop elbows

Description	*Aluminum* Part #	Price/E
4" male inlet	***6000-SSA***	**$338.50**



Fill Pipe Adapters

TFA Series Adapters



- for use with 300-TFG

Adapter Size	Female Thread	*Aluminum - hardcoat* Part #	Price/E	opt qty
3"	3" NPT	***300-TFA***	**$62.65**	10

Fill Adapters



fill adapter with NPSM thread



fill adapter with NPT thread

- for use with 6200 and 6000
- NPSM thread is supplied with gasket

Adapter Size	Female Thread	Height	Material	Part #	Price/E	opt qty
4"	4" NPSM	2-3/8"	bronze	***BZ4051S***	**$92.80**	5
4"	4" NPT	3-1/2"	bronze	***BZ4051***	**118.90**	5
4"	4" NPT	3-1/2"	ZN-AL alloy	***BY4051*** [1]	**106.10**	5

[1] product will be discontinued as inventory is depleted

Vapor Recovery Adapters



- poppeted vapor collar at station vapor outlet
- can also be used as vapor valve on tanker but does not have air interlock mount
- for use with VR6200NP
- low profile design

Adapter Size	Female Thread	Height	Material	Part #	Price/E	opt qty
4"	4" NPT	3-5/8"	bronze	***VR4086***	**$281.15**	5
4"	4" NPT	3-5/8"	ZN-AL alloy	***VR4086-BY***	**221.30**	5

Fill Pipe Adapter Caps



- single action locking cap
- aluminum cap
- bronze cam arms

Size	*Aluminum* Part #	Price/E	opt qty
4"	***SA4050AL***	**$89.05**	10

P Tank Truck

API Dust Cap

Size	Description	*Aluminum* Part #	Price/E	opt qty
4" API	with flat gasket	***41450-DCAL***	**$137.00**	5
	with O-ring seal	***5000-24***	**114.75**	10

Size	Description	*Nylon* Part #	Price/E	opt qty
4" API	with flat gasket	***5000-25***	**$81.50**	20



Gravity Drop Adapters

- for offloading through an API Adapter

Adapter Size	Coupler Size	Description	*Aluminum* Part #	Price/E
3"	4" API	with O-ring seal with flat gasket	***4530***	**$181.25**
3"	4" API	with inline sight glass	***4530SG***	**230.65** NEW
3"	4" API	with flat gasket	***31440-225AL***	**183.80**
4"	4" API	with O-ring seal	***4540***	**181.25**
4"	4" API	with inline sight glass	***4540SG***	**232.85** NEW
4"	4" API	with flat gasket	***41440-225AL***	**189.60**



4540



4540SG

replacement gaskets

Description	Material	Part #	Price/E
O-ring replacement seal	Baylast	***4500-5***	**$4.10**
flat replacement gasket	buna	***2143SEALBU***	**12.75**

4" Vapor Caps

- special locking cap for underground tank vapor outlet VR4086 and tanker vapor valves
- bronze cam arms
- aluminum painted vapor recovery orange

Size	*Aluminum* Part #	Price/E
4"	***VR4050AL***	**$89.05**



Centered 'T' handle allows for one-handed use and provides a solid locking mechanism.

- strong and lightweight
- built-in locking feature
- corrosion resistant materials
- color coded vapor recovery orange

Size	*Nylon* Part #	Price/E
4"	***VR4050PL***	**$59.90**




Dixon Vapor Recovery Couplers

SAFETY ALERT

- Not intended for liquid service, for vapor recovery *only*.
- cast aluminum body
- bronze arms with stainless steel pins
- plated carbon steel finger rings
- Buna-N gasket






coupler with probe x hose shank

Coupler Size	Hose Shank Size	*Aluminum* Part #	Price/E
4"	3"	***4030-CVR-AL***	**$123.00**
4"	4"	***400-CVR-AL***	**126.75**






coupler with probe x adapter

Coupler Size	Adapter Size	*Aluminum* Part #	Price/E
4"	3"	***4030-DAVR-AL***	**$129.75**






coupler with probe x female NPT

Coupler Size	Female NPT Size	*Aluminum* Part #	Price/E
4"	3"	***4030-DVR-AL***	**$133.85**
4"	4"	***400-DVR-AL***	**135.70**





coupler with probe x coupler with probe


Coupler Size	Coupler Size	*Aluminum* Part #	Price/E
4"	4"	***400-DDVR-AL***	**$146.00**

Dixon Bayco Vapor Recovery Couplers

SAFETY ALERT

- Not intended for liquid service, for vapor recovery *only*.
- *The Dixon replacement handle assemblies will not work on these fittings*.
- for use with 3" vapor hose
- cast aluminum body, bronze arms with stainless steel pins and finger rings
- Buna-N gasket






coupler with probe x hose shank

Coupler Size	Hose Shank Size	*Aluminum* Part #	Price/E
3"	3"	***VRC3000AL***	**$129.25**





coupler with poppet and probe x hose shank

Coupler Size	Hose Shank Size	*Aluminum* Part #	Price/E
4"	3"	***VR4030CS-AL***[1]	**$191.35**

SAFETY ALERT

- The VR4030CS-AL has a Viton® O-ring poppet seal.

[1] The VR4030CS-AL will interchange with all competitor vapor valves *except* Civacon #633LVH (special bulb design).

P Tank Truck

Tank Transport Equipment

* Teflon® gaskets are standard in stainless steel fittings.

Fusible Pipe Caps

female NPSM



Size	Stainless Steel * Part #	Price/E	Opt Qty	Aluminum Part #	Price/E	Opt Qty	Iron Part #	Price/E	Opt Qty
3"	***300-SFC-SS***	**$100.00**	10	***300-SFC-AL***	**$98.00**	10	***300-SFC-MI***	**$99.60**	10

Pipe Caps

female NPSM



Size	Stainless Steel * Part #	Price/E	Opt Qty	Aluminum Part #	Price/E	Opt Qty	Iron Part #	Price/E	Opt Qty
2"	***200-PC-SS***	**$100.00**	--	**---**	**---**	--	***200-PC-MI***	**$32.10**	--
3"	***300-PC-SS***	**86.75**	10	***300-PC-AL***	**$37.10**	10	***300-PC-MI***	**44.20**	10
4"	***400-PC-SS***	**220.00**	--	**---**	**---**	--	**---**	**---**	--

Reducers

female NPSM x male NPT



Size	Stainless Steel * Part #	Price/E	Opt Qty	Aluminum Part #	Price/E	Opt Qty	Iron Part #	Price/E	Opt Qty
3" x 2"	***3020-RD-SS***	**$135.95**	10	***3020-RD-AL***	**$54.00**	10	***3020-RD-MI***	**$57.60**	10
4" x 3"	***4030-RD-SS***[1]	**550.00**	--	***4030-RD-AL***	**POR**	--	**---**	**---**	--

[1] welded fabrication

Reducing Caps

female NPSM x female NPT



Size	Stainless Steel * Part #	Price/E	Opt Qty
3" x 1"	***3010-RC-SS***	**$191.00**	10

Gaskets and Washers

Size	Buna-N Part #	Price/E	Opt Qty	Teflon® Part #	Price/E	Opt Qty	Neoprene Part #	Price/E	Viton® Part #	Price/E
1½"	**---**	**---**	--	***150GPCTF***	**$5.00**	--	**---**	**---**	**---**	**---**
2"	***200GPCBU***	**$1.70**	25	***200GPCTF***	**4.25**	10	***KNW25***	**$0.80**	***KVW25***	**$10.10**
3"	***300GPCBU***	**1.95**	25	***300GPCTF***	**6.20**	25	***KNW35***	**1.30**	***KVW35***	**21.85**
4"	**---**	**---**	--	***400GPCTF***	**12.30**	--	***KNW40***	**2.10**	**---**	**---**

Tank Transport Equipment - Intermodal

* Teflon® gaskets are standard in stainless steel fittings.

Pipe Caps

female BSPP



Size	Aluminum Part #	Price/E	Stainless Steel * Part #	Price/E	Opt Qty
3"	***300PCALAP***	**$53.80**	***300PCSSAP***	**$99.00**	10

Thread Adapters

female BSPP x male NPT



Size	Stainless Steel * Part #	Price/E
3" x 2"	***3020RDSSAP***	**$171.00**
3" x 3"	***3030RDSSAP***	**223.00**

Cam and Groove Adapters

female BSPP



Size	Stainless Steel * Part #	Price/E
3"	***300ASSSAP***	**$152.80**

Bayonet Style Dry Disconnect Couplings

Bayco brand BA and BS series bayonet dry disconnect fittings are designed for use in the fuel and lube oil service industry. These fittings are not designed to be interchangeable with other types of Dry Disconnects, however they are used with the Emco Wheaton™ Dry Break™ commonly found in these services. The maximum pressure rating for 2" fittings is **80 PSI** @ 70° F, for pressure ratings at other temperatures contact the factory.

Adapters



bayonet style adapter x female NPT

Size	Seal Material	*Stainless Steel* Part #	Price/E	*Brass* Part #	Price/E	*Aluminum* Part #	Price/E
2"	Buna	***BA31-200***	**$238.05**	**---**	**---**	**---**	**---**
2"	Viton®	***BA32-200***	**245.70**	**---**	**---**	**---**	**---**
3"	Buna	**---**	**---**	***BA31-300***	**$504.70**	***BA61-300***	**$552.10**
3"	Viton®	**---**	**---**	***BA32-300***	**504.70**	***BA62-300***	**552.10**

Dust Caps for Adapters



Size	Body Size	*Polyeten PE-HD 300* Part #	Price/E
1½" and 2"	70 mm	***DDDC150***	**$207.90**
3"	105 mm	***DDDC300105***	**227.90**

Couplers



bayonet style 90° swivel coupler x female NPT

Size	Seal Material	*Anodized Aluminum* Part #	Price/E
2"	Buna	***BS61-200***	**$873.45**
2"	Viton®	***BS62-200***	**930.25**
3"	Buna	***BS61-300***	**1428.65**
3"	Viton®	***BS62-300***	**1548.10**



2010 NEW

bayonet style straight coupler x female NPT


Size	Seal Material	*Anodized Aluminum* Part #	Price/E
2"	Buna	***BC61-200***	**$650.20**
2"	Viton®	***BC62-200***	**705.70**



bayonet style straight swivel coupler x female NPT

Size	Seal Material	*Anodized Aluminum* Part #	Price/E
2"	Buna	***BSS61-200***	**$889.85**
2"	Viton®	***BSS62-200***	**949.90**
3"	Buna	***BSS61-300***	**1382.30**
3"	Viton®	***BSS62-300***	**1497.65**

Dust Plugs for Couplers



Size	Body Size	*Polyeten PE-HD 300* Part #	Price/E
2"	70 mm	***DDDP150***	**$119.95**
3"	105 mm	***DDDP300105***	**123.95**

Ball Nozzles for Bulk Delivery

- rugged construction for rapid fuel oil transfer/delivery
- high flow
- heavy duty roller ball swivel with low temperature seals freely rotates without leaking at **-40°F** and **100 PSI**
- 3 PSI check valve is included to prevent back flow, 5 PSI is optional

super ball nozzle with spout outlet

NEW

Female NPT Inlet	NPT Spout Outlet	*Anodized Aluminum* Part #	Price/E
2"	2"	***BL920***	**$697.20**



BL920

ball nozzle with swivel adapter outlet

Female NPT Inlet	Swivel Adapter Outlet	*Anodized Aluminum* Part #	Price/E
1¼"	1¼"	***BL062***	**$654.60**
1½"	1½"	***BL064***	**654.60**



BL062

ball nozzle with spout outlet

Female NPT Inlet	Spout Outlet	*Anodized Aluminum* Part #	Price/E
1¼"	1¼"	***BL066***	**$654.60**
1½"	1¼"	***BL068***	**654.60**
1½"	1½"	***BL072***	**654.60**



BL072

ball nozzle without spout outlet

Female NPT Inlet	Female NPT Outlet	*Anodized Aluminum* Part #	Price/E
1¼"	1¼"	***BL066NS***	**$528.45**
1½"	1½"	***BL072NS***	**528.45**

Automatic Shut-Off Nozzles



- for card lock and truck refueling stations
- Venturi type automatic shut-off
- high pressure design for up to **80 GPM** flow (requires minimum 7.5 GPM for auto shut-off)
- detachable trigger ratchet
- aluminum construction with bronze trigger

pressure nozzle with spout

Female NPT Inlet	Spout Outlet	*Aluminum* Part #	Price/E
1¼"	1-3/8'	***1144D***	**$668.40**
1½"	1-3/8'	***1124D***	**668.40**

- same features as above, plus a break away spout
- Underwriters Listed

pressure nozzle with spout

Female NPT Inlet	Spout Outlet	*Aluminum* Part #	Price/E
1¼"	1-3/8'	***AN125***	**$705.50**
1½"	1-3/8'	***AN150***	**705.50**

Standard Utility Nozzles





- for use with 12 volt pumps and gravity flow fittings
- diecast metal body; choice of spouts
- for economy fuel dispensing, including construction, farm and small truck utility tanks
- Underwriters Listed
- working pressure to **25 PSI**

Female NPT Inlet	Spout Outlet	*Aluminum* Part #	Price/E
1"	spout only	NEW ***875-4***	**$10.95**
1"	spout only	***875-5***	**10.95**
1"	1" outlet *	***900 ****	**58.35**
1"	1" straight	***900S***	**65.85**
1"	1" bent	***900B***	**65.85**
1"	¾" straight	***900W34S***	**65.85**
1"	¾" bent	***900W34B***	**65.85**
¾"	¾" straight	***900S34***	**65.85**
¾"	¾" bent	***900B34***	**65.85**

* nozzle body only (without spout)

Note: ¾" nozzle inlet uses 1" x ¾" reducer bushing, supplied

Pressure Nozzles for Bulk Delivery





- manual operation (non-automatic) for high pressures and fuel flow up to **80 GPM**
- easy opening dash pot design with shock-less closing
- detachable trigger ratchet, packing gland and seal
- aluminum construction with bronze trigger
- available with aluminum spout or without spout

pressure nozzle without spout

Female NPT Inlet	Female NPT Outlet	*Aluminum* Part #	Price/E
1¼"	1¼"	***114DNS***	**$315.15**
1½"	1½"	***112DNS***	**315.15**

pressure nozzle with spout

Female NPT Inlet	Spout Outlet	*Aluminum* Part #	Price/E
1¼"	1¼"	***114D***	**$341.65**
1½"	1½"	***112D***	**341.65**

Description	*Aluminum* Part #	Price/E
replacement spout for 114D	NEW ***1143A***	**$49.75**
replacement spout for 112D	***1125A***	**54.15**

Overwing Aircraft Nozzles

- manual operation (non-automatic) for high pressures and fuel flow up to 80 GPM
- easy opening dash pot design with shock-less closing
- detachable trigger ratchet, packing gland and seal
- aluminum construction with bronze trigger and plastic guard pad to protect wing
- aluminum spout has cap with spring cord and a fine mesh stainless steel screen filter in the spout
- screw attachment for grounding cable (cable not supplied)



overwing nozzle with spout

Female NPT Inlet	Spout Outlet	*Aluminum* Part #	Price/E
1¼"	1"	***114DAVR***	**$655.65**
1¼"	1¼"	***114D-AV***	**655.65**
1½"	1¼"	***114D-AV-06ASM***	**697.05**

Large Capacity Low Pressure / Gravity Nozzle



- rugged utility nozzle for low pressure/gravity applications
- rapid flow due to 1¼" oversize design
- aluminum body, spout and trigger
- **25 PSI** maximum pressure

gravity nozzle with spout

Female NPT Inlet	Spout Outlet	*Aluminum* Part #	Price/E
1¼"	1¼"	***1250-94***	**$229.20**

Hose Swivels

- for use with petroleum and home heating oil hose
- prevents twisting or kinking

Hose Shanks



Male NPT	Shank Size	*Bronze* Part #	Price/E
1½"	1½"	***1565U***	**$130.85**

Check Valves



Male NPT	Female NPT	*Bronze* Part #	Price/E
1½"	1½"	***1580U***	**$161.35**

Heavy Duty

- male NPT x female NPT threaded connections
- heavy duty internal thrust bearing and anti-friction seal design ensures swiveling at **-40°F**
- can be lubricated without disassembly by using the optional grease fitting kit



Male NPT	Female NPT	*Bronze* Part #	Price/E
1¼"	1¼"	***SWMF125***	**$175.05**
1½"	1½"	***SWMF150***	**175.05**
2"	2"	***SWMF200***	**189.80**

Optional grease fitting kit, ***SWMF-RK1***, **$14.55**

Dixon Diesel and Gasoline Nozzles

2010 NEW

FuelMaster™ Diesel Nozzle



- Provides the high flow capacity required by many truck stops and terminal operations.
- features lightweight Tenzalloy aluminum casting
- Micro-touch valve provides smooth operation and exceptional flow control.
- super tough nylon hose guard and hold-open clip
- easy to change 'lockout style' spout assembly
- green scuff guard

NPT Inlet	Spout Size	Wt (lbs)	Approximate Flow Rate at 20 PSI (GPM)	Part #	Price/E
1"	1-3/16"	3.5	30	***DFN100HF***	**$211.15**

Big Mouth™ Diesel Nozzle



- Micro-touch valve allows precise flow control
- Roto-matic latch pin provides positive auto shut-off
- pure Teflon® packing eliminates stem leaks
- Super tough nylon hold-open clip and hand guard bend, but won't break.
- Snap-on handle cover makes changing scuff guards easy.
- yellow scuff guard

NPT Inlet	Spout Size	Wt (lbs)	Approximate Flow Rate at 20 PSI (GPM)	Part #	Price/E
1"	1-1/8"	3	20	***DFN100***	**$163.25**

Farm and Consumer Nozzles



gasoline nozzle shown

- Automatic fuel nozzles designed for use with small 12 volt and AC utility pumps as well as large farm and consumer pumps.
- Heavy duty, stronger and more secure hook makes it easy to hang the nozzle on the pump.
- *These nozzles are not to be used with gravity flow tanks*.
- black scuff guard on gasoline nozzle, green scuff guard on diesel nozzle

NPT Inlet	Spout Size	Wt (lbs)	Approximate Flow Rate at 20 PSI (GPM)	Part #	Price/E
¾"	13/16"	2½	14	***DN7UOBF*** [1]	**$115.00**
¾"	15/16"	2½	14	***DN7LOBF*** [2]	**115.00**

[1] gasoline nozzle
[2] diesel nozzle

P Tank Truck

Fuel Nozzle Cross Reference

Dixon	M. Carder	OPW	Emco	Husky	Catlow
DN7UOBF	N7UOBF	11AF-40FS	A2501F	XSF-33704	NENLF
DN7LOBF	N7LOBF	11APF-40FS	A2501LF	---	NELF
DFN100	N3-BigMouth	7H	A6000	1+8-173310	MAX1
DFN100HF	N4-Fuelmaster	N/A	N/A	1HS.026810	MAC-1AH

Dixon Diesel and Gasoline Nozzles Accessories

2010 NEW

Single Plane Hose Swivels

- aluminum body
- Brass hex nut prevents galling in the nozzle.
- Viton® / Buna seals
- nylon cord retainer



Size	Part #	Price/E
¾" x ¾"	***DAWS34***	**$42.30**
1" x 1"	***DAWS10***	**65.00**

Breakaways

- aluminum body
- design provides consistent and reliable performance
- lightweight
- easy to repair
- unique ball valves seal both ends when separated
- Buna seals
- brass break rings (2)



Size	Part #	Price/E
¾"	***DAB34***	**$63.50**
1"	***DAB1***	**133.70**

- nickel plated aluminum body
- check valve - Teflon® ball seals both ends when separated
- Viton® / Buna seals
- brass break rings: 4 in 1¼" and 1½"; 6 in the 2"
- Provides protection for all the high capacity fueling operations such as truck and bus terminals, mining, off-road fueling and fuel oil delivery.



Size	Part #	Price/E
1¼"	***DAB14***	**$850.00**
1½"	***DAB15***	**850.00**
2"	***DAB2***	**1728.00**

Lockable Angle Valves

- rotation of cap controls gravity flow from above ground gasoline storage tank
- inlet (pipe from storage tank) x outlet (for hose and nozzle dispensing)
- lockable (lock not included)
- cast non-ferrous alloy construction



Inlet	Outlet	*Cast Alloy* Part #	Price/E
1"	1"	***500AV***	**$90.20**
1¼"	1¼"	***525AV***	**90.20**

Full Flow Ball Valves

- high flow rate; low pressure drop
- wetted parts are aluminum and stainless steel
- seals are FPM (Viton® and PTFE Teflon®)
- spindle can be disassembled even when ball valve is installed
- working pressure: **150 PSI** at 70°F
- available in 2", 3" and 4" in standard flow and two-way flow
- standard valve ports - female NPT, socket weld for Schedule 40 pipe, grooved and 150# flange
- optional ports include DN flange and butt weld

One-Way Ball Valves / Female NPT ends



- two ports - one inlet and one outlet

Size	*Aluminum* Part #	Price/E
2"	***1WAYBV200***	**$804.25**
3"	***1WAYBV300***	**1069.60**
4"	***1WAYBV400***	**1553.70**

2010 NEW

One-Way Ball Valves / Socket Weld Ends to Schedule 40 Pipe



Size	Bore	*Aluminum* Part #	Price/E
2"	2.390"	***1WAYBV200SW***	**$804.25**
3"	3.530"	***1WAYBV300SW***	**1069.60**

2010 NEW

One-Way Ball Valves / Grooved Ends



Size	*Aluminum* Part #	Price/E
2"	***1WAYBV200VIC***	**$984.20**
3"	***1WAYBV300VIC***	**1308.95**

P
Tank Truck

Full Flow Ball Valves

- high flow rate; low pressure drop
- wetted parts are aluminum and stainless steel
- seals are FPM (Viton® and PTFE Teflon®)
- spindle can be disassembled even when ball valve is installed
- working pressure: **150 PSI** at 70°F
- available in 2", 3" and 4" in standard flow and two-way flow
- standard valve ports - female NPT, socket weld for Schedule 40 pipe, grooved and 150# flange
- optional ports include DN flange and butt weld

Two-Way Ball Valves / Female NPT ends

- three ports - one inlet and two outlets, valve directs the flow from the inlet to either of the two outlets
- commonly used for switching compartments or tanks



Size	*Aluminum* Part #	Price/E
2"	***2WAYBV200***	**$1120.00**
3"	***2WAYBV300***	**1442.70**
4"	***2WAYBV400***	**3131.50**

Two-Way Ball Valves / Socket Weld Ends to Schedule 40 Pipe



Size	Bore	*Aluminum* Part #	Price/E
2"	2.390"	***2WAYBV200SW***	**$1120.00**
3"	3.530"	***2WAYBV300SW***	**1442.70**

Two-Way Ball Valves / Grooved Ends



Size	*Aluminum* Part #	Price/E
2"	***2WAYBV200VIC3***	**$1390.00**
3"	***2WAYBV300VIC3***	**1801.70**

Automatic Pressure / Vacuum Relief Caps

- normally closed, stops fuel evaporation and airborne contaminants
- lockable
- relieves both pressure and vacuum buildup in fuel tanks
- two styles available, choose for stationary or mobile fuel storage tanks as listed below

SAFETY ALERT Note: Pressure/vacuum relief caps should be routinely inspected to ensure correct operation and particularly to ensure that the relieving components are free to move and that the air flow path is unblocked.

For stationary fuel tanks



- relieves vacuum at .7 Hg (.33 PSI) and pressure at 2 PSI, 20 SCFM flow

Male NPS	*Bronze* Part #	Price/E
2"	***2000L***	**$37.35**
2½"	***2500L***	**38.25**

For mobile fuel tanks



- relieves vacuum relief at 1" Hg (.5 psig), and pressure at between 7.5 and 9 psig

Male NPT	*Bronze* Part #	Price/E
2"	***200-PV-9***	**$75.00**

Standard Vent Cap




- aluminum body
- allows venting of tank to atmosphere at all times.
- does not have pressure or vacuum valves

Male NPS	*Aluminum* Part #	Price/E
2½"	***2500SFV***	**$28.15**

V-Ring Swivel Joints

V-Ring Parts Identification List


1. body
2. sleeve
3. ball bearings
4. seal retainer
5. V-ring (pressure) seal
6. spring retainer
7. spring
8. ball retainer screw
9. grease fitting
10. O-ring (dust) seal

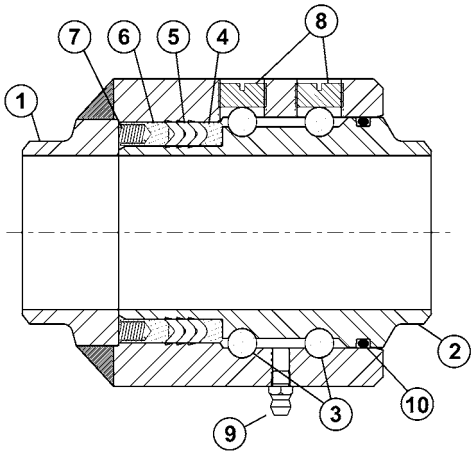


V-Ring Features:

- The spring-loaded triple V-ring sealing system ensures a leak proof seal at either high or low pressure and an extended seal life compared to the conventional single O-ring design.
- The 3" - 8" carbon steel swivels are manufactured from carbon steel with flame hardened dual raceways for greater load bearing capacity and longer life.
- The stainless steel swivels are manufactured in 316 grade stainless steel for superior corrosion resistance.
- available with pressure ratings to 1,000 PSI
- available in carbon steel, stainless steel and aluminum
- ***optional 100% full penetration welding available***


Single Plane V-Ring Style 20



weld end x weld end
sizes 2" - 8"




female NPT x female NPT
sizes 2" - 8"

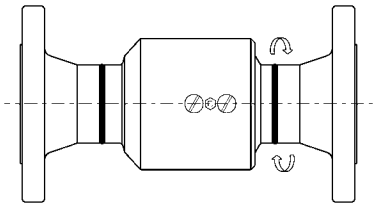


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Single Plane V-Ring Style 30




female NPT x female NPT
sizes 2" - 8"

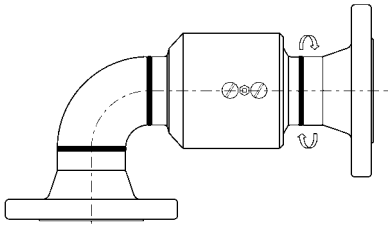


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Single Plane V-Ring Style 40

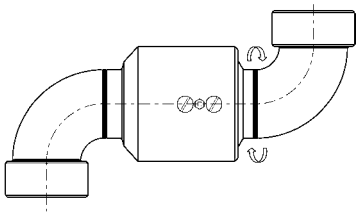


female NPT x female NPT
sizes 2" - 8"

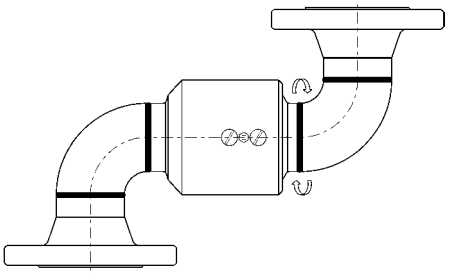


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Double Plane V-Ring Style 50




female NPT x female NPT
sizes 2" - 8"




150# ASA flange x 150# ASA flange
sizes 2" - 8"

Double Plane V-Ring Style 60




female NPT x female NPT
sizes 2" - 8"




150# ASA flange x 150# ASA flange
sizes 2" - 8"

Double Plane V-Ring Style 70

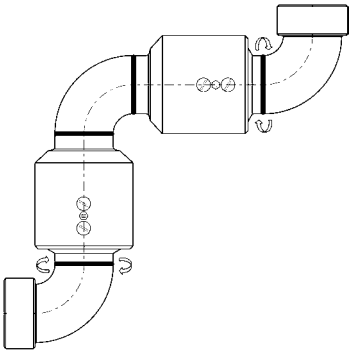


female NPT x female NPT
sizes 2" - 8"

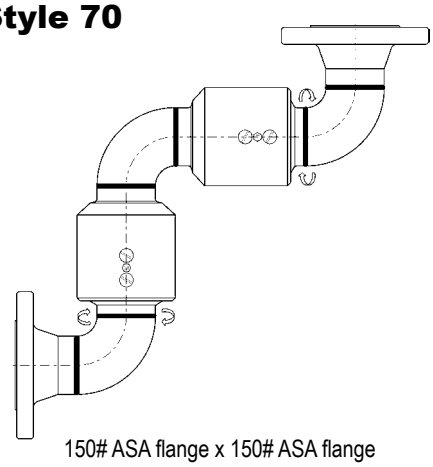


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Triple Plane V-Ring Style 80

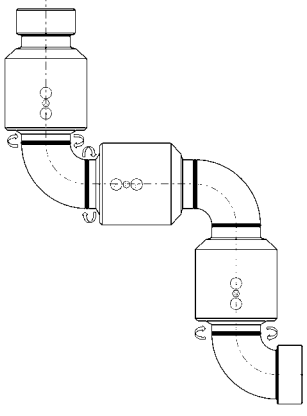


female NPT x female NPT
sizes 2" - 8"

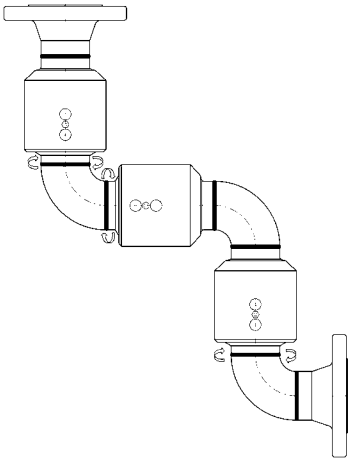


150# ASA flange x 150# ASA flange
sizes 2" - 8"

Triple Plane V-Ring Style 10



female NPT x female NPT
sizes 2" - 8"

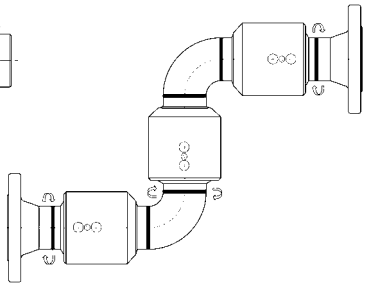


150# ASA flange x 150# ASA flange
sizes 2" - 8"

O-Ring Swivel Joints


O-Ring Parts Identification List

1. O-ring (dust) seal
2. ball retainer screw
3. O-ring (pressure) seal
4. grease fitting
5. ball bearings

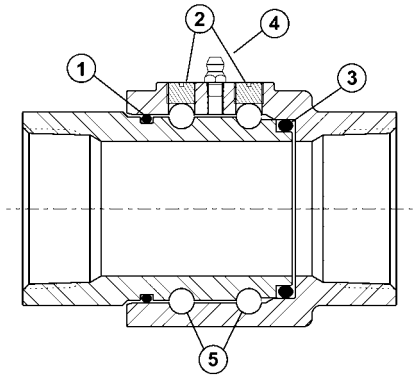


- The O-ring pressure seal ensures a leak-proof seal at either high or low pressure and smoother rotation at lower torques than multiple seal designs.
- Spring-loaded Teflon® pressure seals are available up through 3".
- Carbon steel and stainless steel O-ring type swivels provide greater strength and corrosion resistance needed for lower torque applications.
- available in carbon steel, stainless steel, aluminum, brass and iron
- ***optional 100% full penetration welding available***

Single Plane O-Ring Style 20




female NPT x female NPT
sizes 1" - 4"




150# ASA flange x 150# ASA flange
sizes 1" - 4"


Single Plane O-Ring Style 30



female NPT x female NPT
sizes 1" - 4"

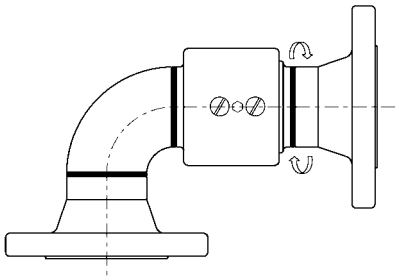


150# ASA flange x 150# ASA flange
sizes 1" - 4"

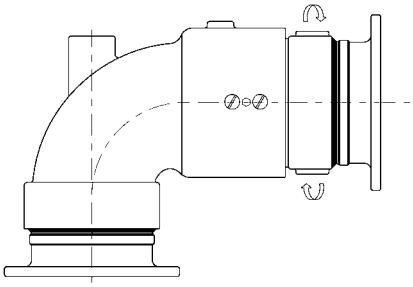


tank truck flange x tank truck flange
sizes 2" - 4"


Single Plane O-Ring Style 40



female NPT x female NPT
sizes 1" - 4"

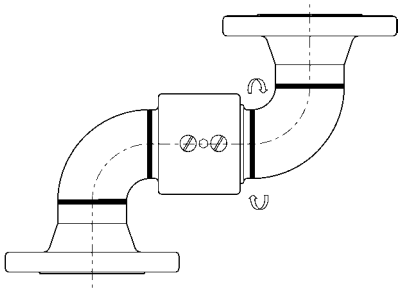


150# ASA flange x 150# ASA flange
sizes 1" - 4"

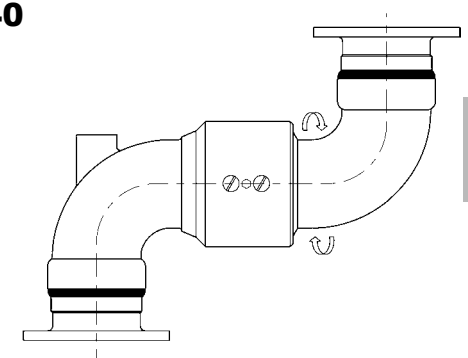


tank truck flange x tank truck flange
sizes 2" - 4"

Double Plane O-Ring Style 50

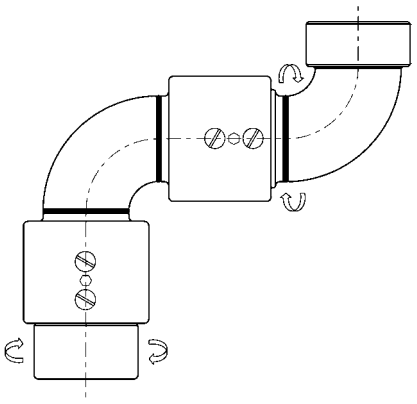


female NPT x female NPT
sizes 1" - 4"

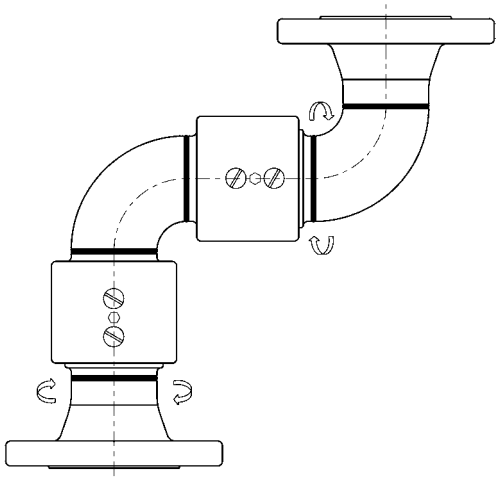


150# ASA flange x 150# ASA flange
sizes 1" - 4"

Double Plane O-Ring Style 60

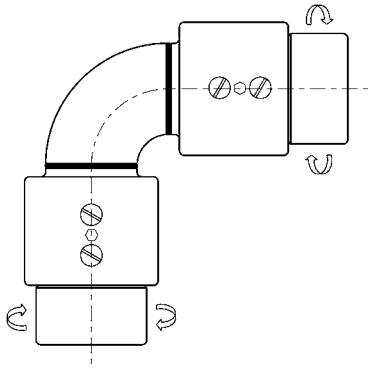


female NPT x female NPT
sizes 1" - 4"

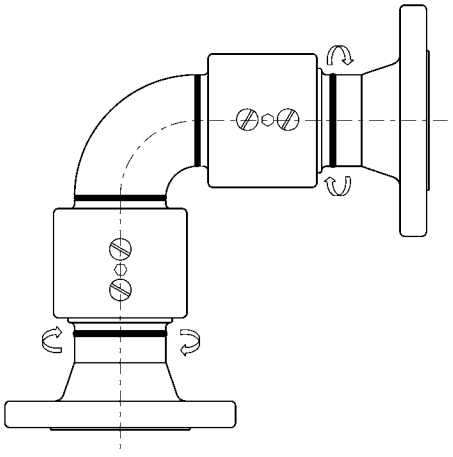


150# ASA flange x 150# ASA flange
sizes 1" - 4"

Triple Plane O-Ring Style 70

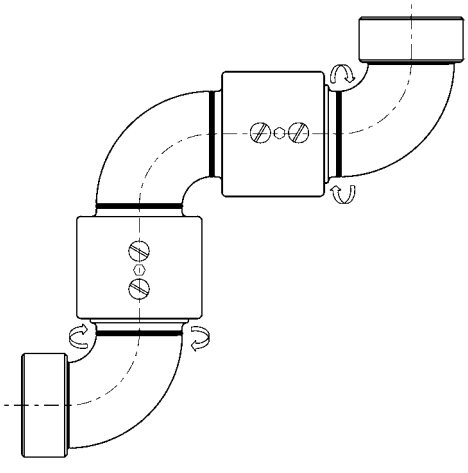

female NPT x female NPT
sizes 1" - 4"

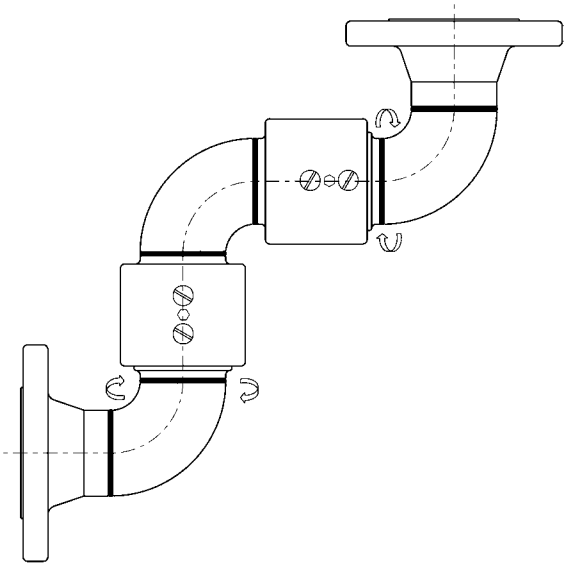

150# ASA flange x 150# ASA flange
sizes 1" - 4"

Ordering Information - Swivels

To select the proper swivel joint you need the following information:

Size: _____ Style (shape): _____

End Configuration: _____ Material: _____

Maximum Working Pressure: _____ Temperature Range: _____

Product being handled: (if a chemical, please advise concentration) _____

If for constant rotation, advise RPM: _____

If for suction service, advise maximum vacuum in inches of Mercury (Hg): _____

Our factory sales and engineering staff will be happy to help you evaluate your swivel application. Please call 800.355.1991.

	swivel size	*swivel style*	*end configuration*		*end configuration*	*swivel material*	*pressure seal* (**Buna-N** *standard*)	*dust seal* (**Buna-N** *standard*)	*retainers* (*V-Ring ONLY*)	*ball bearings* (**carbon steel** *standard*)	*grease*
Example	2	20	F	X	F	CS	0	0	1	0	0
	[A]	**[B]**	**[C]**		**[C]**	**[D]**	**[E]**	**[F]**	**[G]**	**[H]**	**[I]**

[A] Size
[B] Style (see diagrams)

[C] End Connections	**W** Weld End	**F** Female End	**FG** 150# ASA Flange	**TF** Tank Truck Flange	**PF** 300# ASA flange (not available on aluminum)
[D] Material	**CS (V-Ring)** carbon steel	**SS (V-Ring)** stainless steel	**AL** aluminum	**BR** brass	**MI** malleable iron
	OC (O-Ring) carbon steel	**OS (O-Ring)** stainless steel			

Code #	[E] Pressure Seal	[F] Dust Seal	[G] Retainers	[H] Ball Bearings	[I] Grease
0	Buna-N (standard)	Buna-N (standard)	No retainers (O-ring swivels)	Carbon steel (standard)	Standard
1	Viton®	Viton®	Aluminum (standard in CS V-ring)	440 grade stainless	FDA approved/ Food grade
2	Teflon®	---	Teflon® (standard in SS V-ring)	316 grade stainless	Silicone (required with EPR seals)
3	Ethylene Propylene (requires silicone grease)	Ethylene Propylene (requires silicone grease)	---	---	---
4	FDA Buna (O-ring only)	FDA Buna	---	---	---

The swivel should be packed so that the surfaces coming in contact with the fluid being handled are compatible with that fluid. In the case of the use of the swivel in submerged service this would include the dust seals and ball bearings.

Dixon always recommends the use of stainless steel ball bearings when building a swivel for submerged service since the standard carbon steel bearings could rust together making it impossible to disassemble the swivel and possibly affecting its operation.

Safety Break-away Couplings - Breaking Bolt Series

Industrial Version

The breaking bolt industrial breakaway coupling is designed to minimize spillage and damage associated with drive away and pull away incidents


- coupling automatically senses an excessive load, closes the valves and disconnects
- simple mechanism, no loose components lost after release
- high flow rate / low pressure drop
- female NPT is standard, optional ANSI / DIN flanges are available
- stainless steel or aluminum
- working pressure: stainless steel **360 PSI** at 70°F and aluminum **230 PSI** at 70°F
- Viton® is standard seal

Size	Width	Length	Weight in Lbs.		Flow Rate/ GPM
			stainless	aluminum	
2"	4.5"	7"	5	3	**200**
3"	6.2"	11"	18	8	**650**
4"	7.9"	12"	34	14	**800**




Size	DN	*Stainless Steel*		*Aluminum*	
		Part #	Price/E	Part #	Price/E
2"	50	***SBC200SS***	**$3496.20**	***SBC200AL***	**$1631.80**
3"	80	***SBC300SS***	**6182.80**	***SBC300AL***	**3169.40**
4"	100	***SBC400SS***	**9495.75**	***SBC400AL***	**4848.20**

How it Works



The safety break-away valve consists of two halves, each with a valve that has a flat type-sealing surface similar to a dry disconnect coupling.



When the safety break-away couplings separate, it allows the poppets to close. The two poppets close rapidly, minimizing exposure to personnel and the environment.

Safety Break-away Couplings - Cable Release Series

Industrial Version

Cable release series break-away couplings are designed to minimize spillage and damage associated with drive away and pull-away incidents. Couplings feature a simple mechanism and no loose components to lose after release. In some applications the necessary force of the breaking bolts may be too high to prevent damage to loading arms or other pipe and equipment; under these conditions the use of cable release safety break-aways may be more suitable.

- coupling automatically senses an excessive load, closes the valves and disconnects
- release is executed by pulling out the locking bolts bolts with the help of a cable
- when the coupling separates, the poppets close
- 316 T1 stainless steel body with Viton® O-rings
- working pressure: **360 PSI** at 70°F




Size	Width	Length	Weight	Flow Rate/GPM
1½"	3.86"	5.59"	6.8 lbs	**100**
2"	4.33"	5.67"	9.1 lbs	**132**
3"	5.71"	7.68"	18.8 lbs	**264**
4"	7.28"	8.90"	35.4 lbs	**396**


Size	DN	Part #	Price/E
1½"	40	***SBC150SS-CR***	**$POR**
2"	50	***SBC200SS-CR***	**POR**
3"	80	***SBC300SS-CR***	**POR**
4"	100	***SBC400SS-CR***	**POR**

Q Rack Equipment

How it Works



The safety break-away valve consists of two halves, each with a valve that has a flat type-sealing surface similar to a dry disconnect coupling.



When the safety break-away couplings separate, it allows the poppets to close. The two poppets close rapidly, minimizing exposure to personnel and the environment.

TTMA Series Flange Adapters

- provides a simple and easy way to quickly convert threaded components to a standard 4" TTMA flange configuration
- more durable than welded fabrications due to the solid cast lightweight aluminum design
- design improves flow through adapter even on the 3" reducer
- compact size reduces the overall space needed to install
- for flange drilling standards, see page 619

Male Threaded

TTMA flange x standard male NPT

TTMA Flange	Male NPT	*Aluminum* Part #	Price/E
3"	3"	***TTF3AL-3MT***	**$51.15**
4"	3"	***TTF4AL-3MT***	**51.15**
4"	4"	***TTF4AL-4MT***	**51.15**



TTMA flange x male NPT

Extended Length - Male Threaded

TTMA flange x extended length male NPT

TTMA Flange	Male NPT	*Aluminum* Part #	Price/E
4"	3"	***TTF4AL-3EMT***	**$73.35**
4"	4"	***TTF4AL-4EMT***	**73.35**



TTMA flange x male NPT extended length

Female Threaded

TTMA flange x female NPT

TTMA Flange	Female NPT	*Aluminum* Part #	Price/E
4"	3"	***TTF4AL-3FT***	**$65.55**
4"	4"	***TTF4AL-4FT***	**65.55**



TTMA flange x female NPT

Slip-on

2010 NEW

TTMA flange x socket weld

TTMA Flange	Pipe Size	*Aluminum* Part #	Price/E
4"	4"	***TTF400SP***	**$64.40**



TTMA flange x socket weld

TTMA Flange Gaskets

2010 NEW

Size	OD	ID	Thickness	Description	Part #	Price/E
3"	5-7/8"	3-1/2"	1/4"	Teflon® with fiber core	***40321TF***	**$19.55**
4"	6-7/8"	4-9/16"	1/4"	Teflon® with fiber core	***40322TF***	**22.70**
4"	8-3/8"	6-9/16"	1/4"	API sump gasket, Teflon® w/ soft fiber core	***40323TF***	**41.40**



2010 NEW

API Coupler

Dixon Bayco's API coupler is completely modular so the coupler can be built with various face seal combinations to be compatible with different alternative fuel / performance levels and applications. Two models are available: bonded nose seal and replaceable nose seal.



- fully interlocked with 4" API adapter nose ring
- 4" TTMA inlet mounting flange
- 5 cam design for easy alignment and tight connection
- ball-end handle for easy, comfortable operation
- no special tools needed for maintenance
- shaft seals can be changed without removing coupler from loading arm

Technical Specifications:

- weight: 20 lbs.
- maximum working pressure: **150 PSI**
- peak surge pressure: 350 PSI
- operating temperature: **-20°F** to **+400°F** (Viton® seals)
- maximum flow rate: 600 GPM
- pressure drop: 3 to 4 PSI

Material Specifications:

- body: hard coated anodized A1 356 T6
- shroud: hard coated anodized A1 356 T6 with stainless steel insert
- link, shaft, pin and crank: hardened 17-4PH stainless steel
- cam: CF8M stainless steel
- poppet bearing: ZA-12
- seals: Baylast™, Viton-B®, Viton® GFLT

API coupler with replaceable nose seal

Seal Material	Part #	Price/E
Baylast™	***5300***	**$2275.00**
Viton-B®	***5300B***	**2502.50**
Viton® GFLT	***5300G***	**2616.00**

API coupler with bonded nose seal

Seal Material	Part #	Price/E
Baylast™	***5400***	**$2364.00**
Viton-B®	***5400B***	**2600.40**
Viton® GFLT	***5400G***	**2718.00**

API Compatible Rack Cords



- FT600 and FT620 are compatible with API thermistor and optic configurations
- cord is available in coiled or straight lengths
- cord features a heavy highly visible safety orange jacket to meet trip hazard requirements
- cord is bonded mechanically and has superior abrasion and oil resistance
- cord sets are interchangeable with Scully and Civacon
- plug body is machined from 6061 aluminum and is color coded Optic Blue or Thermistor Green
- button contacts are made from 316 stainless steel to prevent corrosion or galling
- all other hardware is stainless steel
- all wiring is compatible with standard Scully color codes and wiring number configurations
- the 9 pin conductor is shielded to be compatible with Scully VIP system

Model FT600

API Thermistor Assemblies

Description	Part #	Price/E
plug with 30' coiled cable	***FT600***	**$986.65**
plug with 30' coiled cord for Canada	***FT600C***	**986.65**
plug with 20' straight cable	***FT600S***	**938.90**
plug with 20' straight cord for Canada	***FT600SC***	**938.90**

replacement parts & accessories

Description	Part #	Price/E
replacement plug body	***FT601***	**$509.85**
replacement plug body for Canada	***FT601C***	**509.85**
replacement 30' coiled cable	***FT602***	**416.12**
plug hanger	***FT603***	**296.64**

Model FT620

API Optic Assemblies

Description	Part #	Price/E
plug with 30' coiled cable	***FT620***	**$986.65**
plug with 20' straight cable	***FT620S***	**938.90**

replacement parts & accessories

Description	Part #	Price/E
replacement plug body	***FT621***	**$525.15**
replacement 30' coiled cable	***FT622***	**428.65**
plug hanger	***FT623***	**305.55**

Tank Truck Flanged Sight Flow Indicators

SAFETY ALERT Note: Due to the proprietary blending of petroleum products, Dixon recommends that the thermoplastic tubing and the Viton® gaskets be immersion tested in the product to be handled to insure compatibility.

- For tank truck flange gaskets, see page 54.
- For dimensional information on tank truck flange drilling, see page 619.

- replaces the acrylic sight glass commonly found on tank trucks
- allows for visual identification of the fuel grade prior to opening the valve
- works with tank truck flanged butterfly valves found on gasoline trucks
- low cost sight glass tube can be replaced easily
- rugged cast aluminum housing is more durable than acrylic sight glass



TTMA pattern flanged short sight flow indicator

Size	*Aluminum* Part #	Price/E
4"	***5200-SFI***	**$162.35**
3"	***5200-SFI-3***	**148.55**

repair kits

Description	Part #	Price/E
3" replacement sight glass, Baylast™ O-ring and retainer ring kit	***5200-SFI-3-RK1***	**$69.00**
3" replacement sight glass, Viton® O-ring and retainer ring kit	***5200-SFI-3V-RK1***	**134.20**
4" replacement sight glass, Baylast™ O-ring and retainer ring kit	***5200-SFI-RK1***	**69.00**
4" replacement sight glass, Viton® O-ring and retainer ring kit	***5200-SFIV-RK1***	**134.20**

- allows for visual identification of the fuel grade prior to opening the valve
- works with tank truck flanged butterfly valves found on gasoline trucks
- larger ID (4-3/8") allows tank truck flanged butterfly valves to connect to either end of the 400-SFI-AL
- rated to **150 PSI**



sight flow indicator with 4-3/8" flow

Size	*Aluminum* Part #	Price/E	Opt Qty
4"	***400-SFI-AL***	**$201.00**	5

replacement parts

Description	Part #	Price/E	Opt Qty
plexiglass insert	***4SFIPSG***	**$78.00**	1
Buna-N gasket	***O249BU***	**4.55**	2
Viton® gasket	***4SFI-G-VI***	**44.10**	2

- allows for visual identification of the fuel grade prior to opening the valve
- 4" flow diameter



sight flow indicator with 4" flow

Size	*Aluminum* Part #	Price/E	Opt Qty
4"	***4-1460-AL***	**$175.00**	10

replacement parts

Description	Part #	Price/E	Opt Qty
plexiglass insert	***4PSG***	**$82.95**	10
Buna-N O-ring	***O246BU***	**4.25**	10

TTMA Flange Extensions



TETF4AL




TETFG4AL


Flange extensions are used on load arms to connect the API load coupler to the load arm.
- adds a 6" space between the load arm and the tank truck
- Flange extension with groove provides a specified parting point to prevent excessive damage to the loading arm.

Size	Description	*Aluminum* Part #	Price/E
4"	TTMA flange extension	***TETF4AL***	**$119.70**
4"	TTMA flange extension with groove	***TETFG4AL***	**124.25**

Type 35 Loading Arm Swivel



style 30



style 50

- TTMA loading arm swivel with D style shovel handle
- TTMA flanges on both ends
- shovel handle is used to guide the API load coupler onto the adapter on the tank truck
- long radius elbow improves the flow into the API load coupler and provides spacing between the load arm and the tank truck
- can be used with flange extensions above

Size	Description	*Aluminum* Part #	Price/E
4"	style50 tank truck x tank truck flange	***440TFxTFAL***	**$1100.00**
4"	style30 tank truck x tank truck flange	***430TFxTFAL***	**900.00**

Type 35 Loading Arm Swivel Replacement Parts

Size	Description	*Aluminum* Part #	Price/E
4"	aluminum nipple	***ATN100x7***	**$18.25**
	D style shovel handle	***100DHAN-AL***	**27.25**
	Buna repair kit	***4RKOBU***	**32.20**
	Viton® repair kit	***4RKOVIVI***	**51.40**

Teflon® Sealants

Thread Sealant Paste

- temperature range: **-300°F** to **500°F**



Can Size	Part #	Price/E	Opt Qty
¼ pint	***LCTS14***	**$12.90**	12
½ pint	***LCTS1***	**18.80**	24
1 pint	***LCTS2***	**29.15**	12
1 quart	***LCTS3***	**52.05**	12

Industrial Teflon® Tape

(White)

- meets Military Specification MIL-T-27730A
- thickness: 3.00 and 3.5 mil (.09 mm)
- temperature range: **-212° F** to **500° F**



Size	Length	Part #	Price/E	Opt Qty
½"	260"	***TTA50***	**$0.70**	500
½"	520"	***TTB50***	**1.05**	500
½"	1296"	***TTC50***	**3.05**	500
¾"	260"	***TTA75***	**1.15**	350
¾"	520"	***TTB75***	**1.35**	350
1"	520"	***TTB100***	**2.40**	250

Stainless Steel Teflon® Tape

(Gray)

- thickness: 4 mil
- temperature range: **-58°F** to **600°F**
- meets Military Specification MIL-T-27730A
- TFE acts as a chemical protection and lubricant
- especially useful on stainless steel threaded joints or connections
- 100% Teflon® with nickel added
- nickel acts like a ball bearing



Size	Length	Part #	Price/E	Opt Qty
½"	260"	***TTA50SS***	**$13.60**	10

Industrial Heavy Duty Teflon® Tape

(Pink)

- thickness: 4 mil
- temperature range: **-400°F** to **500°F**



Size	Length	Part #	Price/E	Opt Qty
½"	540"	***TTBP50***	**$6.35**	330

Teflon® Tape for LP Gas

(Yellow)

- thickness: 4 mil
- service temperature: **500°F** (260°C)
- Underwriters Listed



Size	Length	Part #	Price/E	Opt Qty
½"	260"	***TTA50LP***	**$3.05**	500

Joint Sealant Gasket Material



- GORE-TEX® Interchangeable
- Form-In-Place expanded PTFE gasket material with adhesive backing
- manufactured from 100% virgin PTFE
- unaffected by all common chemicals (ph from 0-14)
- unlimited shelf life
- resilient with low cold flow
- requires less comprehensive force than standard gasket materials
- pressure range from vacuum to 3000 PSI
- temperature range: **-450°F** to **600°F**
- made in the USA
- larger spools are available, consult factory for price and availability
- FDA compliant #21CFR177.1550

Size	Length	Part #	Price/E
1/4"	20'	***LCJS4-20***	**$55.40**
1/4"	50'	***LCJS4-50***	**127.00**
3/8"	25'	***LCJS6-25***	**105.25**
1/2"	15'	***LCJS8-15***	**105.25**
3/4"	15'	***LCJS12-15***	**240.70**


Leak Detector



- detects leaks by forming bubbles which remain for up to ten minutes
- will not cause corrosion or deterioration
- color: fluorescent yellow
- con-toxic, non-freezing
- temperature range: **-7°F** (-20°C) to **180°F** (82°C)
- meets Federal spec. MIL-L-25567-C
- sold in case quantities only

Size	Part #	Price/E	Case Qty
8 oz.	***LCLD***	**$8.60**	24

Dixon Coupling Lubricant



For use in assembly operations involving natural or synthetic rubber or plastic. Also an excellent lubricant when rubber or plastic needs to be cut, machined, pressed, turned, trimmed or ground.

- biodegradable lubricant for coupling shanks

Size	Part #	Price/E
1 pint	***DCL10***	**$20.55**
1 gallon	***DCL80***	**82.00**

WD-40 Smart Straw




- permanently attached straw
- flip up for a precision spray; flip down for regular spray action
- should not be used as a lubricant for coupling shanks SAFETY ALERT
- sold in case quantities only

Size	Part #	Price/E	Case Qty
11 oz.	***WD40***	**$18.75**	12

Coupling Inserters

- for insertion of hose shanks into hose with a 2¾" to 7¼" OD

Description	Part #	Price/E
Supplied with a **10,000 PSI** hand pump and 5 ton ram	***CI96***	**$5560.00**
Supplied with a **10,000 PSI** air/hydraulic pump and 5 ton ram	***CI96AH***	**6260.00**
Small jaws for 1" to 3" OD hose	***CI9311SML***	**177.00**

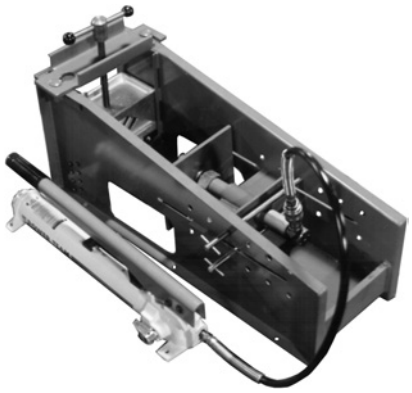

coupling inserter with hand pump



air/hydraulic foot pump

Hand Hydrotest Pump

- stainless steel piston, aluminum body
- designed for use in testing pipe lines, pressure tanks and pressure vessels
- uses efficient and long lasting check valves
- cylinder displacement: 1.37 cubic inches
- 0-1000 PSI pressure gauge, 10' pressure hose and quick disconnect coupler included
- piston: 7/8" with 2" stroke

Inlet NPT	Outlet NPT	Working Pressure PSI	Part #	Price/E
½"	½"	**1000**	***HHTP***	**$1505.60**



Hydrostatic Test Pumps

A safe, cost effective pump to test hose before putting it into service.


Electric



- **1.3 gpm** fill rate
- test pressure: **200** to **2000 PSI**
- suction strainer keeps dirt out of pump
- high pressure test gauge
- 115v motor
- 2 ft. power cord
- easy to use, portable

Description	Part #	Price/E
electric test pump	***ETP***	**$4600.00**

Pneumatic

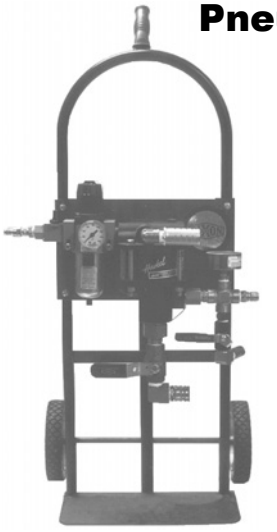

- **5.5 gpm** fill rate
- test pressure: **0** to **1500 PSI**
- stainless interior
- air gauge for quick, easy adjustment of maximum test pressure
- high pressure test gauge
- filter/regulator for clean, dry air to ensure long life of unit
- on - off valve for air input
- 15 ft. of hose included
- easy to use, portable
- Use of coalescing filter and water filter recommended for prolonged life.

Description	Part #	Price/E
pneumatic test pump	***PTP***	**$5695.00**

Hydrostatic Test Pump Accessories

- cost effective, pre-assembled caps or plugs to quickly set up and test hoses
- Caps and plugs come equipped with ½" brass straight-through plugs for quick attachment to intermediate hose on Test Pumps (Pneumatic Test Pump) and bleed-off valve.

cam & groove test caps for male adapters

Size	*Iron* Part #	Price/E
1"	***ID100TC***	**$151.50**
1½"	***ID150TC***	**236.00**
2"	***ID200TC***	**187.20**
3"	***ID300TC***	**329.00**
4"	***ID400TC***	**505.95**

cam & groove test plugs for female couplers

Size	*Iron* Part #	Price/E
1"	***IA100TP***	**$135.00**
1½"	***IA150TP***	**160.00**
2"	***IA200TP***	**158.00**
3"	***IA300TP***	**345.50**
4"	***IA400TP***	**371.00**

female NPT test caps

Size	*Iron* Part #	Price/E
1"	***NPT100TC***	**$123.20**
1½"	***NPT150TC***	**168.60**
2"	***NPT200TC***	**199.00**
3"	***NPT300TC***	**345.00**
4"	***NPT400TC***	**398.00**

male NPT test plugs

Size	*Iron* Part #	Price/E
1"	***100TP***	**$168.80**
1½"	***150TP***	**202.00**
2"	***200TP***	**168.80**
3"	***300TP***	**275.00**
4"	***400TP***	**405.00**

bleed-off valve

Description	Part #	Price/E
for pneumatic test pump	***IBV50BOV***	**$85.55**

FRL Attachments Accessories

Description	Part #	Price/E
3/8" Wilkerson modular coalescing filter (automatic drain)	***M16-03A***	**$250.30**
3/8" Wilkerson modular coalescing filter (manual drain)	***M16-03M***	**197.60**
Modular sleeve needed to connect M16-03A or M16-03M	***GPA-95-292***	**17.00**

Heavy-Duty Lava Hand Cleaner

- heavy duty hand cleaner with pumice
- 7.5 fl oz pump bottle
- sold in case quantity only

Part #	Case Qty	Price/E
LAVA221	12	**$11.50**



Marking Pens

- marks on wood, glass, paper, metal, and many other surfaces
- permanent mark, but can be removed with fluid remover
- unique valve action prevents tip drying

Color	Part #	Price/E
black	***BK91***	**$13.50**
white	***WT91***	**13.50**
yellow	***YW91***	**13.50**



Dixon Soft Hose Mallet

- soft mallet for pounding metal objects without damaging them.
- The head material will not crack and is firmly attached to strong shaft-handle.
- length: 23"
- weight: 10 lbs.

Part #	Price/E
DCM1	**$350.00**



Dixon Hose Knife

- for fast cutting of rubber hose and belting
- guard protects hand while cutting

Part #	Price/E
DRK15	**$23.00**



Diameter Tape

- 6' tape for quickly finding the outside diameter of any cylindrical object
- converts circumference to OD at the measured point
- metal case

Part #	Price/E
DDT1	**$14.85**



Spiral Guard™ Flame Retardant Hose and Cable Protection

Provides heavy duty hose, cable or wire protection. Used in mining, quarrying, forestry, offshore industries and most hydraulic hose applications.



- crush and high abrasion resistance
- chemical and UV ray resistant
- self-lubricating to reduce hose wear
- easy to install on-site
- smooth radius on all edges
- can be used on single or multiple hose bundles
- spiral guard ID is equal to the guard at rest
- sold in coil lengths only

Flame Retardant Product

- approved by MSHA 1C-231/1
- flame retardant and self extinguishing
- temperature range: **-148°F** to **212°F**, (-100°C to 100°C)

Nominal ID	Coil Length	OD Range (inches)	Part #	Price/E
1/2"	66'	1/2" to 5/8"	***FRSGX16***	**$157.10**
5/8"	66'	5/8" to 7/8"	***FRSGX20***	**213.20**
3/4"	66'	7/8" to 1-1/16"	***FRSGX25***	**280.50**
15/16"	66'	1-1/16" to 1-1/4"	***FRSGX32***	**510.55**
1-1/4"	66'	1-1/4" to 1-5/8"	***FRSGX40***	**639.55**
1-1/2"	66'	1-5/8" to 2-1/8"	***FRSGX50***	**914.45**
1-15/16"	66'	2" to 2-1/2"	***FRSGX63***	**1166.90**
2-3/8"	66'	2-1/2" to 3-1/4"	***FRSGX75***	**1447.40**
2-5/8"	66'	3" to 6"	***FRSGX90***	**1649.35**
3-3/16"	33'	6" plus	***FRSGX110***	**1093.95**

Standard Product

- not flame retardant
- temperature range: **-58°F** to **194°F**, (-50°C to 90°C)

Nominal ID	Coil Length	OD Range (inches)	Part #	Price/E
1/2"	66'	1/2" to 5/8"	***NFSGX16***	**$78.55**
5/8"	66'	5/8" to 7/8"	***NFSGX20***	**106.60**
3/4"	66'	7/8" to 1-1/16"	***NFSGX25***	**151.50**
15/16"	66'	1-1/16" to 1-1/4"	***NFSGX32***	**218.80**
1-1/4"	66'	1-1/4" to 1-5/8"	***NFSGX40***	**325.40**
1-1/2"	66'	1-5/8" to 2-1/8"	***NFSGX50***	**420.75**
1-15/16"	66'	2" to 2-1/2"	***NFSGX63***	**583.45**
2-3/8"	66'	2-1/2" to 3-1/4"	***NFSGX75***	**835.90**
2-5/8"	66'	3" to 6"	***NFSGX90***	**1077.15**
3-3/16"	33'	6" plus	***NFSGX110***	**645.15**

Fire Jackets for Hose

Used to protect hose and hose assemblies, tubing, piping, wiring and cables from high temperatures or molten splash. Helps maintain line temperature and reduce environmental overheating and overcooling.

- resistant to hydraulic fluids and lubricating oil
- color is iron oxide red
- supplied in 50' lengths
- temperature range: **-65°F** to **500°F** (-54°C to 260°C)
- Sleeving slides easily over hose and expands to go over fittings.
- compounded silicone rubber coating over fiberglass
- completely non-asbestos




Nominal ID	Part #	Price/E	Nominal ID	Part #	Price/E
1/4"	***0610-4***	**$170.00**	1¼"	***3210-20***	**$450.00**
3/8"	***1010-6***	**170.00**	1½"	***3810-24***	**500.00**
1/2"	***1310-8***	**225.00**	1¾"	***4510-28***	**650.00**
5/8"	***1610-10***	**260.00**	2"	***5110-32***	**725.00**
3/4"	***1910-12***	**290.00**	2½"	***6410-40***	**900.00**
7/8"	***2210-14***	**350.00**	3"	***7610-48***	**1300.00**
1"	***2510-16***	**375.00**	4"	***10210-64***	**1600.00**

Fiberglass Sleeving

2010 NEW

- Braided texturized fiberglass tubing provides thermal insulation protection in applications with service temperatures up to **1000°F**.
- supplied in a continuous length of 100'
- 1/16" wall thickness is braided from texturized E-glass filament yarns. The untreated tubing is flexible and expands to cover changing diameters.



Nominal ID	Part #	Price/E	Nominal ID	Part #	Price/E
1/4"	***LW04200***	**$75.00**	1-1/4"	***LW20200***	**$210.00**
3/8"	***LW06200***	**75.00**	1-1/2"	***LW24200***	**300.00**
1/2"	***LW08200***	**120.00**	2"	***LW32200***	**350.00**
5/8"	***LW10200***	**125.00**	2-1/2"	***LW40200***	**375.00**
3/4"	***LW12200***	**130.00**	3"	***LW48200***	**400.00**
7/8"	***LW14200***	**145.00**	3-1/2"	***LW56200***	**480.00**
1"	***LW16200***	**200.00**	4"	***LW64200***	**500.00**

Fire Jackets

- fiberglass coated silicone rubber
- fluid resistant to hydraulic fluids and lubricating oils
- color is iron oxide red
- temperature range: **-65°F** to **500°F**



Size	Length	Part #	Price/E
3"	50'	***4055-3***	**$600.00**

Fire Tape for Hose

Silicone rubber tape used to seal the ends of fire sleeves to prevent fraying.
- completely non-asbestos
- color is iron oxide red
- temperature range: **-45°F** to **380°F** (-45°C to 200°C)




Size	Length	Part #	Price/E
1"	12 yards	***FTH100***	**$48.50**

Nylon Protective Sleeves - MSHA Accepted

- Woven nylon tubular sleeving, ideal for use as a protective covering on hydraulic and industrial hose.
- Tight weave of the seamless tubular sleeving helps dispense the flow of fluid in a ruptured hose.
- MSHA accepted, withstands temperatures up to **275°F** (135°C) and fully passes flammability tests.



Nominal ID	Outside Flat	*100' rolls*		*300' rolls*	
		Part #	Price/E	Part #	Price/E
0.90"	1.50"	***DHS90-100***	**$129.25**	***DHS90-300***	**$359.65**
1.00"	1.66"	***DHS100-100***	**138.95**	***DHS100-300***	**378.90**
1.13"	1.88"	***DHS106-100***	**149.10**	***DHS106-300***	**406.55**
1.25"	2.13"	***DHS122-100***	**170.00**	***DHS122-300***	**463.30**
1.46"	2.25"	***DHS138-100***	**193.50**	***DHS138-300***	**538.60**
1.42"	2.50"	***DHS142-100***	**199.05**	***DHS142-300***	**541.05**
1.58"	2.75"	***DHS159-1-100***	**212.50**	***DHS159-1-300***	**560.25**
1.78"	2.88"	***DHS175-100***	**225.60**	***DHS175-300***	**615.50**
1.91"	3.00"	***DHS181-100***	**246.45**	***DHS181-300***	**649.25**
2.18"	3.63"	***DHS219-100***	**300.45**	***DHS219-300***	**819.40**
2.38"	3.88"	***DHS238-100***	**349.05**	***DHS238-300***	**972.70**
2.65"	4.25"	***DHS263-100***	**385.85**	***DHS263-300***	**1037.30**
2.86"	4.75"	***DHS288-100***	**419.05**	***DHS288-300***	**1142.80**
3.65"	5.88"	***DHS366-100***	**513.55**	***DHS366-300***	**1363.00**

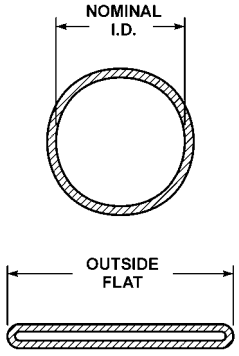

Stretch Straps



- durable tie down straps
- made of EPDM
- length does not include S-hooks
- S-hooks are steel

Length	Part #	Price/E
10"	***SSE10***	**$2.35**
15"	***SSE15***	**2.75**
21"	***SSE21***	**3.20**
31"	***SSE31***	**4.00**
41"	***SSE41***	**4.75**

WARNING!!

Failure to comply with this warning may result in serious damage and/or personal injury.
Maximum end to end safe stretch = 150% of length

- do not exceed maximum safe stretch
- inspect before each use, do not use if strap is cut, cracked or abraded
- inspect hooks for damage and/or wear. Replace if needed.
- protect strap from sharp edges or heat.
- wear eye protection during use
- do not use this product as the primary tie down
- refer to federal or state regulations for proper tie down methods

SAFETY ALERT

Safety Tag



Dixon strongly recommends the use of a safety tag or warning label on all hose assemblies.

- sold in quantities of 100 only

Size	Part #	Price/E
5" x 2-3/8"	***DWL100***	**$0.30**

WARNING!!

- worn-out hose fittings should be replaced
- loose clamps on hose can be dangerous
- bolt type clamps should be retensioned regularly
- for extra safety, retaining devices such as clips, chains or cables must be used

SAFETY ALERT

Safety Tape

Dixon strongly recommends the use of a safety tag or warning label on all hose assemblies.



- length of tape - 55 yards, approximately 255 warnings

Size	Part #	Price/E
1½"	***DSTW***	**$20.50**

WARNING!!

- worn-out hose fittings should be replaced
- loose clamps on hose can be dangerous
- bolt type clamps should be retensioned regularly
- for extra safety, retaining devices such as clips, chains or cables must be used

SAFETY ALERT

Weatherproof First Aid Kit



- polypropylene case
- kit supports 25 persons
- each kits includes:
  adhesive strips, large wound pads, eye pads, triangular bandage, first aid / burn cream, eye flush, elastic bandages, scissors, forceps, first aid instructions, gauze pads, adhesive tape, antiseptic towelettes, aspirin, cold pack, latex exam gloves
- 10 person and 50 person kits are also available, consult the factory for price and availability

Weight	Part #	Price/E
1.8 lbs.	***FAK25P***	**$72.75**

Nominal

Suitable for conveying chemicals, foods, pharmaceuticals, oils, gas, fuels and steam. Available in a variety of end connections in brass, carbon steel and stainless steel.

- nominal standard smooth bore PTFE hose meets SAE100R14
- size range: -3 to -20
- operating temperature: **-76°F** to **500°F** (-60°C to 260°C)
- 304 stainless braided
- Extruded or heat shrink coverings are available upon request.

Smooth Bore PTFE Hose (fittings not included)




Nominal Size	Average ID	Length in Feet	Dash Size	*White, non-conductive tube* Part #	Price/E	*Black, conductive tube* Part #	Price/E
3/16"	.125"	100	dash-03	***WSB-03-100***	**$471.50**	***BSB-03-100***	**$518.75**
1/4"	.187"	100	dash-04	***WSB-04-100***	**465.25**	***BSB-04-100***	**511.75**
5/16"	.250"	100	dash-05	***WSB-05-100***	**498.50**	***BSB-05-100***	**548.25**
3/8"	.312"	100	dash-06	***WSB-06-100***	**561.75**	***BSB-06-100***	**618.00**
3/8T"	.375"	100	dash-06T	***WSB-06T-100***	**788.00**	***BSB-06T-100***	**867.00**
1/2"	.405"	100	dash-08	***WSB-08-100***	**652.50**	***BSB-08-100***	**717.75**
5/8"	.500"	100	dash-10	***WSB-10-100***	**838.75**	***BSB-10-100***	**922.75**
3/4"	.625"	100	dash-12	***WSB-12-100***	**1144.75**	***BSB-12-100***	**1259.00**
3/4T"	.750"	50	dash-12T	***WSB-12T-50***	**863.50**	***BSB-12T-50***	**854.75**
1"	.875"	50	dash-16	***WSB-16-50***	**879.50**	***BSB-16-50***	**967.50**
1-1/8"	1.000"	50	dash-16T	***WSB-16T-50***	**1125.25**	***BSB-16T-50***	**1237.75**
1-1/4"	1.250"	50	dash-20T	***WSB-20Z-50***	**2301.00**	***BSB-20Z-50***	**2531.00**

Fittings


Crimp Collars for all Nominal fittings are included

Female JIC Swivel




Hose Size	Thread Size	*Carbon Steel* Part #	Price/E	*304 Stainless Steel* Part #	Price/E	*Brass* Part #	Price/E	Box Qty
dash 4	1/4"	***FJC-04-04***	**$6.25**	***FJS-04-04***	**$28.25**	***FJB-04-04***	**$5.93**	25
dash 5	5/16"	***FJC-05-05***	**11.50**	***FJS-05-05***	**26.75**	***FJB-05-05***	**8.50**	25
dash 6	3/8"	***FJC-06-06***	**13.75**	***FJS-06-06***	**24.75**	***FJB-06-06***	**9.25**	25
dash 8	1/2"	***FJC-08-08***	**14.00**	***FJS-08-08***	**34.00**	***FJB-08-08***	**10.25**	25
dash 10	5/8"	***FJC-10-10***	**17.00**	***FJS-10-10***	**47.25**	***FJB-10-10***	**15.00**	25
dash 12	3/4"	***FJC-12-12***	**18.50**	***FJS-12-12***	**57.00**	***FJB-12-12***	**27.50**	10
dash 16	1"	***FJC-16-16***	**29.75**	***FJS-16-16***	**100.75**	***FJB-16-16***	**36.50**	10
dash 20Z	1¼"	***FJC-20Z-20***	**POR**	***FJS-20Z-20***	**POR**	***FJB-20Z-20***	**POR**	5

Rigid Male Pipe



Hose Size	Thread Size	*Carbon Steel* Part #	Price/E	*304 Stainless Steel* Part #	Price/E	*Brass* Part #	Price/E	Box Qty
dash 4	1/8"	***MPC-04-02***	**$4.50**	***MPS-04-02***	**$12.75**	***MPB-04-02***	**$5.50**	25
dash 4	1/4"	***MPC-04-04***	**5.25**	***MPS-04-04***	**16.50**	***MPB-04-04***	**5.25**	25
dash 5	1/4"	***MPC-05-04***	**6.00**	***MPS-05-04***	**15.00**	***MPB-05-04***	**7.00**	25
dash 6	1/4"	***MPC-06-04***	**10.25**	***MPS-06-04***	**20.75**	***MPB-06-04***	**6.25**	25
dash 6	3/8"	***MPC-06-06***	**7.50**	***MPS-06-06***	**19.00**	***MPB-06-06***	**10.00**	25
dash 8	3/8"	***MPC-08-06***	**8.75**	***MPS-08-06***	**25.00**	***MPB-08-06***	**9.50**	25
dash 8	1/2"	***MPC-08-08***	**10.50**	***MPS-08-08***	**28.00**	***MPB-08-08***	**13.25**	25
dash 10	1/2"	***MPC-10-08***	**23.50**	***MPS-10-08***	**32.00**	***MPB-10-08***	**14.25**	25
dash 12	3/4"	***MPC-12-12***	**22.50**	***MPS-12-12***	**33.50**	***MPB-12-12***	**30.75**	10
dash 16	1"	***MPC-16-16***	**43.25**	***MPS-16-16***	**111.25**	***MPB-16-16***	**52.25**	10
dash 20Z	1¼"	***MPC-20Z-20***	**POR**	***MPS-20Z-20***	**POR**	***MPB-20Z-20***	**POR**	5

Female SAE Swivel



Hose Size	Thread Size	*Carbon Steel* Part #	Price/E	*Brass* Part #	Price/E	Box Qty
dash 6	3/8"	***SAEC-06-06***	**POR**	***SAEB-06-06***	**POR**	25
dash 12	3/4"	***SAEC-12-12***	**POR**	***SAEB-12-12***	**POR**	10

True ID

Suitable for conveying acids, chemicals, foods and pharmaceuticals.

- range: ¼" to 2"
- operating temperature: **-76°F** to **500°F** (-60°C to 260°C)
- stainless braided
- Other braids including synthetic, extruded and heat shrink coverings are available upon request.

Hose (fittings not included)



Open Pitch Convoluted Hose

Size	White, non-conductive Part #	Price/E	Black, conductive Part #	Price/E
1/4"	***WOC-T04-50***	**$977.25**	***BOC-T04-50***	**$1075.00**
3/8"	***WOC-T06-50***	**865.25**	***BOC-T06-50***	**951.75**
1/2"	***WOC-T08-50***	**936.25**	***BOC-T08-50***	**1029.75**
3/4"	***WOC-T12-50***	**1151.75**	***BOC-T12-50***	**1267.00**
1"	***WOC-T16-50***	**1776.00**	***BOC-T16-50***	**1953.50**
1¼"	***WOC-T20-50***	**2297.75**	***BOC-T20-50***	**2527.50**
1½"	***WOC-T24-25***	**1429.75**	***BOC-T24-25***	**1572.75**
2"	***WOC-T32-25***	**1773.00**	***BOC-T32-25***	**1950.25**


Heavy Wall True ID Smooth Bore Hose

Size	White, non-conductive Part #	Price/E	Black, conductive Part #	Price/E
1/4"	***WTB-T04-50***	**$447.75**	***BTB-T04-50***	**$492.50**
3/8"	***WTB-T06-50***	**551.75**	***BTB-T06-50***	**606.75**
1/2"	***WTB-T08-50***	**681.00**	***BTB-T08-50***	**749.00**
3/4"	***WTB-T12-50***	**1134.75**	***BTB-T12-50***	**1248.25**
1"	***WTB-T16-50***	**1522.50**	***BTB-T16-50***	**1674.75**
1"	***WTB-T16Z-50*** [1]	**2288.25**	***BTB-T16Z-50*** [1]	**2517.25**
1¼"	***WTB-T20Z-50*** [1]	**2865.25**	***BTB-T20Z-50*** [1]	**3151.75**
1½"	***WTB-T24Z-50*** [1]	**3363.25**	***BTB-T24Z-50*** [1]	**3699.50**

[1] double braid

Fittings

Crimp Collars for all True ID fittings are sold separately



Female JIC Swivel

Size	Carbon Steel Part #	Price/E	316 Stainless Steel Part #	Price/E	Box Qty
1/4"	**---**	**---**	***FJR-T04***	**$28.25**	10
3/8"	**---**	**--**	***FJR-T06***	**34.50**	10
1/2"	***FJC-T08***	**$22.25**	***FJR-T08***	**44.50**	10
3/4"	***FJC-T12***	**25.50**	***FJR-T12***	**62.25**	10
1"	***FJC-T16***	**29.75**	***FJR-T16***	**103.25**	10
1¼"	***FJC-T20***	**65.00**	***FJR-T20***	**213.25**	10
1½"	***FJC-T24***	**72.50**	***FJR-T24***	**271.25**	10
2"	***FJC-T32***	**147.50**	***FJR-T32***	**478.50**	10



Rigid Male Pipe

Size	Carbon Steel Part #	Price/E	316 Stainless Steel Part #	Price/E	Box Qty
1/4"	**---**	**---**	***MPR-T04***	**$24.00**	10
3/8"	**---**	**---**	***MPR-T06***	**31.75**	10
1/2"	***MPC-T08***	**$18.25**	***MPR-T08***	**37.00**	10
3/4"	***MPC-T12***	**21.25**	***MPR-T12***	**63.75**	10
1"	***MPC-T16***	**32.75**	***MPR-T16***	**99.00**	10
1¼"	***MPC-T20***	**47.75**	***MPR-T20***	**196.25**	10
1½"	***MPC-T24***	**63.25**	***MPR-T24***	**206.00**	10
2"	***MPC-T32***	**95.00**	***MPR-T32***	**320.00**	10



Flange Retainer

Size	Carbon Steel Part #	Price/E	316 Stainless Steel Part #	Price/E	Box Qty
1/2"	***FRR-T08***	**$93.00**	**---**	**---**	10
3/4"	***FRR-T12***	**151.75**	***FRRE-T12***	**$280.25**	10
1"	***FRR-T16***	**192.25**	***FRRE-T16***	**418.75**	10
1¼"	***FRR-T20***	**POR**	***FRRE-T20***	**POR**	10
1½"	***FRR-T24***	**370.75**	***FRRE-T24***	**502.75**	10
2"	***FRR-T32***	**533.00**	***FRRE-T32***	**650.75**	10

Note: for use with lap joint flanges, see page 531



Sanitary Tri-Clamp

Hose Size	Clamp Size	316 Stainless Steel Part #	Price/E	Box Qty
1/2"	1"	***TCR-T08-16***	**$88.28**	10
1/2"	1½"	***TCR-T08-24***	**101.48**	10
3/4"	1½"	***TCR-T12-24***	**108.74**	10
1"	1"	***TCR-T16-16***	**96.64**	10
1"	1½"	***TCR-T16-24***	**97.08**	10
1½"	1½"	***TCR-T24-24***	**115.28**	10
2"	2"	***TCR-T32-32***	**164.18**	10

Crimp Collars

Size	Carbon Steel Part #	Price/E	304 Stainless Steel Part #	Price/E	Box Qty
1/4"	**---**	**---**	***SSC-T04***	**$16.50**	10
3/8"	**---**	**---**	***SSC-T06***	**17.75**	10
1/2"	***CSC-T08***	**$11.50**	***SSC-T08***	**19.50**	10
3/4"	***CSC-T12***	**14.50**	***SSC-T12***	**31.50**	10
1"	***CSC-T16***	**16.25**	***SSC-T16***	**53.75**	10
1¼"	***CSC-T20***	**27.25**	***SSC-T20***	**86.50**	10
1½"	***CSC-T24***	**34.50**	***SSC-T24***	**98.50**	10
2"	***CSC-T32***	**62.50**	***SSC-T32***	**141.00**	10

Mini Sanitary Tri-Clamp

Size	316 Stainless Steel Part #	Price/E	Box Qty
1/2"	***TCRM-T08***	**$21.51**	10
3/4"	***TCRM-T12***	**25.80**	10

Notes:

- insertion tool is available to aid in assembly fabrication
- contact Dixon Specialty Hose for GSM PTFE and metal hose assemblies

YARDLEY PRODUCTS CORP.

10 West College Avenue
PO Box 357
Yardley, PA 19067-8357

800.457.0154 • 215.493.2723
Fax: 215.493.6796
www.yardleyproducts.com
email: info@yardleyproducts.com

Unique Solutions for Your Fastening Needs

Precision Engineered Threaded Inserts

- large inventory - over 24 million inserts in stock ready for immediate shipment
- fast delivery - same day shipment if order is received by 2 p.m. EST, Next Day delivery available
- patented designs - "time tested" designs proven on thousands of products and a wide variety of materials
- quality - patented designs manufactured to exact tolerances
- dependability - we listen to our customer's needs
- custom manufacturing - experience in manufacturing inserts to specific customer requested tolerances and designs
- flexibility - small quantities, large quantities or special runs plus free samples of stock items
- special runs - no minimum quantities on special order parts
- experience - established 1946
- Visa/Mastercard and American Express accepted

Product Selection Guide

type A closed end inserts, type B open end inserts and type C closed end with counter bore inserts

Install Methods	Base Materials	Description
molded-in epoxied-in	thermoset plastics thermoplastics rubber ceramics	A wide range of threaded inserts featuring patented designs for molded-in use. Close tolerance of minor thread diameter and careful burnishing of inner thread crests assure snug fit on pins. Extremely flat ends on inserts (with no burrs, ridges or other defects) mean no leakage of material on the face of the mold. *Available in brass, aluminum and stainless steel.*



type D studded end inserts

Install Methods	Base Materials	Description
molded-in epoxied-in	thermoset plastics thermoplastics rubber ceramics	Threaded stud inserts featuring patented designs for molded-in use. Proportioned for maximum holding strength. Can be screwed to butt flush with a Yardley Type C Insert. *Available in brass.*



bi-sert® inserts

Install Methods	Base Materials	Description
molded-in	thermoset plastics thermoplastics glass-filled plastics	Designed for rotational molding, this insert provides exceptional torque and pull-out resistance. Unique hex design allows it to be used with fibrous materials where the fibers would block the flow of the plastic material around ordinary inserts. Inside diameter held to strict tolerances for a smooth, tight fit on locating pins. *Available in brass and aluminum.*



zap-sert® inserts

Install Methods	Base Materials	Description
molded-in ultrasonic thermal pressed-in	thermoset plastics thermoplastics	Economical design features a lead on both ends making this insert ideal for high volume, automated production. Unique radial barbs provide strong resistance to pull-out and rotation in plastics and thermoplastics. Can be molded-in or installed with ultrasonic or thermal insertion tools. *Available in brass.*



type E closed end and type F open end pressed-in inserts

Install Methods	Base Materials	Description
pressed-in epoxied-in	thermoset plastics thermoplastics rubber ceramics	Spiral knurled, open or closed-ended inserts for pressing into soft materials such as plastics, foamed plastics and rubber. Ideal for use where minimal pull-out strength is needed, but some torque resistance is required. Can also be molded-in and feature patented I.D. design for use with locating pins. *Available in brass and aluminum.*



Product Selection Guide

quick-sert® inserts



Install Methods	Base Materials	Description
pressed-in	aluminum soft metals	Designed for fast easy press-in installation, providing permanent threads in aluminum and other soft metals. Its smooth tapered lead allows easy positioning for quick starts in a pre-drilled hole and the knurled body locks tightly in the host material. Its thick wall design prevents thread distortion. *Available in plated steel.*

sharp-sert® regular, short and flanged series inserts



Install Methods	Base Materials	Description
pressed-in ultrasonic thermal	thermoset plastics thermoplastics wood	Versatile, economical and trouble free, they offer easy, high-speed installation. Curved hooks and lateral flutes lock them into plastics, particle board and wood. Install with ultrasonic or thermal tools or just hammer or press them in. *Available in brass and stainless steel.*

fiber-sert® regular and diecast series inserts



Install Methods	Base Materials	Description
threaded-in	wood particle board ABS foamed plastics	Special design makes them ideal for wood, particle board, ABS and foamed plastics. Large coarse outer threads give great holding power in weaker materials while inside threads stay clean, free of chips. Install with Yardley pneumatic inserter or easy-to-use self-tapping driver. *Available in brass and diecast.*

tri-sert® regular, short, coarse threaded and slotted coarse threaded series inserts



Install Methods	Base Materials	Description
threaded-in	thermoset plastics thermoplastics wood soft metals	For strong threads in plastics, soft metals and wood. Self-tapping, they provide high torque and pull-out resistance. Install with Yardley pneumatic inserter, insert driver or screw driver. *Available in brass, plated steel and stainless steel.*

intro-sert® regular and short series inserts



Install Methods	Base Materials	Description
ultrasonic thermal	thermoplastics ABS polycarbonates	For use in thermoplastic materials such as ABS and polycarbonates. Intro-Serts have no sharp edges on their outer annular ribs to cause residual stress cracking. Install them fast and easily with ultrasonic or thermal insertion tools. *Available in brass, aluminum and stainless steel.*

tri-sert® slotted coarse threaded inserts




Install Methods	Base Materials	Description
screwdriver Yardley inserting tool	brittle or weak plastics	Inserts are internally and externally threaded metal inserts with a slot on one end. The inserts tap their own threads as they are (turned) into drilled or cored holes. The wider spaced external threads reduce installation torque and provide a stronger hold. *Available in brass and stainless steel. Custom sizes and materials are also available.*

Contact Yardley at 800.457.0154 for more information on all the threaded inserts on pages 595 and 596

Dixon's Mobile Connection Trailers



Dixon's mobile training trailers provide hands-on opportunities for distributors and end users to learn more about the selection, installation and maintenance of Dixon fittings and accessories. Call 800.355.1991 for additional information.

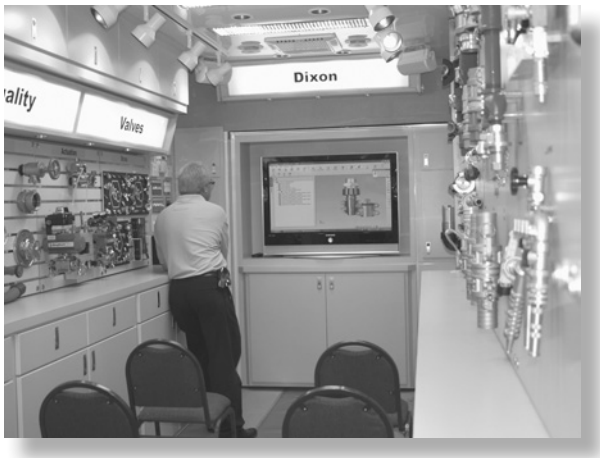

Hose Assembly Safety Survey Center for:
- program introduction
- classroom instruction with audio visual display
- presentation of survey results and follow-up



Training for Distributors and End-Users in:
- product selection
- product installation
- safe product usage

Product Displays featuring:
- Dixon Accessories
- Dixon Bayco
- Dixon Boss
- Dixon Brass
- Dixon Powhatan
- Dixon Quick Coupling
- Dixon Sanitary
- Dixon Specialty Hose





Hydrasearch Company, Inc.

100 Log Canoe Circle
Stevensville, MD 21666
Phone (410) 643-8900
Fax (410) 643-8954
sales@hydrasearch.com
www.hydrasearch.com

Hydrasearch, established in 1962, is a division of Dixon and a large multi-divisional manufacturer and global distributor of diverse commercial hose, technical products and fittings. In 1995 Hydrasearch purchased the Technical Products Company, allowing us to introduce a line of high pressure O-ring face seal valves and pipe and tube fittings.

Today, Hydrasearch products can be found on submarines, surface ships, helicopters, fixed-wing aircraft, tanks, and ground equipment throughout the world. With our experienced staff, expanding product line, and growing global distribution, Hydrasearch continues to improve and expand to meet your needs today and into the future.

Technical Products

- valves and accessories
- valves, instrumentation and adapters
- fittings, couplings and union assemblies
- O-rings and Sil-Braze rings
- hose end fittings and adapters
- cross reference to CPV-O-Seal available

Product Literature

- Marine Hose Fittings (Catalog 506)
- Underway Replenishment Products (Catalog 406)
- Reattachable Couplings for Layflat & Rubber Hoses (Catalog 600)
- Aerospace Hose & Fittings (Catalog 801)
- Technical Products (Catalog 701)

BUCK COMPANY, INC.

897 Lancaster Pike
Quarryville, PA 17566-9738
Phone: 717.284.4114
Fax: 717.284.3737
www.buckcompany.com

Buck Company is a quality automated sand cast foundry designed to handle medium to high volume castings. These castings range from one half pound to one hundred pounds in malleable iron, ductile iron and gray iron. We can also handle jobs ranging from one half pound to seventy five pounds in brass, bronze, and aluminum sand casting. ISO2000 certified.

S.T.A.M.P.E.D.

Questions to Ask

S	**Size**
T	**Temperature**
A	**Application**
M	**Media**
P	**Pressure**
E	**Ends**
D	**Dixon**

Selecting Materials

This information is intended to help make general comparisons between different available materials.

Material	Features and Benefits
Stainless Steel	A corrosion-resistant material that provides high strength at high temperatures, helps prevent contamination of product being transported, maintains cleanliness, and retains a lustrous appearance. Harder then brass. *Type 304* is a low-carbon chromium-nickel stainless steel. *Type 316* is similar to type 304, but has a high nickel content as well as a molybdenum for stronger resistance to heat and corrosion. Often used for water, oil, gas, and steam in low- to high-pressure applications.
Brass	Has good corrosion resistance and is less expensive than stainless steel. Is softer and easier to thread than stainless steel and forms tight seals. It can be used interchangeably with copper where heavier walls are required. Found in plumbing and heating application. Also good with oil, natural gas, and air. Resists corrosion from salt water as well as fresh water polluted with waste from mineral acids and peaty soils. Use in low- to high-pressures applications.
Steel	Used in noncorrosive environments. This carbon- and iron-based metal is hard and strong. It is an economical alternative to stainless steel and brass in high-pressure applications. For use with water, oil, gas, and steam in low- to high-pressure applications where corrosion is not a problem.

SAFETY ALERT

Product application is based not only on material selection but on design of product for intended use.
Please contact the factory for selection of the proper fitting for your application.

Trademarks

Delrin®, Kevlar®, Teflon® and Zytel® are registered trademarks of E.I. duPont Nemours and Company.

Kalrez® and Viton® are registered trademarks of DuPont Dow Elastomers.

All other trademarks appearing in Dixon's Illustrated Price List are the property of their respective owners.

Corrosion Resistance of Coupling Material

Caution

The following data has been compiled from generally available sources and should not be relied upon without consulting and following the specific recommendations of the manufacturer regarding particular coupling materials.

Ratings

Metal	Non-Metal	Gasket/Seal Material
1 = Excellent 2 = Good 3 = Fair X = Not Recommended - = Contact Factory	A = Acceptable X = Not Recommended - = Contact Factory	T = Teflon® V = Viton® E = EPDM, EPR N = Neoprene B = Buna N

Note: (1) Ratings given are based at 70°F. Chemical compatibility varies greatly with temperature. For applications at temperatures other than 70°F, contact the Factory for recommendations.

(2) Gasket / seal materials are not necessarily listed in order of preference.

(3) Chemical resistance of a material does not necessarily indicate the suitability of a fitting in a given application due to variables such as improper clamp and coupling application, special hose construction, gasket material, etc.

Special caution should be taken when handling hazardous materials.

AGENT	Aluminum	Brass	Bronze	Hastelloy, C-276	Malleable Iron Carbon Steel	Monel	Stainless Steel,304	Stainless Steel,316	Nylon	Polypropylene	Seal Material
Acetate Solvents (Crude)	1	X	X	1	2	2	1	1	A	X	T
Acetate Solvents (Pure)	1	1	1	1	X	1	1	1	A	X	T
Acetic Acid (80%)	3	X	X	1	X	1	1	1	X	X	TEVNB
Acetic Acid (50%)	2	X	X	1	X	2	2	1	X	X	TEVNB
Acetic Acid (20%)	2	X	X	1	X	2	2	1	X	X	TEVNB
Acetic Acid (10%)	2	X	2	1	X	2	1	1	X	X	TEVNB
Acetic Anhydride	2	X	2	1	2	2	2	2	X	X	TNB
Acetone	1	2	2	1	2	1	1	1	A	X	TE
Acetylene	1	X	X	2	2	2	1	1	X	X	TEVNB
Alcohols											
Amyl Alcohol	2	2	2	2	2	1	2	2	A	A	TEVNB
Benzyl Alcohol	2	2	2	2	2	1	1	1	X	A	TVB
Butyl Alcohol	1	2	1	2	2	1	1	1	A	A	TEVN
Diacetone Alcohol	1	1	2	1	2	1	2	2	X	A	TE
Ethyl Alcohol	1	2	2	1	2	2	2	2	X	A	TEVNB
Hexyl Alcohol	-	-	-	1	-	-	-	-	A	-	-
Isobutyl Alcohol	-	-	-	-	-	-	-	-	A	-	-
Isopropyl Alcohol	2	2	2	2	2	2	2	2	A	A	TEVNB
Methyl Alcohol (Methanol)	2	2	2	1	2	2	2	2	A	A	TENB
Octyl Alcohol	-	-	-	-	-	-	-	-	A	-	-
Propyl Alcohol	2	2	2	1	2	2	1	1	X	A	TEVNB
Aluminum											
Aluminum Chloride (Aqu.)	X	X	X	1	X	X	X	X	A	A	TEVNB
Aluminum Fluoride (Sat.)	2	-	-	-	X	2	X	2	X	A	TEVNB
Aluminum Nitrate (Sat.)	3	X	-	-	X	-	2	2	A	A	TEVNB
Aluminum Potassium Sulfate (Alum)	2	2	2	2	X	2	X	2	X	A	TEVNB
Aluminum Sulfate (Sat.)	X	X	2	2	X	2	-	2	A	A	TEVNB
Ammonia											
Ammonia Anhydrous	1	X	X	2	1	1	2	1	A	X	TENB
Ammonia Gas	X	X	X	1	1	X	1	1	A	X	TENB
Ammonia Nitrate	-	-	-	-	-	-	-	-	X	-	-
Ammonium											
Ammonium Biflouride	-	X	-	2	X	2	-	-	X	A	TEVB
Ammonium Carbonate (Sat.)	2	X	X	2	2	2	2	2	A	A	TEVNB
Ammonium Casenate	-	-	-	-	-	-	-	-	A	-	-
Ammonium Chloride (Sat.)	X	X	2	2	X	2	X	X	A	A	TEVNB
Ammonium Hydroxide (Sat.)	2	X	X	2	1	X	2	2	A	A	TEVNB
Ammonium Nitrate	2	X	X	-	X	X	-	-	A	A	TENB
Ammonium Phosphate (10-40%)	X	X	X	-	X	2	1	2	A	A	TEVNB
Ammonium Sulfate (10-40%)	X	X	3	2	X	2	X	2	A	A	TEVNB
Aniline	-	X	2	2	X	2	1	1	X	X	TV
Arsenic Acid	X	X	2	2	X	X	2	2	X	A	TEVNB
Asphalt	-	-	-	-	2	-	-	2	X	X	TV
Barium											
Barium Carbonate (Sat.)	X	2	2	2	2	2	2	2	A	A	TEVNB
Barium Chloride (Sat.)	-	2	2	1	-	2	X	-	A	A	TEVNB
Barium Hydroxide (Sat.)	X	2	X	2	2	1	2	2	A	A	TEVNB
Barium Sulfate	2	2	2	-	X	2	2	2	A	A	TEVNB
Barium Sulfide	X	X	X	-	2	X	2	2	A	A	TEVNB
Beer	1	2	2	1	2	1	1	1	A	A	TEVNB
Benzaldehyde	2	2	2	2	X	2	2	2	X	X	TE
Benzene, Benzol	1	2	2	2	2	2	2	2	A	X	TV
Benzine	-	-	-	-	-	-	-	-	A	X	-
Benzoic Acid	2	2	2	-	X	2	2	2	X	X	TVN
Black Liquor	X	X	X	X	-	2	2	2	X	A	TEVNB
Bleach (12.5% Active Chlorine)	X	-	-	1	X	-	-	X	X	A	TEVN
Borax	X	2	2	1	2	1	1	1	X	A	TEVNB
Boric Acid	1	X	2	1	X	2	-	-	X	A	TEVNB
Brine Acid	-	2	2	1	-	-	-	-	X	A	TEVNB
Bromic acid	X	X	X	-	-	X	-	-	X	A	TEVN
Bromine Liquid	2	-	-	-	-	-	X	X	X	X	TV
Butadiene, Butylene	2	2	2	2	2	1	2	2	X	X	TVNB
Butane	2	2	2	2	1	1	2	2	X	X	TV
Butyl Acetate	1	2	2	2	2	2	2	2	A	X	T
Butyric Acid	2	2	X	1	X	2	2	2	A	A	TV

Ratings given are based at 70°F.

AGENT	Aluminum	Brass	Bronze	Hastelloy, C-276	Malleable Iron Carbon Steel	Monel	Stainless Steel,304	Stainless Steel,316	Nylon	Polypropylene	Seal Material
Calcium											
Calcium Bisulfate	X	-	X	-	X	X	X	2	X	A	T
Calcium Bisulfide	-	-	-	-	-	2	-	2	A	A	TVB
Calcium Bisulfite	X	X	2	2	X	X	-	2	X	A	TVNB
Calcium Bromide	X	G	G	-	X	G	E	X	X	X	T
Calcium Carbonate	X	2	2	2	2	2	1	2	A	A	TEVB
Calcium Chloride (Sat.)	-	2	-	1	2	2	-	-	A	A	TEVNB
Calcium Hydroxide (Sat.)	X	2	X	-	2	2	2	2	A	A	TEVNB
Calcium Hypochlorite (Sat.)	X	X	X	-	X	X	X	2	X	A	TEV
Carbon											
Carbon Bisulfide	1	X	2	2	2	X	2	2	A	X	TV
Carbon Dioxide (Dry)	1	1	2	1	2	1	2	2	A	A	TENB
Carbon Dioxide (Wet)	1	X	-	2	3	-	2	2	X	A	TENB
Carbon Disulfide	1	X	2	2	2	X	2	2	A	X	TV
Carbon Monoxide	1	1	1	1	2	1	1	1	A	A	TEVNB
Carbon Tetrachloride	X	-	1	1	2	1	1	-	A	X	TV
Carbonic Acid	1	2	2	1	2	3	2	2	X	A	TEVNB
Castor Oil	2	2	2	1	2	1	2	2	X	A	TEVNB
Caustic Potash	X	-	-	1	X	-	-	2	A	A	TEVNB
Caustic Soda (see Sodium Hydroxide)											
Cellosolves	2	2	2	2	2	2	2	2	X	A	TE
Chlorine (Liquid)	-	-	-	1	2	2	-	3	X	X	TV
Chloroform	-	-	-	2	X	1	-	-	X	X	TV
Chlorosulfonic Acid	-	X	X	1	2	2	X	X	X	X	T
Clorox (Bleach, 5.5% CL)	X	-	-	-	X	-	-	2	X	-	TEVB
Chromic Acid (50%)	2	X	X	2	X	X	3	-	X	X	TVNB
Citric Acid	3	X	X	1	X	2	-	-	X	A	TEVNB
Coke Oven Gas	2	3	3	-	2	2	2	2	X	X	TEVN
Copper											
Copper Chloride	X	X	X	2	X	X	X	X	A	A	TEVNB
Copper Cyanide	X	X	X	1	-	X	2	2	X	-	TEVNB
Copper Sulfate	X	X	X	1	X	X	-	2	A	A	TEVNB
Crysylic Acid (Conc.)	2	2	X	-	2	3	2	2	X	X	TEV
Cyclohexane	2	2	2	2	2	1	2	2	A	X	TVB
Detergents	2	2	2	1	2	-	1	2	A	A	TEVNB
Dextrose	2	-	-	2	-	2	-	-	A	A	TEVNB
Diesel Fuels	1	1	1	2	2	-	1	1	A	X	TVB
Diethylamine	2	-	X	-	X	1	2	2	X	A	TN
Disodium Phosphate	-	-	-	-	1	-	-	1	A	A	TEV
Ethers	2	2	2	2	2	2	1	1	A	X	TB
Ethyl											
Ethyl Acetate	-	-	2	2	2	2	2	2	A	X	T
Ethyl Chloride	-	-	2	2	2	2	-	1	A	X	TEVB
Ethylene											
Ethylene Chloride	-	-	-	-	2	2	-	-	A	X	TV
Ethylene Dichloride	-	2	X	2	2	1	2	2	A	X	TV
Ethylene Glycol	1	2	2	1	2	2	2	2	A	X	TEVNB
Ethylene Oxide	1	X	X	1	2	2	2	2	X	X	T
Fatty Acids	1	3	3	1	X	2	-	1	A	A	TVNB
Ferric											
Ferric Chloride	X	X	2	2	X	X	X	X	X	A	TEVNB
Ferric Hydroxide	-	-	-	1	-	2	1	1	A	-	TEVNB
Ferric Nitrate (10-50%)	X	X	X	-	X	X	2	2	X	A	TEVNB
Ferric Sulfate	X	X	X	-	X	2	-	-	X	A	TEVNB
Ferrous											
Ferrous Chloride (Sat.)	X	X	2	2	-	X	X	X	X	A	TEVNB
Ferrous Sulfate	2	2	2	2	X	2	2	-	X	A	TEVNB
Fluboric Acid	X	-	-	1	1	2	-	-	X	A	TEVNB
Formaldehyde (50%)	-	2	2	2	X	2	1	1	X	A	TEN
Formic Acid (Anhyd.)	1	X	2	1	X	2	-	-	X	A	TEVN
Freon											
Freon 11	2	2	2	-	X	1	2	2	X	X	TVNB
Freon 12	2	2	2	1	X	2	2	2	X	X	TVNB
Freon 22	2	2	2	2	X	2	2	2	X	X	TN
Fruit Juices	2	2	3	1	X	1	2	2	A	A	TVNB
Fuel Oil	2	2	2	2	2	2	2	2	A	X	TVNB
Furfural	2	2	2	2	2	2	2	2	A	X	TEN

AGENT	Aluminum	Brass	Bronze	Hastelloy, C-276	Malleable Iron Carbon Steel	Monel	Stainless Steel,304	Stainless Steel,316	Nylon	Polypropylene	Seal Material
Gasoline											
Refined Gasoline	2	2	2	2	2	2	2	2	A	X	TVNB
Sour Gasoline	X	2	2	2	2	X	2	2	A	X	TVNB
Gelatin	2	2	2	-	X	2	2	2	A	A	TEVNB
Glucose	2	2	2	-	2	2	2	2	A	A	TEVNB
Glue	2	2	2	1	2	2	-	2	-	A	TEVNB
Glycerine	1	1	2	1	2	1	1	1	A	A	TEVNB
Glycols	2	2	2	-	2	2	2	2	A	A	TEVNB
Green Liquor	-	-	-	-	2	-	-	-	-	A	TEVNB
Heptane	2	2	2	1	2	2	2	2	A	X	TVNB
Hexane	2	2	2	1	2	2	1	1	A	X	TVNB
Hydrobromic Acid (50%)	X	X	X	2	X	X	X	X	X	A	TEV
Hydrobromic Acid (20%)	X	X	X	1	X	X	X	X	X	A	TEV
Hydrochloric Acid (20%)	X	X	X	1	X	3	X	X	X	A	TEVNB
Hydrochloric Acid (38%)	X	X	X	1	X	X	X	X	X	A	TEVN
Hydrocyanic Acid	2	X	X	2	2	2	2	2	X	A	TEVN
Hydrofluosilicic Acid (10-50%)	X	2	X	2	X	2	X	2	X	-	TEVNB
Hydrogen											
Hydrogen Peroxide (50%)	-	X	X	2	X	2	-	-	X	A	TEV
Hydrogen Sulfide (Aqu.)	-	-	-	2	-	2	X	2	X	A	TE
Hydrogen Chloride (Dry Gas)	X	2	-	1	2	1	-	-	X	A	TEVN
Hydrogen Gas	1	1	1	1	-	1	1	1	X	A	TEVNB
Hypochlorous Acid	X	X	X	2	X	X	X	X	X	X	TEV
Iodine	1	X	X	-	X	1	X	X	X	A	TEV
Isopropyl Ether	-	2	2	-	-	2	1	2	A	X	T
Jet Fuel (JP4, JP5)	2	1	2	1	2	2	2	2	X	X	TV
Kerosene	2	2	2	2	2	2	2	2	X	X	TVNB
Ketones	2	2	2	1	2	2	2	2	A	X	T
Lactic Acid (25%)	3	2	2	1	X	X	-	-	A	A	TEVN
Lactic Acid (80%)	2	2	X	2	X	-	-	-	A	A	TEVN
Lard Oil	2	-	2	1	3	2	2	2	A	A	TVB
Lead											
Lead Acetate	X	X	X	2	X	2	2	2	X	A	TENB
Lead Chloride	X	-	-	2	-	-	2	2	X	-	TVNB
Lead Sulfate	X	-	-	2	X	2	2	2	X	-	TEVNB
Lime Sulphur	X	X	X	-	X	2	2	2	X	A	TEVN
Linoleic Acid	2	X	3	2	X	2	2	2	X	A	TVB
Linseed Oil	2	2	2	2	2	2	2	2	A	A	TVNB
Lubricants (Oil)	2	1	-	-	2	2	2	2	A	X	TVNB
Magnesium											
Magnesium Carbonate	2	-	-	-	-	2	2	2	X	A	TEVNB
Magnesium Chloride	X	X	2	1	-	-	-	-	X	A	TEVNB
Magnesium Hydroxide	2	2	2	1	2	2	1	1	X	A	TEVNB
Magnesium Nitrate	2	2	2	1	2	2	2	2	X	A	TEVNB
Magnesium Oxide	-	-	-	-	-	-	-	-	X	-	-
Magnesium Sulfate	2	-	2	-	-	1	2	2	X	A	TEVNB
Maleic Acid	-	2	3	2	X	-	-	2	X	A	TEV
Mercuric											
Mercuric Chloride	X	X	X	-	X	X	X	-	X	A	TEVB
Mercuric Cyanide	X	X	X	2	X	2	2	2	X	A	TEVB
Mercury	X	X	X	1	2	-	1	1	A	A	TEVNB
Methane	1	1	2	1	2	1	1	1	A	X	TEVNB
Methanol	2	2	2	1	2	2	2	2	A	A	TENB
Methyl											
Methyl Bromide	X	-	-	-	2	-	2	2	X	X	TV
Methyl Ethyl Ketone	2	2	2	2	2	2	2	2	A	X	TE
Methyl Isobutyl Ketone	2	2	2	2	2	2	2	2	A	X	T
Methyl Methacrylate	2	-	-	-	X	-	2	2	X	A	T
Methylene Chloride	-	2	2	X	2	-	-	-	A	X	T
Milk	1	X	X	1	2	X	1	1	A	A	TEVNB
Mineral Oil	2	1	-	-	2	1	1	2	A	A	TVNB
Muriatic Acid	X	-	-	1	-	X	X	X	X	A	TV
Napthalene	2	2	2	2	2	2	1	1	A	A	TV
Naptha	2	2	2	2	2	2	2	2	A	X	TVB

Ratings given are based at 70°F.

AGENT	Aluminum	Brass	Bronze	Hastelloy, C-276	Malleable Iron Carbon Steel	Monel	Stainless Steel,304	Stainless Steel,316	Nylon	Polypropylene	Seal Material
Nickel											
Nickel Chloride	X	X	X	-	X	2	-	-	X	A	TEVNB
Nickel Sulfate	X	X	-	2	-	-	2	2	X	A	TEVNB
Nitric											
Nitric Acid (100%)	1	X	X	2	X	X	2	-	X	X	TV
Nitric Acid (50%)	X	X	X	1	X	X	2	-	X	X	TV
Nitric Acid (30%)	X	X	X	1	X	X	1	-	X	X	TV
Nitrobenzene	1	2	2	-	2	2	2	2	A	A	T
Oils											
Castor Oil	2	2	2	1	2	1	2	2	A	A	TEVNB
Coconut Oil	2	-	2	-	3	2	2	2	A	A	TVB
Corn Oil	2	2	2	-	2	2	-	2	A	A	TVNB
Cotton Seed Oil	2	2	2	-	2	1	2	2	A	A	TVNB
Fuel Oil	2	2	2	2	2	2	2	2	A	X	TVNB
Linseed Oil	2	2	2	2	2	2	2	2	A	A	TVNB
Mineral Oil	2	1	-	-	2	1	1	2	A	A	TVNB
Silicon Oil	2	1	2	-	2	-	2	2	A	A	TEVB
Vegetable Oil	2	2	2	1	2	1	1	1	A	X	TVNB
Oleic Acid	2	3	2	2	2	1	-	1	A	X	TB
Oleum	2	X	X	-	2	X	2	2	X	X	TV
Oxalic Acid (Sat.)	2	-	2	2	X	2	X	X	X	A	TEV
Oxygen	2	2	2	-	2	2	2	2	X	X	TEVNB
Palmitic Acid (Sat.)	2	3	2	-	3	2	2	2	X	A	TVB
Paraffin	2	2	2	2	2	2	2	2	A	A	TVNB
Perchloroethylene	2	2	2	2	2	1	-	-	X	X	TV
Petrolatum	2	-	2	-	3	2	2	2	A	-	TVNB
Phenol (Carbolic Acid)	1	1	X	1	2	1	-	1	X	X	TV
Phosphoric Acid											
Phosphoric Acid (25-50%)	X	X	2	1	X	X	-	-	X	A	TEVN
Phosphoric Acid (50-85%)	X	X	X	1	X	3	-	-	X	A	TEV
Photographic Solutions	-	-	-	-	X	1	1	1	X	X	TVNB
Phthalic Anhydride	-	2	2	1	2	1	1	1	X	X	TEV
Picric Acid	1	X	X	2	X	X	2	2	X	-	TEVNB
Plating Solutions											
Brass Plating Solution	-	-	-	1	-	-	-	2	X	A	TEVNB
Cadmium Plating Solution	-	-	-	1	-	-	-	2	X	A	TEVNB
Chrome 40% Plating Solution	X	2	2	1	X	X	2	2	X	A	TEVN
Copper (Cyanide) Plating Solution	-	-	-	1	-	-	-	-	X	A	TEVNB
Gold Plating Solution	-	-	-	1	-	-	-	1	X	A	TEVNB
Iron Plating Solution	-	-	-	-	-	-	-	-	X	A	TEVB
Lead Plating Solution	-	-	-	-	-	-	1	1	X	A	TEVNB
Nickel Plating Solution	-	-	-	1	-	-	1	1	X	A	TEVNB
Silver Plating Solution	-	-	-	1	-	-	1	1	X	A	TEVNB
Tin Plating Solution	-	-	-	1	-	-	-	3	X	A	TEVNB
Zinc Plating Solution	-	-	-	1	-	-	-	-	X	A	TEVNB
Potassium											
Potassium Acetate	X	X	X	-	2	-	-	-	A	A	TEVB
Potassium Bicarbonate (30%)	X	2	-	2	2	2	1	1	A	A	TEVNB
Potassium Carbonate (50%)	X	2	X	2	2	2	1	1	A	A	TEVNB
Potaasium Chlorate (30%)	2	X	X	-	2	2	2	1	X	A	TEVNB
Potassium Chloride (30%)	X	X	2	-	2	1	-	-	A	A	TEVNB
Potassium Chromate (30%)	2	2	2	2	-	2	2	2	X	A	TEVB
Potassium Cyanide Solution (30%)	X	X	X	2	2	2	2	2	X	A	TEVNB
Potassium Dichromate (30%)	1	2	2	2	2	2	1	1	X	A	TEVB
Potassium Hydroxide (90%)	X	X	X	2	-	2	X	-	X	A	TENB
Potassium Nitrate (80%)	1	2	2	2	2	2	2	2	X	A	TEVNB
Potassium Permanganate (20%)	2	2	2	1	2	2	2	2	X	A	TEVN
Potassium Sulfate (10%)	1	2	2	1	2	1	1	1	A	A	TEVNB
Propane	1	1	1	2	2	1	2	2	X	X	TVB
Propylene Gylcol	2	2	2	2	2	2	2	2	A	A	TVNB
Propylene Oxide (90%)	-	-	-	-	-	-	1	1	X	X	TE
Pyridine	2	2	2	-	2	2	2	2	A	X	T
Pyrogallic Acid	2	2	2	2	2	2	2	2	X	X	TVNB
Silver Nitrate	X	X	X	-	X	X	2	1	X	A	TEVNB
Soap Solutions	2	2	2	1	2	2	2	2	A	A	TEVNB

Ratings given are based at 70°F.

AGENT	Aluminum	Brass	Bronze	Hastelloy, C-276	Malleable Iron Carbon Steel	Monel	Stainless Steel,304	Stainless Steel,316	Nylon	Polypropylene	Seal Material
Sodium											
Sodium Acetate	1	2	2	-	X	2	2	2	A	A	TEN
Sodium Bicarbonate (20%)	2	2	2	1	3	1	1	1	A	A	TEVNB
Sodium Bisulfate	X	-	2	2	2	-	-	-	A	A	TEVNB
Sodium Bisulfite	X	2	X	2	X	-	-	-	A	A	TEVNB
Sodium Borate	2	2	2	2	3	2	2	2	A	A	TEVNB
Sodium Perborate (10%)	2	X	2	2	2	2	2	2	X	A	TEVNB
Sodium Carbonate	X	2	-	2	2	1	-	2	A	A	TEVNB
Sodium Chlorate (50%)	2	2	2	1	X	1	2	2	X	A	TEVNB
Sodium Cyanide	X	X	X	2	2	X	-	-	A	A	TEVNB
Sodium Dichromate	2	X	X	1	2	-	2	2	X	A	TE
Sodium Hydroxide (70%)	X	X	X	1	3	1	2	2	X	A	TENB
Sodium Hydroxide (50%)	X	X	3	1	3	1	1	-	X	A	TENB
Sodium Hydroxide (30%)	X	2	3	2	2	1	1	1	X	A	TENB
Sodium Chloride (30%)	X	2	2	2	2	1	-	-	X	A	TEVNB
Sodium Hypochlorite	X	X	X	-	X	X	-	-	X	A	TEV
Sodium Metaphosphate	X	X	2	-	X	2	2	2	X	X	TEVNB
Sodium Nitrate (40%)	1	2	-	-	2	2	1	1	A	A	TENB
Sodium Perborate (10%)	2	X	2	2	2	2	2	2	X	A	TEVNB
Sodium Peroxide (10%)	2	X	X	2	2	2	2	2	X	A	TEVNB
Sodium Silicate	1	2	2	2	2	2	2	2	A	A	TEVNB
Sodium Sulfate	-	2	2	2	2	-	-	1	A	A	TEVNB
Sodium Sulfide (50%)	X	X	X	2	2	2	-	2	X	A	TEVNB
Sodium Thiosulphate	2	X	X	2	X	2	2	2	A	A	TEVNB
Stannic Chloride	X	X	X	-	X	X	X	X	X	A	TEVNB
Stannous Chloride	X	X	X	2	X	-	X	-	X	X	TEVNB
Steam	-	-	-	-	-	-	-	-	X	-	-
Stearic Acid	2	3	2	1	3	3	2	1	A	A	TVNB
Stoddard's Solvent	2	2	2	1	2	2	2	2	X	A	TVB
Sugar Liquors (Cane)	1	2	1	-	2	2	2	2	A	A	TEVNB
Sugar Liquors (Beet)	1	2	1	-	2	1	1	1	A	A	TEVNB
Sulfate Liquors	2	X	X	2	3	2	-	2	X	A	TVNB
Sulfite Liquors	X	X	-	1	X	X	2	2	X	X	TVNB
Sulfur Chloride	X	-	X	2	X	X	-	-	X	X	TV
Sulfur Dioxide (Dry)	2	2	2	2	1	2	-	2	X	A	TE
Sulfur Trioxide	2	2	X	2	2	2	-	2	X	X	TEV
Sulfuric Acid (TO 10%)	X	2	X	1	X	X	X	X	X	A	TEVNB
Sulfuric Acid (100%)	X	X	X	1	2	X	-	-	X	X	TV
Sulfurous Acid	2	2	X	-	X	X	X	-	X	A	TV
Tannic Acid	X	-	X	-	X	2	2	2	X	A	TEVNB
Tanning Liquors	1	-	2	1	-	-	1	1	X	A	TVNB
Tartaric Acid	-	-	2	2	-	-	1	1	A	A	TVNB
Titanium Tetrachloride	X	X	X	2	2	2	-	2	X	X	TV
Toluene	1	1	1	1	1	1	1	1	A	X	TVB
Tetrahydrofuran	X	-	2	1	1	-	1	2	A	X	T
Tomato Juice	2	-	3	2	3	2	2	2	X	A	TEVNB
Trichloroethylene	1	-	2	1	2	-	-	-	A	X	TV
Triethanolamine	2	X	2	2	2	2	2	2	A	X	TEVN
Triethylamine	-	-	-	-	-	2	2	2	A	X	TVB
Trisodium Phosphate (10%)	X	2	-	1	2	2	1	1	A	A	TVNB
Turpentine	2	X	2	2	2	1	1	1	X	X	TVB
Urea (50%)	2	-	2	-	2	2	2	2	A	A	TEVNB
Urine	-	-	-	-	2	-	1	1	X	A	TEVNB
Vinegar	2	X	2	2	2	2	2	2	X	A	TEVN
Water Acid (Mine)	X	X	X	1	X	-	-	-	X	A	TEVNB
Water (Distilled)	X	2	2	1	X	X	2	2	A	A	TEVNB
Water (Sea)	2	2	2	1	X	2	2	2	A	A	TEVNB
Whiskey	X	2	2	1	2	2	1	1	X	A	TEVNB
White Liquor (Pulp)	2	-	X	2	X	X	2	2	X	A	TEVNB
Wine	X	2	2	1	X	2	1	1	X	A	TEVNB
Xylene	2	2	2	1	2	2	2	2	A	X	TV
Zinc											
Zinc Chloride	X	X	X	2	X	-	X	2	A	A	TEVNB
Zinc Nitrate	-	-	-	-	-	-	2	2	X	A	TEVNB
Zinc Sulfate (50%)	X	2	2	2	X	2	1	1	X	A	TEVNB

Ratings given are based at 70°F.


Temperature Conversions

Look up reading in middle column (shaded). If in degrees Centigrade, read Fahrenheit equivalent in right-hand column; if in degrees Fahrenheit, read Centigrade equivalent in left-hand column.


°C	°F \ °C	°F
-73	-100	-148
-68	-90	-130
-62	-80	-112
-57	-70	-94
-51	-60	-76
-46	-50	-58
-40	-40	-40
-34	-30	-22
-29	-20	-4
-23	-10	14
-17.8	0	32
-17.2	1	33.8
-16.7	2	35.6
-16.1	3	37.4
-15.6	4	39.2
-15.0	5	41.0
-14.4	6	42.8
-13.9	7	44.6
-13.3	8	46.4
-12.8	9	48.2
-12.2	10	50.0
-11.7	11	51.8
-11.1	12	53.6
-10.6	13	55.4
-10.0	14	57.2
-9.4	15	59.0
-8.9	16	60.8
-8.3	17	62.6
-7.8	18	64.4
-7.2	19	66.2
-6.7	20	68.0
-6.1	21	69.8
-5.6	22	71.6
-5.0	23	73.4
-4.4	24	75.2
-3.9	25	77.0
-3.3	26	78.8
-2.8	27	80.6
-2.2	28	82.4
-1.7	29	84.2
-1.1	30	86.0
-.6	31	87.8
0	32	89.6
.6	33	91.4
1.1	34	93.2
1.7	35	95.0
2.2	36	96.8
2.8	37	98.6
3.3	38	100.4
3.9	39	102.2
4.4	40	104.0
5.0	41	105.8
5.6	42	107.6
6.1	43	109.4
6.7	44	111.2
.72	45	113.0
7.8	46	114.8
8.3	47	116.6
8.9	48	118.4
9.4	49	120.2
10.0	50	122.0
10.6	51	123.8
11.1	52	125.6
11.7	53	127.4
12.2	54	129.2
12.8	55	131.0
13.3	56	132.8
13.9	57	134.6
14.4	58	136.4
15.0	59	138.2
15.6	60	140.0
16.1	61	141.8
16.7	62	143.6
17.2	63	145.4
17.8	64	147.2
18.3	65	149.0
18.9	66	150.8
19.4	67	152.6
20.0	68	154.4
20.6	69	156.2
21.1	70	158.0
21.7	71	159.8
22.2	72	161.6
22.8	73	163.4
23.3	74	165.2
23.9	75	167.0
24.4	76	168.8
25.0	77	170.6
25.6	78	172.4
26.1	79	174.2
26.7	80	176.0
27.2	81	177.8
27.8	82	179.6
28.3	83	181.4
28.9	84	183.2
29.4	85	185.0
30.0	86	186.8
30.6	87	188.6
31.1	88	190.4
31.7	89	192.2
32.2	90	194.0
32.8	91	195.8
33.3	92	197.6
33.9	93	199.4
34.4	94	201.2
35.0	95	203.0
35.6	96	204.8
36.1	97	206.6
36.7	98	208.4
37.2	99	210.2
37.8	100	212.0
43	110	230
49	120	248
54	130	266
60	140	284
66	150	302
71	160	320
77	170	338
82	180	356
88	190	374
93	200	392
99	210	410
100	212	413.6
104	220	428
110	230	446
116	240	464
121	250	482
127	260	500
132	270	518
138	280	536
143	290	554
149	300	572
154	310	590
160	320	608
166	320	626
170	338	640
171	340	644
177	350	662
182	360	680
186	366	691
188	370	698
193	380	716
198	388	730
199	390	734
204	400	752
208	406	763
210	410	770
216	420	788
221	430	806
227	440	824
232	450	842

Fittings Size Chart

Male NPT Thread Sizes

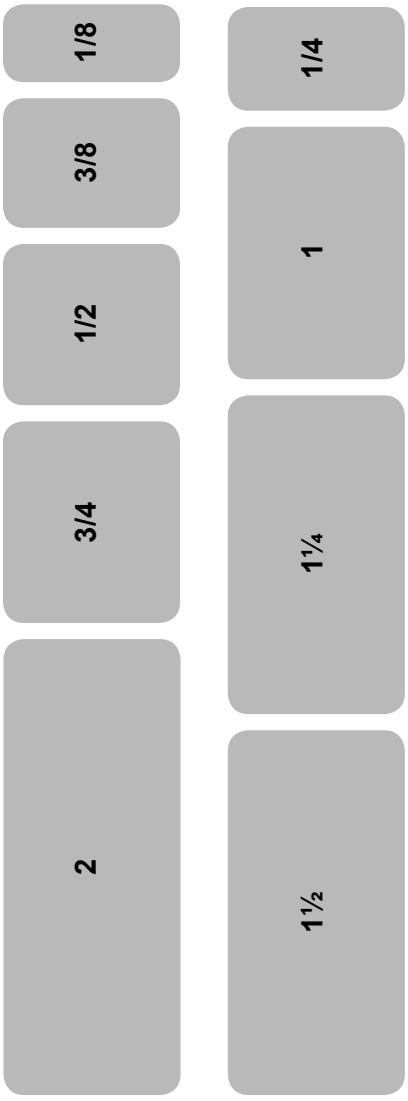

Male NST Thread Sizes

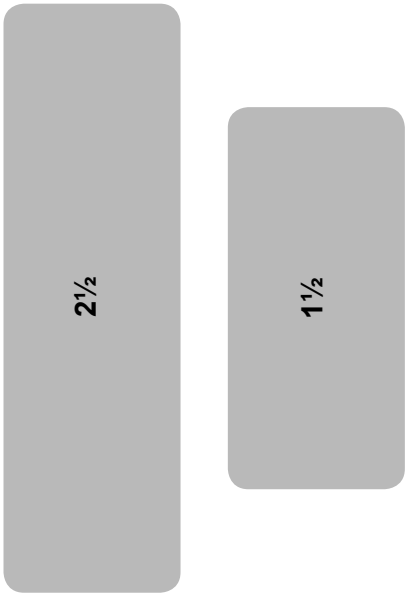

Steam Temperature - Pressure Conversion Guide

Temperature - Pressure Equivalents of Saturated Steam
Gauge Pressure at Sea Level

Temperature		Lbs. per Sq. Inch	Temperature		Lbs. per Sq. Inch	Temperature		Lbs. per Sq. Inch
°F	°C		°F	°C		°F	°C	
212	100.0	0.0	286	141.1	39.4	336	168.9	97.1
214	101.1	0.6	287	141.7	40.3	337	169.4	98.7
216	102.2	1.2	288	142.2	41.1	338	170.0	100.2
218	103.3	1.8	289	142.8	42.0	339	170.6	101.8
220	104.4	2.5	290	143.3	42.9	340	171.1	103.3
222	105.6	3.2	291	143.9	43.8	341	171.7	105.0
224	106.7	3.9	292	144.4	44.7	342	172.2	106.5
226	107.8	4.6	293	145.0	45.6	343	172.8	108.2
228	108.9	5.3	294	145.6	46.5	344	173.3	109.8
230	110.0	6.1	295	146.1	47.5	345	173.9	111.5
232	111.1	6.9	296	146.7	48.4	346	174.4	113.1
234	112.2	7.7	297	147.2	49.4	347	175.0	114.8
236	113.3	8.5	298	147.8	50.3	348	175.6	116.5
238	114.4	9.4	299	148.3	51.3	349	176.1	118.2
240	115.6	10.3	300	148.9	52.3	350	176.7	119.9
242	116.7	11.2	301	149.4	53.4	352	177.8	123.5
244	117.8	12.1	302	150.0	54.4	354	178.9	127.1
246	118.9	13.1	303	150.6	55.4	356	180.0	130.8
248	120.0	14.1	304	151.1	56.4	358	181.1	134.5
250	121.1	15.1	305	151.7	57.5	360	182.2	138.3
252	122.2	16.2	306	152.2	58.6	362	183.3	142.3
254	123.3	17.3	307	152.8	59.7	364	184.4	146.2
256	124.4	18.4	308	153.3	60.7	366	185.6	150.3
258	125.6	19.6	309	153.9	61.9	368	186.7	154.4
260	126.7	20.7	310	154.4	63.0	370	187.8	158.7
261	127.2	21.4	311	155.0	64.2	372	188.9	163.0
262	127.8	22.0	312	155.6	65.3	374	190.0	167.4
263	128.3	22.6	313	156.1	66.5	376	191.1	171.9
264	128.9	23.2	314	156.7	67.6	378	192.2	176.4
265	129.4	23.9	315	157.2	68.8	380	193.3	181.1
266	130.0	24.5	316	157.8	70.0	382	194.4	185.8
267	130.6	25.2	317	158.3	71.3	384	195.6	190.6
268	131.1	25.8	318	158.9	72.5	386	196.7	195.6
269	131.7	26.5	319	159.4	73.7	388	197.8	200.6
270	132.2	27.2	320	160.0	75.0	390	198.9	205.7
271	132.8	27.9	321	160.6	76.3	392	200.0	210.9
272	133.3	28.6	322	161.1	77.5	394	201.1	216.2
273	133.9	29.3	323	161.7	78.8	396	202.2	221.5
274	134.4	30.0	324	162.2	80.1	398	203.3	227.0
275	135.0	30.8	325	162.8	81.5	400	204.4	232.6
276	135.6	31.5	326	163.3	82.8	402	205.5	238
277	136.1	32.3	327	163.9	84.2	404	206.7	244
278	136.7	33.0	328	164.4	85.6	406	207.8	250
279	137.2	33.8	329	165.0	87.0	408	208.9	256
280	137.8	34.5	330	165.6	88.4	410	210	262
281	138.3	35.3	331	166.1	89.8	412	211.1	268
282	138.9	36.1	332	166.7	91.2	414	212.2	275
283	139.4	36.9	333	167.2	92.7	416	213.3	281
284	140.0	37.7	334	167.8	94.1	418	214.4	288
285	140.6	38.6	335	168.3	95.6	420	215.6	294

Degrees Celsius = 5/9 (Degrees F -32)

Pressure Conversions

100 PSI = 6.9 Bars
250 PSI = 17.25 Bars
600 PSI = 41.4 Bars

5 Bars = 72.5 PSI
10 Bars = 145 PSI
25 Bars = 362.5 PSI

Measurement Information

Measures of Pressure

1 Pound Per Square Inch = 144 Pounds Per Square Foot = 0.068 Atmosphere = 2.042 Inches of Mercury at 62°F = 27.7 Inches of Water at 62°F = 2.31 Feet of Water at 62°F.

1 Atmosphere = 30 Inches of Mercury at 62°F = 14.7 Pounds Per Square Inch = 2116.3 Pounds Per Square Foot = 33.95 Feet of Water at 62°F.

1 Foot of Water at 62°F = 62.355 Pounds Per Square Foot = 0.433 Pounds Per Square Inch.

1 Inch of Mercury at 62°F = 1.132 Feet of Water = 13.58 Inches of Water = 0.491 Pounds Per Square Inch.

Column of Water 12 Inches High, 1 Inch in Diameter = .341 Pounds

If temperature is kept constant, the volume of a given mass of gas is inversely proportional to the pressure which is exerted upon it.

Length Conversion Constants

Millimeters x .039370 = Inches
Meters x 39.370 = Inches
Meters x 3.2808 = Feet
Meters x 1.09361 = Yards
Kilometers x 3,280.8 = Feet
Kilometers x .62137 = Statute Mile
Kilometers x .53959 = Nautical Miles


Inches x 25.4001 = Millimeters
Inches x .0254 = Meters
Feet x .30480 = Meters
Yards x .91440 = Meters
Feet x .0003048 = Kilometers
Statute Miles x 1.60935 = Kilometers
Nautical Miles x 1.85325 = Kilometers

Weight Conversion Constants

Grams x .03527 = Ounces (Avd.)
Grams x .033818 = Fluid Ounces (Water)
Kilograms x 35.27 = Ounces (Avd.)
Kilograms x 2.20462 = Pounds (Avd.)

Ounces (Avd.) x 28.35 = Grams
Fluid Ounces (Water) x 29.57 = Grams
Ounces (Avd.) x .02835 = Kilograms
Pounds (Avd.) x .45359 = Kilograms


Circumference of a Circle



Circumference = $2\pi r = \pi d = 3.14159\ d$

Area = $\pi r^2 = \pi \frac{d^2}{4} = .78539d^2$

Right Cylinder



r = radius
h = length

Volume = $\pi r^2 h$

Surface Area = $2\pi r\ (r + h)$

If end planes are parallel but not at 90° to h, the same formulas apply, but a slice at 90° through the cylinder must be used to determine r.

Bolt Tightening Sequence for Dixon Boss Clamps

Note:
1. The correct size Boss clamp must be used.
2. Bolts in Boss clamps are designed to bend as they are tightened. This allows the clamp to conform to the hose outside diameter.
3. Always tighten bolts to their specified torque value. This torque value can be found on the pages 98-99.
4. Periodic re-tightening of bolts is required due to "cold flow" phenomenon present in all rubber hoses.
5. Boss Clamps are for single use only! Once removed they are to be discarded.

2 Bolt Dixon Boss Clamp Bolt Tightening Sequence

Using a torque wrench, begin tightening the bolts as follows:

a) First bolt (nut facing assembler) 1 full turn.

b) Second bolt (opposite first bolt) 1 full turn.

c) Repeat procedure "a" and "b" until both bolts have reached the recommended torque.

d) Remove assembly from vise.

4 Bolt Dixon Boss Clamp Bolt Tightening Sequence

Using a torque wrench, begin tightening the bolts as follows:

a) Back bolt (bolt with nut facing assembler that is furthest away from gripping finger) 1 full turn.

b) Front bolt (bolt with nut facing assembler that is closest to gripping finger) 1 full turn.

c) Snug by hand (if bolts are loose) nuts on opposite side of bolts just torqued.

d) Opposite side back bolt (bolt with nut facing assembler furthest away from gripping finger) 1 full turn.

e) Opposite side front bolt (bolt with nut facing assembler closest to gripping finger) 1 full turn.

f) Snug by hand (if bolts are loose) nuts on opposite side of bolts just torqued.

g) Repeat above procedure "a" through "f" until all of the bolts have reached the recommended torque.

h) Remove assembly from vise.

6 Bolt Dixon Boss Clamp Bolt Tightening Sequence

Using a torque wrench, begin tightening the bolts as follows:

a) Back bolt (bolt with nut facing assembler that is furthest away from gripping finger) having "X" near it one full turn.

b) Front bolt (bolt with nut facing assembler that is closest to gripping finger) of same segment one full turn.

c) Moving to clamp segment to the left of the one just tightened, snug bolts by hand (if bolts are loose).

d) Back bolt to one full turn.

e) Front bolt one full turn.

f) Moving to clamp segment to the left of the one just tightened, snug bolts by hand (if bolts are loose).

g) Back bolt one full turn.

h) Front bolt one full turn.

i) Repeat above procedure "a" through "h" until all of the bolts have reached the recommended torque.

j) Remove assembly from vise.

Fraction - Decimal Conversion Chart

	Inches	Millimeters
1/64	.015625	.3969
1/32	.03125	.7938
3/64	.046875	1.1906
1/16	.0625	1.5875
5/64	.078125	1.9844
3/32	.09375	2.3813
7/64	.109375	2.7781
1/8	.125	3.1750
9/64	.140625	3.5719
5/32	.15625	3.9688
11/64	.171875	4.3656
3/16	.1875	4.7625
13/64	.203125	5.1594
7/32	.21875	5.5563
15/64	.234375	5.9531
1/4	.250	6.3500
17/64	.265625	6.7469
9/32	.28125	7.1438
19/64	.296875	7.5406
5/16	.3125	7.9375
21/64	.328125	8.3344
11/32	.34375	8.7313
23/64	.359375	9.1282
3/8	.375	9.5250
25/64	.390625	9.9219
13/32	.40625	10.3188
27/64	.421875	10.7157
7/16	.4375	11.1125
29/64	.453125	11.5094
15/32	.46875	11.9063
31/64	.484375	12.3032
1/2	.500	12.7001
33/64	.515625	13.0969
17/32	.53125	13.4938
35/64	.546875	13.8907
9/16	.5625	14.2876
37/64	.578125	14.6844
19/32	.59375	15.0813
39/64	.609375	15.4782
5/8	.625	15.8751
41/64	.640625	16.2719
21/32	.65625	16.6688
43/64	.671875	17.0657
11/16	.6875	17.4626
45/64	.703125	17.8594
23/32	.71875	18.2563
47/64	.734375	18.6532
3/4	.750	19.0501
49/64	.765625	19.4470
25/32	.78125	19.8438
51/64	.796875	20.2407
13/16	.8125	20.6376
53/64	.828125	21.0345
27/32	.84375	21.4313
55/64	.859375	21.8282
7/8	.875	22.2251
57/64	.890625	22.6220
29/32	.90625	23.0188
59/64	.921875	23.4157
15/16	.9375	23.8126
61/64	.953125	24.2095
31/32	.96875	24.6063
63/64	.984375	25.0032
1	1.000	25.4001

Identifying Threads


Pipe Threads

Pipe threads are either tapered or straight (parallel). The two styles are not compatible except for NPSL (National Pipe Straight Locknut), which is compatible with NPT.

Tapered threads

Tapered threads are the most common type of thread available. As the name implies, they have a slight taper. When mated together and tightened, the threads compress to form a seal. The mating threads both hold the fitting in place and seal the connection. The most widely used pipe threads in North America are NPT (National Pipe Taper). Some confusion may result from the use of NPT, FPT, and MPT in describing threads. Both FPT and MPT are NPT threads, with FPT meaning female threads (internal) and MPT meaning male threads (external).

NPTF (Dryseal) threads are modified NPT threads, which are less likely to leak without a sealant. For a leak-free seal, we recommend using a sealant compound or PTFE tape. You can use NPTF threads with NPT threads, but you'll lose some of the leak-free characteristics.




tapered threads

Straight threads

Straight (parallel) threads are used for mechanical joining. They serve one purpose - to hold a fitting in place. As a result, an O-ring (elastomer), hard metal seal or a soft seat seal is required. When used together, the threads and sealing method provide a better overall seal than tapered threads. Straight pipe threads include NPSM (National Pipe Straight Mechanical), NPSL (National Pipe Straight Locknut) and NPSH (National Pipe Straight Hose) conform to SAE (Society of Automotive Engineers specifications. Sizing and pitches differ from the NPT threads

Less common straight threads are GHT (Garden Hose) and NST (fire hose coupling).



straight threads

NPT vs. BSP (British Standard Pipe)


BSP threads are common in many countries outside the United States. BSP consists of two types of threads - BSPT (British Standard Pipe Taper) and BSPP (British Standard Pipe Parallel). The two styles are not compatible.

BSPT threads have a slight taper similar to NPT. BSPP threads are straight (parallel) threads and have the same thread angle, shape and threads per inch (pitch) as BSPT threads. *BSPT and BSPP threads should not be substituted for NPT threads*.


NPT and BSPT/BSPP threads have different angles, shape, and (in most cases) threads per inch (pitch). The thread angle is 60° for NPT threads; 55° for BSPT/BSPP threads. NPT threads are flattened at the peaks and valleys, while BSPT/BSPP threads are rounded.

Nominal Pipe Size	Threads per inch	
	NPT	BSPT / BSPP
1/16"	27	---
1/8"	27	28
1/4"	18	19
3/8"	18	19
1/2"	14	14
3/4"	14	14
1"	11½	11
1-1/4"	11½	11
1-1/2"	11½	11
2"	11½	11
2-1/2"	8	11
3"	8	11
3-1/2"	8	11
4"	8	11
5"	8	11
6"	8	11
8"	8	11

BSPT/BSPP threads



NPT threads



Identifying Threads

It is important to identify the threads required before ordering couplings.

Identifying threads can sometimes be the most difficult and frustrating part of coupling selection. However, without the right combination of threads, you may not provide a functional or safe connection.

The diameters, threads per inch (TPI) and thread pitch, etc. are necessary to completely identify a thread. Ring, Plug and GO/NOGO gauges are required to accurately gauge or identify threads. In the field, in the absence of these gauges, thread leaf gauges can be used to identify the Threads Per Inch (TPI) and the thread pitch. On threads you have determined to be straight threads, a caliper can be used to measure the Outside Diameter of the Male (ODM) or the Inside Diameter of the Female (IDF). A caliper can also be used to take measurements of tapered thread diameters. However, these are more difficult to define because of the taper. Fortunately, there are few tapered threads to deal with and these can usually be identified from the nominal ODM and the TPI.

However, identifying the thread may not fully identify what is needed in a mating fitting. The application is the primary *limiting factor on the thread type used.* Dixon offers products with a wide variety of threads used with hose, pipe and hydraulics.

When attempting to choose a fitting, it is always advisable to first identify the thread to which it must connect. This may entail checking with a fitting or equipment manufacturer.


The fire hose thread specifications for some local municipal fire equipment and hydrants may vary according to local specifications. These can generally be most easily identified by contacting the local fire department responsible for the hydrant. The most common thread used on fire equipment is National Standard Thread (NST), also known as National Hose thread (NH).

When it is not possible to identify the thread:


1) Determine the number of threads per inch by measuring the distance from peak of thread to peak of thread across the largest number of whole threads. Then divide the number of threads by the measurement (This will provide the TPI).
2) Check to see if the thread is straight or tapered.
   a) Straight Threads
      Measure the Outside Diameter of the Male (ODM) or the Inside Diameter of the Female (IDF), from peak of thread to peak of thread.
   b) Tapered Threads
      Measure the Outside Diameter of the Male (ODM) at the large end and the small end, or the Inside Diameter of the Female (IDF) at the large end and the small end, from peak of thread to peak of thread. Then measure the Outside Diameter (OD) of the unthreaded pipe.

Once the application and these two pieces of information have been determined, the thread can generally be determined. When in doubt, contact the factory.

Straight Thread

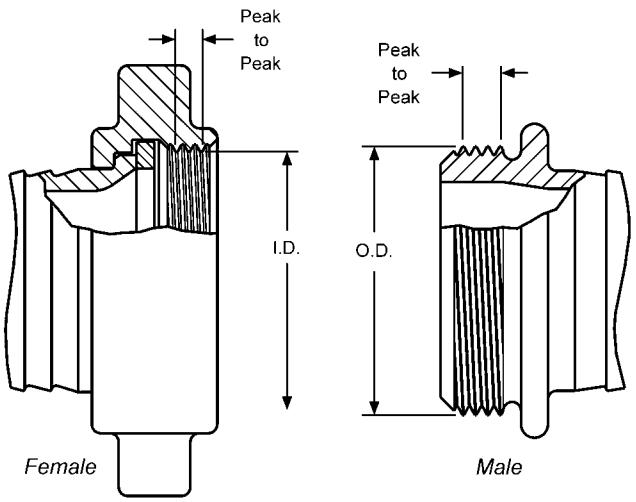

Tapered Thread

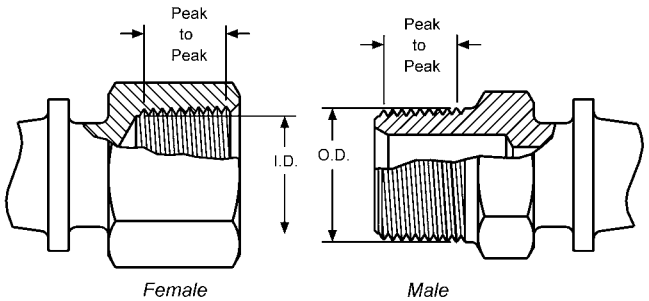

Threading Information

Abbreviation	System Name	Compatibility	Seal Method
BSPP	**B**ritish **S**tandard **P**ipe **P**arallel	Male BSPP with Female BSPP Female BSPP with Male BSPP Female BSPP with Male BSPTr	Washer Washer Washer
BSPTr	**B**ritish **S**tandard **P**ipe **T**aper	Male BSPTr with Female BSPTr Male BSPTr with Female BSPP Female BSPTr with Male BSPTr *Female BSPTr not compatible with Male BSPP*	Thread Washer Thread
CHT	American Standard Fire Hose Thread (1" National Hose Thread is **C**hemical **H**ose **T**hread, also known as Booster Hose Thread)	1" Male NH (NST) with 1" Female NH (NST) 1"Female NH (NST) with 1" Male NH (NST) 1" Thread is used on both 3/4" hose and 1" hose. *Not compatible with other systems*	Washer Washer
GHT	**G**arden **H**ose **T**hread	Male GHT with Female GHT Female GHT with Male GHT Thread is same for all size hose *Not compatible with other systems*	Washer Washer
IPS	**I**ron **P**ipe **S**traight **T**hread	Generic Name for Straight Pipe Thread See NPSH for compatibility	Washer
IPT	**I**ron **P**ipe **T**hread	Generic Name for All Pipe Thread *More information required*	
JIC	**J**oint **I**ndustrial **C**ommittee	Used with other mating JIC threads	Mechanical
NH or NST	American Standard Fire Hose Coupling Thread (**N**ational **H**ose thread also known as **N**ational **S**tandard **T**hread)	Male NH (NST) with Female NH (NST) Female NH (NST) with Male NH (NST) *Not compatible with other systems* Thread pitch and diameters of fire threads may vary according to local and municipal regulations.	Washer Washer
NPT	American Standard Taper Pipe Thread (**N**ational **P**ipe **T**apered)	Male NPT with Female NPT Male NPT with Female NPTF Male NPT with Female NPSM Male NPT with Female NPSH Female NPT with Male NPT Female NPT with Male NPTF Female NPT not compatible with Male NPSM or Male NPSH	Thread Thread Washer Washer Thread Thread
NPTF	American Standard Taper Pipe Fuel Dryseal Thread (**N**ational **P**ipe **T**apered) (Dryseal)	Male NPTF with Female NPTF Male NPTF with Female NPT Male NPTF with Female NPSM Male NPTF with Female NPSH Female NPTF with Male NPTF Female NPTF with Male NPT *Female NPTF with Male NPSM or NPSH* *Note: NPTF with NPTF threads do not require sealant for the initial use. After that, sealant is required.*	Thread Thread Washer Washer Thread Thread *Not Compatible*
NPSH	American Standard Straight Pipe for Hose Couplings (**N**ational **P**ipe **S**traight **H**ose)	Male NPSH with Female NPSH Female NPSH with Male NPSH Female NPSH with Male NPT Female NPSH with Male NPTF Female NPSH with Male NPSM	Washer Washer Washer Washer Washer
NPSM	American Standard Straight Mechanical Joints (**N**ational **P**ipe **S**traight **M**echanical)	Male NPSM with Female NPSM Male NPSM with Female NPSH Female NPSM with Male NPSM Female NPSM with Male NPT Female NPSM with Male NPTF	Seal can be either mechanical or washer. Mating fittings must be of same type.
SIPT	**S**traight **I**ron **P**ipe **T**hread	Generic name for Straight Pipe Thread	Washer
TIPT	**T**apered **I**ron **P**ipe **T**hread	Generic name for Tapered Pipe Thread	Thread
NYC	**NYC** Fire Department	Straight Thread used in New York City	Washer
Chicago	**Chicago** Fire Department	Straight Thread used in Chicago	Washer

Thread Dimensions

Nominal Dimensions of Standard Threads

ODM -- Outside Diameter of the Male IDF -- Inside Diameter of the Female TPI -- Threads Per Inch


Size	Pipe OD	Tapered Threads		Straight Threads											
		NPT	*BSPTr*	*NPSH*			*NPSM*			*NST (NH)*			*BSPP*		
		TPI	TPI	TPI	ODM *(max)*	IDF *(min)*	TPI	ODM *(max)*	IDF *(min)*	TPI	ODM *(max)*	IDF *(min)*	TPI	ODM *(max)*	IDF *(min)*
1/8"	.405	27	28				27	0.397	0.358					0.383	0.337
1/4"	.540	18	19				18	0.526	0.468					0.516	0.450
3/8"	.675	18	19				18	0.662	0.603					0.656	0.588
1/2"	.840	14	14	14	0.8248	0.7395	14	0.823	0.747					0.825	0.733
3/4"	1.050	14	14	14	1.0353	0.9500	14	1.034	0.958					1.041	0.950
1"	1.315	11.5	11	11.5	1.2951	1.1921	11.5	1.293	1.201	8	1.375	1.2246	11	1.309	1.193
1-1/4"	1.660	11.5	11	11.5	1.6399	1.5369	11.5	1.638	1.546				11	1.650	1.534
1-1/2"	1.900	11.5	11	11.5	1.8788	1.7758	11.5	1.877	1.785	9	1.990	1.8577		1.882	1.766
2"	2.375	11.5	11	11.5	2.3528	2.2498	11.5	2.351	2.259				11	2.347	2.231
2-1/2"	2.875	8	11	8	2.8434	2.6930	8	2.841	2.708	7.5	3.068	2.9104	11	2.960	2.844
3"	3.500	8	11				8	3.467	3.334	6	3.623	3.5306	11	3.460	3.344
4"	4.500	8	11				8	4.466	4.333	4	5.010	4.7111		4.450	4.334
4-1/2"										4	5.760	5.4611	11		
5"	5.563	8	11				8	5.528	5.395	4	6.260	5.9602	11	5.450	5.359
6"	6.625	8	11				8	6.585	6.452	4	7.025	6.7252		6.450	6.359
8"	8.625	8													
10"	10.750	8													
12"	12.750	8													

GHT (3/4") -- 1.0625 ODM, 11-1/2 TPI

Note: Female NPT (Tapered Pipe) thread is not available on hose swivel nuts.


Normal Engagement Length of NPT Thread in Inches (A) *

* Dimensions given do not allow for variations in tapping or threading.




Thread Size	Dimension A
1/8"	1/4"
1/4"	3/8"
3/8"	3/8"
1/2"	1/2"
3/4"	9/16"
1"	11/16"
1-1/4"	11/16"
1-1/2"	11/16"
2"	3/4"
2-1/2"	15/16"
3"	1"
4"	1-1/8"
5"	1-1/4"
6"	1-5/16"
8"	1-7/16"
10"	1-5/8"
12"	1-3/4"

Thread Sealing Tips

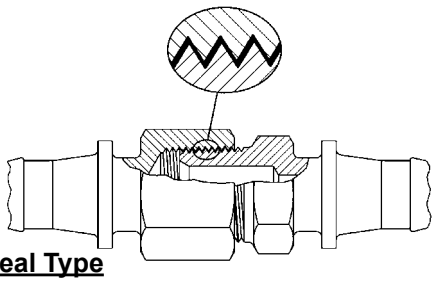


Thread Seal Type

- A seal is obtained by applying a sealant to the male thread before engaging.
- The sealant is used to prevent spiral leakage.
- Thread tape or paste is the preferred sealant in this type of application.
- Please refer to page 585 for thread tape options.

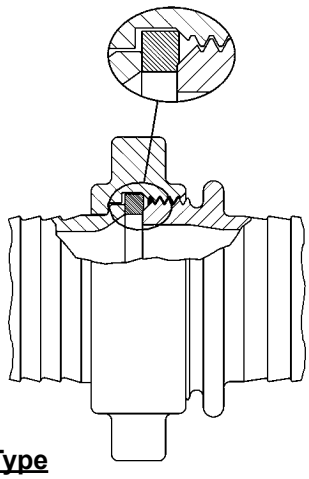

Washer Seal Type

- A seal is obtained when the male thread is tightened down onto the washer of the female assembly.
- The washer should be inspected regularly and replaced as needed to prevent leakage.
- Please refer to pages 270, 283 and 565 for replacement washers.

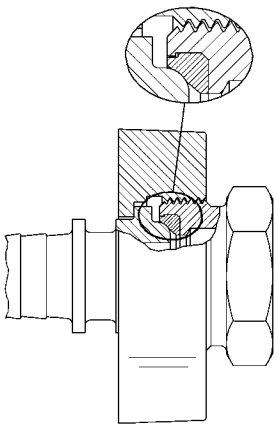

Mechanical Seal Type

- A seal is obtained through metal to metal contact or metal to seal contact, i.e. JIC couplings (page 372) have a metal to metal seal. Boss Ground Joint couplings (pages 93, 96) have a metal to seal contact, (shown above).
- The couplings should be retightened as needed to prevent leakage.

Thread Sealing Tips

Sealing NPT threads can be an exasperating experience if certain techniques are not followed. The following tips will help alleviate many common problems in thread sealing:

1. Always use some type of sealant (tape or paste) and apply sealant to male thread only. If using a hydraulic sealant, allow sufficient curing time before system is pressurized.
2. When using tape sealant, wrap the threads in a clock-wise motion starting at the first thread and, as layers are applied, work towards the imperfect (vanishing) thread. If the system that the connection being made to cannot tolerate foreign matter (i.e. air systems), leave the first thread exposed and apply the tape sealant as outlined above.
3. When using paste sealant, apply to threads with a brush, using the brush to work the sealant into the threads. Apply enough sealant to fill in all the threads all the way around.
4. When connecting one stainless steel part to another stainless steel part that will require future disassembly, use a thread sealant that is designed for stainless steel (see page 585). This stainless steel thread sealant is also useful when connecting aluminum to aluminum that needs to be disconnected in the future. These two materials gall easily, and if the correct sealant is not used, it can be next to impossible to disassemble.
5. When connecting parts made of dissimilar metals (i.e. steel and aluminum), standard tape or paste sealant performs satisfactory.
6. For sizes 2" and below, tape or paste performs satisfactory. When using thread tape, four wraps (covering all necessary threads) is usually sufficient.
7. For sizes 2½" and above, thread paste is recommended. If thread tape is used, eight wraps (covering all necessary threads) is usually sufficient. Apply more wraps if necessary.
8. For stubborn to seal threads, apply a normal coating of thread paste followed by a normal layer of thread tape.
9. For extremely stubborn to seal threads, apply a normal coating of thread paste followed by a single layer of gauze bandage followed by a normal layer of thread tape.

Caution!

When this procedure is done, the connection becomes permanent. Extreme measures will be necessary to disconnect these components. *All other measures to seal the threads should be explored prior to use of this technique.*

10. Over-tightening threads can be just as detrimental as insufficient tightening. For sizes 2" and below, hand tighten the components and, with a wrench, tighten 3 full turns. For sizes 2½" and above, hand tighten the components and, with a wrench, tighten 2 full turns.

Force Chart

Force (In Pounds)

Hose ID	25 PSI	50 PSI	75 PSI	100 PSI	150 PSI	200 PSI	250 PSI	300 PSI	500 PSI	1000 PSI
1/4"	1	2	4	5	7	10	12	15	25	49
3/8"	3	6	8	11	17	22	28	33	55	110
1/2"	5	10	15	20	29	39	49	59	98	196
3/4"	11	22	33	44	66	88	110	133	221	442
1"	20	39	59	79	118	157	196	236	393	785
1-1/4"	31	61	92	123	184	245	307	368	614	1227
1-1/2"	44	88	133	177	265	353	442	530	884	1767
2"	79	157	236	314	471	628	785	942	1571	3142
2-1/2"	123	245	368	491	736	982	1227	1473	2454	4909
3"	177	353	530	707	1060	1414	1767	2121	3534	7069
4"	314	628	942	1257	1885	2513	3142	3770	6283	12566
5"	491	982	1473	1964	2945	3927	4909	5891	9818	19635
6"	707	1414	2121	2827	4241	5655	7069	8482	14137	28274
8"	1257	2513	3770	5027	7540	10053	12566	15080	25133	50266
10"	1964	3927	5891	7854	11781	15708	19635	23562	39270	78540
12"	2827	5655	8482	11310	16965	22620	28274	33929	56549	113098

Note: For hose I.D.'s from 1-1/4" to 12" the force in pounds is greater than the PSI.

- *Force is the dynamic power which is exported longitudinally through a hose, towards the ends. To arrive at the number of pounds of force exerted, you merely multiply the area of the I.D. times the working pressure being used.*
- Area of a circle: πr^2 (PI [3.1416] times radius squared)
- Force = Area x Pressure

Pressure - Temperature Ratings

Pressure Class	150	300
Test Pressure	425	1100
Service Temperature	Working Pressure	
-20 to 100	275	720
150	255	710
200	240	700
250	225	690
300	210	680
350	195	675
400	180	665
450	165	650
500	150	625
550	140	590
600	130	555
650	120	515
700	110	470
750	100	425

Note: Ratings apply to all products covered by USA B16.5 valves conforming to the requirements of this standard must, in other respects, merit these ratings.

All ratings are maximum allowable non-shock pressures (PSIG) at the tabulated temperatures (degree Fahrenheit) and may be interpolated between temperatures shown. The primary service pressure ratings are shown in bold face type. Temperatures are those on the inside of the pressure retaining structure.

The use of these ratings requires gaskets conforming to the requirements of USA B16.5. The user is responsible for selecting gaskets of dimensions and materials to withstand the required bolt loading without injurious crushing, and suitable for the service conditions in all other respects.

Pipe Dimensions

Dimensions of Seamless and Welded Steel Pipe
ASA-B36.10 and B36.19


Nominal Pipe Size	Outside Diameter	Pipe Schedule Wall Thickness												
		10	20	30	Stand.	40	60	Extra Strong	80	100	120	140	160	XXX Strong
1/8"	0.405"	0.049	---	---	0.068	0.068	---	0.095	0.095	---	---	---	---	---
1/4"	0.540"	0.065	---	---	0.088	0.088	---	0.119	0.119	---	---	---	---	---
3/8"	0.675"	0.065	---	---	0.091	0.091	---	0.126	0.126	---	---	---	---	---
1/2"	0.840"	0.083	---	---	0.109	0.109	---	0.147	0.147	---	---	---	0.188	0.294
3/4"	1.050"	0.083	---	---	0.113	0.113	---	0.154	0.154	---	---	---	0.219	0.308
1"	1.315"	0.109	---	---	0.133	0.133	---	0.179	0.179	---	---	---	0.250	0.358
1-1/4"	1.660"	0.109	---	---	0.140	0.140	---	0.191	0.191	---	---	---	0.250	0.382
1-1/2"	1.900"	0.109	---	---	0.145	0.145	---	0.200	0.200	---	---	---	0.281	0.400
2"	2.375"	0.109	---	---	0.154	0.154	---	0.218	0.218	---	---	---	0.344	0.436
2-1/2"	2.875"	0.120	---	---	0.203	0.203	---	0.276	0.276	---	---	---	0.375	0.552
3"	3.500"	0.120	---	---	0.216	0.216	---	0.300	0.300	---	---	---	0.438	0.600
3-1/2"	4.000"	0.120	---	---	0.226	0.226	---	0.318	0.318	---	---	---	---	---
4"	4.500"	0.120	---	---	0.237	0.237	---	0.337	0.337	---	0.438	---	0.531	0.674
5"	5.563"	0.134	---	---	0.258	0.258	---	0.375	0.375	---	0.500	---	0.625	0.750
6"	6.625"	0.134	---	---	0.280	0.280	---	0.432	0.432	---	0.562	---	0.719	0.864
8"	8.625"	0.148	0.250	0.277	0.322	0.322	0.406	0.500	0.500	0.594	0.719	0.812	0.906	0.873
10"	10.750"	0.165	0.250	0.307	0.365	0.365	0.500	0.500	0.594	0.719	0.844	1.000	1.125	1.000
12"	12.750"	0.180	0.250	0.330	0.375	0.406	0.562	0.500	0.688	0.844	1.000	1.125	1.312	1.000

Definitive Cross-Reference from NPS to DN Specification Sizes


Nominal Pipe Size	DN	OD (inches)	Pipe Schedule Wall Thickness													
			5S	5	10S	10	20	30	40S	40	60	80S	80	100	120	160
1/8"	6	0.405	---	0.035	---	0.049	---	0.057	---	0.068	---	---	0.095	---	---	---
1/4"	8	0.540	---	0.049	---	0.065	---	0.073	---	0.088	---	---	0.119	---	---	---
1/2"	15	0.840	---	0.065	---	0.083	---	0.095	---	0.109	---	---	0.147	---	0.170	0.188
3/4"	20	1.050	---	0.065	---	0.083	---	0.095	---	0.113	---	---	0.154	---	0.170	0.219
1"	25	1.315	---	0.065	---	0.109	---	0.114	---	0.133	---	---	0.179	---	0.200	0.250
1-1/4"	32	1.660	---	0.065	---	0.109	---	0.117	---	0.140	---	---	0.191	---	0.215	0.250
1-1/2"	40	1.900	---	0.065	---	0.109	---	0.125	---	0.145	---	---	0.200	---	0.225	0.281
2"	50	2.375	---	0.065	---	0.109	---	---	---	0.154	---	---	0.218	---	0.250	0.344
2-1/2"	65	2.875	---	0.083	---	0.120	---	---	---	0.203	---	---	0.276	---	0.300	0.375
3"	80	3.500	---	0.083	---	0.120	---	---	---	0.216	---	---	0.330	---	0.350	0.438
4"	100	4.500	---	0.083	---	0.120	---	---	---	0.237	0.281	---	0.377	---	0.437	0.531
5"	125	5.563	---	0.109	---	0.134	---	---	---	0.258	---	---	0.375	---	0.500	0.625
6"	150	6.625	---	0.109	---	0.134	---	---	---	0.280	---	---	0.432	---	0.562	0.719
8"	200	8.625	---	0.109	---	0.148	0.250	0.277	---	0.322	0.406	---	0.500	0.593	0.718	0.906
10"	250	10.750	0.134	0.134	0.165	0.165	0.250	0.307	0.365	0.365	0.500	0.500	0.593	0.718	0.843	---
12"	300	12.750	0.156	0.165	0.180	0.180	0.250	0.330	0.375	0.406	0.500	0.500	0.687	0.843	1.000	---

Flange Information


Flange Bolt Tightening Sequence
(Use appropriate gaskets and bolts)



4 Bolt



8 Bolt




12 Bolt


See page 619 for drilling dimensions

Flange Diagrams


Threaded Applications




Threaded Flange with raised face



Welded Applications




Slip-On Flange with raised face




Weld Neck Flange with raised face

Floating Applications
(flange free to swivel)



Slip-On Flange with raised face



Lap-Joint Flange

Flange Dimensions

Dimensions of 150 LB. ASA Steel Flanges

Nominal Pipe Size	Flange OD	Thickness*	OD of Raised Face	Diameter of Bolt Circle	Number of Bolts	Diameter of Bolt Holes	Diameter of Bolts
1"	4-1/2"	9/16"	2"	3-1/8"	4	5/8"	1/2"
1-1/2"	5"	11/16"	2-7/8"	3-7/8"	4	5/8"	1/2"
2"	6"	3/4"	3-5/8"	4-3/4"	4	3/4"	5/8"
2-1/2"	7"	7/8"	4-1/8"	5-1/2"	4	3/4"	5/8"
3"	7-1/2"	15/16"	5"	6"	4	3/4"	5/8"
4"	9"	15/16"	6-3/16"	7-1/2"	8	3/4"	5/8"
5"	10"	15/16"	7-5/16"	8-1/2"	8	7/8"	3/4"
6"	11"	1"	8-1/2"	9-1/2"	8	7/8"	3/4"
8"	13-1/2"	1-1/8"	10-5/8"	11-3/4"	8	7/8"	3/4"
10"	16"	1-3/16"	12-3/4"	14-1/4"	12	1"	7/8"
12"	19"	1 1/4"	15"	17"	12	1"	7/8"

* 1/16" raised face is included in the thickness.

Dimensions of Tank Truck Flanges (TTMA Drilling)

Nominal Pipe Size	Flange OD	Thickness*	Diameter of Bolt Circle	Number of Bolts	Diameter of Bolt Holes	Diameter of Bolts
3"	5-5/8"	3/8"	4-7/8"	8	7/16"	3/8"
4"	6-5/8"	3/8"	5-7/8"	8	7/16"	3/8"
6"	8-7/8"	3/8"	8-1/8"	12	7/16"	3/8"

* Listed thickness is for aluminum flanges

Water Data and Formulas

1 gallon water = 231 cubic inches = 8.333 pounds

1 pound of water = 27.7 cubic inches

1 cubic foot water = 7.5 gallons = 62.5 pounds (salt water weighs approximately 64.3 pounds per cubic foot)

Pounds per square inch at bottom of a column of water = height of column in feet x .434

1 miner's inch = 9 to 12 gallons per minute

Horsepower to Raise Water

If pumping liquid other than water, multiply the gallons per minute below by the liquids specific gravity

$$\text{Horsepower} = \frac{\text{gallons per minute x total head in feet}}{3960}$$

Gallons Per Minute through a Pipe

GPM = .0408 x pipe diameter inches^2 x feet/minute water velocity

Weight of Water in a Pipe

Pounds water = pipe length feet x pipe diameter inches^2 x .34

Distance (inches)	Gallons per Minute Discharge for a Given Nominal Pipe Diameter (inches)				
	5	6	8	10	12
5	163	---	---	---	---
6	195	285	---	---	---
7	228	334	580	---	---
8	260	380	665	1060	---
9	293	430	750	1190	1660
10	326	476	830	1330	1850
11	360	525	915	1460	2020
12	390	570	1000	1600	2220
13	425	620	1080	1730	2400
14	456	670	1160	1860	2590
15	490	710	1250	2000	2780
16	520	760	1330	2120	2960
17	550	810	1410	2260	3140
18	590	860	1500	2390	3330
19	620	910	1580	2520	3500
20	650	950	1660	2660	3700
21	685	1000	1750	2800	3890
22	720	1050	1830	2920	4060
23	750	1100	1910	3060	4250
24	---	1140	2000	3200	4440

Water Discharge Table

This table is intended for general reference and general applicability only, and should not be relied upon as the sole or precise source of information available with respect to the subject covered. The user should also refer to and follow manufacturer's specific instructions and recommendations with regard to such information, where they exist.

Flow of water through 100 foot lengths of hose, Straight-Smooth Bore - U.S. Gallons per minute

PSI at Hose Inlet	Nominal Hose ID Diameters - Inches							
	1"	*1-1/4"*	*1-1/2"*	*2"*	*2-1/2"*	*3"*	*4"*	*6"*
20	26	47	76	161	290	468	997	2895
30	32	58	94	200	360	582	1240	3603
40	38	68	110	234	421	680	1449	4209
50	43	77	124	264	475	767	1635	4748
60	47	85	137	291	524	846	1804	5239
75	53	95	154	329	591	955	2035	5910
100	62	112	180	384	690	1115	2377	6904
125	70	126	203	433	779	1258	2681	7788
150	77	139	224	478	859	1388	2958	8593
200	90	162	262	558	1004	1621	3455	10038

Figures are to be used as a guide since the hose inside diameter tolerance, the type of fittings used, and orifice restriction all influence the actual discharge. Thus, variations plus or minus from the table may be obtained in actual service.

Conversion Table - Feet of Water to Inches of Mercury

Feet of Water	1	2	4	6	8	10	12	14	16	20	22	24	26	28	30	32	34
Inches of Mercury	0.9	1.8	3.5	5.3	7.1	8.8	10.6	12.4	14.1	17.7	19.4	21.2	23.0	24.8	26.5	28.3	30.0

Feet Head of Water to PSI

Feet Head	Pounds per Square Inch	Feet Head	Pounds per Square Inch	Feet Head	Pounds per Square Inch	Feet Head	Pounds per Square Inch
1	0.43	15	6.50	100	43.31	250	108.27
2	0.87	20	8.66	110	47.64	300	129.93
3	1.30	25	10.83	120	51.97	350	151.58
4	1.73	30	12.99	130	56.30	400	173.24
5	2.17	40	17.32	140	60.63	500	216.55
6	2.60	50	21.65	150	64.96	600	259.85
7	3.03	60	25.99	160	69.29	700	303.16
8	3.46	70	30.32	170	73.63	800	346.47
9	3.90	80	34.65	180	77.96	900	389.78
10	4.33	90	38.98	200	86.62	1000	433.00

Note: One foot of water at 62° F equals 0.433 PSI.
To find the PSI for any feet head not given in the table, multiply the feet head by 0.433.

Maximum Recommended Air Flow (SCFM) Through ANSI Standard Weight Schedule 40 Metal Pipe

The flow values in the table below are based on a pressure drop of 10% of the applied pressure per 100 feet of pipe for 1/8", 1/4", 3/8", and 1/2" pipe sizes; and a pressure drop of 5% of the applied pressure per 100 feet of pipe for 3/4", 1", 1-1/4", 2", 2-1/2", 3" pipe sizes. The table gives recommended flows for pipe sizes at listed pressures and should be used to determine appropriate piping for air systems.

Applied Pressure **PSI**	Nominal Standard Pipe Size										
	1/8"	*1/4"*	*3/8"*	*1/2"*	*3/4"*	*1"*	*1-1/4"*	*1-1/2"*	*2"*	*2-1/2"*	*3"*
5	0.5	1.2	2.7	4.9	6.6	13	27	40	80	135	240
10	0.8	1.7	3.9	7.7	11.0	21	44	64	125	200	370
20	1.3	3.0	6.6	13.0	18.5	35	75	110	215	350	600
40	2.5	5.5	12.0	23.0	34.0	62	135	200	385	640	1100
60	3.5	8.0	18.0	34.0	50.0	93	195	290	560	900	1600
80	4.7	10.5	23.0	44.0	65.0	120	255	380	720	1200	2100
100	5.8	13.0	29.0	54.0	80.0	150	315	470	900	1450	2600
150	8.6	20.0	41.0	80.0	115.0	220	460	680	1350	2200	3900
200	11.5	26.0	58.0	108.0	155.0	290	620	910	1750	2800	5000
250	14.5	33.0	73.0	135.0	200.0	370	770	1150	2200	3500	6100

Air Supply Requirements (operating pressure: 90 PSI)

Tool	Class	Typical Air Consumption (CFM)	Hose Size (inches)		
			0-10 ft.	10-50 ft.	50-200 ft.
Paving Breakers	25 lb. 35 lb. 60 lb. 80 lb.	45 50 65 80	1/2 1/2 1/2 3/4	1/2 3/4 3/4 3/4	3/4 3/4 1 1
Claydiggers		45	1/2	1/2	3/4
Hand Drills	8 lb. 15 lb.	20 32	3/8 3/8	3/8 1/2	1/2 1/2
Rock (Sinker) Drills	45 lb. 55 lb.	105 130	3/4 3/4	3/4 1	1 1
Tampers	5" butt 6" butt	20 30	3/8 1/2	1/2 1/2	1/2 3/4
Sump Pump Sludge Pump	3 HP Ejector	100 90	3/4 1	3/4 1	1 1
Vibrators	2-1/2" 3"	60 60	1 1	1 1	1 1
Chipping Hammers		25	3/8	1/2	1/2
Impact Wrenches	3/8" sq. dr. 1/2" 3/4" 1"	10 15 25 50	5/16 5/16 3/8 1/2	3/8 3/8 1/2 3/4	3/8 1/2 1/2 3/4
Drills	1/4" - 1/2"	22	3/8	3/8	1/2
Grinders	die/burr small angle 3 HP vertical	20 20 75	3/8 3/8 1/2	3/8 3/8 3/4	1/2 1/2 1

CFM vs PSI for Nozzles

Gauge PSI	CFM Free Air Flow @ Nozzle Diameter (Inch)							
	1/64	1/32	3/64	1/16	3/32	1/8	3/16	1/4
1	.03	.11	.2	.4	1.0	1.7	3.9	6.8
5	.06	.24	.5	1.0	2.2	3.9	8.7	15.4
10	.08	.34	.8	1.4	3.1	5.4	12.3	21.8
15	.10	.42	.9	1.6	3.7	6.6	15.0	26.7
20	.12	.48	1.1	1.9	4.2	7.7	17.1	30.8
25	.13	.54	1.2	2.2	4.7	8.6	19.4	34.5
30	.16	.63	1.4	2.5	5.6	10.0	22.5	40.0
40	.19	.77	1.7	3.1	6.8	12.3	27.5	49.1
50	.22	.91	2.0	3.6	8.2	14.5	32.8	58.2
60	.26	1.05	2.3	4.2	9.4	16.8	37.5	67.0
70	.29	1.19	2.7	4.8	10.7	19.0	43.0	76.0
80	.33	1.33	3.0	5.3	11.9	21.2	47.5	85.0
90	.36	1.47	3.3	5.9	13.1	23.5	52.5	94.0
100	.40	1.61	3.7	6.4	14.5	25.8	58.3	103.0
110	.43	1.76	3.9	7.0	15.7	28.0	63.0	112.0
120	.47	1.90	4.30	7.6	17.0	30.2	68.0	121.0
130	.50	2.04	4.6	8.1	18.2	32.4	73.0	130.0
140	.54	2.17	4.9	8.7	19.5	34.5	78.0	138.0
150	.57	2.33	5.2	9.2	20.7	36.7	83.0	147.0
175	.66	2.65	5.9	10.6	23.8	42.1	95.0	169.0
200	.76	3.07	6.9	12.2	27.5	48.7	110.0	195.0

PSI = pounds/square inch; CFM = cubic feet/minute

Formulas

Air Velocity in a Pipe

Using the equation and typical values of V, D and L explained to the right approximate values of P are computed as follows:

Velocity Ft/Sec	Pipe Diameter in Inches, 10' long				
	1	2	4	6	10
1	.0004	.0002	.0001	.00007	.00004
2	.0016	.0008	.0004	.00030	.00016
5	.0100	.0050	.0025	.00170	.0010
10	.0400	.0200	.0100	.00670	.0040
15	.0900	.0450	.0225	.01500	.0090
20	.1600	0080	.0400	.02700	.0160
25	.2500	.1250	.0625	.04170	.0250
30	.3600	.1800	.0900	.06000	.0360

$$V = \sqrt{\frac{25{,}000\ DP}{L}}$$

V = air velocity in feet per second
D = pipe inside diameter in inches
L = length of pipe in feet
P = pressure loss due to air friction in ounces/square inch

formula from B.F.Sturtevant Company

Air Volume Discharged from Pipe

CFM = air volume in cubic feet per minute
V = air velocity in feet per second as determined in the equation at the top of this page
A = cross section area of pipe in square feet

$$CFM = 60VA$$

Boyle's Law

If temperature is kept constant, the volume of a given mass of gas is inversely proportional to the pressure which is exerted upon it.

$$\frac{\text{Initial Pressure}}{\text{Final Pressure}} = \frac{\text{Final Volume}}{\text{Initial Volume}}$$

Suggested Pipe Size for Compressed Air Flow at 100 PSI Length of Run, Feet

SCFM Air Flow	25	50	75	100	150	200	300	500	1000	Compressor HP
4	½	½	½	½	½	½	½	¾	¾	1
12	½	½	½	¾	¾	½	¾	1	1	3
20	¾	¾	¾	¾	1	¾	1	1¼	1¼	5
30	¾	¾	1	1	1	1	1¼	1¼	1¼	7½
40	¾	1	1	1	1¼	1	1¼	1½	1½	10
60	1	1	1¼	1¼	1¼	1¼	1½	1½	2	15
80	1	1¼	1¼	1¼	1½	1¼	1½	2	2	20
100	1¼	1¼	1½	1½	1½	1½	2	2	2½	25
120	1¼	1½	1½	1½	2	1½	2	2½	2½	30
160	1¼	1½	1½	2	2	1½	2½	2½	3	40
200	1½	2	2	2	2	2	2½	3	3	50
240	1½	2	2	2	2½	2	2½	3	3	60
300	2	2	2	2½	2½	2	3	3	3½	75
400	2	2½	2½	2½	3	2½	3	3½	4	100
500	2	2½	2½	3	3	2½	3½	3½	4	125

On a compressed air distribution system, pressure losses greater than 3% are considered excessive, and a well-designed system having a steady rate of air flow is usually designed for not more than a 1% loss or 1 PSI for a 100 PSI system. The pipe size depends not only on the volume of air flow but how far it must be carried. To hold the distribution loss to 1 PSI, pipes of larger diameter must be used on longer runs to carry the same flow that can be handled by smaller pipes on shorter runs.

Figures in the body of the chart above are pipe sizes recommended on a 100 PSI system to carry air with less than 1 PSI loss. When measuring lengths of runs, add 5' of length for each pipe fitting. If carrying 120 PSI pressure these sizes will carry slightly more air than shown, or pressure loss will be slightly less than 1 PSI. If carrying 80 PSI pressure these pipes will carry slightly less air at 1 PSI pressure loss than shown in the chart.

The left column of the chart shows the volume of air to be carried. It is difficult to estimate the air flow volume to be carried in each leg of the distribution system. This varies with the application. On some applications, like in a large plant with many legs in the distribution system serving dozens of air-operated machines, the air usage may be at a fairly steady rate. Other applications, usually on small systems, may have to carry a high surge of air if several machines happen to be operated at the same time. Then there may be a period with almost no flow.

To make a realistic estimate of air flow volume, the far right column of the chart showing compressor HP may be used. On steady pumping, a compressor will produce a minimum of 4 SCFM air flow for each 1 HP of capacity. This is a conservative figure, as most compressors will produce 5 or 6 SCFM.

For example, a 25 HP compressor will produce at least 100 SCFM of air as shown in the far left column on the same line as 25 HP.

excerpted from *Industrial Fluid Power*, Volume 1, third edition, 1984

Air Receiver Capacities

If your tank is not listed in the table to the right, use the following formula to calculate the tank size (gallons) and then estimate the cubic feet tank capacity at a given pressure from the table above.

$$\text{Tank Gallons} = \frac{\text{Tank Height} \times (\text{Tank Radius})^2}{73.53}$$

Height and Radius are in inches

Tank Size (inches)	Tank Size (gallons)	Gauge Pressure on Tank (PSI)			
		0	**100**	**150**	**200**
		Cubic Feet Tank Capacity			
12 x 24	10	1.3	11	15	19
14 x 36	20	2.7	21	30	39
16 x 36	30	4.0	31	45	59
20 x 48	60	8.0	62	90	117
20 x 63	80	10.7	83	120	156
24 x 68	120	16.0	125	180	234
30 x 84	240	32.0	250	360	467

Air Hose Friction

Hose Size (inches)	CFM thru 50' Hose	Gauge Pressure - Pounds/sq inch			
		50	**70**	**90**	**110**
		PSI Loss Over 50' Hose Length			
½"	20	1.8	1.0	.8	.6
	30	5.0	3.4	2.4	2.0
	40	10.1	7.0	5.4	4.3
	50	18.1	12.4	9.5	7.6
	60	+	20.0	14.8	12.0
	70	+	28.4	22.0	17.6
	80	+	+	30.5	24.6
	90	+	+	41.0	33.3
	10	+	+	+	44.5
	110	+	+	+	+
¾"	20	04	.2	.2	.1
	30	.08	.5	.4	.3
	40	1.5	.9	.7	.5
	50	2.4	1.5	1.1	.9
	60	3.5	2.3	1.6	1.3
	70	4.4	3.2	2.3	1.8
	80	6.5	4.2	3.1	2.4
	90	8.5	5.5	4.0	3.1
	100	11.4	7.0	5.0	3.9
	110	14.2	8.8	6.2	4.9
	120	+	11.0	7.5	5.9
	130	+	+	9.0	7.1
1"	20	.1	0	0	0
	30	.2	.1	.1	.1
	40	.3	.2	.2	.2
	50	.5	.4	.3	.2
	60	.8	.5	.4	.3
	70	1.1	.7	.6	.4
	80	1.5	1.0	.7	.6
	90	2.0	1.3	.9	.7
	100	2.6	1.6	1.2	.9
	110	3.5	2.0	1.4	1.1
	120	4.8	2.5	1.7	1.3
	130	7.0	3.1	2.0	1.5


PSI = pressure in pounds/square inch
CFM = air flow in cubic feet/minute

+ pressure loss is too great and therefore the combination of Hose Size, CFM, and Gauge Pressure is not recommended. Gauge Pressures the indicated air pressure in pounds/square inch, at the source (i.e. the air compressor receiver tank)

Simple Filter Troubleshooting


Malfunction	Possible cause	Remedy
Excessive pressure drop	Micron rating of element too small.	Use larger micron element size for application.
	Filter element blocked.	1. Clean element (not coalescing element). 2. Replace with new element.
	Flow requirement greater than filter capacity.	Use larger filter.
Dirt passing through filter	Element seals missing or defective (N.B. Seals not required on some units).	1. Replace seal. 2. Tighten element.
	Damaged element.	Replace element.
Water passing through filter	Water level in bowl above baffle.	Drain water.
	Flow capacity of filter exceeded.	Maintain flow within capacity of filter or change to filter capable of handling desired flows.
Crazing of polycarbonate bowl or milky appearance	Bowl has been cleaned with incompatible fluid.	Replace bowl. (Clean only with clean warm water and soap.)
	Bowl is being used in an area containing fumes or vapors incompatible with polycarbonate.	Replace bowl. Eliminate source of problem or convert from plastic to metal bowls.
	Compressor oil vapor may be causing problem.	Replace bowl. Eliminate source of problem or convert from plastic to metal bowls.
	Air intake to compressor may contain fumes or vapor incompatible with polycarbonate.	Replace bowl. Eliminate source of problem or convert from plastic to metal bowls.
Water beyond the filter	Inlet air has a high temperature and as it cools downstream, moisture condenses to water.	Fit dryer, pre-cool air or fit filter immediately prior to application.

General Purpose Filter

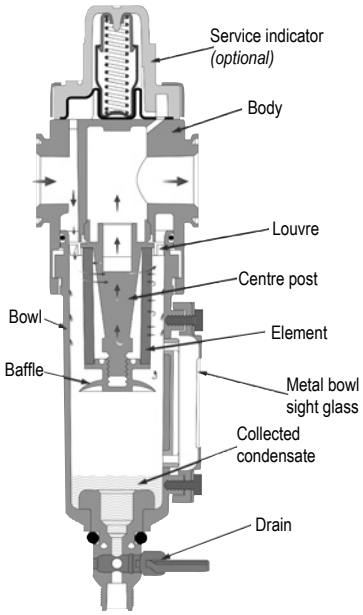

Simple Regulator Troubleshooting

General Purpose Regulator

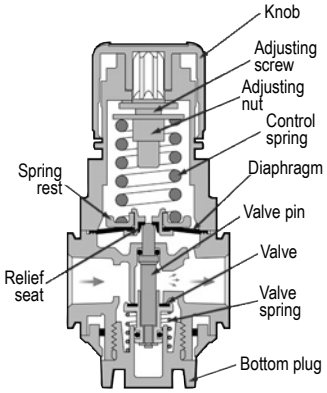


Malfunction	Possible cause	Remedy
Regulator creep (increase in secondary pressure due to leak from primary)	Dirty or cut valve elastomers. Nick in valve seat.	Replace or clean valve. If body or valve seat is damaged it can be replaced on some models. On others replacement of complete regulator is required.
Won't relieve secondary pressure	Non-relieving diaphragm assembly.	If this feature is required, replace with relieving type diaphragm assembly.
Won't reach desired pressure	Regulating spring with low spring rate.	Use regulating spring with spring rate designed to cover desired range.
Excessive leak from relief hole	Damaged relief seat. Ruptured diaphragm. Leakage past valve causing secondary to increase somewhat and open relief seat.	Replace diaphragm assembly. Replace or clean valve.
Regulator chatter	A resonant condition is generally only encountered under a certain set of conditions of flow and pressure and then only in some applications in which regulator couples with other system components.	Replace spring with a higher pressure range spring. Replace with a piston type regulator since they have less tendency to chatter.
Regulator difficult to adjust	Adjusting screw or knob locking device in locked position. Contaminants in adjusting screw threads.	Pull to unlock knob and adjust; push knob to lock. Threaded adjusting screws: loosen lock nut, remove adjusting screw, clean thread and lubricate. Place some lubricant on tip of screw.

Simple Lubricator Troubleshooting

Malfunction	Possible cause	Remedy
No Drip Rate	Oil adjustment knob fully clockwise	Readjust knob.
	Low oil level	Check oil level.
	Airflow through lubricator too low	Use smaller size lubricator.
		Remove bowl and sight feed adjustment dome and clear syphon tube.
	Blocked oil filter screen	Remove sight feed adjustment dome and clean or replace screen located in dome assembly.
	Air leaks	Check bowl, filler plug and sight dome seals. Tighten if necessary.
Oil Foaming	Over aeration	Check bowl seals for slight leaks.
Oil Emulsified	Water in lubricator	Fit filter immediately upstream.
Drip Rate changes after setting	Fade	Readjust drip rate.

Oil-Fog Lubricator

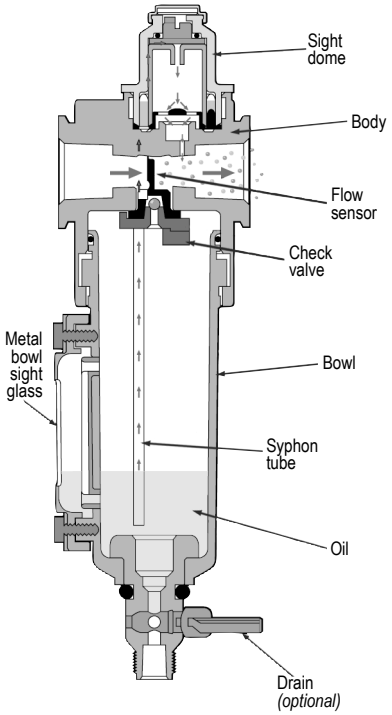

Setting Lubricator Drip Rates

What is the correct drip rate setting?


The drip rate will depend on the application, the amount of lubrication required, the flow through the lubricator and the lubricator type. In Micro-Fog lubricators only 10% of the droplets in the sight dome are carried downstream. The drip rate in Micro-Fog lubricators therefore tends to be much higher. The following table can be used to estimate drip rate for required flow. This is very much a rule of thumb. In practice it is necessary to fine tune the oil drip rate in each application.

Typical Drip Rate per Minute Micro-Fog	Typical Drip Rate per Oil-Fog	Approximate Flow SCFM (dm^3/s)
20	2	10 (5)
40	4	20 (10)
60	6	30 (15)
80	8	40 (20)
100	10	50 (25)
120	12	60 (30)

Can the drip rate be shut off?


In lubricators with needle valve type sight dome, yes.
Some Norgren sight domes use a felt pad which is soaked in oil at the point where the drops are formed. With this type of sight dome the oil droplets cease once the felt pad dries out. With the new style dome (L72/73/74 and L07) complete shut off is not possible. Minimum adjustment for the drip rate is around 1 drop per minute.

Cam and Groove Nominal Take-Up Lengths

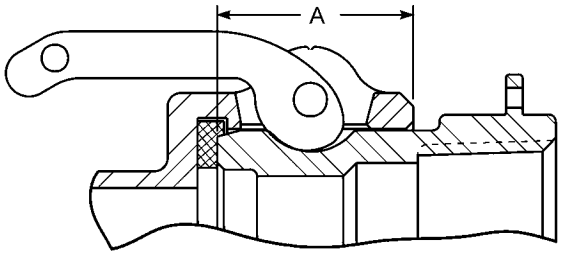

Thread Size	Dimension A
1/2"	0.97"
3/4"	0.97"
1"	1.20"
1-1/4"	1.44"
1-1/2"	1.50"
2"	1.81"
2-1/2"	1.82"
3"	1.78"
4"	1.84"
5"	2.00"
6"	2.13"
8"	2.06"
8"	3.22"

Air Chief Actual Size Profile Chart

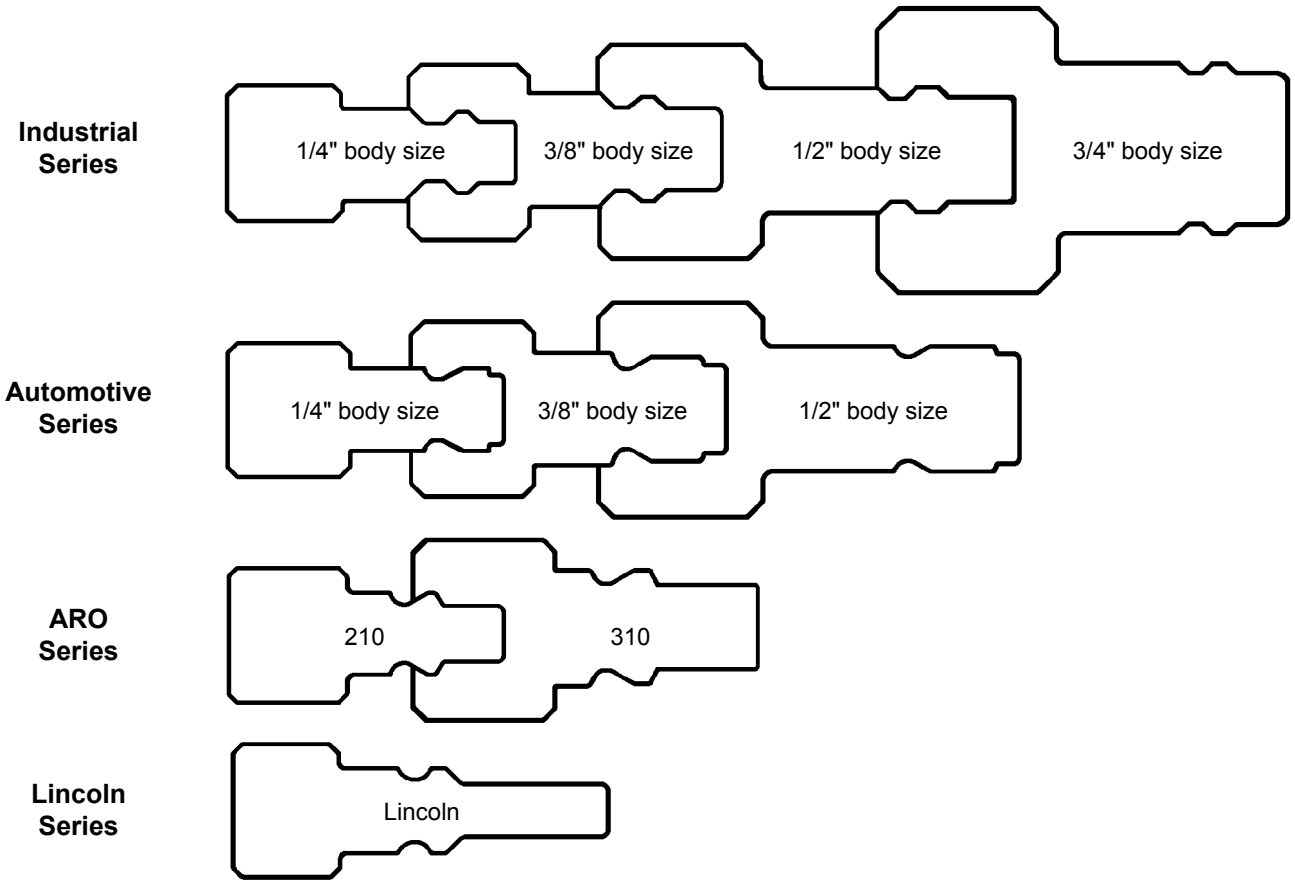


* ½" Industrial Series may also interchange with ½" Automotive Series.

Hydraulic Plug Profile Chart

Industry/Competitor Interchange


Dixon 7800 Series, page 354

Perfecting W Series
Aeroquip 5100
Parker 6100

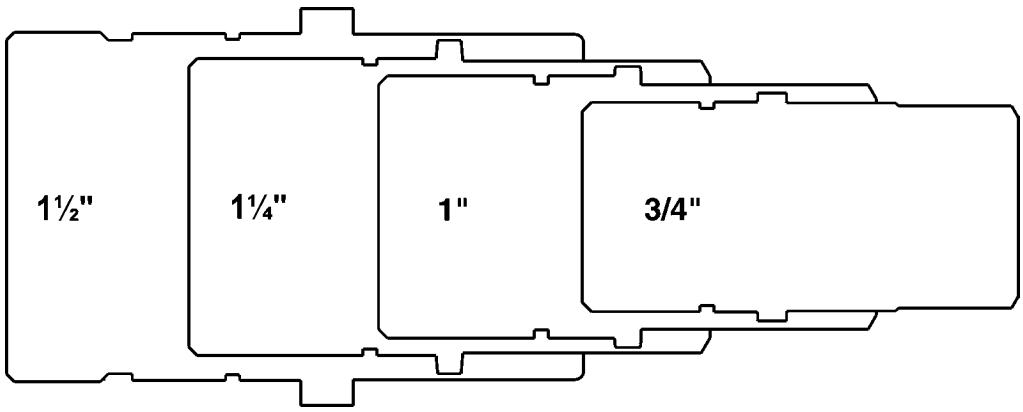


Dixon VH Series, page 358

Perfecting V Series
Snap-tite H
Faster TNV

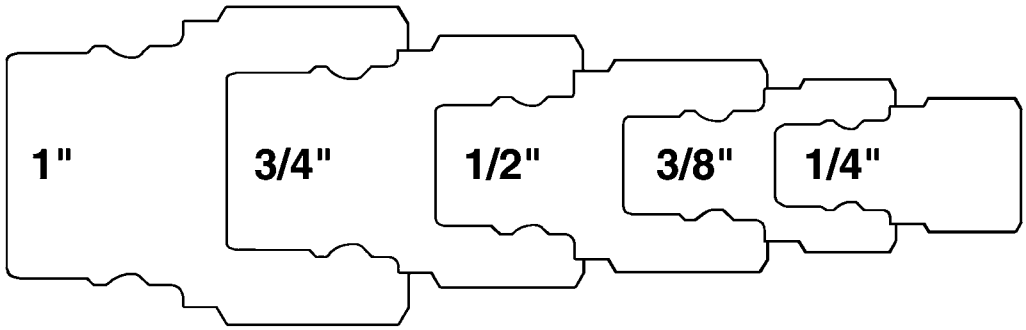


Dixon Flush Face Fittings, page 357

Perfecting HT Series
Aeroquip FD49
HTMA Parker FF

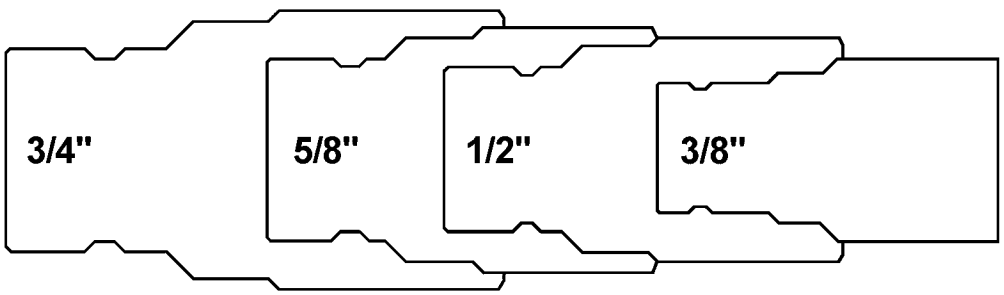

Dixon 3000 Series, page 352


Perfecting T Series
Parker 3000
Enerpac C604

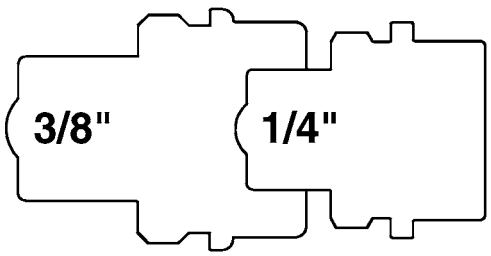

Hydraulic Plug Profile Chart


Industry/Competitor Interchange

Dixon Straight Thru Fittings, page 346

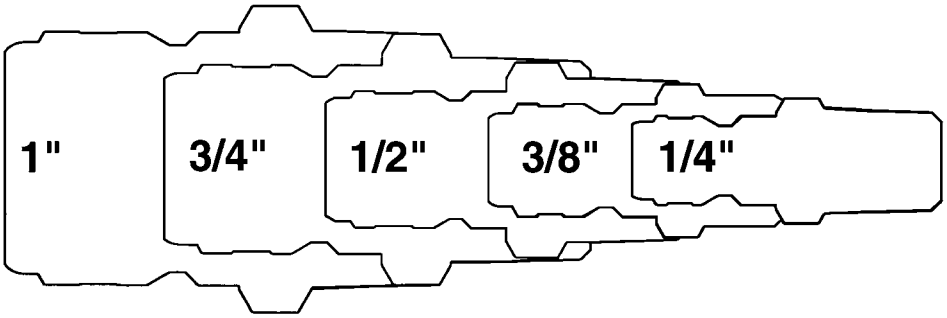


Perfecting E Series
Parker ST
Hansen ST

Flow Mate Couplings, page 348

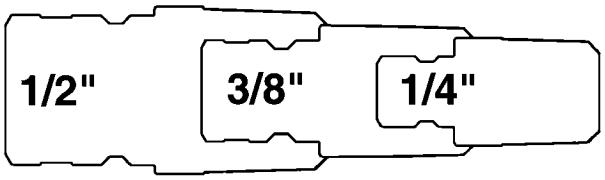


Perfecting CM Series
Parker Moldmate
Hansen Flo-Temp

Dixon Industrial Fittings, page 351

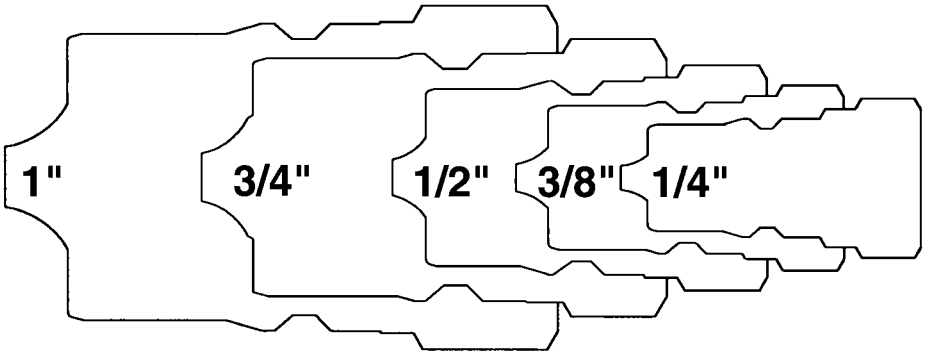


ISO 7241-B
Perfecting H Series
Hansen HK
Aeroquip FD45
Parker 60

Dixon Agricultural Fittings, page 353

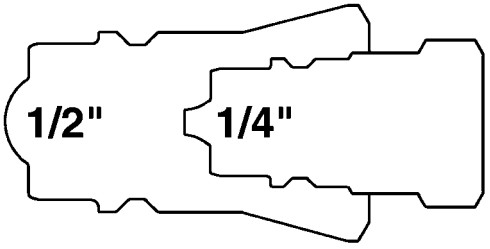

Perfecting R Series
Aeroquip FD76
Parker/Pioneer 4000
Safeway S20

Dixon 5600 Series, page 356

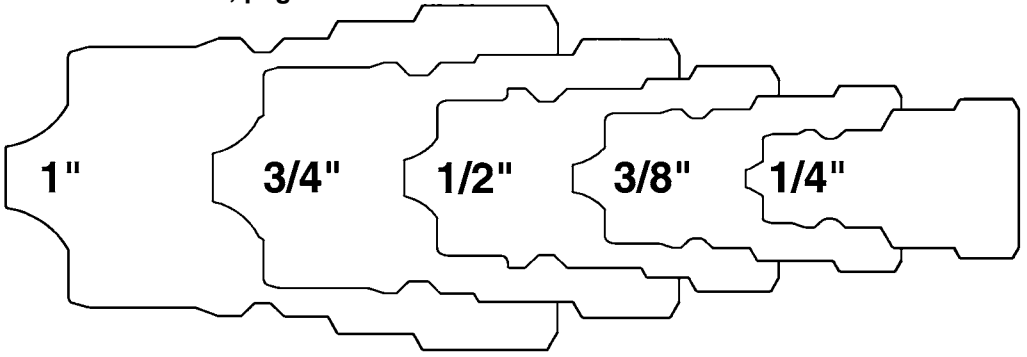


ISO 7241-A
Perfecting K Series
Aeroquip 5600
Parker 6600


Sanitary Sizing Guide

- These actual size diagrams are provided to eliminate sizing errors when specifying sanitary fittings.
- The outside diameters are the same for ½" and ¾" (0.992 O.D.) and 1" and 1½" (1.984 O.D.).
- Sizes 2" and above have specific outside diameter dimensions.
- Diagrams are not available for 3" and above, a table is supplied for your convenience.


½" mini




¾" mini




1" mini

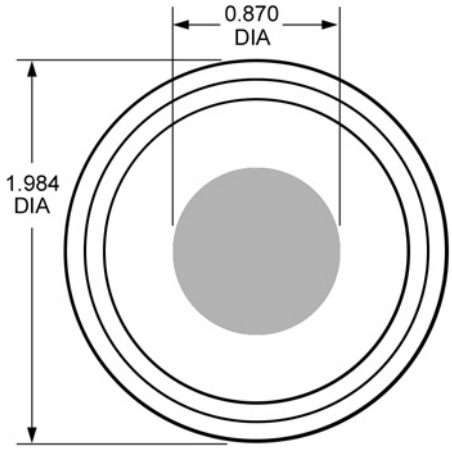


1½" mini

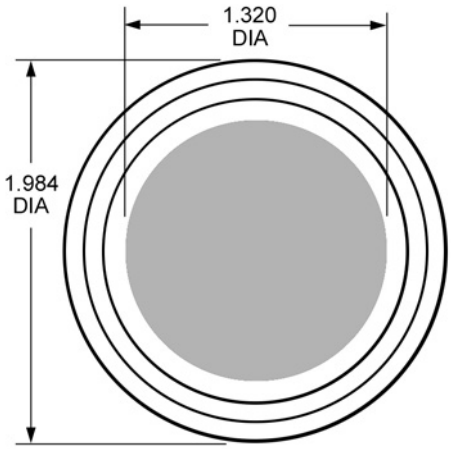

2" mini

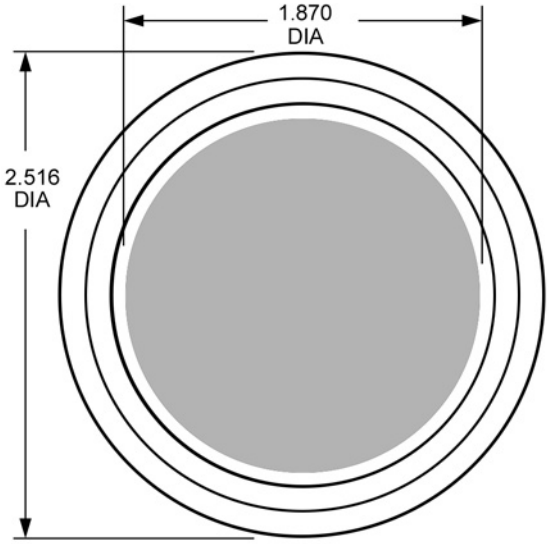


2½" mini

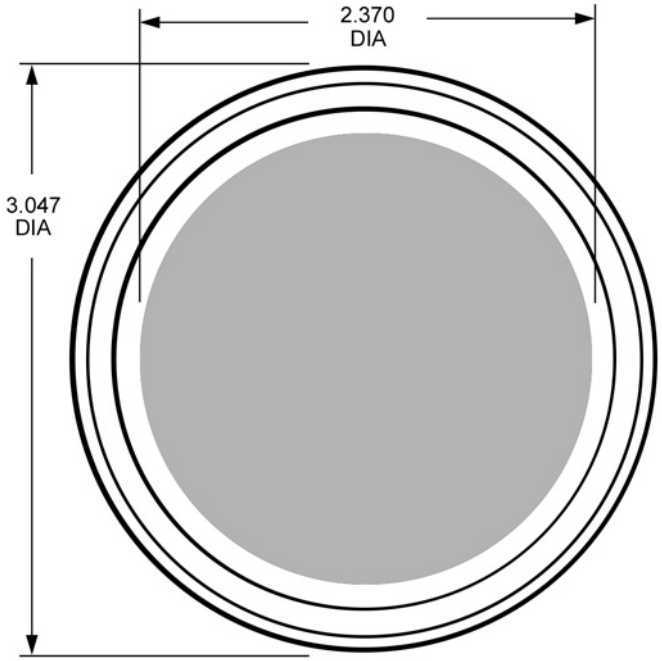

Sanitary Size	OD of clamp end	ID of fitting	Sanitary Size	OD of clamp end	ID of fitting
½"	0.992	0.370	3"	3.579	2.870
¾"	0.992	0.620	4"	4.682	3.834
1"	1.984	0.870	6"	6.562	5.782
1½"	1.984	1.320	8"	8.602	7.760
2"	2.516	1.870	10"	10.570	9.782
2½"	3.047	2.370	12"	12.570	11.760

Valve Selection Guide


Ball Valve

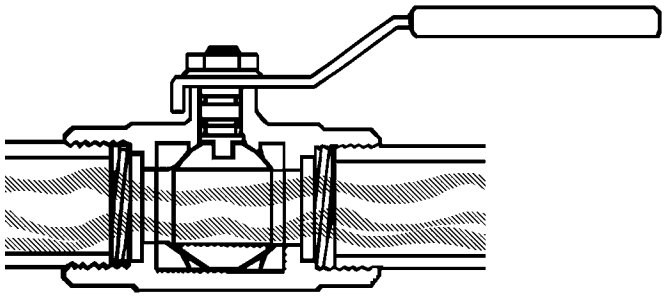



- can be used for on and off service or throttling
- when positive shut-off is necessary
- where a low valve profile is necessary
- only 90° rotation from open to fully closed (quick opening)
- Handle position is a quick indication of whether valve is open or closed.
- full port ball valves do not resist flow


Butterfly Valve






- where positive shut-off is necessary
- primarily for fully open or fully closed applications
- may be used for throttling
- only 90° rotation from open to fully closed
- lightweight
- easy to install
- less costly than an iron body gate valve


Gate Valve

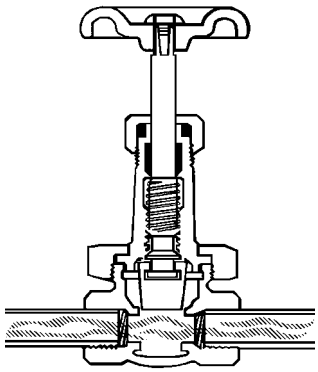



- for fully open or fully closed service - not for throttling
- for minimum line pressure drop
- for minimum fluid entrapment in the line
- for relatively infrequent operation


Check Valve






- To control the direction of flow and for quick, automatic reactions to flow change. Swing check valves are used when a minimum resistance to flow is required.
- Swing check valves are recommended for use in conjunction with gate valves. They should not be used in a rapid recycling system such as reciprocating pumps or air compressor service where they could cause chatter and damaging vibration.

Globe Valve

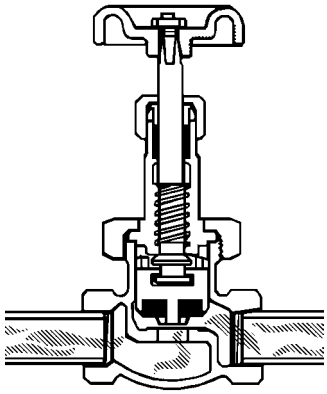




- for regulation (throttling) of flow
- for frequent operation; short stem travel reduces operator's time
- where some line resistance is acceptable

3-Way Ball Valve Flow Options

'T' Pattern, Side Entry

Top view

position A **position B** **position C** **position D**

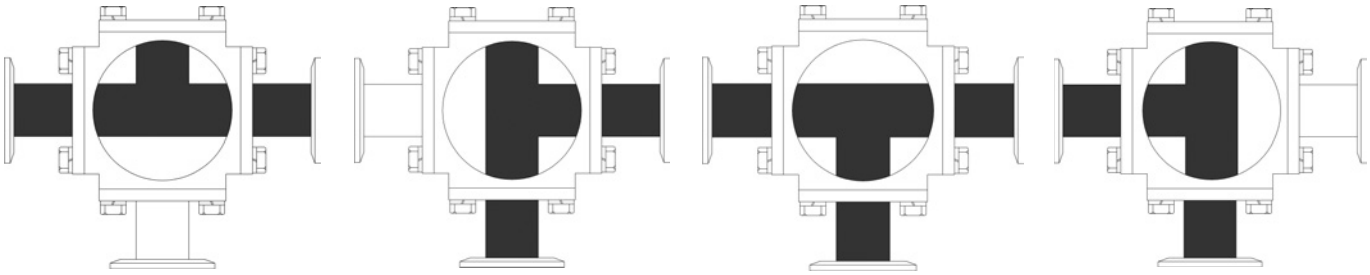


Number	Rotation	Flow Plan Options
1	90°	A, B
2	90°	B, C
3	90°	C, D
4	90°	A, D
5	180°	A, B, C
6	180°	B, C, D
7	180°	A, C, D
8	180°	A, B, D

'L' Pattern, Side Entry

Top view

position A **position B** **position C**

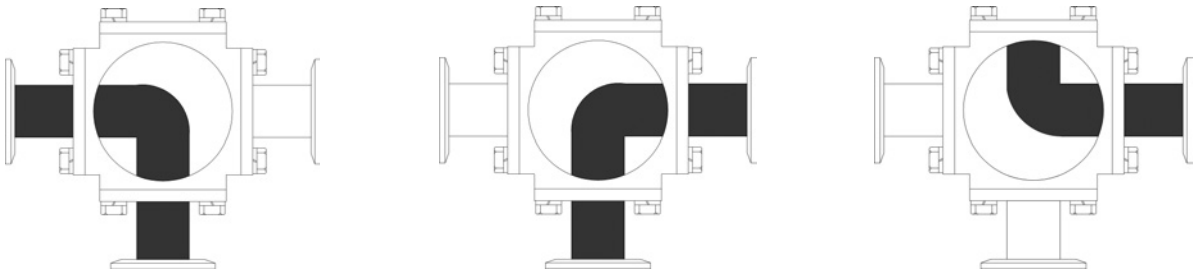

Number	Rotation	Flow Plan Options
1	90°	A, B
2	180°	A, B, C

Crimp Recommendations

The crimp recommendation charts on pages 634-641 are only guides. It will not apply to every coupling situation. In some instances alternative dies and crimping dimensions must be employed to ensure safety. Experience has shown that variances in the construction of similar hoses and couplings may cause some assemblies to react differently when crimped. It is not uncommon to find hose with an outer diameter that fluctuates from one end to the other or from production lot to production lot. These inconsistencies coupled with the inherent differences between textile or wire braid, hard or soft wall, the presence or absence of an internal spiral wire and the differences in hose coverings make it difficult to establish hard and fast rules. Therefore, its imperative that hose dimensions are accurately measured, assemblies are tested, and documentation is maintained.

Crimped Dix-Lock and Dual-Lock Recommendation Guide

See pages 109 and 111 for the Dix-Lock and Dual-Lock products.

Hose ID	Part #	Hose OD		Crimp Diameter (±0.005)	Crimp Length		% Reduction
		Fractional	*Decimal*		*QM/QB*	*PHL*	
½"	***QM3WF***	54/64	0.844	0.925	1-1/8	1-1/4	18.9
	QB3WF	55/64	0.859	0.940	1-1/8	1-1/4	18.1
	QM22WF	56/64	0.875	0.950	1-1/8	1-1/4	18.9
	QB22WF	57/64	0.891	0.965	1-1/8	1-1/4	18.4
	QM33WF	58/64	0.906	0.975	1-1/8	1-1/4	19.0
	QB33WF	59/64	0.922	0.990	1-1/8	1-1/4	18.5
		60/64	0.938	1.005	1-1/8	1-1/4	18.0
	PHL8WF	61/64	0.953	1.015	1-1/8	1-1/4	18.5
		62/64	0.969	1.030	1-1/8	1-1/4	18.1
		63/64	0.984	1.040	1-1/8	1-1/4	18.6
		1	1.000	1.055	1-1/8	1-1/4	18.2
		1-1/64	1.016	1.065	1-1/8	1-1/4	18.8
		1-2/64	1.031	1.080	1-1/8	1-1/4	18.3
¾"	***QM4WF***	1-10/64	1.156	1.220	1-1/4		18.5
	QB4WF	1-11/64	1.171	1.235	1-1/4		18.0
	QM23WF	1-12/64	1.187	1.244	1-1/4		18.7
	QB23WF	1-13/64	1.203	1.260	1-1/4		18.1
	QM44WF	1-14/64	1.218	1.270	1-1/4		18.8
	QB44WF	1-15/64	1.234	1.285	1-1/4		18.2
		1-16/64	1.250	1.295	1-1/4		18.8
	PHL12WF	1-17/64	1.265	1.310	1-1/4		18.4
		1-18/64	1.281	1.320	1-1/4		18.8
		1-19/64	1.296	1.335	1-1/4		18.5
		1-20/64	1.312	1.345	1-1/4		19.0
		1-21/64	1.328	1.360	1-1/4		18.5
		1-22/64	1.343	1.370	1-1/4		19.0

Crimped 3500 Nipple Recommendation Guide

See page 281 for the 3500 Nipples.

Hose ID	Part #	Hose OD		Crimp Diameter (±0.005)	Crimp Length	% Reduction
		Fractional	*Decimal*			
½"	***3512WF***	54/64	0.844	0.906	1-1/4	21.1
		55/64	0.859	0.906	1-1/4	24.5
		56/64	0.875	0.938	1-1/4	19.3
		57/64	0.891	0.938	1-1/4	22.6
		58/64	0.906	0.969	1-1/4	17.8
¾"	***3514WF***	1-10/64	1.156	1.218	1-7/16	17.8
		1-11/64	1.171	1.218	1-7/16	20.7
		1-12/64	1.187	1.218	1-7/16	23.6
		1-13/64	1.203	1.250	1-7/16	19.4
		1-14/64	1.218	1.250	1-7/16	22
1"	***3518WF***	1-30/64	1.468	1.500	1-15/16	23
		1-31/64	1.484	1.531	1-15/16	19
		1-32/64	1.500	1.531	1-15-16	21.6
		1-33/64	1.515	1.563	1-15/16	17.9
		1-34/64	1.531	1.563	1-15/16	20.3

Crimped Air King Recommendation Guide

See page 106 for Air King products.

Hose ID	Part #	Hose OD		Crimp Diameter (±0.005)	Crimp Length	% Reduction
		Fractional	*Decimal*			
½"	***AM1WF***	54/64	0.843	0.906	1-1/4	18.3
		55/64	0.859	0.937	1-1/4	13.2
		56/64	0.875	0.937	1-1/4	16.9
		57/64	0.890	0.968	1-1/4	12.1
		58/64	0.906	0.968	1-1/4	15.5
		59/64	0.921	1.000	1-1/4	11.1
		60/64	0.937	1.000	1-1/4	14.4
		61/64	0.953	1.000	1-1/4	17.2
		62/64	0.968	1.031	1-1/4	13.4
		63/64	0.984	1.031	1-1/4	16.1
		1	1.000	1.062	1-1/4	12.7
		1-1/64	1.015	1.062	1-1/4	15.3
		1-2/64	1.031	1.093	1-1/4	12.0
¾"	***AM6WF*** ***RAM6WF***	1-4/64	1.062	1.156	1-1/4	13.4
		1-5/64	1.078	1.156	1-1/4	17.3
		1-6/64	1.093	1.187	1-1/4	11.9
		1-7/64	1.109	1.187	1-1/4	15.8
		1-8/64	1.125	1.218	1-1/4	11.2
		1-9/64	1.140	1.218	1-1/4	14.6
		1-10/64	1.156	1.218	1-1/4	17.5
		1-11/64	1.171	1.250	1-1/4	13.0
		1-12/64	1.187	1.250	1-1/4	16.2
		1-13/64	1.203	1.281	1-1/4	12.3
		1-14/64	1.218	1.281	1-1/4	15.1
		1-15/64	1.234	1.312	1-1/4	11.5
		1-16/64	1.250	1.312	1-1/4	14.4
		1-17/64	1.265	1.312	1-1/4	16.9
		1-18/64	1.281	1.343	1-1/4	13.5
		1-19/64	1.296	1.343	1-1/4	15.9
		1-20/64	1.312	1.375	1-1/4	12.6
		1-21/64	1.328	1.375	1-1/4	15.0
		1-22/64	1.343	1.406	1-1/4	12.1
1"	***AM11WF-1***	1-18/64	1.281	1.375	1-1/2	16.7
		1-19/64	1.296	1.375	1-1/2	20.5
		1-20/64	1.312	1.406	1-1/2	15.0
		1-21/64	1.328	1.406	1-1/2	18.6
		1-22/64	1.343	1.437	1-1/2	13.7
		1-23/64	1.359	1.437	1-1/2	17.5
		1-24/64	1.375	1.468	1-1/2	12.8
		1-25/64	1.390	1.468	1-1/2	16.1
		1-26/64	1.406	1.500	1-1/2	11.5
		1-27/64	1.421	1.500	1-1/2	14.7
		1-28/64	1.437	1.500	1-1/2	17.6
		1-29/64	1.453	1.531	1-1/2	13.9
	AM11WF-1 ***AM11WF***	1-30/64	1.468	1.531	1-1/2	16.8
		1-31/64	1.484	1.562	1-1/2	12.8
		1-32/64	1.500	1.562	1-1/2	15.4
		1-33/64	1.515	1.593	1-1/2	12.0
		1-34/64	1.531	1.593	1-1/2	14.7
	AM11WF	1-35/64	1.546	1.625	1-1/2	11.1
		1-36/64	1.562	1.625	1-1/2	13.7
		1-37/64	1.578	1.625	1-1/2	15.9
		1-38/64	1.593	1.656	1-1/2	12.9
		1-39/64	1.609	1.656	1-1/2	15.1
		1-40/64	1.625	1.687	1-1/2	12.4
		1-41/64	1.640	1.687	1-1/2	14.5
		1-42/64	1.656	1.718	1-1/2	11.8
		1-43/64	1.671	1.718	1-1/2	14.0
		1-44/64	1.687	1.750	1-1/2	11.3
		1-45/64	1.703	1.750	1-1/2	13.3
		1-46/64	1.718	1.750	1-1/2	15.1

Crimped Global Air King Recommendation Guide

See page 103 for Global Air King products.

½" Global Air King

Hose ID	Stem Part #	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction
			Fractional	*Decimal*		
½"	***GAM1***	***CCF0906***	54/64	0.8438	0.840	15
		CCF0906	55/64	0.8594	0.853	15
		CCF0906	56/64	0.8750	0.867	15

¾" Global Air King

Hose ID	Stem Part #	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction
			Fractional	*Decimal*		
¾"	***GAM6***	***CCF1120***	1-5/64	1.0781	1.082	20
		CCF1120	1-6/64	1.0938	1.094	20
		CCF1149	1-7/64	1.1094	1.107	20
		CCF1149	1-8/64	1.1250	1.119	20
		CCF1190	1-9/64	1.1406	1.122	20
		CCF1190	1-10/64	1.1563	1.134	20
		CCF1218	1-11/64	1.1719	1.147	20
		CCF1218	1-12/64	1.1875	1.159	20
		CCF1246	1-13/64	1.2031	1.182	20
		CCF1246	1-14/64	1.2188	1.194	20

1" Global Air King

Hose ID	Stem Part #	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction
			Fractional	*Decimal*		
1"	***GAM11***	***CCF1438***	1-25/64	1.3906	1.388	20
		CCF1438	1-26/64	1.4063	1.400	20
		CCF1469	1-27/64	1.4219	1.413	20
		CCF1469	1-28/64	1.4375	1.425	20
		CCF1500	1-29/64	1.4531	1.438	20
		CCF1500	1-30/64	1.4688	1.450	20
		CCF1531	1-31/64	1.4844	1.463	20
		CCF1531	1-32/64	1.5000	1.475	20

Crimped Surelock Recommendation Guide

See page 107 for Surelock products.

Hose ID	Part #	Hose OD		Crimp Diameter (±0.005)	Crimp Length	% Reduction
		Fractional	*Decimal*			
½"	***SL050CR***	54/64	0.843	0.969	1-1/4	16.6
		55/64	0.859	0.969	1-1/4	20.2
		56/64	0.875	0.969	1-1/4	23.5
		57/64	0.890	1.000	1-1/4	18.6
		58/64	0.906	1.000	1-1/4	21.7
		59/64	0.921	1.031	1-1/4	17.2
		60/64	0.937	1.031	1-1/4	20.2
		61/64	0.953	1.032	1-1/4	23.0
		62/64	0.968	1.063	1-1/4	18.8
		63/64	0.984	1.063	1-1/4	21.5
		1	1.000	1.094	1-1/4	17.7
		1-1/64	1.015	1.094	1-1/4	20.2
		1-2/64	1.031	1.094	1-1/4	22.5
¾"	***SL075CR***	1-4/64	1.062	1.156	1-1/4	18.8
		1-5/64	1.078	1.156	1-1/4	22.7
		1-6/64	1.093	1.188	1-1/4	17.1
		1-7/64	1.109	1.188	1-1/4	20.7
		1-8/64	1.125	1.188	1-1/4	24.0
		1-9/64	1.140	1.219	1-1/4	19.0
		1-10/64	1.156	1.219	1-1/4	22.2
		1-11/64	1.171	1.250	1-1/4	17.6
		1-12/64	1.187	1.250	1-1/4	20.6
		1-13/64	1.203	1.250	1-1/4	23.3
		1-14/64	1.218	1.281	1-1/4	19.2
		1-15/64	1.234	1.281	1-1/4	21.8
		1-16/64	1.250	1.313	1-1/4	18.0
		1-17/64	1.265	1.313	1-1/4	20.5
		1-18/64	1.281	1.313	1-1/4	22.8
		1-19/64	1.296	1.344	1-1/4	19.3
		1-20/64	1.312	1.344	1-1/4	21.6
		1-21/64	1.328	1.375	1-1/4	18.3
		1-22/64	1.343	1.375	1-1/4	20.4
1"	***SL100CR***	1-30/64	1.468	1.500	1-1/2	21.9
		1-31/64	1.484	1.531	1-1/2	18.0
		1-32/64	1.500	1.531	1-1/2	20.6
		1-33/64	1.515	1.531	1-1/2	23.0
		1-34/64	1.531	1.563	1-1/2	19.3
		1-35/64	1.546	1.563	1-1/2	21.7
		1-36/64	1.562	1.594	1-1/2	18.3
		1-37/64	1.578	1.594	1-1/2	20.5
		1-38/64	1.593	1.625	1-1/2	17.3
		1-39/64	1.609	1.625	1-1/2	19.4
		1-40/64	1.625	1.625	1-1/2	21.4
		1-41/64	1.640	1.656	1-1/2	18.5
		1-42/64	1.656	1.656	1-1/2	20.4
		1-43/64	1.671	1.688	1-1/2	17.6
		1-44/64	1.687	1.688	1-1/2	19.5
		1-45/64	1.703	1.688	1-1/2	21.3
		1-46/64	1.718	1.719	1-1/2	18.6
1½"	***SL150CR***	2-1/64	2.015	2.094	2-7/8	19.9
		2-2/64	2.031	2.094	2-7/8	22.3
		2-3/64	2.046	2.125	2-7/8	18.8
		2-4/64	2.062	2.125	2-7/8	21.1
		2-5/64	2.078	2.125	2-7/8	23.2
		2-6/64	2.093	2.156	2-7/8	20.0
		2-7/64	2.109	2.156	2-7/8	22.0
		2-8/64	2.125	2.188	2-7/8	19.0
2"	***SL200CR***	2-41/64	2.640	2.718	3	20.1
		2-42/64	2.656	2.750	3	17.3
		2-43/64	2.671	2.750	3	19.2
		2-44/64	2.687	2.750	3	21.0
		2-45/64	2.703	2.781	3	18.3
		2-46/64	2.718	2.781	3	20.1
		2-47/64	2.734	2.813	3	17.6
		2-48/64	2.750	2.813	3	19.3

Crimped Interlocking Cam & Groove Recommendation Guide

See page 40 for Interlocking Cam & Groove products.

1½" Interlocking Style Cam and Groove

Hose ID	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction	Crimp Die #	Offset
		Fractional	*Decimal*				
1½"	***CF150-1***	1-49/64	1.766	1.845	20%	45	0.072
		1-50/64	1.781	1.857	20%	45	0.085
		1-51/64	1.797	1.870	20%	45	0.097
		1-52/64	1.813	1.882	20%	45	0.110
	CF150-2	1-53/64	1.828	1.895	20%	45	0.123
		1-54/64	1.844	1.907	20%	45	0.135
		1-55/64	1.859	1.920	20%	45	0.148
		1-56/64	1.875	1.932	20%	45	0.160
	CF150-3	1-57/64	1.891	1.945	20%	45	0.173
		1-58/64	1.906	1.957	20%	45	0.185
		1-59/64	1.922	1.970	20%	45	0.198
		1-60/64	1.938	1.982	20%	45	0.210
	CF150-4	1-61/64	1.953	1.995	20%	45	0.223
		1-62/64	1.969	2.007	20%	45	0.235
		1-63/64	1.984	2.020	20%	51	0.011
		2	2.000	2.032	20%	51	0.024
	CF150-5	2-1/64	2.016	2.045	20%	51	0.036
		2-2/64	2.031	2.057	20%	51	0.049
		2-3/64	2.047	2.070	20%	51	0.061
		2-4/64	2.063	2.082	20%	51	0.074
	CF150-6	2-5/64	2.078	2.095	20%	51	0.087
		2-6/64	2.094	2.107	20%	51	0.099
		2-7/64	2.109	2.120	20%	51	0.112
		2-8/64	2.125	2.132	20%	51	0.124
	CF150-7	2-9/64	2.141	2.145	20%	51	0.137
		2-10/64	2.156	2.157	20%	51	0.149
		2-11/64	2.172	2.170	20%	51	0.162
		2-12/64	2.188	2.182	20%	51	0.174
	CF150-8	2-13/64	2.203	2.195	20%	51	0.187
		2-14/64	2.219	2.207	20%	51	0.199
		2-15/64	2.234	2.220	20%	51	0.212
		2-16/64	2.250	2.232	20%	51	0.224
	CF150-9	2-17/64	2.266	2.245	20%	57	0.000
		2-18/64	2.281	2.257	20%	57	0.013
		2-19/64	2.297	2.270	20%	57	0.025
		2-20/64	2.313	2.282	20%	57	0.038
	CF150-10	2-21/64	2.328	2.295	20%	57	0.050
		2-22/64	2.344	2.307	20%	57	0.063
		2-23/64	2.359	2.320	20%	57	0.075
		2-24/64	2.375	2.332	20%	57	0.088

2" Interlocking Style Cam and Groove

Hose ID	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction	Crimp Die #	Offset
		Fractional	*Decimal*				
2"	***CF200-1***	2-21/64	2.328	2.388	20%	57	0.144
		2-22/64	2.344	2.400	20%	57	0.156
		2-23/64	2.359	2.413	20%	57	0.169
		2-24/64	2.375	2.425	20%	57	0.181
	CF200-2	2-25/64	2.391	2.438	20%	57	0.194
		2-26/64	2.406	2.450	20%	57	0.206
		2-27/64	2.422	2.463	20%	57	0.219
		2-28/64	2.438	2.475	20%	57	0.231
	CF200-3	2-29/64	2.453	2.488	20%	63	0.007
		2-30/64	2.469	2.500	20%	63	0.020
		2-31/64	2.484	2.513	20%	63	0.033
		2-32/64	2.500	2.525	20%	63	0.045
	CF200-4	2-33/64	2.516	2.538	20%	63	0.058
		2-34/64	2.531	2.550	20%	63	0.070
		2-35/64	2.547	2.563	20%	63	0.083
		2-36/64	2.563	2.575	20%	63	0.095
	CF200-5	2-37/64	2.578	2.588	20%	63	0.108
		2-38/64	2.594	2.600	20%	63	0.120
		2-39/64	2.609	2.613	20%	63	0.133
		2-40/64	2.625	2.625	20%	63	0.145

Crimped Interlocking Cam & Groove Recommendation Guide

See page 40 for Interlocking Cam & Groove products.

2" Interlocking Style Cam and Groove

Hose ID	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction	Crimp Die #	Offset
		Fractional	*Decimal*				
2"	***CF200-6***	2-41/64	2.641	2.638	20%	63	0.158
		2-42/64	2.656	2.650	20%	63	0.170
		2-43/64	2.672	2.663	20%	63	0.183
		2-44/64	2.688	2.675	20%	63	0.195
	CF200-7	2-45/64	2.703	2.688	20%	63	0.208
		2-46/64	2.719	2.700	20%	63	0.220
		2-47/64	2.734	2.713	20%	63	0.233
		2-48/64	2.750	2.725	20%	69	0.008
	CF200-8	2-49/64	2.766	2.738	20%	69	0.020
		2-50/64	2.781	2.750	20%	69	0.033
		2-51/64	2.797	2.763	20%	69	0.046
		2-52/64	2.813	2.775	20%	69	0.058
	CF200-9	2-53/64	2.828	2.788	20%	69	0.071
		2-54/64	2.844	2.800	20%	69	0.083
		2-55/64	2.859	2.813	20%	69	0.095
		2-56/64	2.875	2.825	20%	69	0.108
	CF200-10	2-57/64	2.891	2.838	20%	69	0.121
		2-58/64	2.906	2.850	20%	69	0.133
		2-59/64	2.922	2.863	20%	69	0.146
		2-60/64	2.938	2.875	20%	69	0.158

3" Interlocking Style Cam and Groove

Hose ID	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction	Crimp Die #	Offset
		Fractional	*Decimal*				
3"	***CF300-1***	3-23/64	3.359	3.553	20%	90	0.010
		3-24/64	3.375	3.565	20%	90	0.022
		3-25/64	3.391	3.578	20%	90	0.035
		3-26/64	3.406	3.590	20%	90	0.047
	CF300-2	3-27/64	3.422	3.603	20%	90	0.059
		3-28/64	3.438	3.615	20%	90	0.072
		3-29/64	3.453	3.628	20%	90	0.084
		3-30/64	3.469	3.640	20%	90	0.097
	CF300-3	3-31/64	3.484	3.653	20%	90	0.110
		3-32/64	3.500	3.665	20%	90	0.122
		3-33/64	3.516	3.678	20%	90	0.135
		3-34/64	3.531	3.690	20%	90	0.147
	CF300-4	3-35/64	3.547	3.703	20%	90	0.160
		3-36/64	3.563	3.715	20%	90	0.172
		3-37/64	3.578	3.728	20%	90	0.185
		3-38/64	3.594	3.740	20%	90	0.197
	CF300-5	3-39/64	3.609	3.753	20%	90	0.210
		3-40/64	3.625	3.765	20%	90	0.222
		3-41/64	3.641	3.778	20%	90	0.235
		3-42/64	3.656	3.790	20%	96	0.010
	CF300-6	3-43/64	3.672	3.803	20%	96	0.023
		3-44/64	3.688	3.815	20%	96	0.035
		3-45/64	3.703	3.828	20%	96	0.048
		3-46/64	3.719	3.840	20%	96	0.060
	CF300-7	3-47/64	3.734	3.853	20%	96	0.073
		3-48/64	3.750	3.865	20%	96	0.085
		3-49/64	3.766	3.878	20%	96	0.098
		3-50/64	3.781	3.890	20%	96	0.110
	CF300-8	3-51/64	3.797	3.903	20%	96	0.123
		3-52/64	3.813	3.915	20%	96	0.135
		3-53/64	3.828	3.928	20%	96	0.148
		3-54/64	3.844	3.940	20%	96	0.160
	CF300-9	3-55/64	3.859	3.953	20%	96	0.173
		3-56/64	3.875	3.965	20%	96	0.185
		3-57/64	3.891	3.978	20%	96	0.198
		3-58/64	3.906	3.990	20%	96	0.210
	CF300-10	3-59/64	3.922	4.003	20%	96	0.223
		3-60/64	3.938	4.015	20%	96	0.235
		3-61/64	3.953	4.028	20%	102	0.011
		3-62/64	3.969	4.040	20%	102	0.024

Crimped Interlocking Cam & Groove Recommendation Guide

See page 40 for Interlocking Cam & Groove products.

4" Interlocking Style Cam and Groove

Hose ID	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction	Crimp Die #	Offset
		Fractional	*Decimal*				
4"	***CF400-1***	4-23/64	4.359	4.553	20%	114	0.064
		4-24/64	4.375	4.565	20%	114	0.077
		4-25/64	4.391	4.578	20%	114	0.089
		4-26/64	4.406	4.590	20%	114	0.102
	CF400-2	4-27/64	4.422	4.603	20%	114	0.115
		4-28/64	4.438	4.615	20%	114	0.127
		4-29/64	4.453	4.628	20%	114	0.139
		4-30/64	4.469	4.640	20%	114	0.152
	CF400-3	4-31/64	4.484	4.653	20%	114	0.164
		4-32/64	4.500	4.665	20%	114	0.177
		4-33/64	4.516	4.678	20%	114	0.189
		4-34/64	4.531	4.690	20%	114	0.202
	CF400-4	4-35/64	4.547	4.703	20%	114	0.214
		4-36/64	4.563	4.715	20%	114	0.227
		4-37/64	4.578	4.728	20%	120	0.003
		4-38/64	4.594	4.740	20%	120	0.016
	CF400-5	4-39/64	4.609	4.753	20%	120	0.028
		4-40/64	4.625	4.765	20%	120	0.041
		4-41/64	4.641	4.778	20%	120	0.053
		4-42/64	4.656	4.790	20%	120	0.066
	CF400-6	4-43/64	4.672	4.803	20%	120	0.078
		4-44/64	4.688	4.815	20%	120	0.091
		4-45/64	4.703	4.828	20%	120	0.103
		4-46/64	4.719	4.840	20%	120	0.116
	CF400-7	4-47/64	4.734	4.853	20%	120	0.129
		4-48/64	4.750	4.865	20%	120	0.141
		4-49/64	4.766	4.878	20%	120	0.153
		4-50/64	4.781	4.890	20%	120	0.166
	CF400-8	4-51/64	4.797	4.903	20%	120	0.179
		4-52/64	4.813	4.915	20%	120	0.191
		4-53/64	4.828	4.928	20%	120	0.203
		4-54/64	4.844	4.940	20%	120	0.216
	CF400-9	4-55/64	4.859	4.953	20%	120	0.228
		4-56/64	4.875	4.965	20%	126	0.004
		4-57/64	4.891	4.978	20%	126	0.016
		4-58/64	4.906	4.990	20%	126	0.029
	CF400-10	4-59/64	4.922	5.003	20%	126	0.041
		4-60/64	4.938	5.015	20%	126	0.054
		4-61/64	4.953	5.028	20%	126	0.066
		4-62/64	4.969	5.040	20%	126	0.079

Note: The crimp die #'s and offset dimensions are for use with Dixon's Holedall Crimp System (CM400) ***only****.*

Crimped Sanitary Recommendation Guide

See page 391 for Crimp Sanitary products.

1" Crimped Sanitary Fittings

Hose ID	Stem Part #	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction
			Fractional	*Decimal*		
1"	***CSSR100*** ***CBSR100***	***F16G-1453***	1 26/64	1.406	1.565	23%
			1 27/64	1.422	1.577	23%
			1 28/64	1.438	1.589	23%
		F16G-1500	1 29/64	1.453	1.601	23%
			1 30/64	1.469	1.613	23%
			1 31/64	1.484	1.625	23%
		F16G-1547	1 32/64	1.500	1.637	23%
			1 33/64	1.516	1.649	23%
			1 34/64	1.531	1.661	23%
		F16G-1594	1 35/64	1.547	1.673	23%
			1 36/64	1.563	1.685	23%
			1 37/64	1.578	1.697	23%
		F16G-1641	1 38/64	1.594	1.709	23%
			1 39/64	1.609	1.721	23%
			1 40/64	1.625	1.733	23%

Crimped Sanitary Recommendation Guide

See page 391 for Crimp Sanitary products.

1½", 2", 3" and 4" Crimped Sanitary Fittings

Hose ID	Stem Part #	Ferrule Part #	Hose OD		Crimp Diameter (±0.005)	% Reduction
			Fractional	*Decimal*		
1½"	***CSSR150 CBSR150 CILR150 CTER150***	***F24G-1969***	1 58/64	1.906	2.063	23%
			1 59/64	1.922	2.075	23%
			1 60/64	1.938	2.087	23%
			1 61/64	1.953	2.099	23%
		F24G-2031	1 62/64	1.969	2.111	23%
			1 63/64	1.984	2.123	23%
			2	2.000	2.135	23%
			2 1/64	2.016	2.147	23%
		F24G-2094	2 2/64	2.031	2.159	23%
			2 3/64	2.047	2.171	23%
			2 4/64	2.063	2.183	23%
			2 5/64	2.078	2.195	23%
		F24G-2156	2 6/64	2.094	2.207	23%
			2 7/64	2.109	2.219	23%
			2 8/64	2.125	2.231	23%
			2 9/64	2.141	2.243	23%
2"	***CSSR200 CBSR200 CILR200 CTER200***	***F32G-2531***	2 30/64	2.469	2.611	23%
			2 31/64	2.484	2.623	23%
			2 32/64	2.500	2.635	23%
			2 33/64	2.516	2.647	23%
		F32G-2594	2 34/64	2.531	2.659	23%
			2 35/64	2.547	2.671	23%
			2 36/64	2.563	2.683	23%
			2 37/64	2.578	2.695	23%
		F32G-2656	2 38/64	2.594	2.707	23%
			2 39/64	2.609	2.719	23%
			2 40/64	2.625	2.731	23%
			2 41/64	2.641	2.743	23%
		F32G-2719	2 42/64	2.656	2.755	23%
			2 43/64	2.672	2.767	23%
			2 44/64	2.688	2.779	23%
			2 45/64	2.703	2.791	23%
3"	***CSSR300 CBSR300 CILR300 CTER300***	***F48G-3625***	3 36/64	3.563	3.683	23%
			3 37/64	3.578	3.695	23%
			3 38/64	3.594	3.707	23%
			3 39/64	3.609	3.719	23%
		F48G-3688	3 40/64	3.625	3.731	23%
			3 41/64	3.641	3.743	23%
			3 42/64	3.656	3.755	23%
			3 43/64	3.672	3.767	23%
		F48G-3750	3 44/64	3.688	3.779	23%
			3 45/64	3.703	3.791	23%
			3 46/64	3.719	3.803	23%
			3 47/64	3.734	3.815	23%
		F48G-3813	3 48/64	3.750	3.828	23%
			3 49/64	3.766	3.840	23%
			3 50/64	3.781	3.852	23%
			3 51/64	3.797	3.864	23%
		F48G-3875	3 52/64	3.813	3.876	23%
			3 53/64	3.828	3.888	23%
			3 54/64	3.844	3.900	23%
			3 55/64	3.859	3.912	23%
		F48G-3938	3 56/64	3.875	3.924	23%
			3 57/64	3.891	3.936	23%
			3 58/64	3.906	3.948	23%
			3 59/64	3.922	3.960	23%
4"	***CSSR400 CBSR400 CILR400 CTER400***	***F64G-4688***	4 40/64	4.625	4.857	23%
			4 41/64	4.641	4.869	23%
			4 42/64	4.656	4.881	23%
			4 43/64	4.672	4.893	23%
		F64G-4750	4 44/64	4.688	4.905	23%
			4 45/64	4.703	4.917	23%
			4 46/64	4.719	4.929	23%
			4 47/64	4.734	4.941	23%
		F64G-4813	4 48/64	4.750	4.954	23%
			4 49/64	4.766	4.966	23%
			4 50/64	4.781	4.978	23%
			4 51/64	4.797	4.990	23%
		F64G-4875	4 52/64	4.813	5.002	23%
			4 53/64	4.828	5.014	23%
			4 54/64	4.844	5.026	23%
			4 55/64	4.859	5.038	23%
		F64G-4938	4 56/64	4.875	5.050	23%
			4 57/64	4.891	5.062	23%
			4 58/64	4.906	5.074	23%
			4 59/64	4.922	5.086	23%

Glossary of Terms

A

ANSI American National Standards Institute, Inc.

API American Petroleum Institute

ASME American Society of Mechanical Engineers

ASTM American Society for Testing and Materials

Anodize A process for aluminum, similar to zinc or chrome plating steel, in which an aluminum part is electrically charged then, dipped in various chemicals to produce various colors and/or surface hardness.

B

Burst Pressure The pressure at which rupture occurs.

C

Chamfer To cut an angle on the hose tube to aid in stem insertion and to prevent the hose end from flaring when a stem is inserted.

Clamp A metal fitting, band or wire used around the outside of a hose end to secure a coupling, fitting or nipple.

Cold Flow Continued deformation or movement of rubber under stress.

Compression Set The deformation that remains in rubber after it has been subjected to and released from stress such as a clamp. The longer the stress is maintained the more definitive the deformation.

Coupling A device at the end or ends of a length of hose that allows a connection to be made.

Crimping The act of forming the metal sleeve or ferrule of a hose fitting with a surrounding series of die segments to compress the hose within the fitting. The crimping process changes the shape of the entire circumference and length simultaneously. Often interchanged with the term "swaged".

D

Durometer An instrument for measuring the hardness of rubber.

Durometer Hardness A numerical value which indicates the resistance to indentation of the blunt indentor of the durometer.

E

Elastomer Any of various elastic substances resembling rubber.

Expansion Ring Typically refers to a type of fire hose couplings that are attached by expanding a sleeve (usually brass) outward to compress the hose against the wall of the bowl of the coupling.

External Swage (Swaging) A ferrule is passed through a reducing die, usually split, to bring the ferrule OD down to a predetermined size (for proper coupling retention) forcing the hose tube down into the stem serrations.

F

Ferrule A collar placed over a hose end to attach the fitting to the hose. The ferrule may be crimped swaged, forcing the hose against the shank of the coupling, or the shank may be expanded, forcing the hose out against the ferrule, or both.

Glossary of Terms

G

Gripping Finger The part of the clamp that goes over and behind the stem collar to aid in clamp retention.

H

Hard Coat An anodizing process in which the surface hardness of aluminum becomes similar to or greater than that of case hardened steel.

I

Internal Expansion (IX) A plug (or bullet) is pulled through a stem or a set of blades (fingers) increase the stem ID to the plug OD or a predetermined setting when using expansion blades (fingers). This forces the stem serrations into the hose tube and the hose cover into the serrations of the ferrule.

J

JIC Joint Industrial Committee

JIC Thread Typically refers to the threads on hydraulic fittings having 37° conical sealing surfaces.

M

MSHA Mine Safety and Health Administration

N

NSF/ANSI Standard 61 Drinking Water System Components was published in 1988 to establish minimum requirements for the control of potential adverse human health effects from products that contact drinking water.

Nipple The section of the fitting that is inserted into the hose. Also known as the shank of a coupling.

Nominal A dimensional value assigned for the purpose of convenient designation.

O

Operating Pressure The pressure at which system functions, also known as Working Pressure

P

PSI Pounds per square inch

PSIG Pounds per square inch gauge

Permanent Fitting The type of fitting which, after it is applied, cannot be removed for reuse.

Polymer A macromolecular material formed by the chemical combination of monomers having the same or different chemical composition.

Proof Pressure A specified pressure which exceeds the hose assemblies rated working pressure to indicate its reliability at normal working pressure. Follow RMA's testing guidelines for specific pressures and duration's for various types of hose.

PTFE Versatile polymer, polytetrafluoroethylene, commonly known as the DuPont brand name Teflon®

R

RMA Rubber Manufacturers Association

Reusable Fitting The type of fitting that is designed to be removed from a hose and recoupled on another hose.

Glossary of Terms

S

SAE Society of Automotive Engineers

SAE Threads Similar to JIC except 45° conical sealing surfaces

SCFM Standard Cubic Feet per Minute. Typically refers to the amount of compressed air a compressor can produce.

Safety Factor A ratio used to establish the working pressure of a hose based upon the burst pressure. Typical Safety Factors are as follows:

1. Water hose up to 150 psi WP: 3 to 1
2. Hose for all other liquids, solid materials suspended in liquids or air and water hose over 150 psi WP: 4 to 1
3. Hose for compressed air and other gases: 4 to 1
4. Hose for liquid media that immediately changes into gas under standard atmospheric conditions: 5 to 1
5. Steam hose: 10 to 1

Serration The part of the shank (stem) that grips the hose tube.

Shank The section of the fitting or coupling that is inserted into the hose.

Sintered Process in which powdered metal is formed in a mold under extreme pressure to form a finished part.

Surge A rapid rise and decrease of internal pressure.

T

Torque Amount of force required to turn an object. Usually measured in inch pounds (in. lbs.) or foot pounds (ft. lbs.)

Tube The innermost part of the hose that's purpose is to contain the media being transported. Usually, rubber compounds or plastics are blended to give the tube specific properties so that it is compatible with certain media.

U

UHMW Ultra High Molecular Weight. Next generation of chemical hoses after cross-linked polyethylene having a thin tube liner made from extremely dense material giving it excellent chemical resistance properties.

V

Victaulic Groove A style of couplings that has a groove cut near the end of the stem where threads would typically be. The couplings are attached using a "C" shaped clamp that fits into the grooves on the stem.

W

WOG Water, Oil, Gas. Pressure rating for valves handling these products. This does not include steam.

WP Working Pressure

Working Pressure The maximum pressure to which a hose assembly will be subjected to including pressure surges.

X

XLPE Cross-Linked Polyethylene tube material that has good chemical resistance properties.

Page #

A

Acetal push-on fittings 319-320
Adapters -
Aviation 73
Bevel seat 416
Brewery hose 400
Boss 97
Cam and groove 18-21, 30, 34, 37, 38, 39, 40, 41-54, 56-57, 59-60
Drum thread 495
Dry gas 72
Dry quick disconnects 69-76
Fill pipe 562
Flange 554
Forestry 488
Grooved 555
Hydrant 41, 297, 473-475
Hydraulic 367-374
LP gas hose 148-150
Pump 547
Push-in 320
Rubber hose 399, 415, 424
Sanitary 397-400, 415, 416, 430
Suction 470, 471
Swivel 470, 472
Threaded, brass 302, 303
Agricultural -
Hydraulic couplings 353
Tufflite 330
Air -
Blow Guns 136-140
Brake fittings 182-184
Check valves 118, 134, 349, 439-440, 524, 525
Couplings 100-113, 122-129, 148-150
Dryers, desiccant 198, 238
Gauges, process 256
Hammer fittings 99
Hose, polyurethane 141
Hose, self storing 141-142
Hose reel, manual 147
Hose reel, retractable 146
In-line lubricator base 114
Liquifit™ fittings 185-189
Receiver manifold, ASME 116
with Watts Filter 117

Page #

Air, *continued*
Sharkbite® push-in fittings 161-162
Tool lubricant 131
Tool swivel 145
Valves 106, 133-134, 495-525
Wilkerson combo unit with frame 117
Air Chief -
A series 128
Angled swivel 120
Ball swivel connectors with Air Chief plugs 119
Quick disconnects 120-129
Stainless steel 121-124
Air King -
Clamps 104
with ferrules 106
Global 103
Global 4-lug 103
In-line ball valve 106
Safety pin 105
Universal couplings 102
Universal swivels 106
Air Line -
Shut-off valve 133, 215, 239, 524-525
Swivels 144-145
Aluminum -
Ball shut-off nozzle 485, 490
Caps and plugs with chain 462
Double male nipples 479
Drum gate valves 495
Hydrant adapters 39, 475
Manifold connectors 132
Swivel adapters 470-472
Angled industrial plugs 120
Angled swivels 144
ANSI split flange adapter 554
Anti-freeze lubricant 132
API
Certified couplings 386
Coupler 582
Rack cords 582
ARO-speed quick disconnects 127
ASA flange -
Cam and groove 52
Quick-connect 271-272
ASME air receiver manifold 116

Page #

Automatic -
Drain valve, FRL 211
Safety couplers 123
Shut-off nozzles 568
Automotive quick disconnects 125-126
Aviation, dry couplings 72-73
Axial restraint couplings 526

B

Backflow preventer 468
Ball -
Check valves 439
Cone check valves 525
Full flow 497, 572-573
Nozzles 567
Seat, female 312
Shut-off 485, 490
Swivels 144, 286, 312
Swivel connector with Air Chief plugs 119
Valves 106, 350, 495-525
Band clamp -
Tools 340-341
Band and buckle 337
F series 337
K series 338
Smooth ID 339
Barbed push-on fittings 121, 125-128, 144, 306-308, 329
Bayonet style dry disconnects 567
Bell reducers 536
Bent stem swivels 145
Bevel Seat fittings 415-418
Bi-metal thermometers 254
Blow guns -
Extended nozzle 140
Extensions 139
High volume 138-139
Replacement tips 139
Rubber tipped 137, 139
Pistol grip 140
Premium 136, 139
Safety 136-138, 140
Safety air booster 137
Typhoon 138-139

	Page #
Bolted fittings	547
Boss -	
Adapters	97
Assembly information	92
Clamps	98-99
Fittings with ferrules	97
Ground joint knurled nut	93
Ground joint seal couplings	93, 96
Hose menders	95
Male stems	90
Washer seal couplings	94, 96
Wing nut caps	97
Boss-Lock -	
Cam and groove	18-29, 37-38, 41, 50-51, 56-59
EZ Boss-Lock	22-29, 38, 41, 44-45 50, 52, 58-62
Bowes style fittings	109-111
Brass -	
Adapters	302-303, 543
Ball valves	498-504, 511-512, 515-516
Barbed hose fittings	109-111, 120-128, 277-278, 282, 301, 306-312, 346-348
Combination nipples	263
Connectors	155, 159
Dual Lock	112-113
Elbows	156, 159, 305, 307, 310-311
Ferrules	316
Flare fittings	154-156
Gas regulators	229
Gauges	256, 260, 262
Hex plugs	303, 544
Hydrant adapters	473-474
Inserts	158, 310
Long shank fittings	282
Male swivel inserts	312
Nickel plated push-in fittings	167-168
Nylon/nickel push-in fittings	168-170
Push-on fittings	306-308
Reusable fittings	313
Security chains with rings	63
Short shank fittings	268-269
Single male outlet with hex	476
Straight through tank fittings	160
Tees	155, 158, 160, 164-165,

	Page #
Brass, *continued*	
	305, 310-311, 544
Threaded unions	155, 303, 536
Turbo garden hose nozzle	296
Water regulators	191, 230
Break-away couplings -	
Industrial	68
Marine	67
Breakable cap	463
Breather vents	130
Broom, water	293
Bulkhead fittings	547
Butterfly valves	436-438, 522
Buttweld fittings	59, 410, 422, 426
C	
Cam and groove -	
Adapters	18-21, 30, 34, 37-54, 56-60, 476, 557-558, 563, 565
Couplers	22-32, 35, 37-41, 44-60, 67-70, 72-76, 388, 454, 557-558, 564
Clips and lanyards	33, 61-63
Crimped fittings	37, 40
Crimp sleeve	37
Dry disconnect	74-75
Dust caps	28-29, 32, 35, 50
Dust plugs	20-21, 30, 34
Elbows	34-35, 44-46
Flanged coupler & adapters	52, 54
Flat Seal	57
Gaskets	64-65
Global	30-33
Handles	33, 61-62
Hydrant adapters	41, 473-474, 476
Hydrant connections	41, 460
Locking caps	50
Notched fittings	37-39
Reducing cplrs. & adps.	47-50
Phonograph finish	41
Polypropylene	34-35
replacement parts	36
Port on lug	49
Pull rings	62
Specialty items	60

	Page #
Cam and groove, *continued*	
Spool adapters	51
Spool couplers	51
Strap Grip	56, 341
Swaged-on	37
Tank car fittings	42-43
TTMA slip-on x socket flange	53
Vapor recovery couplings	55, 564
Welding fittings	57-58
buttweld to tube	59
Caps -	
Aluminum	462, 565
API, dust	563
Blank end	555
Brass	461
Breakable	463
Dix-Lock	111
Dust, cam and groove	28-29, 32, 35
Dust, hydraulic	352-358
Fill pipe	562
Hydraulic	365
Lockable	50
LP gas	150
Nylon	328, 330, 563
Pipe	541, 545
Sanitary	395, 409, 417, 419, 430
Tank transport	565
Thermoplastic	465
Universal hose	463
Vacuum relief	574
Vapor	563
Vent	574
with chain	461-463
Carded FRL's	223
CBC-lok® tube fittings	152-153
Century brass type fittings	385-386
Check valves -	
Ball cone	525
In-line	173
Safety	118
Series C	134, 349
Spring loaded	278, 524
Swing	424
Unidirectional	173
Chicago type fittings	102-105
Clamp-It band and buckles	337

	Page #
Clamps -	
3-segment	99, 393
Accessories	340
Air King	104
Band	337-338
Bolted	342, 393, 409
Boss	98-99
Center punch	337, 339
Constant Torque	344
Dairy	394
Double bolt	342
Hydraulic	359-360
Kits	332
Pinch-on	331
Racks	336
Raised end, IXH California style	383
Sanitary	392-394
Sanitary accessories	394
Single bolt	342
Smooth ID	339
Spiral	343
Spring hose	343
Stepless ear	332
Strap-Grip	341
T-bolt	344-345, 394
Thumb screw	334
Toggle	393
Tools	340-341
Worm gear	333-336
Worm gear racks	336
Clappers, Siamese	460
Claw type fittings	102-106
Cleaning -	
Hydro-blast tool	140
Lava, heavy-duty hand soap	589
Cleco style fittings	109-111
Close nipples	239, 289, 304, 548
Coil Chief	142
Combination nipples	263-267
Composite mini ball valves	172
Compound gauges	262
Compression bibb faucet	494
Compression fittings	157-160
Compressor Y valve	113
Conical muffler/filters	130
Connectors, push-in	161-171, 174-181
Constant flow nozzles	297, 480
Constant torque clamps	344
Continuous swiveling elbows	458
Contractor pressure gauges	258
Couplings -	
API	582
Cam and groove	22-32, 35, 37-41, 44-60, 67-70, 72-76, 557-558, 564
Dry quick disconnects	69-75
Equipment	375
Inserter	587
LP gas hose	148-150
Lubricants	586
Merchant	549
Safety, automatic	123
Short shank	268-269, 284
CP type fittings	102-106
Crimped fittings -	
cam and groove	37, 38-40
sanitary	391
true ID	594
Crimping tools	63, 317-318
Crows foot type fittings	102-106
D	
Desiccant dryer, FRL	198, 238
Diameter tape	589
Differential pressure indicator	215
DIN11851	413
Displays, FRL	222
DIN fittings	413
Dix-Lock -	
Quick-acting couplings	109-111
with ferrules	111
DOT -	
Airbrake tubing	181
Push-in fittings	178-181
Double -	
Bolt clamps	342
Male hex nipples	478
Male nipples	479
Swivels	472
Drain cocks, lever and internal	134
Drip leg auto drain	239
Drum plug wrench	494
Dryers -	
Desiccant air	198, 238
Dry -	
Aviation	72-73
Gas	76
Gauges	256-259
Hydrant fittings	492
Quick disconnects	69-71, 566
Dual foot gauges	143
Dual Lock -	
Flanged knurled locking	113
Quick-acting couplings	112-113
with ferrules	113
Dust caps -	
Aviation	73
Cam and groove	28-29, 32, 35, 50
Dry gas	76
Hydraulic	352-358
Threaded	328, 330, 565
Dust plugs -	
Aviation	72
Cam and groove	20-21, 30, 34
Dry gas	76
Hydraulic	352-358
E	
Elbows -	
Acetal push-in	315
Air brake	184
Bevel seat	415
Cam and groove	34-35, 44-46
Coaxial	561
Continuous swiveling	458
Drop	558-561
Grooved	553
Hydraulic	362-372
JIC	307, 372-373, 528
Nickel plated	169-170
Nylon	326-327, 330
Nylon/nickel plated	169-172
Polypropylene	34-35, 326-327
Quick connect	271, 274
SAE, 45° swivel	307
Sanitary	401, 415, 420 422-423, 429
Stainless steel	166

	Page #
Elbows, *continued*	
Street	305, 539, 544, 546
Threaded, 45°	538-539
Threaded, 90°	310, 364-365, 537, 539, 542, 544
Threaded side outlet	538
Electrically actuated valves	509-516
Elevated temperature washdown nozzle	286
Equipment -	
Clamp tools	332, 340-341, 343
Coupling inserters	587
Crimpers	317-318
Cutters	322
Hand crimper for wire rope	63
for Push-On fittings	308
RAMs	375
Test pumps	587-588
Expansion rings	443
Expansion ring couplings	442
Expansion unit assembly	443
External crimp ferrules	40
External drain cocks	134
Externally swaged fittings	377-382

F

Faucet	
Adjustable	494
Bibb	494
Drum	494
Ferrule crimping tools	317-318
Ferrules -	
Bevel seat	414
Brass	316
Crimped, sanitary	391
Externally swaged	378-379
Grooved stem style	40
I-Line	420
Internally expanded	384-385
Notched	37, 39, 379
Petroleum	386
Stainless steel	37, 39, 317, 386, 389, 391
Fill Pipe -	
Adapter caps	562
Adapters	562
Filter/Regulators -	
accessories	220-221, 246
Carded	223
FRL	203-204, 231, 248
Mini's	192, 224
Series I	231
Watts	248
Wilkerson	203-204
Filters -	
accessories	212-215, 240-242, 252
Airline	194-195, 225-226
Carded	223
Inlet	292
In-Line, air/oil	131
Mini in-line	131
Oil removal	227
Series I	225-227
Watts	247-248
Wilkerson	194-197
Filters, Regulators, Lubricators	190-253
Finger type clamps	98-99
Fire Hose -	
Adapters	470-476
Adj. pressure restricting device	459
Breakable caps	463
Caps and plugs	461-463
Chemical booster	454
Couplings	441-443
Dry hydrant	492
Expanders	443
Forestry mop up	488
Hose	447-453, 488
Hydrant adapter	473-475
Hydrant connections, C&G	41
Jackets	590-591
Master streams	486
Monitors	486
Nozzles	480-486
Pin rack	458
Racks	457-458
Reels	455-456
Roof connections	460
Siamese clappers	460
Single jacket 500#	457
Spanner wrenches	270, 464-465
Storz fittings	487
Fire Hose, *continued*	
Thermoplastic adjust-a-plug	463
Wharf hydrant	468
Wall reel	455
Valves	459, 466-469
Fire jackets for hose	590-591
Fire tape	591
First aid kit	592
Flame retardant hose and cable	
protection	590
Flange -	
Hydraulic 4-bolt	361-362
Tube OD weld	428
Tube OD wall	428
Flanged -	
Adapters	52-54, 361, 533, 554
Assemblies	381
Combination nipples	267
Couplers and adapters	52-54
Quick-connect, fittings	271-272
TTMA extension	584
Flanges	531-532
Flare fittings	154-156, 373-374
Flat face fittings	364-365
Flat seal couplings	57, 441
Flo-Mate couplings	348
Floor flange	542
Flowmax connectors -	
Diesel fueling system	78-79
ENBL series	84
Fuel vent	79
Gravity fill receiver	79
High flow series	84
R series	82-83
Standard	80-81
Flow Chief food grade fittings	389-391
Flow control valves -	
Air	135, 172-173
Hydraulic	349
Flush face hydraulic fittings	357
Flutterguard dry gauges	258
Fog nozzles	480-484
Food grade fittings	389-440
Foot valves	279
Forestry fog nozzle	490-491

Page #

FRL's -
- Accessories 212-221, 240-246, 252-253
- Displays 222
- Carded 223
- Series I 223-246
- Watts 247-253
- Wilkerson 190-222

Fuel nozzles 570-571
Fusible pipe caps 565

G

Garden hose -
- Hose 294-295
- Accessories 296-299
- Fittings 298-302
- Nozzles 296-297
- Quick couplers 300

Gaskets 42, 64, 94, 96, 101, 105, 110, 270, 272, 275, 328, 383, 387, 405-408, 412-413, 418, 421, 441, 443, 480-481, 532, 556, 565
Gas -
- Dry couplings 72
- LP, hose coupling & adapters 148-150
- Regulators 229

Gate valve -
- Self closing 495
- Single hydrant 466
- Wedge disc 467

Gauges 254-262
Gravity drop adapter 563
Grease whip assemblies 314
Grip-L couplings 526-527
Grooved fittings -
- End caps 555
- Gaskets 556
- Lightweight 550
- Mechanical tees 552
- Nuts and bolts 556
- Quick release 551
- Rigid 551
- Series 45 553
- Series 90 553
- Series AN 555
- Series BE 555

Grooved fittings, *continued*
- Series EC 555
- Series FA 554
- Series HN 555
- Series RA 554
- Series SF 554
- Series T 553
- Standard 550
- Valves 497-498

Grooved nipples 264, 555
Grooved stem style ext. crimp ferrule 40
Ground joint -
- Air hammer couplings 99
- Fittings 93, 96, 99

H

Hammer lug type couplings 92, 96-97, 99
Hammer Unions 90
Hand cleaner, Lava 589
Handles, cam and groove 33, 36, 61-62
Hangers -
- pipe 411
- tube 432-433

Hastelloy fittings 60, 263
Heavy duty ends for IXH clamps 383
Hex bushings 303, 535, 542
Hex manifold 133
Hex plugs, brass 303, 541
Holedall -
- Couplings 97, 378, 381-382
- Expander machine 387
- Ferrules 379-380, 382, 384
- Food grade fittings 389-391
- Flanged assemblies 381
- Nipples 378
- Notched ferrules 380
- Notched stems 380
- Swaging machines 375
- Petroleum fittings 385-386
- Rams 375

Horizontal swing check valves 524
Hose -
- Air, self-storing 142
- Braided rubber 292
- Caps 463
- Contractors 294

Hose, *continued*
- Crimper 318
- Cutters 322
- Diameter tape 589
- Fire 447-453
- Fire jackets for hose 590-591
- Fittings, barbed 109-111, 119-128, 277, 282, 301, 309-315, 346-348
- Flexogen® 294
- Garden 294-295
- Hand crank reel 292
- Hot water reinforced 295
- Hot water washdown 285
- Knife 589
- Layflat garden 294
- Mallet 589
- Menders 95, 277-278, 284, 300, 308-309, 327
- Mill 444-446
- Nominal smooth bore 593
- Polyurethane whip hose 141
- PTFE 593
- Racks 147, 457-458
- Recreation 295
- Reels 146-147
- Reels, style V swing wall 455
- Room equipment 589-592
- Spiral guard protection 590
- Stations, water and steam 285
- Swivels 68, 144-145, 569
- True ID 594

Hot & cold water washdown stations 285
Hot water washdown nozzle 286
Hot water washdown hose 285
Hydrant -
- Adapters 41, 297, 473-475
- Connections, cam and groove 41
- Dry fittings 492
- Gate valves 466-469

Hydraulic -
- 3000 series 352
- 4-bolt flanges 361-362
- 5600 series 356
- 7800 series 354
- Adapters 361-362, 367-368, 372-373
- Agricultural 353

	Page #
Hydraulic, *continued*	
Ball valve, high pressure	350, 504
Couplings	346-359
Dust plugs and caps	352-358
Flat face	364-365
Flo-Mate	348
Flush face	357
Industrial	351-352
Pipe swivel adapters	367-368
Pipe fittings	369-372
Quick-Connect	346-347,351-353, 356-358
Return line clamps	359
SAE O-ring fittings	363, 366
Split flange adapters	361-362
VH series	358
Water-blast	359
WS series	355
Hydro-blast cleaning tool	140
Hydrostatic test pumps	588
Hydrotest pump	587
I	
I-line fittings	419-421
Inflator gauges, tire	143
Inlet filter	392
In-line	
Ball valve, air king end	106
Check valves	173
Filters, mini	131
Flow control valves	172-173
Lubricators	114
Swivels	144
Industrial -	
Cable release coupling	68
Hydraulic couplings	351-352
Interchange angled swivel	120
Quick connects	120-124
Inserts, threaded	595-596
Interlocking clamps	98-99
Internally expanded fittings	382-384
Injector nozzle	290
J	
JIC adapters	372-373
JIC fittings	307, 312, 362-363, 528, 593
Joint sealant gasket material	586
K	
Keychains	130
King -	
Combination nipples	263-267
BSPT end	264
Quick acting	101
Cable	115
Shank couplings	268-269, 282-284
Extra long	273
Heavy duty	276
Steel nipples	280-281
L	
Lance, spray and extensions	289-290
Lanyards and safety clips	62-63, 105
Lay flat hose fittings	57, 441
Lever drain cocks	134
Lever ring, quick connector	275
Lincoln quick disconnects	129
Line strainers	290, 519-520
Liquid filled gauges	259-261
Liquifit™ fittings	185-189
Locking ball valves	499-501
Locking Kit, Dry Disconnect	74
Lockable caps	50
Long handle short shank female	476
Long shank couplings	282-283
LP -	
Boss male stems	56, 95, 341
Gas hose coupling & adapters	148-150
Lubricants -	
Air tool	131
Anti-freeze	132
Gruvlok	556
Lubricators -	
Accessories	218-220, 244-245, 253
Carded	223
In-line	114
Micro-fogging	232-234
Oil-fogging	235-236
Pyrex® sight feed dome	234
Lubricators, *continued*	
Series I	232-236
Watts	250
Wilkerson	192, 204-207
M	
Magnetic thermometers	255
Make-A-Clamp clamp kit	336
Mallet, hose	589
Manifolds -	
2 in 1	132
3 in 1	132
Air receiver	116
Aluminum	132
GHT, 4 valve	299
Hex, flat	133
Modular	171
Regulator	229
Marine break-away coupling	67
Marking pens	589
Mechanical tees	552
Menders	95, 277-278, 284, 300, 308-309, 327
Merchant couplings	549
Metal hose fittings	528-556
Metric	
Push-in fittings	176-177
Tubing	176
Mini -	
Combination units	193, 224
Filter/regulators	192, 224
Filters	131, 190-192, 223-224
Lubricators	131, 192, 223-224
Regulators	131, 190-191, 223-224
Mining fittings	101
Monitor nozzle	486
Muffler/filters	131
Muffler, speed control	130, 518
Mulconroy	375
N	
Needle valves -	
Air	134
Hydraulic	350
Nipples -	
3500	281

Page #

Nipples, *continued*
- Close 239, 284, 304, 548
- Combination 263-267
- Double male 478-479
- Female to male 477
- Grooved 264
- Hex 303, 477-478, 543, 548
- Hex welding 529
- King 280
- Notched turned back 267, 530
- Octagon 529
- Pipe 277, 304, 529, 548
- Polypropylene 266, 323-324

Norgren FRL's 224-246

Notched -
- Cam and groove fittings 37-39
- Ferrules, Holedall 37, 379-380
- Stems, Holedall 378
- Turned back nipples 267, 530

Nozzles -
- Adjust-a-Power 296
- Automatic shut-off 568
- Ball 567
- Ball shut-off 485, 490
- Constant flow 297, 480
- Elevated temperature 286
- Fire hose 297, 481-485, 489
- Flexible water 298
- Fog 480-483, 491
- Fuel 570-571
- Garden hose 296-297
- High pressure spray 291
- Holder 292
- Injector nozzle 290
- Master Stream 486
- Multi-pack 291
- Overwing aircraft 569
- Pressure 291, 569
- Quick connect spray 291
- Shut-Off 485, 489-490
- Soap 291
- Solid brass 297, 483
- Spray hose 286-287, 291
- Stainless steel 287
- Sweeper 297
- Temperature indicating 287

Page #

Nozzles, *continued*
- Tips 484-485
- Turbo nozzle 292, 296
- Utility 568

NPT threaded fittings 529, 535-544

Nylon fittings 323-330

Nylon 12 tubing 174-175

Nylon protective sleeve 591

O

Oil removal filter 227

Oil vapor removal filter 227

Open flex 1L couplings 527

OSHA valves 118

Oxyacetylene -
- Ferrules 315
- Hose couplings 315

P

Panel builder gauge 258

Parker EZ-mate 123

Petroleum fittings, API 385

Petroleum fittings, Holedall 385-387

Phonograph finish fittings 41, 266

Pin Lug -
- Caps 461
- Couplings 41, 43, 268, 269, 283, 442, 460-463, 468-473, 476, 479, 565

Pinch-on clamps and accessories 331-332

Pipe -
- Adapters 555
- Bolted fittings 547
- Caps 565
- Cross 541
- Fittings 526-556
- Hangers 411
- Nipples 284, 529, 548
- Play 484
- Thread sealant 585

Pliers, spring hose clamp 343

Plugs -
- Aluminum, with chain 462
- Dust, cam and groove 20-21, 30, 34
- Hydraulic flat face 365
- Hydraulic male pipe 366
- LP gas 150

Page #

Plugs, *continued*
- Push-in fitting 170
- Square head 328, 541

Pneumatically actuated valves 508, 510, 512, 514, 516

Polyethylene tubing 174-175

Polypropylene -
- Ball valves 520
- Bolted fittings 547
- Cam and groove fittings 34-35
  - Replacement parts 365
- Chemical transfer fittings 319
- Pipe fittings 545-546
- Sleeves 411

Polyurethane -
- air hose 141
- tubing 174-175
- whip hose 141

Pop-off valves, safety 133

Positioners 518

Pressure gun 288
- Lance 289
- Telescoping 290

Pressure recommendations 10-13

Process gauges 256

Pull rings, cam and groove 62

Pump adapters 547

Punch style clamps 337-339

Push-in fittings 161-171, 319-320

Push-in fitting kit 171

Push-on fittings 306-308

Push-on fitting tool 308

PVC tubing 321

Q

Quick acting couplings 101, 107, 109-113

Quick connect -
- Agri-Lock style 271-272
- Air fittings 107, 109-113, 120-129
- Bauer style 273-275
- Cam and groove 16-60
- Hydraulic fittings 346-347, 351-358
- Suction fittings 268-270

Quick couplings and plugs 290

Quick release couplings 551

Page #

R

Rack cords, API compatible 582
Racks -
Fire hose 457-458
Hose 146
Hump 456
Mixing station 285
Worm gear clamp 336
Radiator bibb 298
Railroad tank car -
Fittings 42-43
Gaskets 42
Reducer -
Adapters 47-50, 302, 543
Bell 536
Couplings 47-50
Hex nipples 477-478, 544
Quick connect 274
Sanitary 403, 416, 425-426, 431
Union 158
Reels -
Continuous flow 455-456
Hand crank 292
Hose 145-146, 455
Style V swing wall 455
Regulators -
Accessories 215-217, 242-243, 253
Airline 190-191, 198-204, 228-231, 248-249
Carded 223
Dial air 198
Gas 229
General 223, 229
High pressure 201
Manifold 229
Mini general purpose 229
Mini water 191, 230
Replacement springs 215, 242
Series I 228-231
Watts 249
Wilkerson 198-202
Water 230
Replacement handles, cam & groove 61-62
Right hand couplings 315
Rigid couplings 551
Roof connections 460

Page #

Rostra type fittings 385-388

S

Saddle hose racks 457
SAE fittings 307, 357, 362-363, 366
Safety -
Blow guns 136-140
Break-away couplings 67-68
Cables 115
Check valves 118
Clips and lanyards 33, 62-63, 105
Industrial, cable release break-away 68
Information 2-7
Marine, break-away 67
Shut-off valves 118, 133, 349
Tape and tags 592
Vented ball valves 501
Sand blast couplings 100
Sanitary -
Adapters 397-400, 410, 424, 430
Bevel seat fittings 414-418
Bolted clamp 409
Buttweld fittings 422-426
Tube x adapter buttweld 410
Caps 395, 409, 413, 417-419, 430
Clamps 392-394, 409, 419
Clamp accessories 394
Clamp fittings 392-409
Crosses 403, 424
DIN11851 413
Buna-N gasket 413
Elbows 401, 415, 420, 422-423, 429
Ferrules 395-397, 409-410, 414, 420
Flanges 428
Gaskets 405-408, 412-413, 418, 421
I-Line fittings 419-421
Lateral 404, 427, 431
Nuts 394, 417
Reducers 403, 416, 425-426, 431
Spray balls 434
Tees 402, 424-425, 430
True Y 427
Tube hangers 432-433
Tube OD fittings 428, 431

Page #

Sanitary, *continued*
U Bend 404, 427
Valves, ball 435
Valves, butterfly 436-438
Valves, check 439-440
Wrenches 417
Sanitary crimp fittings-
Bevel seat 391
Clamp end 391
Ferrule, 304 stainless steel 391
I-line 391
Tube weld end 391
Sanitary IX fittings-
Bevel seat 390
Clamp end 389-390
Ferrule, Flow Chief 389
Male NPT 390
Tube weld end 389
Screw clamps 333-336
Scovill type fittings 385
Security chains 63
Self-closing gate valves 495
Self-storing air hose 141
Service kit, pinch-on clamps 332
Service station equipment 557-574
Sharkbite® push-in fittings 161-162
Short shanks 268-269, 284, 301, 324
Shut-off -
Nozzles 485, 489-490
Safety valves 133
Valves 133, 239, 524
Siamese clappers 460
Sight flow indicators 72, 534, 583
Single bolt clamps 342
Skimmers 279
Sleeves 37, 157, 182, 591
Soap, high pressure nozzle 291
Solenoids 518
Spanner wrenches 270, 464-465
Speed control mufflers 130, 518
Spiral -
Hose and cable protection 590
Wire hose clamps 343
Splicer, elbow 310-311
Splicer, flange adapters 361-362
Splicer, tee 311

Page #

Spool adapters & couplers, cam & groove 51
Spray hose -
- Couplings 283
- Nozzles 291-292

Spring guard 115
Spring return handle valve 501
Squeeze Lok hose assembly tool 315
Stainless steel -
- Ball cone check valve 525
- Ball valves 501-502, 504-510, 513-514
- Bolted fittings 547
- Clamps, pinch-on 331
- Dry quick disconnects 70-71, 74-76
- Inserts 284
- Ferrules 37-40, 317, 380, 386, 3891, 391
- Gauges 256, 258-261
- Hose swivels 68
- Lockable ball valves 505
- Menders 277-278, 284
- Notched short shank cam and groove 37-39
- Quick couplings 120-124
- Push-in fittings 166
- Short shank couplings 284
- Sight flow indicator 534
- Spray nozzle 287
- Thermowells, threaded stainless 255
- Threaded fittings 529-541
- Thread tape 585
- Tube hangers 432
- Y strainer 519

Steam -
- Hose couplings 93-94
- Quick disconnects 92
- Gauge siphon 255
- Valve, 250 lb. 504

Stepless® ear clamps 332
Storz fittings 66, 487
Straight through fittings 346-347
Stretch strap 592
Strainers -
- Foot valves and strainers 279
- Line 290
- Y and T line 519

Page #

Strainers, *continued*
- Y, cast iron, bronze 519

Strap-Grip 57, 341
Straub pipe couplings 526-527
Suction hose couplings 269
Super King shank couplings 283
Surelock Quick-acting couplings 107
Swaged fittings 37, 97, 377-382
Swing wall reels, style V 455
Switches, limit 518
Swivel -
- 37° female 374
- Adapters 367-368, 470-472
- Angled 144-145
- Angled industrial plugs 120
- Ball connectors with Air Chief plugs 119
- Connectors for spray gun 286
- Continuous swiveling elbows 458
- Double female 472
- Fittings 144-145, 156, 163, 165, 167-170, 306-307, 301-302, 312-313, 320
- Hose 68, 141, 569
- Joints 85-89
- Loading arms 584

Syracuse valves 495

T

Tags, hose 592
T-Bolt clamps 344-345
Tank car -
- Fittings, railroad 42-43
- Gaskets 42

Tank truck equipment 557-574
- API coupler 582
- Fuel nozzles 570-571
- Loading arm swivel 584
- TTMA flange extension 584

Tape -
- Fire 591
- Safety 592
- Teflon® 585
- Thread 585

Tees -
- Bullhead 540

Page #

Tees, *continued*
- Female, threaded 540
- Female, reducing 539
- Fittings 155, 158, 160, 162, 164-168, 170-171, 176-181, 183, 186-188, 305, 310-311, 319, 327, 330, 365, 539, 544, 546
- Grooved 553
- Mechanical 552
- Sanitary 402, 424-425, 430
- Side outlet 540
- Street service 540

Teflon®-
- Gaskets 42, 64, 565
- Sealant 585
- Tape 585

Telescoping lance 290
Temperature indicating nozzle 287
Test plugs and caps 588
Test pumps 588
Thermometers -
- Bimetal 255-256
- Magnetic 255

Thermoplastic -
- Caps 465
- FM approved nozzles 481
- Nozzles 480-481, 489
- Plug 465

Thermowells, stainless threaded 255
Thor style fittings 107-113
Thread -
- Tape, stainless steel 585
- Tape, Teflon® 585

Threaded -
- Caps 328, 562
- Elbows, 90° 305, 310-311, 320, 326-327
- Polypropylene 545-546
- Unions 303, 535-536
- Tees 540, 544, 546
- Test caps 588

Thumb screw clamps 334
Tight fill couplers and adapters 557-558
Tire -
- Inflator chuck 143
- Inflator gauges 143

	Page #
T Line strainers	520
Tools -	
Clamp	332, 340-341
Crimping	317-318
Push-on fitting	308
Tube fittings	152-153, 166-173
Tubing -	
Braided	321
Clear	321
Cutters	322
DOT, air brake	181
Fluoropolymer FEP 140	175
Metric	176
Nylon 12	174-175
Polyurethane	174-175
Polyethylene	174
PVC, clear and braided	321
Valves	172-173
Tuff-Lite fittings	323-330
Turned back nipples	267, 530
250 lb. steam valve	504
Tygon type tubing	321

U

Unions-	
Hammer	90
Push-in	163-164, 166, 168, 170-171
Threaded	303, 364, 536
Universal -	
Couplings	102-103
Unloader, spray gun	293

V

Vacuum gauges	262
Valves-	
1-way ball	495, 497-498, 572
2-way ball	497-498
250 lb. steam	504
3-way diverting	502
3-way shut-off	239
3A ball	435
Actuated	507-517
Actuated valve accessories	518
Adjustable faucet	494
Valves, *continued*	
Air blow check	440
Air fuse	118
Angle	459, 572
Balance release	293
Ball	106, 350, 495-525, 572-573
Ball cone check	525
Ball, with NPT tap for drain	503
Butterfly	436-438, 522
Check	118, 134, 173, 278, 349, 439-440, 496, 524-525
Chicago pattern	468
Compact polypropylene	521
Composite mini ball	172
Compressor Y	113
Deadman handle	501
Drum gate	495
Dual Y ball	113, 503
Econovalves	523
Electrically actuated	507-516
Fire hose	459-460, 466-469
Flow control	135, 172-173, 349
Foot	279
Full flow	495, 572
Gate	466-467, 495
Global ball	499
Globe	468, 496
High pressure hydraulic ball	350, 504
Horizontal swing check	524
In-line ball valve, Air King	106
In-line check	173
In-line flow control	172-173
Locking handle	499, 501, 505
Lockout venting	501
Needle, air	134
Needle, hydraulic	350
Nozzle	520-521
Pneumatically actuated	507-517
Polypropylene	520-521
Quick exhaust	172
Release	293
Safety check	118
Safety pop-off	133
Safety release	293
Sanitary	435-440
Self closing gate	495
Valves, *continued*	
Siamese	460
Single hydrant	466
Solder end	498
Spring check	439
Spring loaded	278, 524
Swing check, horizontal	524
Thermal relief	293
Unidirectional, stainless check	173
Unloader	293
Wye	469
Vapor recovery couplers	55, 564
Vent -	
Breather	130
Station	574
Vented grip lance	289
VH series, hydraulic	358
Victaulic -	
Couplings and nipples	550-556
Flat Seal	57, 441

W

Washdown	
Hose	285
Nozzles	286-287
Rack	285
Stations	285
Swivel connectors	286
Washer type couplings	94, 96
Washers -	
Air King	105
Cam and groove	42, 64
Fire hose	443, 480-481
Garden hose	297, 328
Ground joint	94, 96
Holedall petroleum	387
Suction and shank fittings	270, 272, 275, 283
Water broom	293
Water nozzle, flexible	298
Water regulators	191, 230
Water-steam washdown stations	285
Watts FRL's	117, 247-253
WD40	586

	Page #
Welding -	
45°, 90°, straight female end	528
Cam and groove fittings	57-59
Gauges	262
Heavy duty ends	383
Liner	413
Male	413
Nipples	529
Threaded fittings	529
Wharf hydrant	468
Whip hose	141
Wilkerson FRL's	117, 190-222
Wing nut cap, Boss	97
Worm gear clamps	333-336
Worm gear clamp racks	336
Wrench grips	529
Wrenches -	
drum plug	494
hex	418
LP gas hose	149
spanner	270, 464-465
Wyes	469

Y

Y line strainers	519
Y, Dix-Lock	111

PART NUMBER INDEX

In the following index, a (•) is used to represent a variable. Therefore, to find AD075EZ or AD400EZ, look for: **AD•••EZ**

	Page #
••••-AA-AL	51
••••-A-AL	18
••••-A-AL	47
••••-AA-SS	51
••••-ALT-AL	54
••••-A-SS	19
••••-A-SS	47
••••-B-AL	48
••••-B-SS	48
••••-C-AL	47
••••-C-SS	47
••••-DA-AL	49
••••-DA-BR	49
••••-D-AL	47
••••-DA-MI	49
••••-DA-SS	49
••••-DD-AL	51
••••-DD-SS	51
••••-D-SS	47
••••-E-AL	18
••••-E-AL	47
••••-E-SS	19
••••-E-SS	47
••••-F-AL	20
••••-F-AL	48
••••-F-BR	20
••••-F-SS	21
••••-F-SS	48
•••A-90AL	45
•••A-90SS	45
•••-AA-AL	51
•••-AA-BR	51
•••-A-AL	18
•••-A-ALH	18
•••-AA-SS	51
•••-A-BR	18
•••-A-HA	60
•••-AL-AL	52
•••-AL-SS	52
•••-ALT-SS	54
•••-A-MI	19
•••-A-PM	19
•••-A-SS	19
•••AWBPSTAL	57
•••AWBPSTSS	57
•••AWSPAL	57
•••AWSPSS	57
•••B-90AL	46
•••B-90SS	46
•••-B-AL	26
•••-B-ALH	26
•••-B-BR	26
•••-B-MI	27
•••-B-SS	27
•••C-90AL	45
•••C-90BR	45
•••C-90SS	45
•••-C-AL	22
•••-C-ALH	22
•••-C-BR	22
•••-C-MI	23
•••CNOSSS	39
•••-C-SS	23
•••D-90AL	45
•••D-90BR	45
•••D-90SS	45
•••DA-45AL	44
•••DA-45SS	44
•••DA-90AL	44
•••DA-90SS	44
•••-D-AL	24
•••-D-ALH	24
•••-D-BR	24
•••-DC-AL	28
•••-DC-ALH	28
•••-DC-BR	28
•••DC-LAL	50
•••DC-LBR	50
•••DC-LSS	50
•••-DC-MI	29
•••-DC-SS	29
•••DD-45AL	44
•••DD-45SS	44
•••DD-90AL	44
•••DD-90SS	44
•••-DD-AL	51
•••-DD-SS	51
•••-DL-AL	52
•••-DL-SS	52
•••-DLT-AL	54
•••-D-MI	25
•••-DP-AL	20
•••-DP-ALH	20
•••-DP-BR	20
•••-DP-MI	21
•••-DP-PM	21
•••-DP-SS	21
•••-D-SS	25
•••DWBPSTAL	58
•••DWBPSTSS	58
•••DWSPAL	58
•••DWSPSS	58
•••E-90AL	45
•••E-90SS	45
•••-E-AL	18
•••-E-ALH	18
•••-E-BR	18
•••-E-HA	60
•••-E-MI	19
•••ENOSSS	39
•••-E-PM	19
•••-E-SS	19
•••F-90AL	46
•••F-90SS	46
•••-F-AL	20
•••-F-ALH	20
•••-F-BR	20
•••-F-HA	60
•••-F-MI	21
•••-F-PM	21
•••-F-SS	21
•••-G-BU	64
•••-G-EPR	64
•••-G-NE	64
•••-G-SIL	64
•••-G-TES	64
•••-G-TEV	64
•••-G-TF	64
•••GTFACC	64
•••GTFEP	64
•••GTFVI	64
•••GTFWB	64
•••GTHK	64
•••-G-VI	64
•••-G-WB	64
•••-G-WNE	64
•••-HP-SP	61
•••-HRP-BR	61
•••-HRP-SP	61
•••-HSCRP-SI	61
•••-LH-BR	61
•••PRSCSS	62
•••TP	588
••10-•	590
••10-••	590
••-A-AL	18
••-A-BR	18
••-A-PM	19
••-A-SS	19
••-B-AL	26
••-B-BR	26
••-B-SS	27
••-C-AL	22
••-C-BR	22
••-C-SS	23
••-D-AL	24
••-D-BR	24
••-DC-AL	28
••-DC-BR	28
••-DC-SS	29
••-DP-AL	20
••-DP-BR	20
••-DP-SS	21
••-D-SS	25
••-E-AL	18
••-E-BR	18
••-E-PM	19
••-E-SS	19
••-F-AL	20
••-F-BR	20
••-F-PM	21
••-F-SS	21
••-G-BU	64
••-G-TF	64
••-G-TF-VI	64
••-G-VI	64
••-HP-SP	61
••SFO	362

	Page #
••SFXO	362
•00GTTFCB	54
•00GTTFK	54
•00GTTFTK	54
•00-TCA-AL	42
•00-TCA-BR	42
•00-TCA-SS	42
•AF•-B	128
•AM•-B	128
•AS•-B	128

0

	Page #
0•••	331
0•••R	331
001-••••	314
0304C-•	373
0304C-••	373
0306-•	373
0306-••	373
040•3	174
05094	174
05106	174
06138	174
0804	174
081•0	174
0817	174
0817BL	174
0817BL100	174
0817BR	174
0817CR	174
09••	332

1

	Page #
1•	342
1••	331
1•••	331
1•••	342
1•••R	331
1••R	331
10••	332
100••	335
10-076-004	233, 236
100DHAN-AL	584
1025P0•00	176
103-••••	312
105-••••	312
1091P••••	175
1091U••••	175
1091U••R00	175
1092T••••	175
1094P••••	175
1094U••••	175
1094U••R00	175
10WSDP-A	355
10WSF1•	355
10WSF1•-BOP	355
11-009-0••	230
110319	560
112012	559, 560
1124D	568
1125A	568
112D	568
112DNS	568
1143A	568
1144D	568
114D	568
114D-AV	569
114D-AV-06ASM	569
114DAVR	569
114DNS	568
1204-••-••	369
1208	174
1208BR	174
1208CR	174
1217AR-4	116
1217AR-4AK	116
1217AR-4AKWF	117
1217AR-4FR	116
1217AR-4PHL	116
1217FRAME	116
122••	174
1231-••-••	369
1234-••-••	370
1238-••-••	370
1240-••-••	369
1250-94	569
1251-••H	366
1254-••H	366
1255-••H	366
126-••••	312
128P•LJ15	381
128P•SO15	381
12P•	381
12WSDP-A	355
134-••••	310
139-••••	310
13H-G•••	417
13IB	394
13IB6	394
13ILB•••	419
13ILH•••	419
13MHHM•••	392
13MHHM•••SN	392
13MHHM-3P•••	393
13MHHM-DP•••	392
13MHHM-Q•••	392
13MHHV•••	409
13MHLA•••	393
13MHP•••	393
13MHPV400	409
13MO•••	394
13PS-•••	432
13PV-•••	411
13R-G•••DIN	413
13RP	394
13RP6	394
13WGC•••	394
13WNS	394
13WNX	394
13WNXH	394
13WNXM	394
1404-•-•	367
1404-••-••	367
1405-•-•	367
1405-••-••	367
14-19-G•••	415
142-••••	312
143-••••	312
144-••••	312
144F-•	155
145-••••	312
149F-•-•	156
14A-G•••	414
14AHR-G•••	415
14AHT-G•••	416
14A-R•••	414
14A-R•••DIN	413
14MPHR-G•••	399
14MPHR-G••••••	399
14MPHRL•••	400
14MPHR-R••	399
14MPHR-R•••	399
14MPHR-R••••	399
14MPHR-R••••••	399
14MPHT-R•••	400
14MPW-R••	397
14MPW-R•••	397
14PRF-G•••	414
14R-G•••	414
14RMP-G•••	395
14RMP-R•••	395
14VB-R•00	428
14WHRL-R•••	424
14WI-G•••	420
14WLI-G•••	420
14WLMP-G•••	396
14WLMP-R•••	396
14WMP-G••	396
14WMP-G•••	396
14WMP-G••••	396
14WMP-R••	396
14WMP-R•••	396
14WMP-R••••	396
14WMV-R•••	409
14WMX-R•••	409
15••U	569
1501-•-•	368
1501-••-••	368
1502-•-•	368
1502-••-••	368
1503-•-•	367
1503-••-••	367
150F-•-•	156
150GPCTF	565
155F-•	156
156	98
156-090•	315
158-090•	315
159F-•-•	156
15A-G•••	414
15A-R•••	414
15A-R•••DIN	413
15B15-100RBF	457
15B15-50RBF	457

	Page #
15R-G•••	414
15TRF-G•••	414
15WI-G•••	420
15WLI-G•••	420
16-••3	351
16-00•	352
16-00•A	352
161••	443
1612	174
163••	174
164C-••	158
165-••••	304
165C-••	158
166-••••	304
166FSV-•-•	156
169-0•0•	305
169C-••••	159
16A-G•••	417
16AI-14I•••	419
16AI-15I•••	419
16AMP-G•••	395
16AMP-G100-150	395
16AMP-G50-75	395
16AMP-R•••	395
16AMP-R•••DIN	413
16AMP-R100-150	395
16AMP-R50-75	395
16AMV-R•••	409
16P•	381
16WSDP-A	355
16WSF16	355
16WSF16-BOP	355
17-••3	351
17-00•	352
17-00•A	352
17-016-107	239
170C-••••	159
171C-••••	160
172C-••••	160
174-0•0•	303
174-F	322
176-0•0•	303
1765A	317
176C-0402	160
177-••••	311
177C-0402	160
179-••••	311
179C-••••	160
17MP-14-G•••	397
17MP-15-G•••	397
18-•••	353
18-001-9••	243
18-011-0••	244
18-025-003	243, 246
185-••••	313
18500116	332
187	98
187-••••	313
188-••	359
189	465
189DH	465
18A57	253
18B57	253
19-•••	353
1-HR1004	147
1-HR1004-3	147
1-HR1004A	147
1WAYBV•••	497, 572
1WAYBV•••SW	497, 572
1WAYBV•••VIC	497, 572

2

2	342
2•	342
2••	331
2•••	331
2•••R	331
2••R	331
200••	335
2000L	574
200GPCBU	565
200GPCTF	565
200-PC-MI	565
200-PC-SS	565
200-PV-9	574
200YDAAAL	60
206	98
2117-01	244
212	98
2143SEALBU	563
21MP-G•••	398
21MP-G••••••	398
21MP-R••	398
21MP-R•••	398
21MP-R••••	398
21MP-R••••••	398
225	98
228-••••	304
22MP-G•••	399
22MP-G••••••	399
22MP-R••	399
22MP-R•••	399
22MP-R••••	399
22MP-R••••••	399
22-ST14C	63
2325-1•	244
233	464
2404-•-•	372
2404-••-••	372
2405-•-•	372
2405-••-••	372
24PFX•.•••	389
250	98
2500HB0000	387
2500L	574
2500SFV	574
2501-•-•	373
2501-••-••	373
2503-•-•	372
2503-••-••	372
25H-•••	417
25H-••••••	417
2601-•-•-•	373
2601-••-••-••	373
2603-•	374
2603-••	374
264C-03	158
269C-0202	159
2700LN-•	374
2700LN-••	374
2701LN-•	374
2701LN-••	374
270AT	308
271-••••	306
273-••••	308
275	98
2796-52	240, 244
280-••••	306
282-••••	307
284-••••	307
286-••••	307
287-••••	307
288-••••	307
289-••••	307
289-••••SAE	307
290-••••	307
292-••••	307
294-••••	308
2962-89	242
2ES2-B	346
2-HR1004-3	147
2-HR1005	147
2HTF2	357
2WAYBV•••	498, 573
2WAYBV•••SW	498, 573
2WAYBV•••VIC3	498, 573

3

3	342
3••	331
3•••	331
3•••R	331
3••R	331
30-•00	352
30-•00DP	352
300••	335
300-•-•	362
300-••-••	362
3000-10	240
30025••4	254
300300FCE	557
300300MAE	557
3004•••4	254
3004030MAE	557
3006•••4	254
3009••••	169, 254
300-AL-MI	52
300ASSSAP	565
300BR••••	536
300EL90••	537
300EL90•••	537
300-FCE	557
300FT••	540
300-G-BU	64, 557

	Page #
300GPCBU	565
300GPCTF	565
300H-PADBR	61
300H-PADSS	61
300-HR325P-BR	61
300-HR325P-SI	61
300-HR325P-SP	61
300-MAE	557
300MICAP•••	541
300MIU••	536
300MIU•••	536
300-P	557
300-PC-AL	565
300PCALAP	565
300-PC-MI	565
300-PC-SS	565
300PCSSAP	565
300RHC••	537
300RHC•••	537
300-SFC-AL	565
300-SFC-MI	565
300-SFC-SS	565
300SSSG	287
300-TCA-MI	42
300-TFA	562
300-TFG	557
3010-RC-SS	565
3014••••	169
302•	275
302••	275
3020DAT••SS	49
3020-RD-AL	565
3020-RD-MI	565
3020-RD-SS	565
3020RDSSAP	565
303•	275
303••	275
30-300F	352
3030RDSSAP	565
3040ALTAL	54
3040DLTAL	54
306	98
306-••••	305
31••	133
31-•00	352
31-•00DC	352
3101••••	177
3102••••	170, 177, 254
3102••00DOT	180
3103••••	168
3103••••DOT	180
3104••••	170, 177, 254
3104••00DOT	180
3106••••	170, 177
3106••00DOT	180
3108••••	168, 176
3108••••DOT	179
3109••••	169, 176
3109••••DOT	179
3113••••	170
3114••••	176
3114••••DOT	179
3115••••DOT	179
3116••00	170, 177
3116••00DOT	181
3126••00	170, 177
3129••••	170
3140••00	170, 177
3140••00DOT	180
31440-225AL	563
3148••••	170
3148••••DOT	180
3161-1•	240
3163-05	242
3166••••DOT	181
31685604DOT	181
3175••••	169, 176
31825600DOT	181
31835600DOT	181
3199••••	177
3201••20	167
3202••00	168
3203••••	167
3204••00	168
3206••00	168
3209••••	167
3215••••	167
322-••••	305, 544
324-••••	305
326-••••	305
3275••••	167
329•0420	167
32P•LJ15	381
32P•SO15	381
32PFX•.•••	389
3315••••	171
340-••-••	362
3407-0•	242
35••	281
35••AA	52
35••CA	52
35••CC	52
350	98
351•WF	281
35-20•-10	494
3646-5•	240, 244
3652-11	240
375	98
3776-5•	240, 244
3783-52	241, 244
38025600	166
3804••••	166
3805••••	166
3806••••	166
3812D	329
3816••••	166
3889••••	166
38D	329
390-••-••	362
390-8-12	362
3942	330
3ES3-B	346
3-HR1004-3	147
3-HR1005	147
3HTDP	357
3HTF•	357
3SSBV••	506
3SSBV•••	506
4	
4	342
4••	331
4••	342
4••R	331
4•0TFxTFAL	584
400•	336
4000-51R	240
40022ALTAL	54
40022DLTAL	54
400-AS-AL	53
400-CVR-AL	55, 564
400-DDVR-AL	55, 564
400-DVR-AL	55, 564
400GPCTF	565
400-PC-SS	565
400-SFI-AL	583
400-TLT-AL	60
401	98
401-01	255
401-01S	255
4030-CVR-AL	55, 564
4030-DAVR-AL	55, 564
4030-D-BR	47
4030-DVR-AL	55, 564
4030-MAE	557
4030-RD-AL	565
4030-RD-SS	565
4032•TF	581
4055-3	591
4055-5•	244
40A-45TCAL	42
40BS-O•••	418
40BS-S•••	418
40IE•••	421
40IH•••	421
40IT•••	421
40IV•••	421
40MP-E•••	406
40MPF-E•••	407
40MPF-E••••	407
40MPF-SFY•••	407
40MPF-SFY••••	407
40MPF-U•••	406
40MPF-U••••	406
40MPF-UW•••	407
40MPF-XW•••	407
40MPF-XW••••	407
40MP-G•••	406
40MP-G••••	406
40MP-GR•••	408
40MP-GRE•••	408
40MP-SFY•••	406
40MPS-U••••	408
40MP-U•••	405

	Page #
40MP-U•••DIN	413
40MP-UW•••	405
40MPV-G•••	412
40MPV-U•••	412
40MP-XC•••	405
40MP-XW•••	405
40PFX•.•••	389
41440-225AL	563
41450-DCAL	563
4-1460-AL	583
418	98
41FL-•	154
41FS-•	154
4203-51RF	244
4213-89	241, 243, 245
4214-5•	241, 243, 245
4215-0•	241, 243, 245
4216-50	241, 243, 245
4224-50	241, 243, 245
4228-01	241, 243, 245
4232-0•	242
4248-89	242, 246
4255-51	242, 246
4266-5•RF	240
4272-99	244
42777••-0001	258
4277776-0003	258
42F-•	155
42MP-E••	406
42MP-G••	406
42MP-GRE50	408
42MP-SFY••	406
42MP-U••	405
42MP-UW••	405
42MP-XC••	405
42MP-XW••	405
4303-77R	244
4313-50	241, 243, 245
4314-5•	241, 243, 245
4315-0•	241, 243, 245
4316-50	241, 243, 245
4324-50	241, 243, 245
4324-51	245
4325-5•R	240, 246
4325-50R	244
4326-01	240, 244, 246
4328-50	241, 243, 245
4332-0•	242
4338-0•	240
4341-01	240
4344-0•	240
4348-89	242, 246
4355-51	242, 246
4380-•00	242
4380-0••	240
4380-050	244
4381-•00	242
4382-•00	244
4384-•70	241, 243, 245
4385-700	240
44••	559
4424-50	241, 243, 245
4425-5•RF	240
4425-50RL	244
4432-0•	242
4438-0•	240
4455-51	242, 246
45•0	563
45•0SG	563
450	98
4500-5	563
450-4S	141
4525••	114
452963	112
462-•	319
462-••	319
464-•	319
464-•••	319
465-•	320
465-••	320
466-•B	320
468-•A	320
468-•B	320
468-•C	320
468-•D	320
469-•B	320
469-•C	320
469-•D	320
469-4A	320
469-4B	320
469S-•A	320
469S-•B	320
469S-•C	320
469S-•D	320
46F-•-•	155
489-•	319
4895••••	173
48F-•-•	155
48P•LJ15	381
48P•SO15	381
48PFX•.•••	389
4-DBHU-4	153
4-DCAP	153
4-DF PLUG	153
4-DFC-4	152
4-DMC-•	152
4-DME-•	152
4-DTTT-4	153
4-DU	
4EAF•	359
4ES4-B	346
4-HR1005	147
4HTDP	357
4HTF•	357
4HTOF•	357
4P•	381
4PSG	583
4RKOBU	584
4RKOVIVI	584
4SFI-G-VI	583
4SFIPSG	583
5	
5	342
5••	331
5••	342
5•••LP	146
5••R	331
5•00	582
5•00B	582
5•00G	582
5000-•	370
5000-••	370
5000-•-•	370
5000-••-••	370
5000-2•	563
50025104	254
50040064	254
500AN4	296
500-AN7	296
500AV	571
500-GH4V	298
500GTCABU	42
500GTCATF	42
500GTCATV	42
500GTCAVI	42
504-12••	302
509-1612	302
5095-17	244
5111A	317
519•0	341
5191-8•	242, 246
5200-SFI	583
5200-SFI-3	583
5200-SFI-3-RK1	583
5200-SFI-3V-RK1	583
5200-SFI-RK1	583
5200-SFIV-RK1	583
52025064	254
5203-06	243, 246
5204•••4	254
5226-97	242
525AV	571
529-03	242
5298-14	242
5301-55	244
5311-0•	240
5379-RK	240
5390-77	240
5404-•	370
5404-••	370
5404-•-•	370
5404-••-••	370
5406-•-•	371
5406-••-••	371
5406C-•	371
5406C-••	371
5502-•	371
5502-••	371
5570-04	243
5578-0•	242
56-•••	356
5602-•	371
5602-••	371

	Page #
5605-•	372
5605-••	372
5605-50	244
57-•••	356
5771-02	244
5797-50	241
5882-1•	240
59-00•	519
5925-0•	240
5939-06	241
5945-•0	242
5988-02	242
5HTDP	357
5HTF6	357

6

	Page #
6	342
6••	342
600-••-••	362
6000-••	558
6000-9	559, 560
6000ASAL	561
6000EHK	559, 560
6000NPHK	560
6000-SSA	561
600-HRP-SI	61
6033•	545, 547
604••	547
605••	545, 547
60C-••	157
60NAB•	182
60NAB••	182
60PT-••	157
61•••	519
61-•••	525
61405	520
615••	36
61769	545
619-50	240
61C-••	157
61CL-••	157
61NAB•	182
61NAB••	182
62•	163
6200	558
6200-1	559
6200-15ASSM	559, 560
6200-7	559, 560
6200-7X	559
6200A	558
6200ARK	559
6200BK	559, 560
6200D	558
6200SGK	559
6200SHK	559, 560
6200T	558
6200X	558
6200XA	558
6200XD	558
6200XDT	558
6200XT	558
621•	163
621••	546, 547
62-10•	525
6212-5•	241, 244
6219•	545
622••	545, 546, 547
6230	559
6230X	559
62797	36
628••	547
629••	547
62C-••	158
62C-••••	158
62CBH-••	158
62NAB•	183
62NAB••	183
62NABH•	183
62NBH•	183
62NBH••	183
62NFBH•	183
62NFBH••	183
630••	547
6302••00WP2	186
6304••00WP2	186
63046056WP2	186
6306••••WP2	186
6315••••WP2	185
6316••00WP2	186
6322••••WP2	188
6325••133WP2	185
6326••00WP2	187
6340••00WP2	186
6351••00WP2	187
63545	36
6366••••WP2	188
6382••00WP2	188
6388••00WP2	188
639C-04	160
63NAB•	182
63NAB••	182
63PT-••••	158
64•	164
640-••-••	362
6400	561
6401-•-•	363
6401-••-••	363
6403-•	363
6403-••	363
6405-•-•	366
6405-••-••	366
6408HHP-•	363
6408HHP-••	363
641•	164
6410-•-•	366
6410-••-••	366
64NAB•	183
64NAB••	183
64P•LJ15	381
64P•SO15	381
64PFX•.•••	389
65•	164
6500	558
6500-•	374
6500-••	374
6500-•-•	374
6500-••-••	374
6500A	558
6503••••WP2	187
650-4S	141
6505••••WP2	185
650-6S	141
6508••••WP2	187
6509••••WP2	187
651•	164
6521••••WP2	187
6579••••WP2	185
65NAB•	184
65NAB••	184
66••x••	164
66•x•	164
6602-•	374
6602-••	374
66C-••••	159
66NAB••	182
66NAB•••	182
66NBH86	183
68••x••	164
68•x•	164
682C-••••	160
688-••	359
68C-••••	159
68NAB•••VS	182
68NAB••VS	182
68NAB1212VS	182
69••x••	163
69•x•	163
690-••-••	362
6901-•-•	368
6901-••-••	368
69NAB•••VS	184
69NAB••VS	184
69NAB1212VS	184
69S••x••	163
69S•x•	163
6-DBHU-6	153
6-DCAP	153
6-DF PLUG	153
6-DFC-4	152
6-DMC-•	152
6-DME-•	152
6-DTTT-6	153
6-DU	153
6ES6-B	346
6HTDP	357
6HTF6	357
6P•	381
6WSDP-A	355
6WSF6	355
6WSF6-BOP	355

7

	Page #
7	342
7•••LP	146

	Page #
70••x•	164
70•x•	164
700013-•••	114
7065••••	172
70NAB••	184
70NAB•••	184
71••x••	165
71•x•	165
71NAB•••VS	183
71NAB••VS	183
71S••x••	165
71S•x•	165
72••x••	165
72•x•	165
720-01	244
72NAB•••VS	183
72NAB••VS	183
72S••x••	165
72S•x•	165
750	99
75TH2R0•5SS	255
7600HP	146
7660••••	172
7665••••	172
769	342
77-•••	354
77-••••	354
7770••00	172
7775••••	173
78-•••	354
78-••••	354
7800MP	146
79-•••	354
79-••••	354
7910••00	172
7982••••	172
79940420	173
7995••••	173
7996••00	173
79NAB•••VS	184
79NAB••VS	184

8

8	342
8••	342
8••••LP	146
80••	298
800-HNP-BR	61
800-HP-BR	61
801-E-AL	18, 56
8027	330
80B••-100HCF	454
80B••-50HCF	454
82•	163
821•	163
850	99
850•••	388
851661	114
855	318
8552••	112
855A	318
856-•	318
860	318
861-••	318
875-•	568
8-DBHU-8	153
8-DCAP	153
8-DF PLUG	153
8-DFC-8	152
8-DMC-•	152
8-DME-8	152
8-DTTT-8	153
8-DU	153
8ES8-B	346
8HTDP	357
8HTF8	357
8P•	381
8WSDP-A	355
8WSF8	355
8WSF8-BOP	355

9

9	342
900	568
9000-48S	138
9000-MJ	138
900B	568
900B34	568
900S	568
900S34	568
900W34B	568
900W34S	568
9076M	114, 131
90DCS•025F	460
90FRC•025	460
90FRC•025F	460
90PPA•••	34
90PPC•••	35
90PPD•••	35
90PPF•••	34
90SCS4025F	460
94•5U061•	123
968	98
96P•LJ15	381
96P•SO15	381
988	342
9901	332

A

A•	104
A••	104
A•F•-B	128
A•M•-B	128
A•S•-B	128
A•VC•-MG	189
A3••-••RAS	447
A3••100RAS	447
A3••-100UC	447
A3••-50UC	447
A3•5100PBF	447
A3•5100RAF	447
A3•5100RBF	447
A3•5-50PBF	447
A3•5-50RAF	447
A3•5-50RBF	447
A5•5-••RAF	448
A5•5-••RAS	448
A5•5100PBF	448
A5•5100RAF	448
A5•5100RAS	448
A5•5100RBF	448
A5•5-100UC	448
A5•5-50PBF	448
A5•5-50RBF	448
A5•5-50UC	448
A510-100RAF	448
A510-100RAS	448
A510-50RAF	448
A510-50RAS	448
A515OR50RAS	448
A515R50RAF	448
A515U••CBF	448
A515U100CBF	448
A515Y50RAF	448
A52•2L-A	386
A71•	555
A71•S	555
AAPN75GHT	296
AB•	102
AB••	101, 102
AB•••	26
AB•••EZ	26
ABB	102
ABB1	102
ABC	102
ABC250	463
ABC1	102
ABH	102
ABH081••	454
ABH101••F	454
AC•	63, 105
AC•••	22
AC•••EZ	22
AC•00C	56
ACB304	272, 275
ACL•	62
ACL8	105
ACPSO150F	485
AD•••	24
AD•••EZ	24
AD90400EZ	45
ADA••••	50
ADA••••EZ	50
ADD•••	51
ADD••••	51
ADFR•5•5	472
ADFR•5•5F	472
ADFR•5F•5S	472
ADFR1010S	472
ADH••F••F	492
ADH••M••F	492
ADHC•••F	492
ADHP•••F	492
ADMR••••F	479

	Page #
ADMR•5F•5F	479
ADMR10S10S	479
ADPW	494
ADS400	53
AE•00C	56
AE600	56
AFC•••	462
AFC•••F	462
AFN150	491
AFN150NST	491
AFP•••F	462
AG••	532
AGHV-FF	299
AGHYV-FF	299
AH•••	28
AH•••EZ	28
AHA••••	475
AHA••••F	475
AHA••••S	475
AHA••••T	475
AHA••S••	475
AHA••S••F	475
AHA••S••T	475
AHA•5•5ADP	41, 476
AHDBF75	494
AHGV250F	466
AHGV250F-H	466
AHW	465
AHWPT	465
AK3526-300FL	486
AK4450NST	486
AKSP1	105
AKSP25	105
AL248	289
AL3••	289
AL32•XX	289
AL4••	290
AL41•	292
AL455F	290
AL60•	293
AL702	293
AL9	288
AL-TPR25-•0	292
AL-TPR30-•0	292
AM•	102
AM••	101
AM••	102
AM•SWIV	106
AM•WF	106
AM11WF	106
AM11WF-1	106
AM7T	106
AMB	102
AMB1	102
AMC	102
AMC1	102
AMF••	132
AMH	102
AN1••	568
ANH••	100
ANH•••	100
ANSI••	554
ANT1••	490
ANT1••F	485, 490
APN•000	529
APRD•50F	459
AQ62DOT•	178
AQ64DOT•	178
AQ68DOT•x•	178
AQ69DOT•x•	178
AQ69DOTS•x•	178
AQ71DOTS•x•	178
AQ72DOTS•x•	178
AR20831	293
AR3000-A2	290
AR3500	292
AR5000-1	293
AR503830SSP	292
AR-BROOM16	293
ARPW10S10S	462
ARPW15F10S	462
AR-REEL100	292
ARTEL18A	290
ARTEL-BELT	290
AS156	559, 560
ASB••	100
ASB•••	100
ASC•••	100
ASCM•8	130, 518
ASF••F•0T	470
ASF•50F	470
ASFI••T••B	72
ASFI••T••T	72
ASM••F•0T	471
ASM•50F	471
ASP-•BV	130
AST•	263
AST••	263
ATCS•0	43
ATCT•0	43
ATN100x7	584
ATS••12H	145
ATS7838F	145
ATS7838M	145
AV•50	459
AV•50-I	459
AV•50-W	459
AVF•50	459
AVF•50-I	459
AVN••00-200	555
AWR14	101
AWR4	105
AWS6	105
AWSG	286
AWSG-TG	286
AWSG-W	286
AY4-FF	299

B

	Page #
B•	93, 94, 98
B••	93, 94, 98
B••SC	97
B•7	93
B07-102AG	224
B07-102MG	224
B07-202AG	224
B07-202AGC	223
B07-202MG	224
B07-202MGC	223
B08-0•AG	192
B08-0•AGMB	192
B08-0•MG	192
B08-0•MGMB	192
B11-0•WJC	248
B11-0•WJCR	248
B12NOZNUT	330
B16-•••S	92
B16-••3	351
B16-1200S	92
B16W-G•••	430
B17-•••S	92
B17-••3	351
B17-1200S	92
B18-0•AG	203
B18-0•AGMB	203
B18-0•MG	203
B18-0•MGMB	203
B19WB-G•••	430
B19WV-R•••	410
B19WX-R•••	410
B23BMP-G•••	395
B23BMP-R•••	395
B23BMP-R••14	395
B24PPHAP-G••	433
B24PPHAP-G•••	433
B24PPSTW-G••	433
B24PPSTW-G•••	433
B24PS-G••	432
B24PS-G•••	432
B24RG-G••	432
B24RG-G•••	432
B24PV-G•••	411
B24RPH-G••	432
B24RPH-G•••	432
B24RV-G•••	411
B24SPHAP-G••	433
B24SPHAP-G•••	433
B24SPSTW-G••	433
B24SPSTW-G•••	433
B25-G••••••	428
B28-0•AG	204
B28-0•AGMB	204
B28-0•MG	204
B28-0•MGMB	204
B28AMP-R•••	404
B28BMP-R•••	404
B28WA-R•••P	427
B28WA-R•••U	431
B28W-R•••P	427
B28W-R•••U	431
B2CM-G•••	422
B2CMP-G•••	401
B2CMP-R••	401
B2CMP-R•••	401

	Page #
B2CM-R•••	422
B2E-G•••	415
B2EI-G200	420
B2F-G•••	415
B2FMP-14-G•••	401
B2FP-G•••	422
B2KM-G•••	423
B2KMP-G•••	401
B2KMP-R••	401
B2KMP-R•••	401
B2KM-R•••	423
B2KS-G•••P	423
B2KS-G•••U	429
B2KS-R•••P	423
B2KS-R•••U	429
B2KS-R••P	423
B2S-G•••P	422
B2S-G•••U	429
B2S-R•••P	422
B2S-R•••U	429
B2T-G•••	423
B2WCL-G•••P	422
B2WCL-G•••U	429
B2WCL-R•••P	422
B2WCL-R•••U	429
B2WCL-R••P	422
B2WK-G•••P	423
B2WK-G•••U	429
B2WK-R•••P	423
B2WK-R•••U	429
B2WUL-R•••P	427
B2WUMP-R•••	404
B3114MP-G••••••	403
B3114MP-R••••••	403
B3115F-G••••••	416
B31TP-G••••••	416
B31W-G••••••P	426
B31W-G••••••U	431
B31WMP-G••••••	397
B31WMP-R200100	397
B31W-R••••••P	426
B31W-R••••••U	431
B3214MP-G••••••	403
B32W-G••••••P	425
B32W-G••••••U	431
B32W-R••••••U	431
B38SL-G•••	428
B38SL-R•••	428
B4•	99
B45AB-R•••	440
B45AB-R100150	440
B45BC-R•••	440
B45BC-R100150	440
B45BY-R•••	439
B45CC-R•••	440
B45CC-R100150	440
B45MP-R••	439
B45MP-R•••	439
B45MP-RK•••	439
B5101E•••CC-A	436
B5101E•••CC-B	436
B5101E•••CC-C	437
B5101E•••CC-D	437
B5101S•••CC-A	436
B5101S•••CC-B	436
B5101S•••CC-C	437
B5101S•••CC-D	437
B5101V•••CC-A	436
B5101V•••CC-B	436
B5101V•••CC-C	437
B5101V•••CC-D	437
B5102E•••-A	438
B5102S•••-A	438
B5102V•••-A	438
B5104E•••CC-D	438
B5104S•••CC-D	438
B5104V•••CC-D	438
B6-1	94
B72G-•AG	231
B72G-•AG-MB	231
B72G-•MG	231
B72G-•MG-MB	231
B73G-•AG	231
B73G-•AG-MB	231
B73G-•MG	231
B73G-•MG-MB	231
B74G-•AG	231
B74G-•AG-MB	231
B74G-•MG	231
B74G-•MG-MB	231
B7MP-G•••	402
B7MP-R••	402
B7MP-R•••	402
B7MPS-R•••	402
B7RMP-G••••••	402
B7RMP-R••••••	402
B7RWWW-G••••••P	425
B7W-G•••P	425
B7W-G•••U	430
B7W-R•••P	425
B7W-R•••U	430
B7WWW-G•••P	424
B7WWW-G•••U	430
B7WWW-R•••P	424
B7WWW-R•••U	430
B9MP-R•••	403
B9WWWW-G•••0P	424
BA•F•F	303, 543
BA1616	303
BA2	93
BA3•-•00	566
BA6•-•00	566
BA7•	302
BA7••	302
BA97•	302
BAS97•	302
BB•	98
BB••	93, 96
BB••	98
BB•••	26
BB•••EZ	26
BB3-0•AG	191
BB3-0•AGMB	191
BB3-0•MG	191
BB3-0•MGMB	191
BBFVW•••	522
BBFVW•••E	522
BBLV••	499
BBLV•••	499
BBU••	98
BBU9	98
BBV••	499
BBV•••	499
BBV•••DTW	502
BBV•••DW	113, 503
BBV•••DWV	113, 503
BBV•••FP	503
BBV•••FP	503
BBV•••LV	501
BBV•••SR	501
BBV•••ST	504
BBV•••VT	503
BBV••DTW	502
BBV••LV	501
BBV••SR	501
BBV••ST	504
BBV••TW	502
BBV••VT	503
BC•••	22
BC•••EZ	22
BC600	22, 56
BC7•	301
BCF7•	301
BCM7•	301
BCN••	239, 303, 544
BCN100	239, 303, 544
BCV•••	134
BD	98
BD•••	24
BD•••EZ	24
BEC••	555
BF••	309
BF•••	309
BF8••	316
BFC•••	135
BFC••••	135
BFL•••	316
BFM•••	316
BFM7••B	316
BFMW1•••	316
BFN•••	482
BFN•••NST	482
BFN75	482
BFN75GHT	482
BFNE150NST	482
BFO•••	315
BFP200	468
BFS••	312
BFS••••	312
BFS•50	441
BFS•50F	441
BFSF•50	441
BFSF•50F	441
BFSM•50	441

	Page #
BFSM•50F	441
BFVL•••	522
BFVL•••E	522
BFVW•••	522
BFW•••	316
BFW1•••	316
BGB•	96
BGB••	96
BGB••	96
BGE•	138
BGE••	138
BGF••	93, 96
BGV••	496
BGV•••	496
BH•••	28
BH•••EZ	28
BH6	61
BHSC1••	61
BHSC34	61
BHT••••	540
BIT-KIT	288
BK60•A	252, 253
BK60•Y	252, 253
BK91	589
BL•••	567
BL0••NS	567
BLCA152CS	63
BLS••	282
BLS•••	282
BLS•••NST	282
BLS••NST	282
BLS15	282
BLT•••••	556
BM•	277, 309
BM••	277, 309
BM•-•	277, 309
BMA97•	302
BMAS974	286
BMS••	95
BMS6	95
BN•	297, 483
BN••	309
BN••	483
BN•••	135
BN•••	309
BN•••RU••	313
BN••F	483
BN••RU••	313
BSB••	100
BSB•••	100
BN••••	135
BNS••	286
BNS••SS	286
BNT1••F	485
BOC-T••-25	594
BOC-T••-50	594
BPF••	306
BPF•••	135
BPF25•	306
BPFS••	306
BPM•	308
BPM25	308
BPN••	306
BPN25•	306
BR••••	321
BR••••	536
BR••••B	536
BR••••FS	536
BR••••G	536
BR••••SS	536
BRN15•NST	483
BruteXpand	443
BS•••	301
BS••N	269
BS•01	269
BS•9	99
BS6•-•00	566
BSB••	100
BSB•••	100
BSB-••-100	593
BSB-••T-50	593
BSB-06T-100	593
BSB-16-50	593
BSB-20Z-50	593
BSC•••	100
BSM••	303
BSO150-H	485
BSO150NST	485
BSS6•-•00	566
BST•	263
BST••	263
BTB-T••-50	594
BTB-T••Z-50	594
BTN75	296
BU••	98
BU49	99
BU9	98
BV••	500
BV•••	500
BV2BV-•••11-BBC	512
BV2BV-•••11-BCC	512
BV2BV-•••11-EA	511
BV2BV-•••11-EG	511
BV2BV-•••11-EK	511
BV2BV-•••11-ES	511
BV2BV-•••11-ET	511
BV2CV-•••CC-A	435
BV2HG-•••11-BBC	508
BV2HG-•••11-BCC	508
BV2HG-•••11-EA	507
BV2HG-•••11-EG	507
BV2HG-•••11-EK	507
BV2HG-•••11-ES	507
BV2HG-•••11-ET	507
BV2HG-25011EP	507
BV2IG-•••11-BBC	510
BV2IG-•••11-BCC	510
BV2IG-•••11-EA	509
BV2IG-•••11-EG	509
BV2IG-•••11-EK	509
BV2IG-•••11-ES	509
BV2IG-•••11-ET	509
BV3BVLR-•••1BBC	516
BV3BVLR-•••1BCC	516
BV3BVLR-•••1-EA	515
BV3BVLR-•••1-EG	515
BV3BVLR-•••1-EK	515
BV3BVLR-•••1-ES	515
BV3BVLR-•••1-ET	515
BV3BVTR-•••1BBC	516
BV3BVTR-•••1BCC	516
BV3BVTR-•••1-EA	515
BV3BVTR-•••1-EG	515
BV3BVTR-•••1-EK	515
BV3BVTR-•••1-ES	515
BV3BVTR-•••1-ET	515
BV3IGLF-•••1BBC	514
BV3IGLF-•••1BCC	514
BV3IGLF-•••1-EA	513
BV3IGLF-•••1-EG	513
BV3IGLF-•••1-EK	513
BV3IGLF-•••1-ES	513
BV3IGLF-•••1-ET	513
BV3IGTF-•••1BBC	514
BV3IGTF-•••1BCC	514
BV3IGTF-•••1-EA	513
BV3IGTF-•••1-EG	513
BV3IGTF-•••1-EK	513
BV3IGTF-•••1-ES	513
BV3IGTF-•••1-ET	513
BVFS••	278, 524
BW•••••F-PC	454
BWSG	286
BWSG-TI	287
BWSG-W	286
BY4051	562
BZ4051	562
BZ4051S	562

C

	Page #
C••	550
C••BU	550
C••F	300
C••HM	300
C••M	300
C03-0•A	193
C03-0•AMB	193
C03-0•M	193
C03-0•MMB	193
C08-0•A	193
C08-0•AMB	193
C08-0•M	193
C08-0•MMB	193
C11-0•A	251
C11-0•M	251
C119-••AMB	251
C119-••MMB	251
C119-04A	251
C119-04M	251
C16-0•A	207
C16-0•AMB	207
C16-0•M	207
C16-0•MMB	207
C18-0•A	208

	Page #
C18-0•AMB	208
C18-0•M	208
C18-0•MMB	208
C2	341
C26-0•A	208
C26-0•AMB	208
C26-0•M	208
C26-0•MMB	208
C28-0•A	209
C28-0•AMB	209
C28-0•M	209
C28-0•MMB	209
C31-0•A	209
C31-0•AMB	209
C31-0•M	209
C31-0•MMB	209
C31-08FRAME	117, 210
C32112M	147
C33112L	147
CAB•••	268
CAB•50N	269
CAL•5	63
CARP••BZ	62
CAS••••NOS	39, 265, 380
CB	93, 94
CB6-0•AG	203
CB6-0•AGMB	203
CB6-0•MG	203
CB6-0•MGMB	203
CBB•••	268
CBC••	301
CBSR•••	391
CC	94
CC••••	142
CC•••00B	142
CCF••••	104
CCH50	295
CD	98, 104
CF150-•	40
CF200-•	40
CF300-•	40
CF400-•	40
CFB•••NST	480
CFB•••S	480
CFB2015S	480
CFB75GHT	480
CFG•••NST	480
CFG•••S	480
CFR47-1-•00	456
CFR47-150-•00	456
CFR47-C•	456
CFR-HC	456
CFR-RK	456
CG•••	337
CGN•50NST	484
CGN•50-TIP	484
CGSN15•F	484
CH-B-••	63
CH-C-12	63
CH-SS-••	63
CI9311SML	587
CI96	587
CI96AH	587
CILR•••	391
CL••••	321
CL••••-50	321
CMF•8	130
CN	80
CN•••	239, 548
CN•••	548
CN•••B	304
CN•••G	548
CN•••SS	284, 548
CN-P	80
CN-PLUG	80
CPV150F	468
CR	336
CR-C	80
CR-CAP	80
CRL	336
CRLWC	336
CR-S	80
CRWC	336
CS•••	337
CSB•••	269
CSC-T••	594
CSES150F	458
CSES150T	458
CSES2015F	458
CSM•••	269
CSN75	296
CSSR•••	391
CT•••L	344
CTER•••	391
CV•••	524
CWH50	294

D

	Page #
D•••	442
D•••••	442
D•••••F	442
D•••ANSW	144
D•••F	442
D•40•	132
D0•	134
D1••	143
D150SDB	287
D201	137
D201RT	138
D204-30	136
D204-30P	136
D204-30SB	137
D230	140
D3••R	144
D34•U	145
D44•S	144
D44•SL	144
D605	137
D7•	495
D7•SC	495
D75AL	495
D8•5100PBF	449
D8•5100RAF	449
D8•5100RAS	449
D8•5100RBF	449
D8•5-25RAF	449
D8•5-50PBF	449
D8•5-50RAF	449
D8•5-50RAS	449
D8•5-50RBF	449
D8•5Y100RAF	449
D8•5Y50RAF	449
DAA•••AL	73
DAA•••ALFL	73
DAB•	571
DAB••	571
DAC•••AL	72
DAC•••ALBSP	72
DADC250	73
DADP250	72
DATL•••	131
DATL•••W	132
DAWS••	571
DB••	94
DB3	94
DBA11-•••	75
DBA11-1520	75
DBA12-•••	75
DBA12-1520	75
DBA63-•••	75
DBA64-•••	75
DBA66-•••	75
DBA69-300	75
DBA71-•••	75
DBA72-•••	75
DBA73-•••	75
DBA74-•••	75
DBA76-•••	75
DBA77-•••	75
DBAV73-2030	75
DBC61-•••	74
DBC62-•••	74
DBC63-•••	74
DBC64-•••	74
DBC66-•••	74
DBC69-300	74
DBC71-•••	74
DBC72-•••	74
DBC73-•••	74
DBC74-•••	74
DBC76-•••	74
DBC77-•••	74
DBC77-•••-GL	74
DBC79-300	74
DBCL-•••	74
DBS61-200	74
DBS62-200	74
DBS63-200	74
DC•	122, 126
DC••	122, 126, 127, 129
DC•••	122, 126
DC••••	122, 124, 126, 127
DC••••L	122, 127
DC••••LSE	123

	Page #
DC••••S	122
DC••••SE	123
DC•••L	126
DC••S	122
DC••SE	123
DC•S	122
DC•SE	123
DC41	139
DCB•	124
DCB••	124
DCB•••	124
DCB••••	124
DCL••	586
DCM1	589
DCP•	125
DCP••	120, 121, 125, 127, 129
DCP•••	125
DCP••••	120, 121, 125, 127
DCP••••ANSW	120
DCP••••B	120, 121
DCP••••L	121, 127
DCP••••S	121
DCP•••L	125
DCP••ANSW	120
DCP••B	120, 121
DCP••S	120, 121
DCP••SWIV	119
DCP41	139
DCS•	124
DCS••	124
DCS••••	124
DCS•025F	460
DD	98
DDA•••AL	71
DDA•••ALFL	71
DDA•••BR	71
DDA•••BRFL	71
DDA•••GM	71
DDA•••GMFL	71
DDA•••SS	71
DDA•••SSFL	71
DDA300AL105	71
DDA300AL105FL	71
DDA300AL105TTMA	71
DDA300AL119TTMA	71
DDA300GM105	71
DDA300GM105FL	71
DDA300SS105	71
DDA300SS105FL	71
DDA400AL164TTMA	71
DDC•••AL	70
DDC•••BR	70
DDC•••GM	70
DDC•••SS	70
DDC300AL105	70
DDC300GM105	70
DDC300SS105	70
DDDC•••	71, 566
DDDC300105	71, 566
DDDP•••	70, 566
DDDP300105	70, 566
DDT1	589
DFC-•	153
DFG•	143
DFN100	570
DFN100HF	570
DFP•5•5	472
DFP•5•5F	472
DFP•5F•5S	472
DFR•5•5	472
DFR•5•5F	472
DFVS••	279
DGA•••SS	76, 151
DGA•••SSFL	76, 151
DGC•••SS	76, 151
DGDC•••	71, 76, 151
DGDC300	76, 151
DGDP•••	76, 151
DGH7	300
DGH7C	300
DGH7CV	300
DGH7P	300
DGH7V	300
DGHW7	300
DHR•	147
DHS•••-100	591
DHS•••-300	591
DHS•BF	492
DHS159-1-100	591
DHS159-1-300	591
DHSSC6	492
DKC1	130
DL••	342, 359
DL•••	342
DLB12	99
DM•	278
DM••	278
DM•••	278
DM••-100UC	446
DM••-50UC	446
DM•5100RAF	446
DM•5-50RAF	446
DM815W50RAF	451
DM815W50RAS	451
DMH••••	478, 547
DMH••••F	478
DMH••F••F	478
DMH••T••T	478
DMH15F15S	478
DMH20DR20	495
DMP•15•5	479
DMP•5•5F	479
DMP•5F•5T	479
DMP25F25S	479
DMR•5•5	479
DMR•5•5F	479
DMR15F15T	479
DMXL2•	278
DN-•	153
DN7LOBF	570
DN7UOBF	570
DP2-01-00•	215
DPW	494
DRC-•	153
DRK15	589
DRP-85-059	212
DSB••	279
DSBV••	506
DSBV•••	506
DST••	279
DSTW	592
DTW•50	443
DWG050	287
DWL100	592
DX283•	456
E	
E•S•	347
E•S•-B	347
E72-•A	237
E72-•A-MB	237
E72-•M	237
E72-•M-MB	237
E73-•A	237
E73-•A-MB	237
E73-•M	237
E73-•M-MB	237
E74-•A	238
E74-•A-MB	238
E74-•M	238
E74-•M-MB	238
EA4F•	359
EC•••	555
EK602A	252
EK602B	252
EK602G	252
EK602VA	252
EK602VB	252
EK602VY	252
EK602Y	252
EL•5H•M	310
EL•F•F	305, 542
EL•H•M	310
EL2151•-90	271
EL315••-45	274
EL315••-90	274
EL315•-45	274
EL315•-90	274
EL45••	538
EL45•••	538
EL90•••	537
EL90•••B	537
EL90•••FS	537
EL90•••G	537
EL90•••SS	537
ENBG1	140
ENBL	80
ENBL-P	80, 84
ENBL-P•	84
ENBL-PLUG	80
ER••••	443
ER•••••	443
ERJ	80
ERJ-C	80

	Page #
ERS	80
ERS-C	80, 84
ERS-C•	84
ERS-CAP	80
ES••	334
ESS••	334
ETP	588
EVGR•••	523
EVNPT•••	523
EVNPT75	523
EVNPTGR100200	523
EVNPTGR200	523
EVNPTSL100	523
EVSL100	523

F

	Page #
F•	337
F••	337
F••	340
F•••	340
F03-0•A	190
F03-0•AMB	190
F03-0•M	190
F03-0•MMB	190
F07-100A	224
F07-100M	224
F07-200A	224
F07-200AC	223
F07-200M	224
F07-200MC	223
F08-0•A	190
F08-0•AMB	190
F08-0•M	190
F08-0•MMB	190
F128-•	379
F160-•	379
F16-0•A	194
F16-0•AMB	194
F16-0•M	194
F16-0•MMB	194
F16G-••••	391
F17-•00A	226
F17-•00M	226
F18-0•A	194
F18-0•AMB	194
F18-0•M	194
F18-0•MMB	194
F18-C00A	226
F18-C00M	226
F20-•	379
F24-•	379
F24G-••••	391
F26-0•A	194
F26-0•AMB	194
F26-0•M	194
F26-0•MMB	194
F28-0•A	195
F28-0•AMB	195
F28-0•M	195
F28-0•MMB	195
F30-0•A	195
F30-0•AMB	195
F30-0•M	195
F30-0•MMB	195
F32-•	379
F32G-••••	391
F35-0BAMB	195
F35-0BMMB	195
F35-0CAMB	195
F35-0CMMB	195
F40-•	379
F48-•	379
F48G-••••	391
F602-0•BJ	247
F602-0•BJR	247
F602-0•WJ	247
F602-0•WJR	247
F602-1•WJ	248
F602-1•WJR	248
F64-•	379
F64G-••••	391
F72G-•A	225
F72G-•A-MB	225
F72G-•M	225
F72G-•M-MB	225
F73G-•A	225
F73G-•A-MB	225
F73G-•M	225
F73G-•M-MB	225
F74C-•A-MB	227
F74G-•A	226
F74G-•A-MB	226
F74G-•M	226
F74G-•M-MB	226
F74H-•A-MB	227
F74V-•A-MB	227
F80-•	379
F96-•	379
FA•0	554
FAB•••	268
FAB•50N	269
FAK25P	592
FBB•••	268
FBSO1••F	490
FBSO1••F-PG	490
FBSO1••S	490
FBSO1••S-PG	490
FBV••	500
FBV•••	500
FBV•••SE	498
FBV••SE	498
FBVG••	499
FBVG•••	499
FBVI••	500
FBVI•••	500
FC•••	461
FC•••F	461
FC•50F-C	461
FC2121•	271
FC223••	271
FC310•	273
FC310••	273
FC310•ST40	276
FC314•	272
FC314••	272
FCM312•	273
FCSB•••	269
FCSM•••	269
FD1	296
FD47I-150-100	456
FEC70••B	493
FEC70••B-BRH	493
FEC70••B-PL	493
FEC70••B-RG	493
FEC975•	493
FEC975•-BRH	493
FEC975•-PL	493
FEC975•-RG	493
FF••	542
FF•••	542
FFB10•	350
FFC•0•	350
FFH•5•5F	476
FFH•5F•5F	476
FFN1••	491
FFN1••NST	491
FFN75GHT	491
FFS•0•	350
FGH••	294
FHCS150	464
FHHR-•	457
FHHR-C	457
FHHR-C•	457
FHPR150	458
FHPR2515	458
FHR-C	455
FHR-V•	455
FJB-••-••	593
FJB-20Z-20	593
FJC-••-••	593
FJC-20Z-20	593
FJC-T••	594
FJR-T••	594
FJS-••-••	593
FJS-20Z-20	593
FL128-•	379
FL160-•	379
FL20-•	379
FL24-•	379
FL32-•	379
FL40-•	379
FL48-•	379
FL64-•	379
FL80-•	379
FL96-•	379
FLG•••E	554
FM•••	529
FM••••	477
FM••••	529
FM••••F	477
FM••••T	477
FM••F••F	477
FM••F••S	477
FM••F••T	477

	Page #
FM••S••	477
FM••S••F	477
FM••S••T	477
FMB•••	529
FMB••••	529
FMC•••	348
FMC•••L	348
FMF•••	528
FMF••••	528
FMF••••-45	528
FMF••••-90	528
FMF•••-45	528
FMF•••-90	528
FMI319••	274
FMI319••••	274
FMP•••	348
FMP•••F	348
FMR•••	529
FMR••••	529
FMR318••	274
FMR318••••	274
FMS•••	529
FMS••••	529
FN•••NST	481
FN•••S	481
FN600	78
FN600B	78
FN600BL	78
FN600B-PLUG	78
FN600S	78
FNB•••NST	481
FNB•••S	481
FNB75GHT	297, 481
FNB75GHT-GD	297
FNB75S	481
FNBE150NST	481
FNBE150S	481
FNG•••NST	481
FNG•••S	481
FNPSO150F-•0	489
FNPSO150S-•0	489
FNS	78
FNS2	78
FNSID	78
FO•	337
FO••	337
FOS•	337
FOS••	337
FP•••	461
FP•••F	461
FP2091•	272
FP250F-C	461
FP308•	274
FP308••	274
FP475S	486
FP500A	486
FP500B	486
FRA	78
FRA-C	78
FRC•025	460
FRC•025F	460
FR-CAP	78
FRP-95-•••	212, 213, 220, 221
FRP-95-199	131
FRP-96-315	212
FRRE-T••	594
FR-RS	78
FR-RS-C	78
FR-RS-R	78
FRR-T••	594
FRS	78
FRS-C	78
FRSGX••	590
FRT••••	539
FS•	337
FS••	337
FS•50	441
FS•50F	441
FS2403-•	364
FS2403-••	364
FS2404-•-•	364
FS2404-••-••	364
FS2408-•	365
FS2408-••	365
FS2501-•-•	364
FS2501-••-••	364
FS2603-•	365
FS2603-••	365
FS304C-•	365
FS304C-••	365
FS6400-•-•	364
FS6400-••-••	364
FS6500-•-•	364
FS6500-••-••	364
FS6602-•	365
FS6602-••	365
FS6801-•-•	365
FS6801-••-••	365
FSAC600	57
FSAE600	57
FSCV••	496
FSCV•••	496
FSF•50	441
FSF•50F	441
FSG•••	441
FSGLBV••	496
FSGLBV•••	496
FSGV••	496
FSGV•••	496
FSM•••T	441
FSM•50	441
FSM•50F	441
FST••	267
FST•••	267
FSW1	464
FT••	540
FT••B	540
FT••FS	540
FT••G	540
FT••SS	540
FT6••	582
FT6••C	582
FT6••S	582
FT600SC	582
FTH100	591
FVFA••	279
FVL••	279
FVS••	279
FVSP••	279
FW••	380
FWV•5F•5F	491
FWV10S10S	491
FWV15F10S	491

G

	Page #
G•••-A-AL	30
G•••-A-BR	30
G•••-A-SS	30
G•••-B-AL	31
G•••-B-BR	31
G•••-B-SS	31
G•••-C-AL	31
G•••-C-BR	31
G•••-C-SS	31
G•••-D-AL	32
G•••-D-BR	32
G•••-DC-AL	32
G•••-DC-BR	32
G•••-DC-SS	32
G•••-DP-AL	30
G•••-DP-BR	30
G•••-DP-SS	30
G•••-D-SS	32
G•••E	556
G•••-E-AL	30
G•••-E-BR	30
G•••-E-SS	30
G•••-F-AL	30
G•••-F-BR	30
G•••-F-SS	30
G•••HRP	33
G•••HRPSS	33
G•••T	556
G•••V	556
G••HRP	33
G••HRPSS	33
G10	43
G2457-00	519
G32••-00	519
G400N	556
G52•2	385
G9	42
GAM•	103
GAM••	103
GAS••••NO	37, 267, 530
GAS••••TO	380
GAS•••NOS	39, 265, 380
GAW	465
GB•	93
GB••	93
GB6-1	93
GBA	93
GBA4•	99
GBB••	99

	Page #
GBC	93
GBR••	256
GBR•••	256
GBR••••	256
GBRW••	262
GBRW•••	262
GBRW••••	262
GBRW30R	262
GC•••	257
GC2••	262
GCA	93
GCC	93
GCS•••	37
GDB••	93
GDB3	93
GDF•	99
GDF••	99
GDL•	99
GDL••	99
GF•	93
GF••	93
GF•••	93
GF111P•	97
GF26-1	93
GF26P•	97
GF36P•	97
GF61P•	97
GF81P•	97
GFAS••	97
GFAS6	97
GFR-••	79
GFR-0	79
GFR1-••	79
GFR1-0	79
GH••••	95
GHC7	302
GHGN	298
GHV	298
GHVEZK	298
GHY	298
GHYV	298
GJ••	99
GL•••	257
GL•••	262
GL•••FG	258
GLBR••	260
GLBR•••	260
GLBR••••	260
GLBR••••-4	260
GLBR•••-4	260
GLBR••-4	260
GLBR100004	260
GLBRC••	260
GLBRC•••	260
GLBRC••••	260
GLP5••	261
GLS4••	261
GLSC4••	261
GLSS••	259
GLSS•••	259
GLSS••••	259
GLSSC•••	260
GM•	93
GM••	93
GMAS••	97
GMAS6	97
GMC	93
GNB75GHT	297
GNW•	530
GNW••	530
GNW•••	530
GNWP•	530
GNWP••	530
GNWP•••	530
GPA-95-•••	213, 214, 215, 216, 217, 218, 219, 220, 221
GPA-95-292	214, 216, 219, 588
GPA-96-•••	213, 214, 216, 217, 218, 219, 221
GPA-97-•••	213, 214, 216, 218, 219, 221
GROOVLUB32	556
GROOVLUB4	556
GRP-95-•••	212, 213, 215, 216, 218, 221
GRP-96-•••	212, 213, 215, 216, 218, 220, 221
GS••••-4	257
GS•••-4	257
GS••-4	257
GSAFETYCLIP	33
GSS••	259
GSS•••	259
GSS••••	259
GSS••••-4	259
GSS•••-4	259
GSS••-4	259
GWH-••00	314
GWH-C	314

H

	Page #
H••	551
H•••R50UC	452
H•••Y50UC	453
H••BU	551
H4•0Y50SZ	453
H420R50RBS	452
H5•••	385
H5•••-BU	385
H5•••NST	385
H5•5R50PBF	452
H5•5R50RAF	452
H5•5R50RAS	452
H5•5R50RBF	452
H507•-BU	387
H52••-A	385, 386
H52••-A-BU	385, 386
H52••L-A	386
H52••L-A-BU	386
H57••	387
H6••	388
H6•5Y50PBF	453
H6•5Y50RAF	453
H6•5Y50RAS	453
H6•5Y50RBF	453
HA••••	473
HA••••F	473
HA••••T	473
HA••S••	473
HA••S••F	473
HA••S••T	473
HA••T••F	473
HA•5•5ADP	41, 476
HA2576	297, 473
HAB•••EZ	60
HAC•••EZ	60
HAD•••EZ	60
HB•••	266, 545
HB••••	535
HB••••B	535
HB••••FS	535
HB••••G	535
HB••••SS	535
HB1F•M	303, 542
HB2F•M	303, 542
HB3F•M	303, 542
HB4F•M	303, 542
HBC••S	339
HBC•S	339
HC90	322
HC90RB	322
HD1-•	360
HD2-•	360
HD2-••	360
HDBF75	494
HDE••	383
HDSSF75	494
HFN•••	482
HFN•••NST	482
HFN-P•	84
HFR-C•	84
HGB100NST	481
HGB100S	481
HGCFB•50NST	480
HGCFB150S	480
HGG100NST	481
HGG100S	481
HGV250	466
HGV250F	466
HGV250-H	466
HGVW250F	466
HGVW250-W	466
HHCI	315
HHP•M	303, 544
HHTP	587
HN	81
HN••SS	548
HN•M•M	303, 543
HN100SS	548
HN-P	81
HN-PLUG	81
HP•	335
HPBV••	350, 504
HPBV•••	350, 504

	Page #
HPBV•••SAE	350, 504
HPBV••SAE	350, 504
HPBV••SS	350, 504
HPFN150	483
HPFN150NST	483
HPSG	288
HPSGC	288
HPSGHD	288
HPSGW	288
HR	81
HR1610	147, 457
HR1610-•	147, 457
HR-C	81
HRC-•••	360
HR-CAP	81
HS••	333
HS•••	333
HS•••AL	68
HS•••SS	68
HS••Y	334
HSR••	455
HSR25-24	455
HSRC••	455
HSRC25-24	455
HSS••	333
HSS•••	333
HST•5	263
HSTBC•••	345
HSTBC••••	345
HT•DC	357
HT•F•	357
HT4OF•	357
HTBC•••	345
HTBG	139
HTBG•	139
HTBG••	139
HTBG•EXT	139
HTBG••EXT	139
HTBGA	139
HTBGC	139
HTBG-CT	139
HTBGS	139
HTM•••	335
HTSW	464
HU100•••	90
HU100•••BW	90
HU1002•••	90
HU1502200	90
HU200•••	90
HU200200BW	90
HU206•••	90
HU602•••	90
HWH50	295
HWH50-75	295
HY•	360
HY••	360

I

IA•••TP	588
IB•••	27
IBR••••	321
IBV••	504
IBV•••	504
IBV50BOV	588
IC•••	23
ICL••••	321
ID•••	25
ID•••TC	588
IH•••	29
IH6	61
IHSC152	61
IHSC34	61
IT•••SL	108
IXAN••	390
IXF16-•	384
IXF20-•	384
IXF24-•	384
IXF32-•	384
IXF40-•	384
IXF48-•	384
IXF64-•	384
IXF96-•	384
IXF96-••	384
IXFDPLG••7	389
IXFS••	390
IXH••	383
IXHC•••	383
IXHCG•••	383
IXM••	383
IXMS••	390
IXPE32-3A	389
IXSE••	390
IXSE••-3A	389
IXV••	383

J

J•••	63
J47	99
J48	342, 359
J49	342
J844-••-B-100	181
J844-••-BL-100	181
J844-••-R-100	181
JS•••	339
JX49	342

K

K•	338
K••	338
K84••	330
KB12	93, 94
KHN•••	280
KLW•	270, 283
KLW••	270, 283
KM••	278
KM•••	278
KNW•	270
KNW••	270, 565
KRN•••	280
KRN••••	280
KRW•	270
KRW••	270
KRW•075	270
KS•	338
KS••	338
KS•••501	338
KSV10-1••	133
KVW••	270, 565

L

L••	550
L••45	553
L••BU	550
L03-0•A	192
L03-0•AMB	192
L07-•00A	224
L07-200AC	223
L08-0•A	192
L08-0•AMB	192
L1110-L2287	560
L14AM7-G••	396
L14AM7-G•••	396
L14AM7-G••••	396
L14AM7-R••	396
L14AM7-R•••	396
L14AM7-R••••	396
L14AM7V-R•••	410
L14AM7X-R•••	410
L16-0•A	204
L16-0•AMB	204
L17-•00A	233
L17-•00APX	234
L17-•00D	236
L18-0•A	205
L18-0•AMB	205
L26-0•A	205
L26-0•AMB	205
L28-0•A	206
L28-0•AMB	206
L30-0•A	206
L30-0•AMB	206
L40-0AA	207
L40-0AAMB	207
L40-0BA	207
L40-0BAMB	207
L50•	553
L50-0CA	207
L50-0CAMB	207
L5025	553
L606-••W	250
L606-0•B	250
L72C-•	235
L72C-•MB	235
L72M-•	232
L72M-•MB	232
L72M-•MBPX	234
L73C-•	235
L73C-•MB	235
L73M-•	232
L73M-•MB	232
L73M-•MBPX	234
L74C-•	236
L74C-•MB	236
L74M-•	233

	Page #
L74M-•MB	233
L74M-•MBPX	234
LAVA221	589
LB•••	114
LCJS•-••	586
LCJS12-15	586
LCLD	586
LCTS•	585
LCTS14	585
LDC2	134
LDCF2	134
LDCM2	134
LHC95	322
LHC95RB	322
LHFS400F	476
LHFS4045F	476
LHW	43, 465
LJ•••	531
LJ••••	531
LLBV2515F	469
LM••-	382
LM••••-	382
LP••	56, 95, 341
LP••	95
LP16-80	95
LP2•-80	56, 95, 341
LPB•6	95
LR304•	275
LR304••	275
LR7	63, 105
LRP-95-•••	218
LRP-96-•••	218
LS••	334
LS•••	334
LSS••	334
LSS•••	334
LW••200	590

M

	Page #
M•	95
M••	95
M••-••GAX	445
M••-••KAF	445
M••-••KAS	445
M••-••UC	444
M••100RAS	444
M••-100UC	444
M••-50RAS	444
M•5-••RAF	444
M•5100RAF	444
M15100RBF	444
M15-50RBF	444
M16-0•A	196
M16-0•M	196
M16-03A	196, 588
M16-03M	196, 588
M26-0•A	196
M26-0•M	196
M30-0•A	196
M32-0AAMB	197
M35-0BAMB	197
M35-0CAMB	197
M5834F	300
M5834HM	300
M5834M	300
MA•••	268
MA•50N	269
MAH•	333
MAH••	333
MB•••	268
MBV••	500
MC2111•	271
MC2221•	271
MC309•	273
MC309••	273
MC309•ST40	276
MC313•	272
MC313••	272
MCH50	295
MCM311•	273
MCM311•XL	273
MCS•••	269
ME•••	148, 149, 150
ME•••-1	150
ME•••-16	148
ME•••S	148, 149, 150
ME•••S-16	148
ME109-NH3-1	150
ME229-1	150
ME229S-1	150
ME3162-••	149
ME3162-32B	149
ME3162-32S	149
ME4•1F-1	150
ME4•1FS-1	150
MEP120B	149
MEW•	149
MF200	131
MFB10•	350
MFB2	101
MFC•0•	350
MFFS••-16	101
MFMS06-16	101
MFN••	101
MFS••-16	101
MFS•0•	350
MFS2•-2•	101
MFTN16	101
MFVN16	101
MH•	333
MH••	333
MH•Y	334
MIC••	541
MIC•••	541
MICAP••	541
MICAP•••	541
MICAP••G	541
MIRU7550	535
MIU••	536
MIU•••	536
ML•00M	131
ML200	131
MLS••	282
MOC250F-C	476
MOC250F-P	476
MOC3025F-C	476
MOC3025F-P	476
MP2101•	272
MP323•	274
MP323••	274
MPB-••-••	593
MPB-20Z-20	593
MPC-••-••	593
MPC-20Z-20	593
MPC-T••	594
MPR-T••	594
MPS-••-••	593
MPS-20Z-20	593
MRCH••	549
MRCH•••	549
MS•	95
MS••	95
MS••X••	95
MS•X•	95
MS6	95, 360
MSA	95
MSB	95
MSBC•00SS	67
MSC	95, 360
MSP4••	291
MSP4PAK	291
MSP-95-989	212
MT•••	255
MT••••	552
MT••••••	552
MTP-95-5••	212

N

	Page #
N•	530
N••	530
N•••	530
N•••NO	267, 530
NF307Y50GHT	488
NF610Y100RAS	488
NF610Y50RAS	488
NF615Y100RAF	488
NF615Y100RAS	488
NF615Y50RAF	488
NF615Y50RAS	488
NFSGX••	590
NG••	532
NIPPLE/1	559, 560
NORG74DISPLAY	222
NPT•••TC	588
NTL••	330
NTT••	330
NV•F	134
NV4M	134
NW•	530
NW••	530
NW•••	530
NZ•••4	291
NZ•040S	291
NZ6540QCS	291

	Page #
NZMMEG5P-0••	291
NZMQC5P-•••	291

O

	Page #
O24•BU	583
OA••	315
OCT32	529
OCTOE32	529
OCTOES32	529
OCTS••	529
O-RING-AS-334	560

P

	Page #
P••	316
P18••00	519
P191700	519
P1A-•00A	224, 237
P1A-•00M	224, 237
P3-TFG-•	557
P3-TFG-••	557
P41/P42	316
P8A-•60A	238
P8A-•60M	238
PAP250	463
PBC250	463
PBLSS••	258
PBLSS•••	258
PBLSS••••	258
PEDF200	494
PEDF75	494
PF•	112
PF••	112
PF12SS	112
PFB•	112
PFB••	112
PFB8	112
PFC•••	319
PFC250F	463
PFC250U	463
PFCW•••	463
PFCW•••F	463
PFD•••	141
PFL12	112
PFL12FS	113
PFL12SS	112
PFL8	112
PFL8FS	113
PFN•••	319
PFN4005F	489
PFNB100S	481
PFNB150NST	481
PFNB150S	481
PG700	140
PGH••	295
PGS••	256
PGS•••	256
PGS••••	256
PHL•	112
PHL••	112
PHL•FS	113
PHL12FS	113
PHL12SS	112
PHL12WF	113
PHL8WF	113
PHLB••	112
PHW	465
PIN5/16x11/4P	559, 560
PL•••	114
PL400L	114
PL400LWF	114
PL400WF	114
PM•	112
PM••	112
PM12SS	112
PMB••	112
PMB8	112
PML•	112
PML•FS	113
PML12	112
PML12FS	113
PML12SS	112
PN•••	529
PN••••	529
PN15	489
PN15F	489
PNB75GHT	296
PNS•••	529
PNS••••	529
PP•VEU•-MG	189
PP•VFC•-MG	189
PP•VFE•-MG	188
PP•VME•-MG	188
PP•VMC•-MG	189
PP•VTEU•-MG	189
PP•VUC•-MG	189
PP6VFE•-MG	188
PPA••	34
PPA•••	34
PPA7••	325
PPB••	35
PPB•••	35
PPC••	35
PPC•••	35
PPCF7•	324
PPCM7•	324
PPD••	35
PPD•••	35
PPE••	34
PPE•••	34
PPF••	34
PPF•••	34
PPH••	35
PPH•••	35
PPLSS••	327
PPM•	327
PPN••	266, 323
PPN••	323
PPN•••	323
PPP••	34
PPP•••	34
PPSO150F	489
PPSO150S	489
PRC	458
PRN•50F	458
PRWB	458
PS4••	212, 213, 218
PS4••B	212, 213
PSM0•0•	141
PSN76	297
PSW	464
PSW-B	464
PSW-Y	464
PSW-Z	464
PT•••	255
PTH-•00AG	224
PTLS10040	520
PTLS7540	520
PTP	588
PTTF150F	489
PTTF150S	489
PU••••	141
PV•00	521
PVFP••	521
PVFP•••	521
PVFPN•••	521
PVFPS200	521
PVFPSA200	521
PVN200	521
PW•5F•5F	462
PW6•5B100RBS	449
PW6•5B50RBS	449
PYLS•••40	519
PYLS7540	519

Q

	Page #
QB•	109
QB••	109, 110
QB•••	110
QB••WF	111
QBCAP	111
QBM•	110
QM•	109, 111
QM••	109, 110
QM•••	110
QM••WF	111
QMCAP	111
QSS••	109, 110
QSS•••	110
QTF1••T-F	488
QTF100S-F	488
QTF150F-F	488
QTF75GHT-F	488
QTM1••T-F	488
QTM100S-F	488
QTM150F-F	488
QTM75GHT-F	488

R

	Page #
R••	316
R••	551
R••AS	385
R••BS	385
R••BU	551
R••CS	385

	Page #
R•5FS	385
R•AAL-A	386
R•AAS	385
R•AS	385
R•ASS-A	386
R•BAL-A	386
R•BS	385
R•BSS-A	386
R•CAL-A	386
R•CS	385
R•CSS-A	386
R•DAL-A	386
R•DSS-A	386
R•ESS-A	386
R03-0•R	190
R03-0•RG	190
R07-•00R	224
R07-•00RG	224
R07-200RGC	223
R08-0•R	191
R08-0•RG	191
R11-0••RG	229
R11-0•C	249
R11-0•CG	249
R119-••C	249
R119-••CG	249
R125AAS-A	385, 386
R125AS-A	385, 386
R125BS-A	385, 386
R125CS-A	385, 386
R125DS-A	385, 386
R125ES	385
R125ES-A	386
R12P•	381
R12P1••0	381
R1375BS	385
R1375CS	385
R1375DS	385
R1375ES	385
R15AAAS-A	385, 386
R15AAS-A	385, 386
R15AS-A	385, 386
R15BS-A	385, 386
R15CS-A	385, 386
R15DS-A	385, 386
R15ES-A	385, 386
R15GS	385
R16-0•R	199
R16-0•RG	199
R16-0•RH	201
R16-0•RHG	201
R16P•	381
R16P1••0	381
R17-•00R	228
R17-•00RG	228
R18-0•R	199
R18-0•RG	199
R18-C05R	228
R18-C05RG	228
R1AAAS-A	385, 386
R1AAS-A	385, 386
R1AS-A	385, 386
R1BS-A	385, 386
R1CS-A	385, 386
R1DS-A	385, 386
R1ES-A	385, 386
R200SS	62
R21-0•R	198
R21-0•RG	198
R25AAL-A	386
R25ASS-A	386
R25BAL-A	386
R25BSS-A	386
R25CAL-A	386
R25CSS-A	386
R25DAL-A	386
R25DS	385
R25DSS-A	386
R25EAL-A	386
R25ES	385
R25ESS-A	386
R26-0•R	199
R26-0•RG	199
R26-0•RH	201
R26-0•RHG	201
R28-0•R	200
R28-0•RG	200
R2DS	385
R2EAL-A	386
R2ES	385
R2FS	385
R30-0•R	200
R30-0•RG	200
R30-0•RH	202
R30-0•RHG	202
R30-0AR	200
R30-0ARG	200
R30-0ARH	202
R30-0ARHG	202
R32P•LJR15	381
R32P•SOR15	381
R3AAAL-A	386
R3AAAS	385
R3AASS-A	386
R40-0BR	200
R40-0BRG	200
R40-0BRH	202
R40-0BRHG	202
R40-0CR	200
R40-0CRG	200
R40-0CRH	202
R40-0CRHG	202
R43-•••RG	230
R46-200R	131, 223, 229
R46-200RG	131, 223, 229
R48P•LJR15	381
R48P•SOR15	381
R4FSS-A	386
R4GSS-A	386
R4HSS-A	386
R4KSS-A	386
R4LSS-A	386
R4MSS-A	386
R504-12••	302
R515100CBF	451
R515100CBF/F	451
R515100RAF	450
R515100RAF/F	450
R515100RAS	450
R515100RAS/F	450
R515-50CBF	451
R515-50CBF/F	451
R515-50RAF	450
R515-50RAF/F	450
R515-50RAS	450
R515-50RAS/F	450
R515U100CBF	451
R515U100CBF/F	451
R515U100RAF	450
R515U100RAF/F	450
R515U100RAS	450
R515U100RAS/F	450
R515U50CBF	451
R515U50CBF/F	451
R515U50RAF	450
R515U50RAF/F	450
R515U50RAS	450
R515U50RAS/F	450
R64P•LJR15	381
R64P•SOR15	381
R72G-•R	228
R72G-•RG	228
R72M-•R	229
R72M-•RG	229
R73G-•R	228
R73G-•RG	228
R74G-•R	228
R74G-•RG	228
R75AAS	385
R83-200R	229
R8P2SS	381
R91-221RG	230
R96P•LJR15	381
R96P•SOR15	381
RA•F•M	303, 543
RA6F6M	303
RA7•	302
RA7••	302
RA97•	302
RAGG••••	554
RAM•	102
RAM••	102
RAM6WF	106
RAM7T	106
RAMB	102
RAMC	102
RAMH	102
RAS97•	302
RB•	96, 98
RB••	96, 98
RB•••BL	27
RB•••EZ	27
RB3-0•R	191
RB3-0•RG	191

	Page #
RBU••	98
RBU9	98
RC•••BL	23
RC•••BLNO	23, 38
RC•••BT	59, 400
RC•••CEZ	56
RC•••EZ	23
RC•••EZ-•0	37
RC•••EZNO	23, 38
RC•••SE	400
RC•00EZNO	38
RC•00EZPF	41
RC•F•F	303, 543
R-CN	82
R-CN-P	82
R-CN-PLUG	82
R-CR	82
R-CR-C	82
R-CR-CAP	82
RD•••••	442
RD•••••F	442
RD•••BL	25
RD•••EZ	25
RD253	442
RD253F	442
RDA••••BL	50
RDA••••EZ	50
RDA90600EZ	44
RDD••••EZ	51
RDD•••EZ	51
RDL•••EZ	52
RDM•	278
RDM••	278
RDWBPST•••EZ	58
RDWSP•••EZ	58
RE•••-•••0	37
RE•••BT	59, 400
RE•••NO	38
RE•••SE	400
RE•00C	56
RE200PF	41
REL••••	538
R-EN	82
R-EN-P	82
R-EN-PLUG	82
R-ER	82
R-ER-C	82
R-ER-CAP	82
RES••	284
RES•••	284
RFC•••	461
RFC•••F	461
RFP250F	461
RFST••	267
RFST•••	267
RG2051•	272
RG2061•	272
RG305•	275
RG305••	275
RG306•	275
RG306••	275
RGB••	96
RGB6	96
RGB8	96
RGF••	96
RGF61P•	97
RGF81P•	97
RH•••BL	29
RH•••EZ	29
RHA••••	474
RHA••••F	474
RHA••••T	474
RHA••S••	474
RHA••S••F	474
RHA••S••T	474
RHA••T••F	474
RHA2515F-C	474
RHC••	537
RHC•••	537
RHC•••B	537
RHC•••FS	537
RHC•••G	537
RHC•••SS	537
RHC••B	537
RHC••FS	537
RHC••G	537
RHC••SS	537
RHEZ1••	62
RHEZ34	62
RHEZ6	62
R-HN	83
RHN••••SS	548
R-HN-P	83
R-HN-PLUG	83
R-HR	83
R-HR-C	83
R-HR-CAP	83
RHS••	279
RHS•••	279
RHSC1••	61
RHSC34	61
RK•••	142
RK119A	253
RK119B	253
RK119D	253
RK119Y	253
RK602MD	252
RKB605WB	253
RKHN881	284
RKR10Y	253
RLP•6	56, 95, 341
RM•	277, 284
RMA97•	302
RMS•	95
RMS••	95
RN••	284
RN••	530
RN•••	284
RN•••	530
RN•••NO	267, 530
RNB150NST	480
RNB150S	480
RPA-95-•••	215, 216
RPA-96-735	215, 221
RPN••	306
RRH15168	442
RRH15168F	442
RRHS••	279
RRP-95-•••	215, 216, 221
RRP-96-•••	215, 216, 221
RS•••••	442
RS•••••F	442
RSDM•5	283
RSDR•5	283
RSE••250F	458
RSE45250F-C	458
RSF•50F	470
RSF25F••T	470
RSFSA250F	470
RSFSA25F••T	470
RSHR20	283
RSK•6	283
RSM•50F	471
RSM25F•0T	471
RSMSA250F	471
RSMSA25F••T	471
RSS••	279
RST•	263, 284
RST••	263, 284
RST••••	265
RST•••NOS	265, 380
RST••A	264
RST••PF	266
RSTB•	264
RSTB••	264
RSTV••	264
RTCA•0	43
RTCT•0	43
R-TN	83
R-TN-P	83
R-TN-PLUG	83
R-TR	83
R-TR-C	83
R-TR-CAP	83
RTW150	443
RWDGV250F	467
RWDGV3025F	467
RWF••	96

S

	Page #
S••	268
S•••	268
S•••••	442
S•••••F	442
S••N	269
S•01	269
S6175	469
S6175-H	469
S6175S	469
S7100	469
S7100-15	469
S7337S	469
SA15Y57	253
SA200AW57	252, 253

	Page #
SA200CW57	252, 253
SA4050AL	562
SA600Y7-1	252
SA602MD	252
SAEB-••-••	593
SAEC-••-••	593
SAF602-057•	252, 253
SAHW	464
SAP•	264
SAP••	264
SAR10Y57	253
SB••	268
SB•••	268
SBC•••AL	67, 580
SBC•••SS	67, 580
SBC•••SS-CR	68, 580
SBCS	100
SBDV••	469
SBG	100
SC•••	343
SC1000	343
SCCW•••	343
SCCW1000	343
SCM•8	130, 518
SCS4025F	460
SCV•00	349
SCVH•	118
SCVH••	118
SCVJ6	118
SCVL•	118
SCVL••	118
SCVM•	118
SCVM••	118
SCVR6	118
SCVS•	118
SCVS••	118
SD••	283
SDMP••	283
SE•F•M	305, 544
SE45••	539
SE45•••	539
SE45•••G	539
SE6F6M	305
SE90••	539
SE90••B	539
SE90••FS	539
SE90••G	539
SE90••SS	539
SEGC1-•••-••	115
SF•••F	470
SF1471-•••	534
SF150S	470
SF1631-•••	534
SF25F••T	470
SFC•00	349
SFC1200	349
SFMF•••	528
SFMF••••	528
SFMF••••-45	528
SFMF••••-90	528
SFMF•••-45	528
SFMF•••-90	528
SG•••	337
SGH••	294
SGH••-75	294
SGS•••	56, 341
SGV•50F	468
SGVF•50	468
SHC••••	343
SHCP	343
SHP•••	541
SHP•••B	541
SHP•••FS	541
SHP•••G	541
SHP•••SS	541
SHS••	273, 279
SHS••	279
SK••	283
SK1098	332
SL••	108
SL•••	481
SL•••CR	107
SL•••F	107
SL•••H	107
SL•••M	107
SL075GHT	481
SL150NST	481
SLL1	108
SLP1	108
SLR•	108
SLS•••	282
SLS1	108
SM•50F	471
SM150S	471
SM15S15F	471
SM25F••T	471
SM515W50RAF	451
SM515W50RAS	451
SMV•00	349
SN•00	349
SN1200	349
SN75	296
SN75NPT	296
SO•••	531
SO••••	531
SOE••	538
SOE•••	538
SOR•••	531
SOT••	540
SOT•••	540
SP••	275
SP159	275
SP390	272, 275
SPF•00	349
SRH360NPT-G075	434
SS•••	283
SS•••	337
SS16-••3	351
SS17-••3	351
SS337	94
SSA•4	286
SSBV••	505
SSBV•••	505
SSBV•••RP	506
SSBV•••SR	501
SSBV••RP	506
SSBV••SR	501
SSBV••TW	502
SSBV100TW	502
SSC••	301
SSCAP••	541
SSCF••	301
SSCM•	301
SSC-T••	594
SSE••	592
SSGV••	496
SSGV•••	496
SSLBV••	505
SSLBV•••	505
SSLBV•••SP	505
SSLBV••SP	505
SSPM•	308
SST••	540
SST•••	540
SST10	138
ST•	263
STGNWP••	530
263	
ST•••	263
ST••PF	266
STB•	264
STB••	264
STB•••	264
STBC•••	344
STBC••••	344
STBC••••L	345
STBC•••L	345
STC•	263
STC••	263
STC•••	263
STC••••	265
STC•••NOS	265, 380
STC••A	264
STC175200	265
STC-180B-G•••	434
STC-180T-G•••	434
STC-360-R•••	434
STFC•	346
STFC••	346
STFC•SS	346
STFP•	347
STFP••	347
STFP•B	347
STFP•SS	347
STMC•	346
STMC•SS	346
STMP•	347
STMP••	347
STMP•B	347
STMP•SS	347
STR2••••	526
STR3••••	527
STR6648	527
STV••	264

	Page #
STV•••	264
STW•50	443
SUBV••	520
SUBV•••	520
SUBVN100	520
SV••	144
SV•••	133
SV•••HD	133
SV•••SS	133
SW••	270
SW•••F	443
SW•50	41, 443, 476
SW153	270
SWCV••	524
SWCV•••	524
SWDS	285
SWDSHOSE••	285
SWMF•••	569
SWMF-RK1	569
SZC•••	66, 487
SZCSF•0•0T	66
SZF••••F	487
SZF••••T	66, 487
SZG•00P	66, 487
SZG•00S	66, 487
SZM••••F	487
SZM••••T	66, 487
SZSF••••F	487
SZW2	464

T

	Page #
T•••	531
T••••	531
T60•	553
T6025	553
T73E-•	239
TA•••	325
TA99•	324
TBC•••	344
TC-1000	322
TC-1050RH	322
TC97	322
TC97RB	322
TCF•	325
TCF••	324
TCM7•	324
TCN•0•	328
TCRM-T••	594
TCR-T••-••	594
TCR-T08-16	594
TCS•0	43
TCT•0	43
TETF4AL	54, 584
TETFG4AL	54, 584
TF••	324
TF16WF•-80	378
TF20WF•-80	378
TF32WF•-80	378
TFK	171
TFS••	323
TG••	378
TG•••	378
TGL••	378
TGL•••	378
TGR••	378
THB••	324
THN••	266
TL14AM7-R••	396
TL14AM7-R•••	396
TLFS••	326
TLS••	326
TLSS••	327
TLT7•	326
TM•	277, 327
TM••	277
TM••	378
TM•••	378
TM25	277, 327
TM64-42	379, 380
TML••	378
TML•••	378
TML64-42	379
TMR••	378
TMR••C	378
TN	81
TN••	323
TN•••	323
TN••••	323
TN•••X•	549
TN•••X6SS	284, 549
TN•6	323, 324
TN100X•B	304
TN125X6SS	549
TN150X•B	304
TN200X•B	304
TN-P	81
TN-PLUG	81
TP••	378
TP•••	378
TPF••	329
TPL••	378
TPL•••	378
TPM•	277, 329
TPN••	329
TPP140	293
TPR••	378
TPS•	328
TPX•	328
TR	81
TR•••	531
TR-C	81
TR-CAP	81
TRMS•••	532
TRW7	297, 328
TSA••	325
TSE••	326
TSS••	279
TSSS•••	327
TSST•••	327
TTA••	585
TTA50LP	585
TTA50SS	585
TTB••	585
TTB100	585
TTBP50	585
TTC•	328
TTC50	585
TTF•AL-•MT	53, 533, 581
TTF4AL-•EMT	53, 533, 581
TTF4AL-•FT	53, 533, 581
TTF400SP	53, 533, 581
TUN•••FS	536
TUN•••G	536
TUN•••SS	536
TUN•F	303, 536
TVS7-30	297
TVW7	297, 328
TYP2501-••	139

U

	Page #
U•••	161, 162
U30••	161, 162
UDC••	129
UDC••••	129
UHGV250F	466
UHGV250-W	466
UPP250F	484
UPPT	484
UPPT1••	484
USBG	100
USW	464

V

	Page #
VAM75	106
VHC•••	358
VHC•00B	358
VHC1•••	358
VHCN002	358
VHN•••	358
VHN•00B	358
VHN1•••	358
VN••00-200	555
VNR••••-200	555
VR4030CS-AL	55, 564
VR4050AL	563
VR4050PL	563
VR4086	562
VR4086-BY	562
VR6000-•	558, 560
VR6200	560
VR6200NP	560
VR6230	560
VRC3000AL	55, 564
VT	79
VT•	79
VTT	79

W

	Page #
W••	94, 96
W104-••-••	361
W104-8-8	361
W106-••-••	361
W106-8-8	361
W2	94
W3•	94

	Page #
W4-••-••-U	361
W43-••-••-U	361
W43-8-8-U	361
W44-••-••-U	361
W44-8-8-U	361
W45-••-••	361
W45-8-8	361
W46-••-••-U	361
W46-8-8-U	361
W48-••-••-U	361
W48-8-8-U	361
W4-8-8-U	361
W49-••-••	361
W49-8-8	361
W59-••-••-U	361
W59-8-8-U	361
W60-••-••	361
W60-8-8	361
W61-••-••	361
W61-8-8	361
W74D-2A-MB32	238
W74D-2A-MB7	238
WA•	115
WA2B	115
WA2SS	115
WB•	115
WB1C	115
WB1SS	115
WBC	94
WD40	586
WDGV•••F	467
WDGV3025F	467
WDS1	285
WDSR	285
WF•	94
WF••	94
WF111	94
WF26-1	94
WHYD••25F	468
WILK26DISPLAY	222
WM•	94
WM••	94
WMC	94
WN••	529
WN•••	532
WN1000	532
WOC-T••-25	594
WOC-T••-50	594
WS••DC-A	355
WS••F••	355
WS••F••-BOP	355
WS•DC-A	355
WS•F•	355
WS•F•-BOP	355
WSB-••-100	593
WSB-••T-100	593
WSB-••Z-50	593
WSR•	115
WSR•SS	115
WSR1C	115
WSR1E	115
WT91	589
WTB-T••-50	594
WTB-T••Z-50	594

X

X0•-0•	198, 211
X0•-0•MB	198, 211
X27	342
X51-02	211
XLS-B•A0120P	518
XPO-E4F	518
XPO-P4F	518
XSO-4D4B-0A	518
XSO-4D4D-0A	518
XSO-4S4B-0A	518
XSO-4S4D-0A	518

Y

Y00•	519
Y10075	113
YW91	589

Page # Page # Page # Page #

Engineering Service

Our Engineering Department develops workable solutions to tough problems... high external heat, flame resistance, pressure surges, hose flexing, unusual coupling end configurations requiring special clamp designs... these are only a few of the many challenges Dixon has successfully met.

Some of the services our engineers perform include:


- Working with engineering and operating management to improve existing installations.
- Making a complete study of layout, clearances and other requirements to ensure correctly engineered specifications for fittings.
- Preparing hose drawings and specifications for assurance that the hose and its connections will accurately fit and function in their appropriate applications.

Illustrated below are several types of special design couplings. Each was engineered to function with maximum reliability in meeting a specific service requirement but are also adaptable to other applications.



Custom Couplings

Dixon engineers will design, and the factory produce, special couplings to meet unusual connection or other installation requirements. A typical example is the coupling shown to the right, designed to provide reliable durability and safety in connections on long lengths of oxygen hose tied into established piping in a steel mill. Other "specials" might include lifting rings or hooks, bend shields, and heat shields.

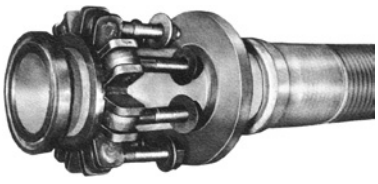

LIMITED WARRANTY

DIXON VALVE AND COUPLING COMPANY (herein called "Dixon") warrants the products described herein, and manufactured by Dixon to be free from defects in material and workmanship for a period of one (1) year from date of shipment by Dixon under normal use and service. It's sole obligation under this warranty being limited to repairing or replacing, as hereinafter provided, at its option any product found to Dixon's satisfaction to be defective upon examination by it, provided that such product shall be returned for inspection to Dixon's factory within three (3) months after discovery of the defect. The repair or replacement of defective products will be made without charge for parts or labor. This warranty shall not apply to: (a) parts or products not manufactured by Dixon, the warranty of such items being limited to the actual warranty extended to Dixon by its supplier; (b) any product that has been subject to abuse, negligence, accident, or misapplication; (c) any product altered or repaired by others than Dixon; and (d) to normal maintenance services and the replacement of service items (such as washers, gaskets and lubricants) made in connection with such services. To the extent permitted by law, this limited warranty shall extend only to the buyer and any other person reasonably expected to use or consume the goods who is injured in person by any breach of the warranty. No action may be brought against Dixon for an alleged breach of warranty unless such action is instituted within one (1) year from the date the cause of action accrues. This limited warranty shall be construed and enforced to the fullest extent allowable by applicable law.

OTHER THAN THE OBLIGATION OF DIXON SET FORTH HEREIN, DIXON DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND ANY OTHER OBLIGATION OR LIABILITY. THE FOREGOING CONSTITUTES DIXON'S SOLE OBLIGATION WITH RESPECT TO DAMAGES, WHETHER DIRECT, INCIDENTAL OR CONSEQUENTIAL, RESULTING FROM THE USE OR PERFORMANCE OF THE PRODUCT.

Some Products and Sizes May Be Discontinued When Stock Is Depleted, Or May Require A Minimum Quantity For Ordering.

NOTE: Reasonable care has been taken in preparing this Illustrated Price List. Dixon Valve & Coupling Company reserves the right to make corrections and price changes.

NOTE: Because of the health hazards associated with contamination and lead content in drinking water systems, Dixon couplings, unless otherwise specifically approved, are not recommended for potable water service and should not be used in applications where drinking water will contact the wetted surfaces of the coupling.

A **Cam & Groove** *pages 14-64*

B **Dry Disconnect Fittings** *pages 63-80*

C **Swivel Joints** *pages 81-84*

D **Boss Fittings** *pages 85-95*

E **Air Fittings, FRL's, Gauges** *pages 96-238*

F **Shank Fittings** *pages 239-259*

G **Brass Fittings** *pages 260-292*

H **Plastic Fittings** *pages 293-304*

I **Clamps** *pages 305-319*

J **Hydraulic Fittings** *pages 320-346*

K **Holedall Fittings** *pages 347-363*

L **Sanitary Fittings** *pages 364-409*

M **Fire Hose Fittings** *pages 410-460*

N **Valves** *pages 461-489*

O **Pipe & Welding Fittings** *pages 490-519*

P **Tank Truck Fittings** *pages 520-532*

Q **Rack Equipment** *pages xxx-xxx*

R **Maintenance & Repair** *pages 533-540*

S **PTFE Hose & Fittings** *pages 541-542*

T **Tech Info** *pages 547-592*

Albany, NY
518-725-0998
178A Corporate Drive
Gloversville, NY 12078
Fax: 518-725-8542

Atlanta, GA
770-486-9619
101 T.D.K. Boulevard
Suite A
Peachtree City, GA 30269
Fax: 770-486-9813

Charlotte, NC
704-376-5755
332-B Atando Avenue
Charlotte,NC 28206
Fax: 704-376-1557

Chicago, IL
630-323-3716
40 Chestnut Avenue
Westmont, IL 60559
Fax: 630-323-4120

Cleveland, OH
330-425-3000
1900 Enterprise Parkway
Twinsburg, OH 44087
Fax: 330-425-1527

Houston, TX
713-678-4291
6525 Homestead Road
Houston, TX 77028
Fax: 713-678-8105

Kansas City, MO
816-241-7111
1814 N. Corrington
Kansas City, MO 64120
Fax: 816-241-7121

Los Angeles, CA
909-605-6400
8840 Flower Road
Suites150/160
Rancho Cucamonga, CA 91730
Fax: 909-605-6200

Portland, OR
503-289-0400
2642 North Marine Drive
Portland, OR 97217
Fax: 503-289-0600

Salt Lake City, UT
801-972-1180
McGillis Ind. Pk. Bldg., #4
1972 South 4370 West
Salt Lake City, UT 84104
Fax: 801-972-8063

Tampa, FL
813-247-3500
5120 Adamo Drive
Suite E
Tampa, FL 33619
Fax: 813-247-7910

Alberta, Canada
780-469-5444
Fax: 780-463-9205

Ontario, Canada
705-436-1125
Fax: 705-436-6251

Quebec, Canada
514-422-9292
Fax: 514-422-0166

Wingfield SA, Australia
61-8-8202-6000
Fax: 61-8-8202-6099

Preston, England
44-1-77-232-3529
Fax: 44-1-77-231-4664

Troisdorf-Spich, Germany
49-2241-84406-0
Fax: 49-2241-8440679

Monterrey, Mexico
52-81-8354-5649
Fax: 52-81-8354-8197

Customer Service
877-963-4966

DIXON
The Right Connection™

Dixon Valve & Coupling Company
800 High Street • Chestertown, MD 21620
410-778-2000
Phone: 410-778-2002 • **800-355-1991**
Fax: 410-778-4702 • 800-283-4966
www.dixonvalve.com

NAHAD MEMBER
THE ASSOCIATION FOR HOSE AND ACCESSORIES DISTRIBUTION

© 2010 DVCC

DPL210-1P70M

Printed in the USA