

The Best Hose Suspension in the World

Hosebun®

MODEL
HB 100 ED
For
Hose I.D. 1" (2.5cm)



Material:	URETHANE
Length:	16 inches / 40.64 centimeters
Shipping Weight:	3 pounds / 1.4 kilograms
Shipping Dimensions:	21x8x4" / 50.8x21x7.5cm
*Sling height: *Measured from top of the bun to the top of the sling	6 inches / 15.24 centimeters
Sling type:	"D-RING" (RS 16 D)
Sling material:	UV Resistant Treated Nylon
Rated capacity:	800 lbs @ 5-1 Safety Factor
Maximum temperature:	200 degrees F / 93.3 Celsius

Notes: The most popular petroleum hose model.
Used throughout the world at refueling stations.
Often used conjunction with retractors.

www.Hosebun.com

USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World

The logo for Hosebun, featuring the word "Hosebun" in a stylized, italicized font with a registered trademark symbol. Above the text is a graphic of a red hose reel with a white hose.

MODEL
HB 125 ED
For
Hose I.D. 1 1/4" (3.1cm)



Material:	URETHANE
Length:	17.50 inches / 44.45 centimeters
Shipping Weight:	3.25 pounds / 1.48 kilograms
Shipping Dimensions:	21x8x4" / 50.8x21x7.5cm
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	5.75 inches / 14.6 centimeters
Sling type:	"D-RING" (RS 16 D)
Sling material:	UV Resistant Treated Nylon
Rated capacity:	800 lbs @ 5-1 Safety Factor
Maximum temperature:	200 degrees F / 93.3 Celsius

Notes: Used with petroleum hose, refueling stations with hyhose retractors, hydraulic hose bundles and theatrical cabling.

The logo for the website www.Hosebun.com, featuring the word "Hosebun" in a stylized font with a registered trademark symbol, and ".com" in a smaller font below it. The logo is set against a red background.

USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World

The logo for Hosebun, featuring the word "Hosebun" in a stylized, italicized font with a registered trademark symbol. Above the text is a graphic of a white arch, resembling a suspension point or a hose loop.

MODEL
HB 150 ED
For
Hose I.D. 1 1/2" (3.8cm)



Material:	URETHANE
Length:	19.50 inches / 45.09 centimeters
Shipping Weight:	3.75 pounds / 1.71 kilograms
Shipping Dimensions:	21x8x4" / 50.8x21x7.5cm
*Sling height: *Measured from top of the bun to the top of the sling	4.50 inches / 11.43 centimeters
Sling type:	"D-RING" (RS 16 D)
Sling material:	UV Resistant Treated Nylon
Rated capacity:	800 lbs @ 5-1 Safety Factor
Maximum temperature:	200 degrees F / 93.3 Celsius

Notes: Often used for bundled hoses/cable like theatrical cable for lighting and sound.

The website logo for Hosebun, featuring the word "Hosebun" in a stylized font with a registered trademark symbol, followed by ".com". The logo is set against a red background.

USA & CANADA (Toll Free)

Phone: 888-829-3773

Fax: 877-382-9626

INTERNATIONAL

Phone: 403-294-0275

Fax: 403-294-0274

The Best Hose Suspension in the World



MODEL
HB 200 ED
 For
Hose I.D. 2" (5cm)



Material:	URETHANE
Length:	18 inches / 45.72 centimeters
Shipping Weight:	4 pounds / 1.81 kilograms
Shipping Dimensions:	21x8x4" / 50.8x21x7.5cm
*Sling height: *Measured from top of the bun to the top of the sling	7.25 inches / 18.42 centimeters
Sling type:	"D-RING" (RS 200 D)
Sling material:	UV Resistant Treated Nylon
Rated capacity:	800 lbs @ 5-1 Safety Factor
Maximum temperature:	200 degrees F / 93.3 Celsius

Notes: Available with Type 4 Hook Eye (RS 200H)



USA & CANADA (Toll Free)
 Phone: 888-829-3773
 Fax: 877-382-9626

INTERNATIONAL
 Phone: 403-294-0275
 Fax: 403-294-0274

hosebun@hotmail.com

The Best Hose Suspension in the World



MODEL
HB 200 SRD
For
Hose I.D. 2" (5cm)



Material:	URETHANE
Length:	12 inches / 30.48 centimeters
Shipping Weight:	2.5 pounds / 1.14 kilograms
Shipping Dimensions:	13x5x3.5" / 33.5x13.5x9cm
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	9.60 inches / 24.38 centimeters
Sling type:	"D-RING" (RS 200 D)
Sling material:	UV Resistant Treated Nylon
Rated capacity:	800 lbs @ 5-1 Safety Factor
Maximum temperature:	200 degrees F / 93.3 Celsius

Notes: Available with Type 4 Hook Eye (RS 200H)



USA & CANADA (Toll Free)

Phone: 888-829-3773

Fax: 877-382-9626

INTERNATIONAL

Phone: 403-294-0275

Fax: 403-294-0274

hosebun@hotmail.com

The Best Hose Suspension in the World



MODEL
HB 300 D
For
Hose I.D. 3" (8.0cm)



Material:	URETHANE
Length:	12.75 inches / 32.39 centimeters
Shipping Weight:	4.25 pounds / 1.93 kilograms
Shipping Dimensions:	13.5x5.5x5" / 35x14x12cm
Sling height: <small> Measured from top of the bun to the top of the sling</small>	8.50 inches / 21.60 centimeters
Sling type:	"D-RING" (RS 300 D)
Sling material:	UV Resistant Treated Nylon
Rated capacity:	800 lbs @ 5-1 Safety Factor
Maximum temperature:	200 degrees F / 93.3 Celsius

Notes: Light duty bun,
Easier mounting with the "D-Ring" attachment.



USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World



MODEL
HB 300 H
For
Hose I.D. 3" (8.0cm)



Material:	URETHANE
Length:	12.75 inches / 32.39 centimeters
Shipping Weight:	4.25 pounds / 2.28 kilograms
Shipping Dimensions:	13.5x5.5x5" / 35x14x12cm
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	14.75 inches / 37.70 centimeters
Sling Type:	Type 4 Hook Eye (RS 300H)
Sling Material:	UV Resistant Treated Nylon
Rated Capacity:	1500 lbs @ 5-1 safety factor
Maximum Temperature:	200 degrees F / 93.3 Celsius

Notes: 300 H Light duty bun with type 4 hook eye sling for increased strength and work safety.



USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World



MODEL
HB 400 D
For
Hose I.D. 4" (10.0cm)



Material:	URETHANE
Length:	11.5 inches / 21.22 centimeters
Shipping Weight:	5 pounds / 2.28 kilograms
Shipping Dimensions:	13x7.5x6.5" / 33x19x16.5cm
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	8 inches / 20.00 centimeters
Sling type:	"D-RING" (RS 400 D)
Sling material:	UV Resistant Treated Nylon
Rated capacity:	800 lbs @ 5-1 Safety Factor
Maximum temperature:	200 degrees F / 93.3 Celsius

Notes: Light duty bun, easier mounting with the "D-Ring" attachment. Often used to support tanker




USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World



MODEL
HB 400 H
For
Hose I.D. 4" (10.0cm)

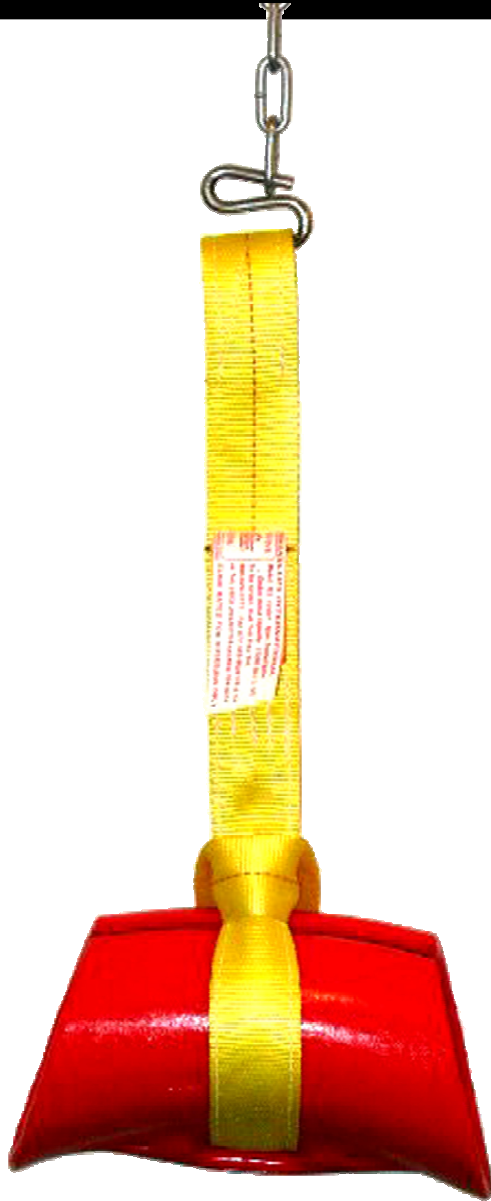

Material:	URETHANE
Length:	11.5 inches / 29.21 centimeters
Shipping Weight:	5 pounds / 2.28 kilograms
Shipping Dimensions:	22.5x9x15" / 57x23x30.5 cm
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	16.0 inches / 40.64 centimeters
Sling Type:	Type 4 Hook Eye (RS 400H)
Sling Material:	UV Resistant Treated Nylon
Rated Capacity:	1500 lbs @ 5-1 safety factor
Maximum Temperature:	200 degrees F / 93.3 Celsius

Notes: 400 H Light duty bun with type 4 hook eye sling for increased strength and work safety.



USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World



MODEL
HB 600 H
For
Hose I.D. 6" (15cm)



Material:	URETHANE
Length:	21.5 inches / 54.6 centimeters
Shipping Weight:	16 pounds / 7.28 kilograms
Shipping Dimensions:	22.5x9x15" / 57x23x30.5 cm
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	22.5 inches / 57.15 centimeters
Sling Type:	Type 4 Hook Eye (RS 600H)
Sling Material:	UV Resistant Treated Nylon
Rated Capacity:	8000 lbs @ 5-1 safety factor
Maximum Temperature:	200 degrees F / 93.3 Celsius

Notes: Use Heat Wrap Model HW 600 to extend temperature capacity up to 1100 degrees Fahrenheit (593 Celsius).



USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World



MODEL
HB 800 H
For
Hose I.D. 8" (20.0cm)



Material:	URETHANE
Length:	30.5 inches / 77.47 centimeters
Shipping Weight:	35 pounds / 15.92 kilograms
Shipping Dimensions:	31.25x12x15" / 80x30.5x38cm
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	18 inches / 45.72 centimeters
Sling Type:	Type 4 Hook Eye (RS 800H)
Sling Material:	UV Resistant Treated Nylon
Rated Capacity:	12000 lbs @ 5-1 safety factor
Maximum Temperature:	200 degrees F / 93.3 Celsius

Notes: Use Heat Wrap Model HW 800 to extend temperature capacity up to 1100 degrees Fahrenheit (593 Celsius).



USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World



MODEL
HB 1000 H
For
Hose I.D. 10" (25.0cm)



Material:	URETHANE
Length:	40.75 inches / 103.51 centimeters
Shipping Weight:	60 pounds / 27.20 kilograms
Shipping Dimensions:	42x14x18" / 105x34x46cm
*Sling height: <small>*Measured from top of the bun to the top of the sling</small>	19.25 inches / 48.90 centimeters
Sling Type:	Type 4 Hook Eye (RS 1000H)
Sling Material:	UV Resistant Treated Nylon
Rated Capacity:	15000 lbs @ 5-1 safety factor
Maximum Temperature:	200 degrees F / 93.3 Celsius

Notes: Use Heat Wrap Model HW 1000 to extend temperature capacity up to 1100 degrees Fahrenheit (593 Celsius).




USA & CANADA (Toll Free)
Phone: 888-829-3773
Fax: 877-382-9626

INTERNATIONAL
Phone: 403-294-0275
Fax: 403-294-0274

The Best Hose Suspension in the World



MODEL
HB 1200 H
 For
Hose I.D. 12" (30.0cm)

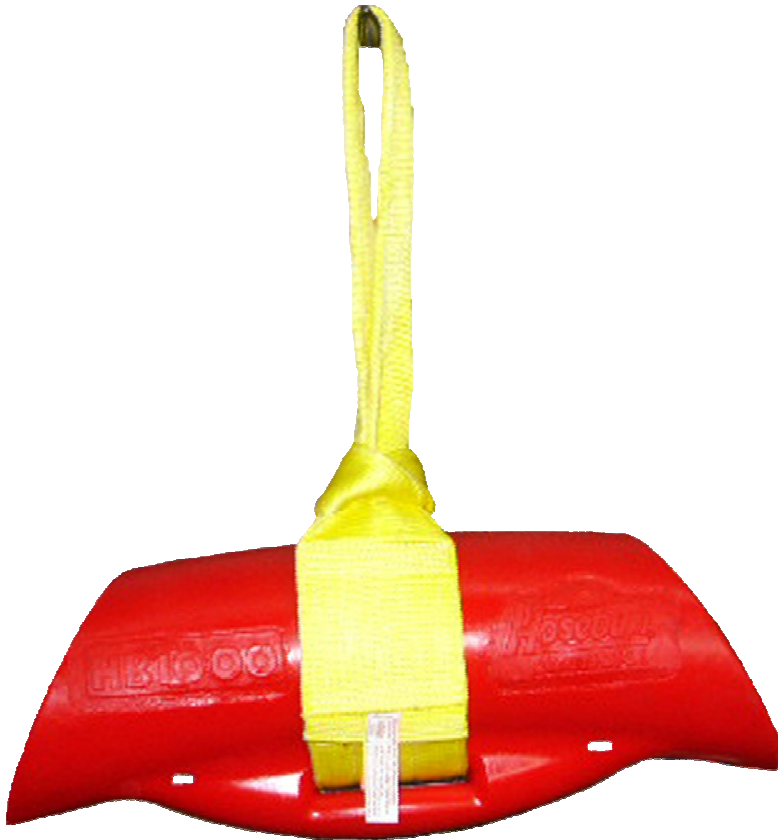

Material:	URETHANE
Length:	40.75 inches / 103.51 centimeters
Shipping Weight:	62 pounds / 28.20 kilograms
Shipping Dimensions:	42x14x18" / 105x34x46cm
*Sling height: *Measured from top of the bun to the top of the sling	23.25 inches / 59.06 centimeters
Sling Type:	Type 4 Hook Eye (RS 1200H)
Sling Material:	UV Resistant Treated Nylon
Rated Capacity:	15000 lbs @ 5-1 safety factor
Maximum Temperature:	200 degrees F / 93.3 Celsius

Notes: Same Mold as HB 1000H but with longer sling to accommodate 12" I.D Hose.



USA & CANADA (Toll Free)
 Phone: 888-829-3773
 Fax: 877-382-9626

INTERNATIONAL
 Phone: 403-294-0275
 Fax: 403-294-0274

The Best Hose Suspension in the World



HOSECADDY™

MODEL
HC 1000



Material:	Each Hosecaddy™ is made with a rugged steel construction that then undergoes hot dipped galvanization and powder coating to ensure years of maintenance-free protection performance.
Weight:	The hose caddy at 93lbs (42.2 kg) is lightweight and durable.
Dimensions:	45" long x 20 1/4" wide x 25" high.
Load Capacity	Easy rolling heavy duty 6" swivel castors on all four corners have a working load capacity of 1600 lbs.
Hose Dimensions	Designed for 6" through 12" large bore hose or a bundle of small 3-4" hoses.

- Notes:**
- Designed to tip sideways for easy loading and unloading of the hose.
 - Available in different colors



USA & CANADA (Toll Free)

Phone: 888-829-3773

Fax: 877-382-9626

INTERNATIONAL

Phone: 403-294-0275

Fax: 403-294-0274

hosebun@hotmail.com

The Best Hose Suspension in the World



HOSE HORSE™

MODEL
HH



Material:	Molded Plastic
Weight:	From 4 - 18 lbs (depends on model)
Dimensions:	Depends on Model
Hose Dimensions	Models available to fit hose sizes from 2 inch up to 24 inches.

*** * GET YOUR HOSE OFF THE GROUND * ***

STACKABLE

DURABLE

AFFORDABLE



USA & CANADA (Toll Free)

Phone: 888-829-3773

Fax: 877-382-9626

INTERNATIONAL

Phone: 403-294-0275

Fax: 403-294-0274