


Hose

High Working Pressure

 Refer to warnings and safety information on pages 3-4 and page 38.

Boston Bulldog Gold

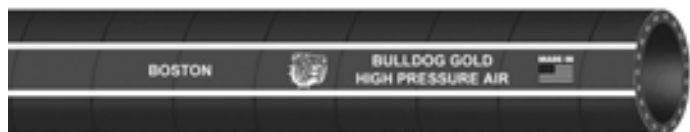

Tube: Nitrile (RMA Class A)

Reinforcement: Wire, 1, 2, or 3 Braid

Cover: Carboxylated Nitrile/Pinpricked

Color: Black

Temperature Range: -40°F To +250°F

Type Of Branding: Printed Strip

Working Pressure: 500-1200 PSI

Type Of Coupling: 430 'U' Series, Non-Reattachable (Swaged), Interlocking, or Steel Nipple. Clamps —Interlocking.

Features:

- Carboxylated Nitrile cover
- Nitrile tube (RMA Class A)
- Continuous permanent brand

Advantages:

- Excellent abrasion, oil, and weather resistant
- Excellent lube oil resistance and high temperature resistance
- Easy identification

Markets:

- Construction Industry
- Oil Field Equipment
- Drilling Equipment
- Mining
- All Markets

Applications:

- Provide power to air-operated construction equipment. (Bull lines, jackhammer, etc.)
- Power air-operated drills, boring, and mining equipment
- Use when you need a reinforced hose for extremely abusive applications

PRODUCT NUMBER	NOMINAL I.D. (IN.)	(MM)	BRAID	NOMINAL O.D. (IN.)	(MM)	APPROX. LBS. WEIGHT PER 100 FT.	MAX. WORKING PRESS. (PSI)	MTO* MIN. ORDER QTY.	STANDARD LENGTH (FT)
H600912	3/4	19.1	1	1-1/4	31.8	64	1,200	2,100	50
H600912-100									100
H600912-150									150
H600916	1	25.4	1	1-1/2	38.1	80	1,000	1,500	50
H600916-100									100
H600916-150									150
H600920	1-1/4	31.8	1	1-13/16	46.0	120	800	—	50
H600920-100									100
H600920-150									150
H600924	1-1/2	38.1	2	2-1/8	53.9	134	600	—	50
H600924-100									100
H600924-150									150
H600932	2	50.8	2	2-21/32	67.4	197	600	—	50
H600932-100									100
H600932-150									150
H600940	2-1/2	63.5	2	3-5/32	80.1	250	600	—	50
H600940-100									100
H600940-150									150
H600948	3	76.2	2	3-23/32	94.4	315	600	—	50
H600948-100									100
H600948-150									150
H600964	4	101.6	3	5	127.0	532	500	—	50
H600964-100									100
H600964-150									150

*MTO—Made To Order