

WEBSTONE BALL VALVES



Webstone ball valves provide you with the most innovative and highest-quality products for residential, commercial, and industrial applications. They are all backed by a lifetime warranty.


We hope you will find the information you are looking for and this reference catalog easy for you to use. Page 34 describes our item numbering system. Page 35 lists our products by material or type. The index lists our products in numerical order by item number.

The Webstone name ensures that you will not find a better ball valve at any price.

4370 SERIES

FULL PORT STAINLESS STEEL BALL VALVES 3 PIECE INVESTMENT CAST - IPS w/LOCKING HANDLE (800 WOG/150 WSP) - ISO 9001

Designed for commercial and industrial use with a broad range of fluid handling applications. This approved Webstone heavy duty 316 Stainless Steel investment cast body features a solid stainless steel ball with reinforced Teflon® seats. The valve is actuated by a blowout proof stem with a Teflon® seal and features an adjustable packing nut. Vinyl coated stamped 304 stainless steel handle with locking device. The 3 piece design makes in-line repair as easy as 1-2-3. Replacement seats and seals are always in stock and available.




All Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING
800 WOG non-shock
150 WSP

1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1.20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

1.	BODY	ASTM A351.GR.CF8M-SS316
2.	END CAP	ASTM A351.GR.CF8M-SS316
3.	SEATS	TEFLON® (PTFE+15%G.F.)
4.	BALL	ASTM A351.GR.CF8M-SS316
5.	STEM	ASTM A351.GR.CF8M-SS316
6.	THRUST WASHER	TEFLON® (PTFE+15%G.F.)
7.	STEM SEAL	TEFLON® (PTFE+15%G.F.)
8.	LEVER HANDLE	SS 304
9.	SPRING WASHER	SS 304
10.	NUT	SS 304
11.	HANDLE JACKET	VINYL
12.	BOLTS	SS 304
13.	NUTS	SS 304
14.	SPRING WASHERS	SS 304

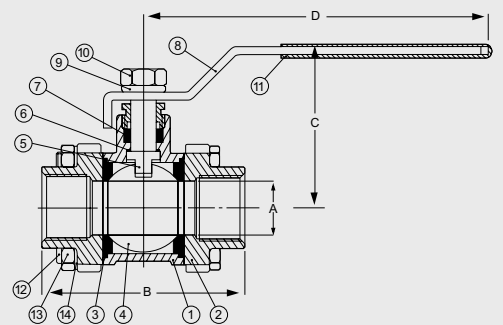

ITEM	SIZE	CTN/CS	A	B	C	D	C _v
43702	1/2	1/40	1/2	2 5/16	2 9/16	4 1/2	14.29
43703	3/4	2/24	3/4	3 1/4	2 3/4	5 1/2	34.06
43704	1	2/24	1	3 1/4	2 3/4	6	56.46
43705	1 1/4	2/12	1 1/4	4 5/8	2 3/4	6	114.03
43706	1 1/2	2/8	1 1/2	4 1/4	3 1/2	6 1/2	161.30
43707	2	2/8	2	5	3 7/8	7 3/4	248.61

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____ Date _____ Contractor _____

Model Specified _____ Qty _____ Approved By _____

Designer/Engineer _____ Date _____ Contractor's PO # _____

Submitted by _____ Date _____ Other _____