


4070 SERIES

**FULL PORT FORGED BRASS BALL VALVES
IPS - (600 WOG/150 WSP) - ISO 9002**

Designed for residential, commercial and industrial use with water, oil or gas and can be used with natural, manufactured, mixed, liquefied petroleum and LP gas/air mixtures. This approved Webstone heavy duty forged brass body valve features an extra hard chrome plated brass ball with Teflon® seats. The valve is actuated by a blowout proof stem with a Teflon® seal and features an adjustable packing nut. Vinyl coated stamped steel reversible handle.



All Teflon® seated valves
*Maximum Temperature is 400°F @ 100 PSI
PRESSURE RATING
1/2" - 2" - 600 WOG non-shock
2 1/2" - 4" 400 WOG non-shock
150 WSP


1. CGA design certified.
2. UL listed 1/4" - 2"
3. CSA (Canadian Standards Association)
Meets both Canadian and US standards for use with petroleum and natural gas mixtures
4. Threaded ends comply with ANSI B1.20.1
5. Teflon® seats withstand temperatures from -40°F to 400°F
5. Manufactured in an ISO 9002 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

| | | |
|-------------------------|------------|-------------------------|
| Job/Customer _____ | Date _____ | Contractor _____ |
| Model Specified _____ | Qty _____ | Approved By _____ |
| Designer/Engineer _____ | Date _____ | Contractor's PO # _____ |
| Submitted by _____ | Date _____ | Other _____ |

| | |
|-------------------|---------------------------------|
| 1. BODY | FORGED BRASS (ASTM B283-C37700) |
| 2. END CAP | FORGED BRASS (ASTM B283-C37700) |
| 3. SEATS | TEFLON® (PTFE) |
| 4. BALL | BRASS / HARD CHROME PLATE |
| 5. STEM | BRASS (ASTM B124-C37700) |
| 6. STEM SEAL | TEFLON® (PTFE) |
| 7. PACKING GLAND | BRASS (ASTM B124-C37700) |
| 8. LEVER HANDLE | C.P. STEEL |
| 9. NUT | C.P. STEEL |
| 10. HANDLE JACKET | VINYL GRIP |

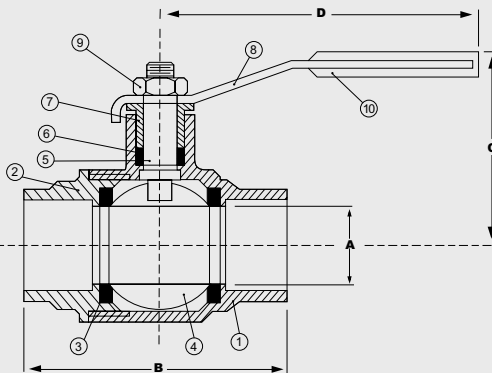

| ITEM | SIZE | CTN/CS | A | B | C | D | C _v |
|-------|-------|--------|--------|--------|---------|--------|----------------|
| 40700 | 1/4 | 12/144 | 3/8 | 1 3/4 | 1 3/8 | 3 1/4 | 7.68 |
| 40701 | 3/8 | 12/144 | 3/8 | 1 7/8 | 1 1/2 | 3 1/4 | 7.80 |
| 40702 | 1/2 | 10/100 | 9/16 | 2 1/4 | 1 7/8 | 3 9/16 | 11.47 |
| 40703 | 3/4 | 5/60 | 3/4 | 2 9/16 | 2 1/8 | 4 3/8 | 27.01 |
| 40704 | 1 | 5/40 | 15/16 | 3 | 2 1/4 | 4 3/8 | 63.26 |
| 40705 | 1 1/4 | 4/28 | 1 1/4 | 3 1/2 | 2 3/4 | 5 1/2 | 127.72 |
| 40706 | 1 1/2 | 4/20 | 1 1/2 | 3 7/8 | 2 15/16 | 5 1/2 | 184.36 |
| 40707 | 2 | 2/12 | 2 | 4 9/16 | 3 3/8 | 6 5/16 | 286.12 |
| 40708 | 2 1/2 | 1/6 | 2 1/2 | 5 1/2 | 4 3/4 | 8 | 319.07 |
| 40709 | 3 | 1/6 | 3 1/4 | 6 1/4 | 5 | 11 1/4 | 431.66 |
| 40710 | 4 | 1/4 | 4 1/16 | 7 | 5 1/2 | 11 1/2 | 558.80 |

Cv - The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.


5070 SERIES

**FULL PORT FORGED BRASS BALL VALVES
CxC - (600 WOG/150 WSP) - ISO 9002**

Designed for residential, commercial and industrial use with water, oil or gas. This approved webstone heavy duty forged brass body valve features an extra hard chrome plated brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal and features an adjustable packing nut. Vinyl coated stamped steel reversible handle.



**TEE HANDLE OPTION
50703-T**



All Teflon® seated valves
*Maximum Temperature is 400°F @ 100 PSI
PRESSURE RATING
600 WOG non-shock
150 WSP


1. UL listed
2. Conforms to Federal Spec. WWV-35C
3. Solder ends comply with ANSI B16.18
4. Teflon® seats withstand temperatures from -40°F to 400°F
5. Manufactured in an ISO 9002 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

| | | |
|-------------------------|------------|-------------------------|
| Job/Customer _____ | Date _____ | Contractor _____ |
| Model Specified _____ | Qty _____ | Approved By _____ |
| Designer/Engineer _____ | Date _____ | Contractor's PO # _____ |
| Submitted by _____ | Date _____ | Other _____ |

| | |
|-------------------|---------------------------------|
| 1. BODY | FORGED BRASS (ASTM B283-C37700) |
| 2. END CAP | FORGED BRASS (ASTM B283-C37700) |
| 3. SEATS | TEFLON® (PTFE) |
| 4. BALL | BRASS / HARD CHROME PLATE |
| 5. STEM | BRASS (ASTM B124-C37700) |
| 6. STEM SEAL | TEFLON® (PTFE) |
| 7. PACKING GLAND | BRASS (ASTM B124-C37700) |
| 8. HANDLE | C.P. STEEL |
| 9. NUT | C.P. STEEL |
| 10. HANDLE JACKET | VINYL GRIP |

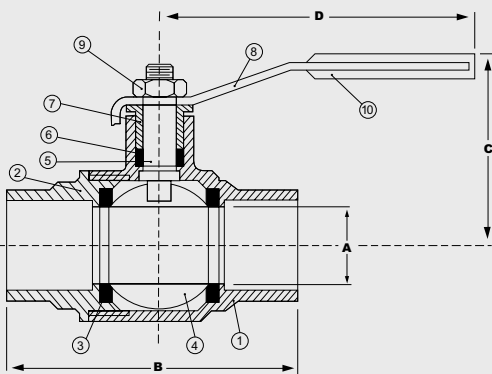

| ITEM | SIZE | CTN/CS | A | B | C | D | C _v |
|---------|-------|--------|-------|--------|--------|--------|----------------|
| 50702 | 1/2 | 10/100 | 1/2 | 2 3/16 | 2 | 3 5/8 | 11.47 |
| 50703 | 3/4 | 5/60 | 3/4 | 2 7/8 | 2 1/16 | 3 5/8 | 27.01 |
| 50704 | 1 | 5/40 | 1 | 3 1/2 | 2 3/8 | 4 3/8 | 49.30 |
| 50705 | 1 1/4 | 4/28 | 1 1/4 | 3 7/8 | 2 3/4 | 5 5/8 | 114.03 |
| 50706 | 1 1/2 | 4/20 | 1 1/2 | 4 1/2 | 3 | 5 5/8 | 168.48 |
| 50707 | 2 | 2/12 | 2 | 5 1/2 | 3 3/4 | 6 3/8 | 255.75 |
| 50703-T | 3/4 | 5/60 | 3/4 | 2 3/4 | 2 | 2 1/16 | 27.01 |