


**4063 SERIES**

**FULL PORT FORGED BRASS BALL VALVES  
COMPRESSION ENDS  
(600 WOG/150 WSP) - ISO 9001**

Designed for residential and commercial use with water, oil or gas. Heavy duty forged brass body. Extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem and features a Teflon® (PTFE) seal and an adjustable packing gland. Vinyl coated stamped steel handle. Compression ends are labor saving and eliminate the risk of damaging seats while soldering. Valve replacement or disconnecting the plumbing system is also an easy job.



all Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
600 WOG non-shock  
150 WSP


1. Conforms to Federal Spec. WWV-35C
2. Teflon® seats withstand temperatures from -40°F to 400°F
3. Manufactured in an ISO 9001 Facility.

Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	<b>BODY</b>	FORGED BRASS (ASTM B283-C37700)
2.	<b>END CAP</b>	FORGED BRASS (ASTM B283-C37700)
3.	<b>SEATS</b>	TEFLON® (PTFE)
4.	<b>BALL</b>	BRASS/HARD CHROME PLATE
5.	<b>STEM</b>	BRASS (ASTM B124-C37700)
6.	<b>STEM SEAL</b>	TEFLON® (PTFE)
7.	<b>PACKING GLAND</b>	BRASS (ASTM B124-C37700)
8.	<b>HANDLE</b>	C.P. STEEL
9.	<b>NUT</b>	C.P. STEEL
10.	<b>HANDLE JACKET</b>	VINYL GROUP
11.	<b>FERRULE</b>	BRASS (ASTM B16-C36000)
12.	<b>COMPRESSION NUT</b>	BRASS (ASTM B124-C37700)

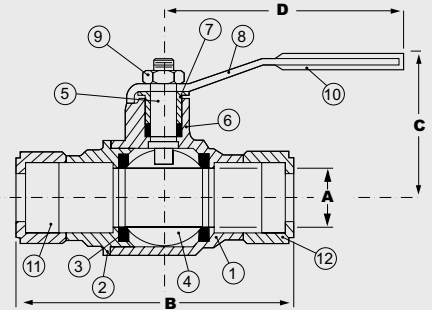

ITEM	SIZE	CTN/CS	A	B	C	D	Cv
40632	1/2	25/100	9/16	2 13/16	2	3 11/16	11.47
40633	3/4	15/60	3/4	3 3/8	2 7/16	3 7/8	27.01
40634	1	10/40	15/16	4 3/16	2 5/8	4 5/8	49.30

Cv: The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.


**4092 SERIES**

**FORGED BRASS CHECKBALL VALVES  
INTEGRAL S.S. SPRING- IPS  
(230 WOG) - ISO 9002**

Designed for residential, commercial and industrial use with water, oil or gas. Heavy duty nickel plated forged brass body. Extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal and features an adjustable packing gland. Vinyl coated Dacromet plated steel handle for resistance to corrosion. This valve features an integral spring check valve confined within the solid brass ball.

**BUILT IN  
CHECKVALVE**

In addition to the space, cost and time saving benefits of this 2-in-one valve, the check valve is self maintaining. By actuating the valve handle at a 45° angle, the check is bypassed and the flow of fluid goes around the ball. This creates turbulence which cleans out the internal spring check valve.



all Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
230 WOG non-shock  
not for use with steam


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1.20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9002 Facility
5. Port dimension listed is obstructed by in-line check valve

Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	<b>BODY</b>	FORGED BRASS (ASTM B283-C37700) NICKEL PLATED
2.	<b>END CAP</b>	FORGED BRASS (ASTM B283-C37700) NICKEL PLATED
3.	<b>SEATS</b>	TEFLON® (PTFE)
4.	<b>BALL</b>	BRASS/HARD CHROME PLATE
5.	<b>STEM</b>	BRASS (ASTM B124-C37700)
6.	<b>STEM SEAL</b>	TEFLON® (PTFE)
7.	<b>PACKING GLAND</b>	BRASS (ASTM B124-C37700)
8.	<b>HANDLE</b>	STEEL DACROMAT PLATED
9.	<b>WASHER</b>	C.P. STEEL
10.	<b>NUT</b>	STEEL
11.	<b>HANDLE JACKET</b>	VINYL GRIP
12.	<b>CHECK VALVE</b>	CELCON
13.	<b>SPRING</b>	SS 304
14.	<b>POPPET SEAL</b>	NEOPRENE

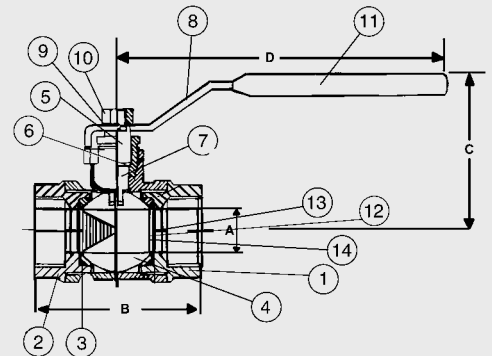

ITEM	SIZE	CTN/CS	A	B	C	D	Cv
40922	1/2	20/120	1/2	1 15/16	1 13/16	4 1/4	2.70
40923	3/4	7/84	3/4	2 1/4	2 1/8	4	4.50
40924	1	8/48	15/16	2 11/16	2 9/16	4 13/16	7.60