
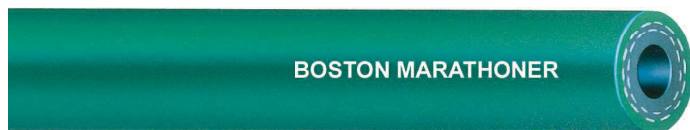


Hose

Low Working Pressure

 Refer to warnings and safety information on pages 3-4 and page 38.

Boston Marathoner



Tube: Blended Nitrile

Reinforcement: Fiber, 2 or 4 Spiral

Cover: Neoprene/Pinpricked

Color: Red (RD), Green (GN), Yellow (YW), Black (BK)

Temperature Range: -40°F To +180°F

Type Of Branding: Ink Print

Working Pressure: 200-300 PSI

Type Of Coupling: 'U' Series, Barbed Inserts, Quick Acting or Long Shank. Clamps—Bolt, Band or Wire.

Features:

- Neoprene cover
- Blended nitrile tube
- Continuous permanent brand
- Longer lengths

Advantages:

- Abrasion, oil, and water resistant
- Medium oil resistant
- Easy identification
- Economical; less waste

Markets:

- Assembly/Manufacturers
- Lumber/Woodworking
- Plywood Mfg.
- Paper/Pulp Processing
- Metal Working

Applications:

- Pneumatic tools on production line
- Transfer air and water

PRODUCT NUMBER	NOMINAL I.D. (IN.)	NOMINAL I.D. (MM)	SPIRAL	NOMINAL O.D. (IN.)	NOMINAL O.D. (MM)	APPROX. LBS. WEIGHT PER 100 FT.	MAX. WORKING PRESS. (PSI)	STANDARD REELS (FT)
H198104-600R	1/4	6.3	2	1/2	12.7	10	200	600(RD)
H198204-600R	1/4	6.3	4	5/8	15.9	13	300	600(RD)
H198105-600R	5/16	7.9	2	5/8	15.9	12	200	600(RD)
H198205-600R	5/16	7.9	4	11/16	17.3	13	300	600(RD)
H198106-600R	3/8	9.5	2	11/16	17.3	15	200	600(RD)
H198206-600R	3/8	9.5	4	3/4	18.3	18	300	600(RD)
H198108-600R	1/2	12.7	2	13/16	20.6	19	200	600(RD)
H198208-600R	1/2	12.7	4	7/8	25.4	23	300	600(RD)
H198210-600R	5/8	15.9	4	1-1/32	26.2	25	300	600(RD)
H198112-250	3/4	19.1	4	1-3/16	30.2	37	225	5-50's(RD)
H198112-600R	3/4	19.1	4	1-3/16	30.2	37	225	600(RD)
H198212-250	3/4	19.1	4	1-3/16	30.2	37	300	5-50's(RD)
H198212-600R	3/4	19.1	4	1-3/16	30.2	37	300	600(RD)
H198216-450R	1	25.4	4	1-7/16	36.5	64	200	450(RD)