


Hose

General Air & Water

⚠ Refer to warnings and safety information on pages 3-4 and page 38.

Boston Bosflex A/W

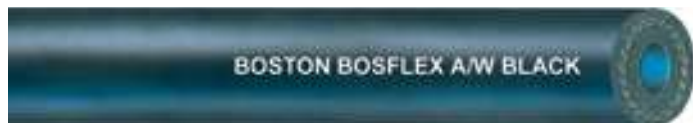

Tube: EPDM

Reinforcement: Fiber, 2 or 4 Spiral, or 2 Braid

Cover: EPDM/Pinpricked

Color: Red (RD), Black (BK)

Temperature Range: -40°F To +180°F

Type Of Branding: Ink Print

Working Pressure: 200-300 PSI

Type Of Coupling: 'U' Series, Barbed Inserts, Quick Acting, Short or Long Shank. Clamps—Interlocking, Bolt, Band or Wire.

Features:

- EPDM cover
- EPDM tube
- Continuous permanent brand
- Longer lengths

Advantages:

- Abrasion, age, and water resistant
- Heat resistant
- Easy identification
- Economical; less waste

Markets:

- Agriculture
- Assembly/Manufacturers
- Construction
- Food Industry
- Metal Working
- Mining
- Oil Industry
- Paper/Pulp
- Ship Building

Applications:

- Spraying and conveying water based liquid fertilizers and pesticides
- Transfer air and water

PRODUCT NUMBER	NOMINAL I.D. (IN.)	(MM)	REINF.	NOMINAL O.D. (IN.)	(MM)	APPROX. LBS. WEIGHT PER 100 FT.	MAX. WORKING PRESS. (PSI)	MTO* MIN. ORDER QTY.	STANDARD REELS (FT)
H10604	1/4	6.3	2 Sp	1/2	12.7	10	200	—	50(BK,RD)
H10604-600R									600(BK,RD)
H10504	1/4	6.3	4 Sp	5/8	15.9	14	300	—	50(RD)
H10504-600R									600 (RD)
H10605-600R	5/16	7.9	2 Sp	19/32	15.1	13	200	10,000	600(BK)
H10505-600R	5/16	7.9	4 Sp	11/16	17.5	14	300	—	600 (RD)
H10606	3/8	9.5	2 Sp	11/16	17.5	15	200	—	50(BK,RD)
H10606-600R									600(BK,RD)
H10506	3/8	9.5	4 Sp	3/4	19.1	18	300	—	50(RD)
H10506-600R									600 (RD)
H10608	1/2	12.7	2 Sp	13/16	20.6	19	200	—	50(BK,RD)
H10608-600R									600(BK,RD)
H10508	1/2	12.7	4 Sp	7/8	22.2	23	300	—	50(RD)
H10508-600R									600(RD)
H10610-600R	5/8	15.9	2 Sp	31/32	24.6	28	200	—	600(BK)
H10510-600R	5/8	15.9	4 Sp	1-1/32	26.2	30	300	—	600(RD)
H10612-250	3/4	19.1	4 Sp	1-3/16	30.2	40	300	—	5-50'S(RD)
H10612-600R									600 (RD)
H10512	3/4	19.1	4 Sp	1-3/16	30.2	37	225	—	50(BK,RD)
H10512-250									5-50's(BK,RD)
H10512-600R									600(BK,RD)
H10516	1	25.4	4 Sp	1-7/16	36.5	60	200	—	50(BK,RD)
H10516-400R									400(RD)
H10516-450R									400(BK)
H10520-300R	1-1/4	31.8	2 Br	1-3/4	44.5	65	200	—	300(BK)
H10524-300R	1-1/2	38.1	2 Br	2	50.8	82	200	—	300(BK)