


# Hose

## Cleaning Service Hoses

 Refer to warnings and safety information on pages 3-4 and page 53.

### Boston Supraforce

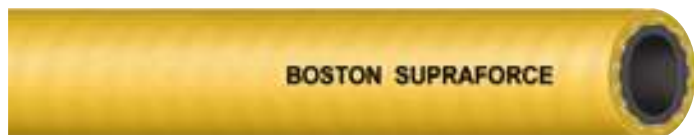

**Tube:** Rubber Modified Thermoplastic

**Reinforcement:** Fiber, 2 Spiral

**Cover:** Rubber Modified Thermoplastic

**Color:** Yellow

**Temperature Range:** +10°F To +180°F

**Type Of Branding:** Ink Print

**Working Pressure:** 300-400 PSI

**Type Of Coupling:** Barbed Inserts. Clamps—Brass Collar.  
*Do not use internal expanded couplings.*

#### Features:

- Light weight
- Flexible
- PVC tube
- Rubber modified thermoplastic cover
- Factory tested to exceed minimum electrical resistivity of one megohm per inch at 1000 volts D.C.

#### Advantages:

- Easy to handle
- Easy to route
- Moderate oil resistance
- Good age, abrasion, ozone, and oil resistance
- No electrical build-up

#### Markets:

- Food processing
- Meat Packing Plants
- Construction

#### Applications:

- High pressure spray
- Washdown
- High pressure air

PRODUCT NUMBER	NOMINAL I.D. (IN.)	(MM)	SPIRAL	NOMINAL O.D. (IN.)	(MM)	APPROX. LBS. WEIGHT PER 100 FT.	MAX. WORKING PRESS. (PSI)	MIN. BEND RADIUS (IN.)	MTO* MIN. ORDER QTY.	STD. REELS (FT)
H153104-500R	1/4	6.3	4	1/2	12.7	9	400	3	5,000	500
H153106-500R	3/8	9.5	4	11/16	17.5	15	400	4-1/2	5,000	500
H153108-500R	1/2	12.7	4	25/32	19.8	17	400	6	5,000	500
H153110-500R	5/8	15.9	4	1-1/2	25.4	28	400	7-1/2	5,000	500
H153112-500R	3/4	19.1	4	1-1/8	28.6	32	400	9	—	500
H153116-300R	1	25.4	4	1-7/16	36.5	48	300	12	5,000	300

*Stated working pressures are tested at 68°F. Working pressure decreases as temperature increases. See chart on page 14 showing the relationship between working pressure and temperature for reinforced PVC hose.*

\*MTO - Made to Order