
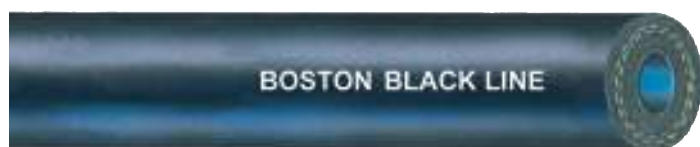


Hose

Specialty Service Hoses

 Refer to warnings and safety information on pages 3-4 and page 71.

Boston Black Line Liquid Propane Gas (LPG)



Tube: Nitrile
Reinforcement: Fiber Braid
 (1" has 2 Stainless Steel Static Wires)
Cover: Vinyl Nitrile, Pinpricked
Color: Black
Temperature Range: -40°F to +140°F (Hose is capable of this rating. LP-Gas should never be elevated above 100°F)
Standards: UL 21 Approved LP-Gas/Natural Gas
Type Of Branding: Ink Print
Working Pressure: LP-Gas 350 PSIG Max WP
 Natural Gas 1 PSIG Max WP
 5:1 Safety Factor on 350 PSIG
Type Of Coupling: Boston 'U' Series.

Features:

- Neoprene cover
- Nitrile tube
- Continuous printed brand and caution label every ten feet
- Fiberglass braid

Advantages:

- Abrasion, oil and weather resistant
- Heat and oil resistant
- Handles intermittent temperatures of hot tar up to +400°F
- Light weight
- Easy to handle
- Longer life
- Easy identification
- Assures proper use

Markets:

- Tank Trucks
- Construction
- Oil Field
- Manufacturing Plants

Applications:

- Loading or unloading, pumping, suction, or gravity flow discharge; transfer of hot tar
- Transfer of asphalt in roofing shingle plant

PRODUCT NUMBER	NOMINAL I.D. (IN.)	(MM)	BRAID	NOMINAL O.D. (IN.)	(MM)	APPROX. LBS. WEIGHT PER 100 (FT)	MAXIMUM WORKING PRESS. (PSIG)	STANDARD REELS* (FT)	MIN. BEND RADIUS (INCH)
H90004-500R	1/4	6.3	1	37/64	14.7	12	350/1	500	3
H90006-500R	3/8	9.5	1	23/32	18.3	17	350/1	500	4.5
H90008-500R	1/2	12.7	1	29/32	23.0	24	350/1	500	6
H90012-500R	3/4	19.1	2	1-15/64	31.4	41	350/1	500	9
H90016-150	1	25.4	2	1-1/2	38.1	52	350/1	150	12
H90016-500R								500	

*All lengths on reels are in 50' increments.



WARNING: Natural gas transfer applications:

- Hose should only be used in open, well ventilated areas.
- Maximum working pressure should not exceed 1 PSIG (UL Specification).
- Not for use in vehicles using compressed natural gas.