
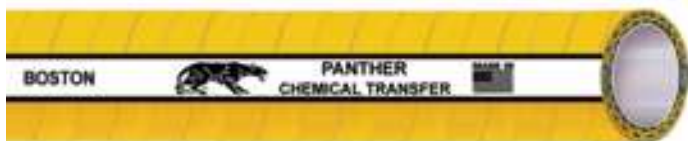


Hose

Chemical Transfer

 Refer to warnings and safety information on pages 3-4 and pages 93-94.

Boston Panther Chemical Transfer



Tube: Clear Cross-Linked Polyethylene (XLPE)

Reinforcement: Fiber, 2 Braid or 2 Ply and Helical Wire

Cover: EPDM

Color: Yellow

Temperature Range: -45°F to +150°F

Type Of Branding: Printed Strip

Suction: Full Vacuum

Working Pressure: 150-200 PSI (Depending on coupling)

Type Of Coupling: Cam and Groove or Swaged/Crimped. Clamps—Interlocking or Band.

Features:

- EPDM cover
- Clear cross-linked polyethylene tube
- Printed strip brand and caution label every ten feet
- Smooth bore
- Every length serialized

Advantages:

- Chemical and ozone resistant; longer hose life.
- Chemical, petroleum, and solvent resistant; won't contaminate, or discolor fluids
- Easy identification
- Safety
- High visibility
- Rapid fluid flow
- Easy to clean
- Safety and maintenance records

Markets:

- Chemical/Petroleum Industry
- Lumber/Woodworking
- Plywood Mfg.
- Pulp/Paper Processing
- Tank Truck
- Railroad Tank Car

Applications:

- Transfer of acids, chemicals, solvents, and petroleum products.
- Transfer of chemicals and solvents for processing products.
- Loading and unloading, pumping, suction, or gravity flow discharge

PRODUCT NUMBER	NOMINAL I.D. (IN.)	NOMINAL I.D. (MM)	REINF.	NOMINAL O.D. (IN.)	NOMINAL O.D. (MM)	APPROX. LBS. WEIGHT PER 100 FT.	MAXIMUM WORKING PRESS. (PSI)	MINIMUM BEND RADIUS (IN.)	MINIMUM BEND RADIUS (MM)	MTO* MIN. ORDER QTY.	STANDARD LENGTH (FT)
H835916-150	1	25.4	2 Br	1-17/32	38.9	72	200	5	127.0	1,650	150
H835920-150	1-1/4	31.8	2 Ply	1-7/8	47.6	86	200	8	203.2	1,350	150
H835924-150	1-1/2	38.1	2 Ply	2-1/8	54.0	89	200	8	203.2	1,200	150
H835932-150	2	50.8	2 Ply	2-5/8	66.7	113	200	9	228.6	900	150
H835940-150	2-1/2	63.5	2 Ply	3-1/8	79.4	140	150	12	304.8	750	150
H835948-150	3	76.2	2 Ply	3-5/8	92.1	164	150	16	406.4	600	150
H835964-150	4	101.6	2 Ply	4-11/16	119.1	239	150	21	533.4	450	150

*MTO - Made to Order