
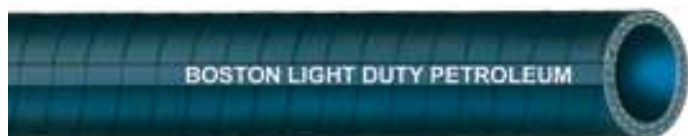


Hose

Light Duty Petroleum

 Refer to warnings and safety information on pages 3-4 and page 109.

Boston Light Duty Petroleum



Tube: Vinyl Nitrile

Reinforcement: Fiber, 4 Spiral and Helical Wires

Cover: Vinyl Nitrile

Color: Black

Temperature Range: -40°F to +160°F

Type Of Branding: Impression

Suction: Full Vacuum

Working Pressure: 100 PSI (Depending on coupling)

Type Of Coupling: Cam and Groove or Combination Nipple.
Clamps—Band.

Features:

- Vinyl nitrile cover
- Vinyl nitrile tube
- Continuous impression brand
- Minimum 4-to-1 safety factor

Advantages:

- Abrasion, animal fat, oil and weather resistant
- Easy identification
- Meets R.M.A. requirements

Markets:

- Petrochemical/Petroleum Industry
- Paper/Pulp Industry
- Oil Exploration and Drilling
- Ship Building

Applications:

- Transfer of petroleum products
- Transfer of crude oil, salt water, fresh water, and slurries.

CATALOG NUMBER	NOMINAL I.D.		SPIRAL	NOMINAL O.D.		APPROX. LBS. WEIGHT PER 100 FT	MAXIMUM WORKING PRESS. (PSI)	MINIMUM BEND RADIUS		STANDARD LENGTHS (FT)
	(IN)	(MM)		(IN)	(MM)			(IN.)	(MM)	
H043624-100	1-1/2	38.1	4	2	50.8	106	100	5	127.0	100
H043632-100	2	50.8	4	2-1/2	63.5	128	100	6	152.4	100
H043648-100	3	76.2	4	3-9/16	90.5	192	100	12	304.8	100
H043664-100	4	101.6	4	4-9/16	115.9	267	100	14	355.6	100