
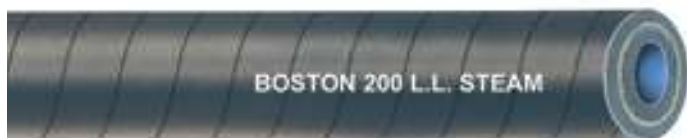


# Hose

## Steam Service Hose

 Refer to warnings and safety information on pages 3-4 and pages 115-118.

### Boston 200 L.L.



**Tube:** EPDM

**Reinforcement:** Wire, 1 Braid

**Cover:** EPDM/Pinpricked

**Color:** Black

**Temperature Range:** +388°F

**Type Of Branding:** Ink Print

**Working Pressure:** 200 PSI (Depending on coupling)  
10:1 Safety Factor

**Type Of Coupling:** Boston Wolf Permanent Crimp Couplings or Interlocking.  
Clamps—Interlocking, (2 Bolt, 4 Bolt).

#### Features:

- EPDM cover
- EPDM tube
- Continuous ink print and date code
- Minimum 10-to-1 safety factor
- Long lengths

#### Advantages:

- Heat, age, ozone and weather resistant.
- Excellent heat resistance
- Handles most steam cleaning detergents
- Easy identification
- Meets safety standards of RMA
- Economical
- Fewer couplings

#### Markets:

- Chemical/Petroleum Industry
- Industrial Cleaning Markets
- Lumber/Woodworking
- Plywood Manufacturing
- Pulp Processing
- Ship Building
- Food Industry

#### Applications:

- Transfer of steam for processing products and cleaning equipment
- Transfer of steam for cleaning of equipment, tanks, buildings, etc.
- Transfer of hot water and steam

PRODUCT NUMBER	NOMINAL I.D. (IN.)	NOMINAL I.D. (MM)	BRAID	NOMINAL O.D. (IN.)	NOMINAL O.D. (MM)	APPROX. LBS. WEIGHT PER 100 FT	MAXIMUM WORKING PRESS. (PSI)	MTQ* MIN. ORDER QTY.	STANDARD LENGTH (FT)
H602706-350R	3/8	9.5	1	13/16	20.6	25	200	3,000	350
H602708-350R	1/2	12.7	1	15/16	23.8	28	200	—	350
H602712-350R	3/4	19.1	1	1-3/16	30.2	40	200	3,000	350

*Not to be used as a pressure washer hose*

*\*MTO - Made to Order*