


# Couplings

## Coll-O-Crimp 265 'P' Series

### Hose End Series: 265 'P' Series



**Typical Application:** General purpose low- pressure air and water lines.

**Compatible Hose:** H265/Ultraforce, H275/Polyforce, H285/Clearforce

**Pressure:** Determined by maximum working pressure for hose size.


**Material:** CA360 Brass

**Advantages:** One piece construction, easy to assemble, corrosion resistant..

**Ordering Information:** Order individually by catalog number. To order replacement collar only, use base number followed by "COO" suffix. (Example: 26504P-COO)

**Assemble With:** T-400-1, T-410-1, T-420-1, T-440-1, T-460, T-462, T-465-1, T-480.

**Note:** Refer to current price list for availability of cataloged items. Configurations and dimensions subject to change without notice.

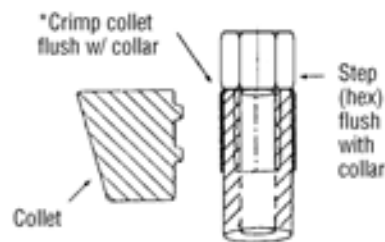

### Componentry for 265 'P' Series Hose Ends

1. Brass Collar
2. Brass Insert

### Assembly Instructions for 265 'P' Series Hose Ends

1. Push collar onto hose until bottomed.
2. Push insert into hose until step on insert (or hex) is flush with collar.

3. Check for bottoming by checking collar movement along insert. Hose is bottomed when collar cannot slide along insert.
4. Position top of collar so that it is flush with the top of the collet. Follow recommended Coll-O-Crimp operating procedures found in the back of this catalog.