Dry Quick Disconnects

Cam and Groove Style Dry Disconnect Couplings

Compatible with most cam and groove style dry disconnects. The Bayco dry disconnect helps prevent spillage from normal or accidental disconnects. It has a spring loaded sealing device designed to "snap" closed should the valve become disconnected with the poppet open, significantly limiting liquid loss.

Our dry disconnect couplings are available in a wide range of sizes, metals, and seal materials. Please refer to our product description cross-reference chart for details. Contact the factory at 800-355-1991 for chemical compatibility, size, and material selection. Special configurations can be designed for your application.

Cam and Groove Style Dry Disconnect Adapters

- · Two-piece adapter design for easy rebuilding of adapters
- Fully interchangeable with Kamvalok (OPW trademark) style fittings
- Aluminum fittings have aluminum nose piece and brass piston
- For pressure ratings at other temperatures, contact the factory








3" adapter



DBVA73-2030

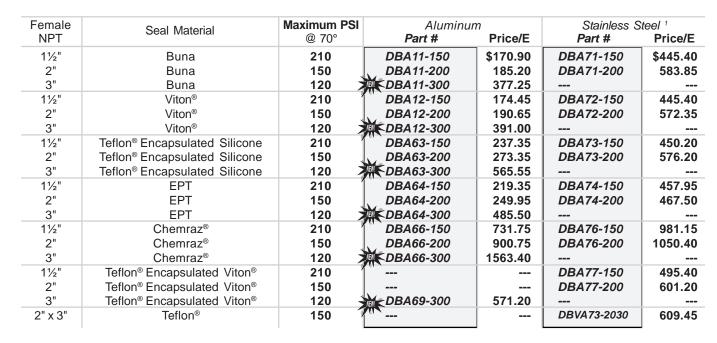

¹ Stainless steel corrosion resistance is comparable to 304 stainless steel



