




DRX200: A Smart Choice.

DRX200—Designed for Your Unique Situation.

Engineered specifically with sand and gravel operations in mind, the DRX200 Impact Bed is intended for up to 200 lb-ft applications of impact energy. (See calculation chart below.) Generally recommended for -4" to -6" (-100mm to -150mm) material, or situations where the greatest dimension of the rock is less than six inches, the DRX200 works with 24" – 72" (600mm – 1800mm) belts.

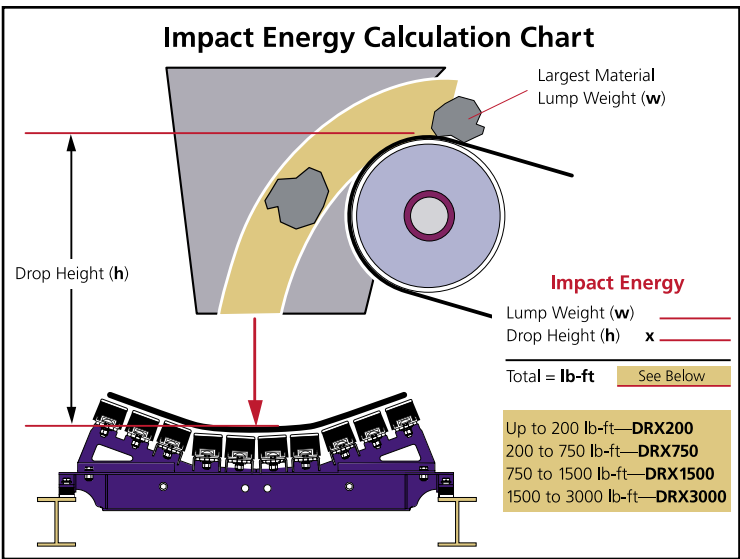

Slide-Out Service™ on the DRX200 Makes Maintenance Hassle Free.

The DRX200 Impact Bed separates in the middle, allowing the two sides to slide apart and out. This unique Slide-Out Service™ feature gives direct access to all the bars and bolts for quick, easy and safe maintenance. The beds offer rapid conversion from run position to service position and back again. Other beds require that a two-man crew spend up to eight hours replacing the bars. With a DRX bed, that same crew can *finish a complete bar change out in just one to two hours*. Further, the DRX line is designed to work with any common rubber impact bar. Use existing stock and maintain a smaller inventory for future change outs.

Safety is also improved with a DRX bed. When the two sides are moved out, a pair of Positive Anchoring Bolts ensures that each side remains secured for safety. When returned to the run position, the side assemblies easily engage with a central locating pin, while the bolts secure each side back in place.