


## PNEUMATICS


### HIGH FLOW ALUMINUM MUFFLER



**Materials:**  
**Body: Aluminum**  
**Element: 50 Mesh Stainless Steel**  
**Max Operating Pressure: 300PSI**  
**Temperature: 35° to 160°F**

Part #	Size	List Price
940-822	1/8"	18.38
940-823	1/4"	6.36
940-824	3/8"	8.66
940-825	1/2"	10.07
940-826	3/4"	16.79
940-827	1"	21.39


### SPEED CONTROL ALUMINUM MUFFLER



**Materials:**  
**Body: Aluminum**  
**Element: 50 Mesh Stainless Steel**  
**Max Operating Pressure: 300PSI**  
**Temperature: 35° to 160°F**

Part #	Size	List Price
940-816	1/8"	7.95
940-817	1/4"	10.07
940-818	3/8"	12.02
940-819	1/2"	19.44
940-820	3/4"	27.75
940-821	1"	31.11


### HIGH FLOW STEEL MUFFLER



**Materials:**  
**Body: Steel**  
**Element: 50 Mesh Stainless Steel**  
**Max Operating Pressure: 300PSI**  
**Temperature: 35° to 160°F**

Part #	Size	List Price
28-373	1/8"	7.85
28-374	1/4"	8.24
28-375	3/8"	10.25
28-376	1/2"	11.31
28-377	3/4"	21.21
28-378	1"	23.86


### ALUMINUM HIGH FLOW MUFFLER



**Materials:**  
**Body: Aluminum**  
**Element: 50 Mesh Stainless Steel**  
**Max Operating Pressure: 300PSI**  
**Temperature: 35° to 160°F**

Part #	Size	List Price
28-367	1/8"	17.50
28-368	1/4"	15.94
28-369	3/8"	25.63
28-370	1/2"	25.63
28-371	3/4"	52.14
28-372	1"	52.14

### PLASTIC HIGH FLOW MUFFLER



**Materials:**  
**Body: Black Nylon**  
**Element: 50 Mesh Stainless Steel**  
**Max Operating Pressure: 150PSI**  
**Temperature: 35° to 120°F**

Part #	Size	List Price
28-363	1/8"	7.25
28-364	1/4"	7.25
28-365	3/8"	11.31
28-366	1/2"	14.39

### NIPPLE INLINE FILTER




**Materials:**  
**Body: Brass**  
**Element: 40 Micron Sintered Bronze**  
**Max Operating Pressure: 300PSI**  
**Temperature: 35° to 300°F**

Part #	Size	List Price
940-845	1/8"	7.28
940-846	1/4"	10.70
940-847	3/8"	11.68
940-848	1/2"	20.50

## PNEUMATICS

### SLIDING HAND VALVES

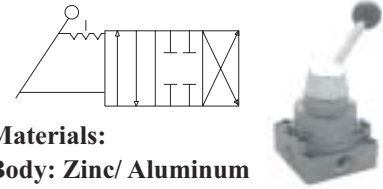

**Materials:**  
**Body: Zinc/ Aluminum**  
**Cover: Zinc**  
**Rotary Disk: Teflon**  
**Pressure Range: 0 to 140PSI**  
**Proof Pressure: 213 PSI**  
**Temperature: 41°F to 140°F**  
**Media: Air**  
**Valve Function: 4-Way, 3 Position**  
**Operation Method: Manually operated 90°, Rotary Disk, Direct-Acting type**


**Body: Zinc**

Part #	Size	List Price
28-360	1/4"	153.24

**Body: Aluminum**

28-361	3/8"	153.24
28-362	1/2"	153.24

### REPAIRABLE AIR/ OIL INLINE FILTER



**Materials:**  
**Body: Anodized Aluminum**  
**Element: 40 Micron Sintered Bronze**  
**Max Operating Pressure: 300PSI**  
**Temperature: 35° to 200°F**

Part #	Size	List Price
940-840	1/8"	17.14
940-841	1/4"	17.14
940-842	3/8"	28.10
940-843	1/2"	63.45
940-844	3/4"	63.45

The only interesting answers are those which destroy the questions.

- Susan Sontag

ACCESSORIES

